SER 321 B Session

SI Session

Sunday, March 30th 2025

7:00 pm - 8:00 pm MST

Agenda

JSON Hands-On Practice

Assignment 3-2 GUI Walkthrough

Client vs. Server Intro

Making your Code Robust

SI Session Expectations

Thanks for coming to the **SER 321** SI session. We have a packed agenda and we are going to try to get through as many of our planned example problems as possible. This session will be recorded and shared with others.

- If after this you want to see additional examples, please visit the drop-in tutoring center.
- We will post the link in the chat now and at the end of the session.
 - tutoring.asu.edu
- Please keep in mind we are recording this session and it will be made available for you to review 24-48 hours after this session concludes.
- Finally, please be respectful to each other during the session.

Interact with us:

Zoom Features



Zoom Chat

- Use the chat feature to interact with the presenter and respond to presenter's questions.
- Annotations are encouraged

```
org.json Docs
```

SER 321 JSON Practice

```
JSONObject json =
```

How would we...

```
Check for the name member?
boolean hasName =
```

```
Get the project name?
```

```
String name =
```

```
"name": "lab3vue_act3_kgrinne3",
"version": "0.0.0",
"private": true,
"scripts": {
 "dev": "vite",
 "build": "vite build",
  "preview": "vite preview"
"dependencies": {
 "vue": "^3.3.4"
"devDependencies": {
  "@vitejs/plugin-vue": "^4.3.1",
  "vite": "^4.4.9"
```

```
org.json Docs
                          "name": "lab3vue_act3_kgrinne3",
                          "version": "0.0.0",
                          "private": true,
JSONObject json =
                          "scripts": {
                                                            Get the scripts
                            "dev": "vite",
                            "build": "vite build",
                            "preview": "vite preview"
                          "dependencies": {
                            "vue": "^3.3.4"
                          "devDependencies": {
                            "@vitejs/plugin-vue": "^4.3.1",
                            "vite": "^4.4.9"
```

SER 321

Get the dev value?

String dev=

JSONObject scripts =

JSON Practice

How would we...

JSON Guide

Step 1:

Object

Step 2:

Get the dev

value

```
org.json Docs
```

SER 321 JSON Practice

```
JSONObject json =
```

How would we...

Build the json object?

You *could* do it all inline, but let's go one object at a time for clarity

```
"name": "lab3vue_act3_kgrinne3",
"version": "0.0.0",
"private": true,
"scripts": {
 "dev": "vite",
 "build": "vite build",
  "preview": "vite preview"
"dependencies": {
 "vue": "^3.3.4"
"devDependencies": {
  "@vitejs/plugin-vue": "^4.3.1",
  "vite": "^4.4.9"
```

```
JSON Guide
                  org.json Docs
                                                  "name": "lab3vue_act3_kgrinne3",
   SER 321
                                                  "version": "0.0.0",
   JSON Practice
                                                  "private": true,
                                                  "scripts": {
JSONObject json =
                                                    "dev": "vite",
                                                    "build": "vite build",
                                                    "preview": "vite preview"
                                                  },
                                                  "dependencies": {
 Answer:
                                                    "vue": "^3.3.4"
                                                  "devDependencies": {
                                                    "@vitejs/plugin-vue": "^4.3.1",
                                                    "vite": "^4.4.9"
```

```
org.json Docs
SER 321
```

JSONObject json =

JSON Practice

```
JSONObject json = new JSONObject();
json.put("name", "lab3vue_act3_kgrinne3");
json.put("version", "0.0.0");
json.put("private", "true");
```

```
"name": "lab3vue_act3_kgrinne3",
"version": "0.0.0",
"private": true,
"scripts": {
  "dev": "vite",
  "build": "vite build",
  "preview": "vite preview"
},
"dependencies": {
  "vue": "^3.3.4"
"devDependencies": {
  "@vitejs/plugin-vue": "^4.3.1",
  "vite": "^4.4.9"
```

```
JSON Guide
                  org.json Docs
                                                  "name": "lab3vue_act3_kgrinne3",
   SER 321
                                                  "version": "0.0.0",
   JSON Practice
                                                  "private": true,
                                                  "scripts": {
JSONObject scripts =
                                                    "dev": "vite",
                                                    "build": "vite build",
                                                    "preview": "vite preview"
                                                  },
                                                  "dependencies": {
 Answer:
                                                    "vue": "^3.3.4"
                                                  "devDependencies": {
                                                    "@vitejs/plugin-vue": "^4.3.1",
                                                    "vite": "^4.4.9"
```

org.json Docs

SER 321 JSON Practice

JSONObject scripts =

```
JSONObject scripts = new JSONObject();
scripts.put("dev", "vite");
scripts.put("build", "vite build");
scripts.put("preview", "vite preview");
json.put("scripts", scripts.toMap());
```

```
"name": "lab3vue_act3_kgrinne3",
"version": "0.0.0",
"private": true,
"scripts": {
  "dev": "vite",
  "build": "vite build",
  "preview": "vite preview"
},
"dependencies": {
  "vue": "^3.3.4"
"devDependencies": {
  "@vitejs/plugin-vue": "^4.3.1",
  "vite": "^4.4.9"
```

```
org.json Docs
   SER 321
   JSON Practice
JSONObject depend =
```

```
},
                                                 "dependencies": {
Answer:
                                                   "vue": "^3.3.4"
                                                 "devDependencies": {
                                                   "vite": "^4.4.9"
```

```
"name": "lab3vue_act3_kgrinne3",
"version": "0.0.0",
"private": true,
"scripts": {
  "dev": "vite",
  "build": "vite build",
  "preview": "vite preview"
  "@vitejs/plugin-vue": "^4.3.1",
```

```
org.json Docs
```

SER 321
JSON Practice

JSONObject depend =

```
JSONObject depend = new JSONObject();
depend.put("vue", "^3.3.4");
json.put("dependencies", depend.toMap());
```

```
"name": "lab3vue_act3_kgrinne3",
"version": "0.0.0",
"private": true,
"scripts": {
  "dev": "vite",
  "build": "vite build",
  "preview": "vite preview"
},
"dependencies": {
 "vue": "^3.3.4"
"devDependencies": {
  "@vitejs/plugin-vue": "^4.3.1",
  "vite": "^4.4.9"
```

```
JSON Guide
                  org.json Docs
                                                  "name": "lab3vue_act3_kgrinne3",
   SER 321
                                                  "version": "0.0.0",
   JSON Practice
                                                  "private": true,
                                                  "scripts": {
JSONObject devDep =
                                                    "dev": "vite",
                                                    "build": "vite build",
                                                    "preview": "vite preview"
                                                  },
                                                  "dependencies": {
 Answer:
                                                    "vue": "^3.3.4"
                                                  "devDependencies": {
                                                    "@vitejs/plugin-vue": "^4.3.1",
                                                    "vite": "^4.4.9"
```

```
org.json Docs
```

SER 321 JSON Practice

JSONObject devDep =

```
Answer:

JSONObject devDep = new JSONObject();
devDep.put("@vitejs/plugin-vue", "^4.3.1");
devDep.put("vite", "^4.4.9");
json.put("devDependencies", devDep.toMap());
```

```
"name": "lab3vue_act3_kgrinne3",
"version": "0.0.0",
"private": true,
"scripts": {
  "dev": "vite",
  "build": "vite build",
  "preview": "vite preview"
},
"dependencies": {
  "vue": "^3.3.4"
"devDependencies": {
  "@vitejs/plugin-vue": "^4.3.1",
  "vite": "^4.4.9"
```

```
org.json Docs
```

Let's **fetch** this value:

JCONObia ed

```
SER 321
JSON Practice
```

```
JSONObject json =
```

JSON Guide

"lat": 42.3434, "lon": -88.0412,

"current": {

"timezone": "America/Chicago",

"timezone offset": -18000,

"dt": 1743090240,

```
"sunrise": 1743075764,
                                                                         "sunset": 1743120715,
                                                                         "temp": 49.12,
                                                                         "feels like": 46.17,
                                                                         "pressure": 1023,
                                                                         "humidity": 60,
                                                                         "dew point": 35.85,
                                                                         "uvi": 1.36.
                                                                          'clouds": 100,
Answer:
                                                                         "visibility": 10000,
                                                                         "wind speed": 6.91,
                                                                         "wind deg": 240,
                                                                         "weather": [
                                                                             "id": 804,
                                                                             "main": "Clouds",
                                                                             "description": "overcast clouds",
                                                                             "icon": "04d"
```

```
org.json Docs
```

Let's *fetch* this value:

```
SER 321
JSON Practice
```

```
JSONObject json =
```

```
Answer:

JSONObject current = json.getJSONObject("current");
int clouds = current.getInt("clouds");
```

```
"lat": 42.3434,
"lon": -88.0412,
"timezone": "America/Chicago",
"timezone offset": -18000,
"current": {
  "dt": 1743090240,
  "sunrise": 1743075764,
  "sunset": 1743120715,
  "temp": 49.12,
  "feels_like": 46.17,
  "pressure": 1023,
  "humidity": 60,
  "dew point": 35.85,
  "uvi": 1.36.
  clouds": 100,
  "visibility": 10000,
  "wind speed": 6.91,
  "wind deg": 240,
  "weather": [
      "id": 804,
      "main": "Clouds",
      "description": "overcast clouds",
      "icon": "04d"
```

```
org.json Docs
```

Let's *change* this value:

JCONObiost -

```
SER 321
JSON Practice
```

JSONObject json = -

JSON Guide

"lat": 42.3434, "lon": -88.0412,

"current": {

"dt": 1743090240,

"timezone": "America/Chicago", "timezone offset": -18000,

```
"sunrise": 1743075764,
                                                                         "sunset": 1743120715,
                                                                         "temp": 49.12,
                                                                         "feels_like": 46.17,
                                                                         "pressure": 1023,
                                                                         "humidity": 60,
                                                                         "dew point": 35.85,
                                                                         "uvi": 1.36.
                                                                          'clouds": 100,
Answer:
                                                                         "visibility": 10000,
                                                                         "wind speed": 6.91,
                                                                         "wind deg": 240,
                                                                         "weather": [
                                                                             "id": 804,
                                                                             "main": "Clouds",
                                                                             "description": "overcast clouds",
                                                                             "icon": "04d"
```

```
org.json Docs
```

Answer:

Let's *change* this value:

```
SER 321
JSON Practice
```

```
JSONObject json =
```

```
JSONObject current = json.getJSONObject("current");
current.put("clouds", 50);
                           Can be any number
```

```
"lat": 42.3434,
"lon": -88.0412,
"timezone": "America/Chicago",
"timezone offset": -18000,
"current": {
  "dt": 1743090240,
  "sunrise": 1743075764,
  "sunset": 1743120715,
 "temp": 49.12,
  "feels_like": 46.17,
  "pressure": 1023,
 "humidity": 60,
  "dew point": 35.85,
 "uvi": 1.36.
  clouds": 100,
  "visibility": 10000,
  "wind speed": 6.91,
  "wind deg": 240,
  "weather": [
     "id": 804,
      "main": "Clouds",
      "description": "overcast clouds",
      "icon": "04d"
```

```
org.json Docs
```

Answer:

Let's *fetch* this value:

```
SER 321
JSON Practice
```

```
JSON Guide
                                "lat": 42.3434,
                                "lon": -88.0412,
JSONObject json = -
                                "timezone": "America/Chicago",
                                "timezone offset": -18000,
                                "current": {
                                  "dt": 1743090240,
                                  "sunrise": 1743075764,
                                  "sunset": 1743120715,
                                  "temp": 49.12,
                                  "feels_like": 46.17,
                                  "pressure": 1023,
                                  "humidity": 60,
                                  "dew_point": 35.85,
                                  "uvi": 1.36,
                                  "clouds": 100,
                                  "visibility": 10000,
                                  "wind speed": 6.91,
                                  "wind deg": 240,
                                  "weather": [
                                      "id": 804,
                                      "main": "Clouds"
                                      "description": "overcast clouds",
```

'1con": "04d'

```
org.json Docs
```

Answer:

Let's *fetch* this value:

```
SER 321
JSON Practice
```

```
"lat": 42.3434,
                                 "lon": -88.0412,
JSONObject json =
                                 "timezone": "America/Chicago",
                                 "timezone offset": -18000,
                                 "current": {
                                   "dt": 1743090240,
                                   "sunrise": 1743075764,
                                   "sunset": 1743120715,
                                  "temp": 49.12,
                                   "feels_like": 46.17,
                                   "pressure": 1023,
                                   "humidity": 60,
                                   "dew_point": 35.85,
                                  "uvi": 1.36,
                                   "clouds": 100,
                                   "visibility": 10000,
                                   "wind speed": 6.91,
                                   "wind deg": 240,
                                   "weather": [
                                      "id": 804,
                                       "main": "Clouds"
                                       "description": "overcast clouds",
                                       '1con": "04d'
```

```
JSONObject current = json.getJSONObject("current");
JSONObject weather =
                  current.getJSONObject("weather");
String description =
                  weather.getString("description");
```

javax.swing API

SER 321

Assignment 3-2 GUI

Frame





picPanel

outputPanel



ClientGui Points of Interest!

Line	Client GUI Item
58	Constructor
86-105	Initializing Game State
114	show()
139	insertImage()
(154)	OutputPanel.appendOutput()

Line	Panel Item
139	OutputPanel - getInputText()
147	OutputPanel - setPoints()
171	OutputPanel - appendOutput()
108	PicturePanel - handleFirstImage()
	1



Think Fast - Client or Server?

```
String host = args[0];
Socket server = new Socket(host, port);
System.out.println("Connected to server at " + host + ":" + port);
```



Think Fast - Client or Server?

```
Socket clientSock;
ServerSocket sock = new ServerSocket(port);
System.out.println("Server ready for connections");
```

How are we feeling about Client/Server communications so far?



Think Fast - Client or Server?

```
try {
  sock = new Socket(host, port: 8888);
 OutputStream out = sock.getOutputStream();
 ObjectOutputStream os = new ObjectOutputStream(out);
  os.writeObject( message);
  os.writeObject( number);
  os.flush();
 ObjectInputStream in = new ObjectInputStream(sock.getInputStream());
  String i = (String) in.readObject();
 System.out.println(i);
  sock.close();
 catch (Exception e) {e.printStackTrace();}
```

SER 321 Client/Server


Think Fast - Client or Server?

```
try {
  ServerSocket serv = new ServerSocket( port: 8888);
  for (int rep = 0; rep < 3; rep++){
    sock = serv.accept();
    ObjectInputStream in = new ObjectInputStream(sock.getInputStream());
    String s = (String) in.readObject();
    System.out.println("Received the String "+s);
    Integer i = (Integer) in.readObject();
    System.out.println("Received the Integer "+ i);
    OutputStream out = sock.getOutputStream();
    ObjectOutputStream os = new ObjectOutputStream(out);
    os.writeObject("Got it!");
    os.flush();
  catch(Exception e) {e.printStackTrace();}
```

What do we mean when we say "make sure your code is robust"?

Error Handling

What do we mean when we say "make sure your code is robust"?

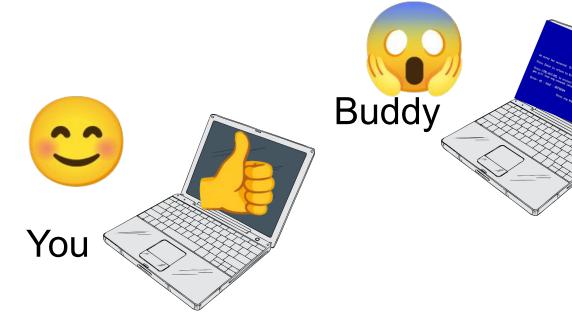



What do we mean when we say "make sure your code is robust"?

```
PS C:\ASU\SER321\examples_repo\ser321examp
                                       PS C:\ASU\SER321\examples_repo\ser321example
les\Sockets\Echo_Java> gradle runServer
                                       Starting a Gradle Daemon, 1 busy and 3 stopp
> Task :runServer
                                       > Task :runClient
Server ready for connections
                                       Connected to server at localhost:9099
Server waiting for a connection
                                       String to send>
                                       <========---> 75% EXECUTING [24m 25s]
Server connected to client
> :runClient
> :runServer
                                       What do you think will happen?
```

We crashed the server!

```
PS C:\ASU\SER321\examples_repo\ser^ to les\Sockets\Echo_Java> gradle run
```

PS C:\ASU\SER321\examples_repo\ser321example Starting a Gradle Daemon, 1 busy and 3 stopp

```
Server ready for connections

Server waiting for a connection

Server connected to client

java.net.SocketException: Connection rese

at java.base/sun.nio.ch.NioSocketImpl.implRead(NioSocketImpl.java:320)

at java.base/sun.nio.ch.NioSocketImpl.read(NioSocketImpl.java:347)

at java.base/sun.nio.ch.NioSocketImpl$1.read(NioSocketImpl.java:800)

at java.base/java.net.Socket$SocketInputStream.read(Socket.java:966)

at Server.main(Server.java:48)

Deprecated Gradle features were used in this build, making it incompatible with Gradle 8.0.
```

```
PS C:\ASU\SER321\examples_repo\ser321examples\Sockets\Echo_Java> gient
Starting a Gradle Daemon, 1 busy and 3 stopped Daemons could not be server at local server at local host:9099
String to send>
<========---> 75% EXECUTING [24m 43s]
> :runClient
Terminate batch job (Y/N)? y
PS C:\ASU\SER321\examples_repo\ser321examples\Sockets\Echo_Java>
```

What happened?

```
while(true) {
       System.out.println("Server waiting for a connection");
        clientSock = sock.accept(); // blocking wait
       PrintWriter out = new PrintWriter(clientSock.getOutputStream(), autoFlush: true);
        InputStream input = clientSock.getInputStream();
                                                                             We saw this...
       System.out.println("Server connected to client");
        int numr = input.read(clientInput, off: 0, bufLen);
       while (numr != -1) {
          String received = new String(clientInput, offset: 0, numr);
          System.out.println("read from client: " + received);
          out.println(received);
                                                                            Then got a
          numr = input.read(clientInput, off: 0, bufLen);
                                                                         SocketException
        input.close();
                                                                            stacktrace...
        clientSock.close();
        System.out.println("Socket Closed.");
                                                    Let's zoom out a bit...
```

This assumes we read from the stream with no problems

If we have a problem, we just throw the error to the console and quit!

```
try {
       if (args.length != 1) {...}
                                                              Sockets/Echo Java
       int port = -1:
       try {...} catch (NumberFormatException nfe) {...}
       Socket clientSock:
       ServerSocket sock = new ServerSocket(port);
                                                                   We saw this...
       System.out.println("Server ready for connections");
       int bufLen = 1024;
       byte clientInput[] = new byte[bufLen]; // up to 1024 bytes in a message.
       while(true) {
               System.out.println("Server waiting for a connection");
               clientSock = sock.accept(); // blocking wait
               PrintWriter out = new PrintWriter(clientSock.getOutputStream(), autoFlush: true);
                InputStream input = clientSock.getInputStream();
               System.out.println("Server connected to client");
               int numr = input.read(clientInput, off: 0, bufLen);
                 String received = new String(clientInput, offset: 0, numr);
                 System.out.println("read from client: " + received);
                 out.println(received);
                 numr = input.read(clientInput, off: 0, bufLen);
                input.close();
               clientSock.close();
               System.out.println("Socket Closed.");
 catch(Exception e) {
       e.printStackTrace();
```

SER 321

Making your Code Robust

What can we do to keep our server from crashing?

Error Handling!

```
try {
        if (args.length != 1) {...}
                                                              Sockets/Echo Java
        int port = -1:
        try {...} catch (NumberFormatException nfe) {...}
        Socket clientSock:
        ServerSocket sock = new ServerSocket(port);
        System.out.println("Server ready for connections");
        int bufLen = 1024;
        byte clientInput[] = new byte[bufLen]; // up to 1024 bytes in a message.
        while(true) {
               System.out.println("Server waiting for a connection");
                clientSock = sock.accept(); // blocking wait
                PrintWriter out = new PrintWriter(clientSock.getOutputStream(), autoFlush: true);
                InputStream input = clientSock.getInputStream();
                System.out.println("Server connected to client");
                int numr = input.read(clientInput, off: 0, bufLen);
                 String received = new String(clientInput, offset: 0, numr);
                 System.out.println("read from client: " + received);
                  out.println(received);
                 numr = input.read(clientInput, off: 0, bufLen);
                input.close();
                clientSock.close();
                System.out.println("Socket Closed.");
  catch(Exception e) {
        e.printStackTrace();
```

```
while(true) {
        System.out.println("Server waiting for a connection");
        clientSock = sock.accept(); // blocking wait
        PrintWriter out = new PrintWriter(clientSock.getOutputStream(), autoFlush: true);
        InputStream input = clientSock.getInputStream();
        System.out.println("Server connected to client");
        int numr = input.read(clientInput, off: 0, bufLen);
        while (numr != -1) {
          String received = new String(clientInput, offset: 0, numr);
          System.out.println("read from client: " + received);
          out.println(received);
          numr = input.read(clientInput, off: 0, bufLen);
        input.close();
        clientSock.close();
        System.out.println("Socket Closed.");
```

```
while (true) {
    System.out.println("Server waiting for a connection");
    clientSock = sock.accept(); // blocking wait
    PrintWriter out = new PrintWriter(clientSock.getOutputStream(), | autoFlush: true);
    InputStream input = clientSock.getInputStream();
    System.out.println("Server connected to client");
    try {
        numr = input.read(clientInput, off: 0, bufLen);
    } catch (SocketException e) {
        System.out.println("Client disconnected.");
        break;
                   Sockets/SimpleProtocolWithSomeErrorHandling
    while (numr != -1) {
        String received = new String(clientInput, offset: 0, numr);
        System.out.println("read from client: " + received);
        out.println(received);
        numr = input.read(clientInput, off: 0, bufLen);
    input.close();
    clientSock.close();
    System.out.println("Socket Closed.");
```

Sockets/SimpleProtocolWithSomeErrorHandling

SER 321 Making your Code Robust



```
static JSONObject testField(JSONObject reg, String key, String type){
 JSONObject res = new JSONObject();
 // field does not exist
 if (!req.has(key)){
   res.put("ok", false);
   res.put("message", "Field " + key +
           " does not exist in request");
   return res;
  System.out.println(req.get(key).getClass().getName());
  // field does not have correct type
 if (!req.get(key).getClass().getName().equals(type)){
   res.put("message", "Field " + key +
           " needs to be of type: " + type);
   res.put("ok", false);
   return res.put("ok", false);
   else {
   return res.put("ok", true);
```

```
while (true){
  System.out.println("Server waiting for a connection");
  sock = serv.accept(); // blocking wait
  in = new ObjectInputStream(sock.getInputStream());
  OutputStream out = sock.getOutputStream();
  os = new DataOutputStream(out);
  String s = (String) in.readObject();
  JSONObject reg = new JSONObject(s);
  JSONObject res =
          testField(req, key: "type", type: "java.lang.String");
  if (!res.getBoolean( key: "ok")) {
    overandout(res);
    continue;
  if (req.getString( key: "type").equals("echo")) {
    res = echo(reg):
   else if (reg.getString( key: "type").equals("add")) {
    res = add(req);
   else if (req.getString( key: "type").equals("addmany")) {
    res = addmany(reg);
  } else {
    res = wrongType(req);
  overandout(res);
```

Sockets/SimpleProtocolWithSomeErrorHandling **SER 321**

Making your Code Robust

```
os = new DataOutputStream(out);
                                                                    String s = (String) in.readObject();
static JSONObject testField(JSONObject req, String key, String type){
 JSONObject res = new JSONObject()
                                 static JSONObject wrongType(JSONObject reg){ 1usage
 // field does not exist
                                    JSONObject res = new JSONObject();
 if (!req.has(key)){
                                    res.put("ok", false);
   res.put("ok", false);
                                    res.put("message", "Type " + req.getString( key: "type") + " not supported.");
   res.put("message", "Field " +
           " does not exist in re
                                    return res;
   return res;
 System.out.println(req.get(key).getClass().getName());
 // field does not have correct type
 if (!req.get(key).getClass().getName().equals(type)){
                                                                      res = echo(req);
   res.put("message", "Field " + key +
           " needs to be of type: " + type);
```

```
// check which request it is (could also be a switch statement)
                                                                       if (req.getString( key: "type").equals("echo")) {
                                                                         else if (reg.getString( key: "type").equals("add")) {
                                                                         res = add(req);
 res.put("ok", false);
                                                                         else if (reg.getString( key: "type").equals("addmany")) {
 return res.put("ok", false);
                                                                         res = addmany(reg);
} else {
                                                                        } else {
 return res.put("ok", true);
                                                                         res = wrongType(req);
                                                                       overandout(res);
```

while (true){

System.out.println("Server waiting for a connection");

in = new ObjectInputStream(sock.getInputStream());


sock = serv.accept(); // blocking wait

OutputStream out = sock.getOutputStream();



Connections!

The New York Times Games



Connections

SER 321 Scratch Space

Upcoming Events

SI Sessions:

- Tuesday, April 1st at 10:00 am MST
- Thursday, April 3rd at 7:00 pm MST
- Sunday, April 6th at 7:00 pm MST

Review Sessions:


- Sunday, April 27th at 6:00 pm MST 2 hour Exam Review Session
- Tuesday, April 29th, at 10:00 am MST Q&A Session

Questions?

Survey:

https://asuasn.info/ASNSurvey



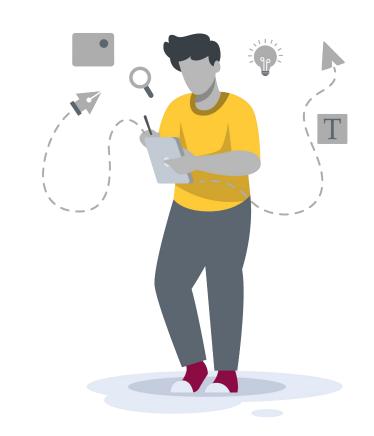

42

More Questions? Check out our other resources!

tutoring.asu.edu



Academic Support Network

Services V Faculty and Staff Resources About Us V

University College

Academic Support

Academic Support Network (ASN) provides a variety of free services in-person and online to help currently enrolled ASU students succeed academically

Services



Subject Area Tutoring

Need in-person or online help with math, science, business, or engineering courses? Just hop into our Zoom room or drop into a center for small group tutoring. We'll take it from there.

Need help using Zoom?

View the tutoring schedule

View digital resources

Go to Zoom



Writing Tutoring

Need help with undergraduate or graduate writing assignments? Schedule an in-person or online appointment, access your appointment link, or wait in our drop-in

Access your appointment link

Access the drop-in queue

Schedule Appointment



Online Study Hub

Join our online peer communities to connect with your fellow Sun Devils. Engage with our tools to search our bank of resources. videos, and previously asked questions. Or, ask our Tutorbot questions.

Now supporting courses in Math. Science. Business, Engineering, and Writing.

Online Study Hub

Go to Zoom

Need help using Zoom?

View the tutoring schedule

View digital resources

- 1. Click on 'Go to Zoom' to log onto our Online Tutoring Center.
- 2. Click on 'View the tutoring schedule' to see when tutors are available for specific courses.

More Questions? Check out our other resources!

tutoring.asu.edu/online-study-hub

Select a subject
- Any -







Don't forget to check out the Online Study Hub for additional resources!

Expanded Writing Support Available

Including Grammarly for Education, at no cost!





tutoring.asu.edu/expanded-writing-support

^{*}Available slots for this pilot are limited

Additional Resources

- Course Repo
- Gradle Documentation
- GitHub SSH Help
- Linux Man Pages
- OSI Interactive
- MDN HTTP Docs
 - Requests
 - Responses
- JSON Guide
- org.json Docs
- javax.swing package API
- Swing Tutorials