


Program probability conditioned on the true source

Mean diagnostic probability, higher is better

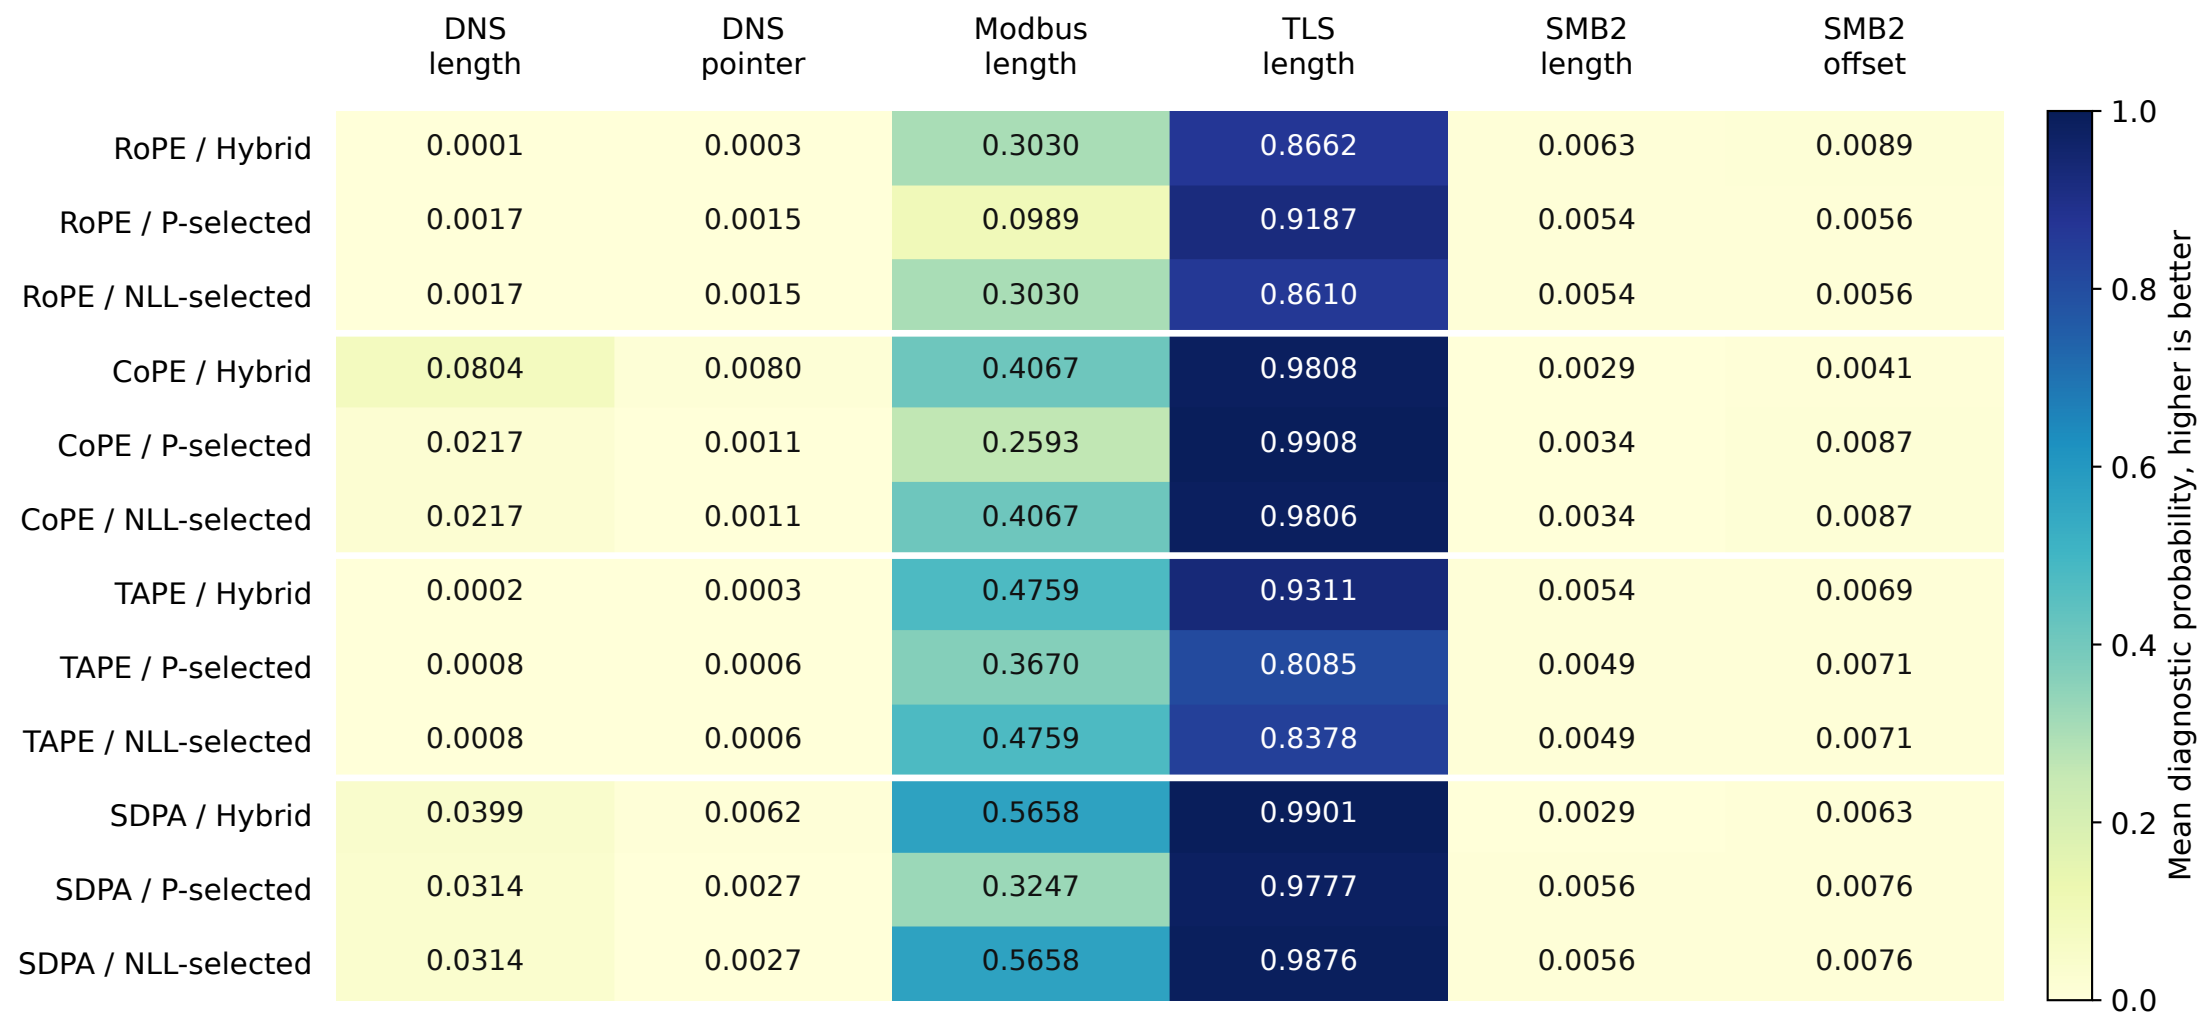

Gold source is used only for post-seal diagnostics, never as a model input.
Program correctness uses the labeled program; alternative programs can have the same executed destination.
Pre-validity head probabilities, not normalized route posteriors. Off heads are untrained and omitted; three-seed means.