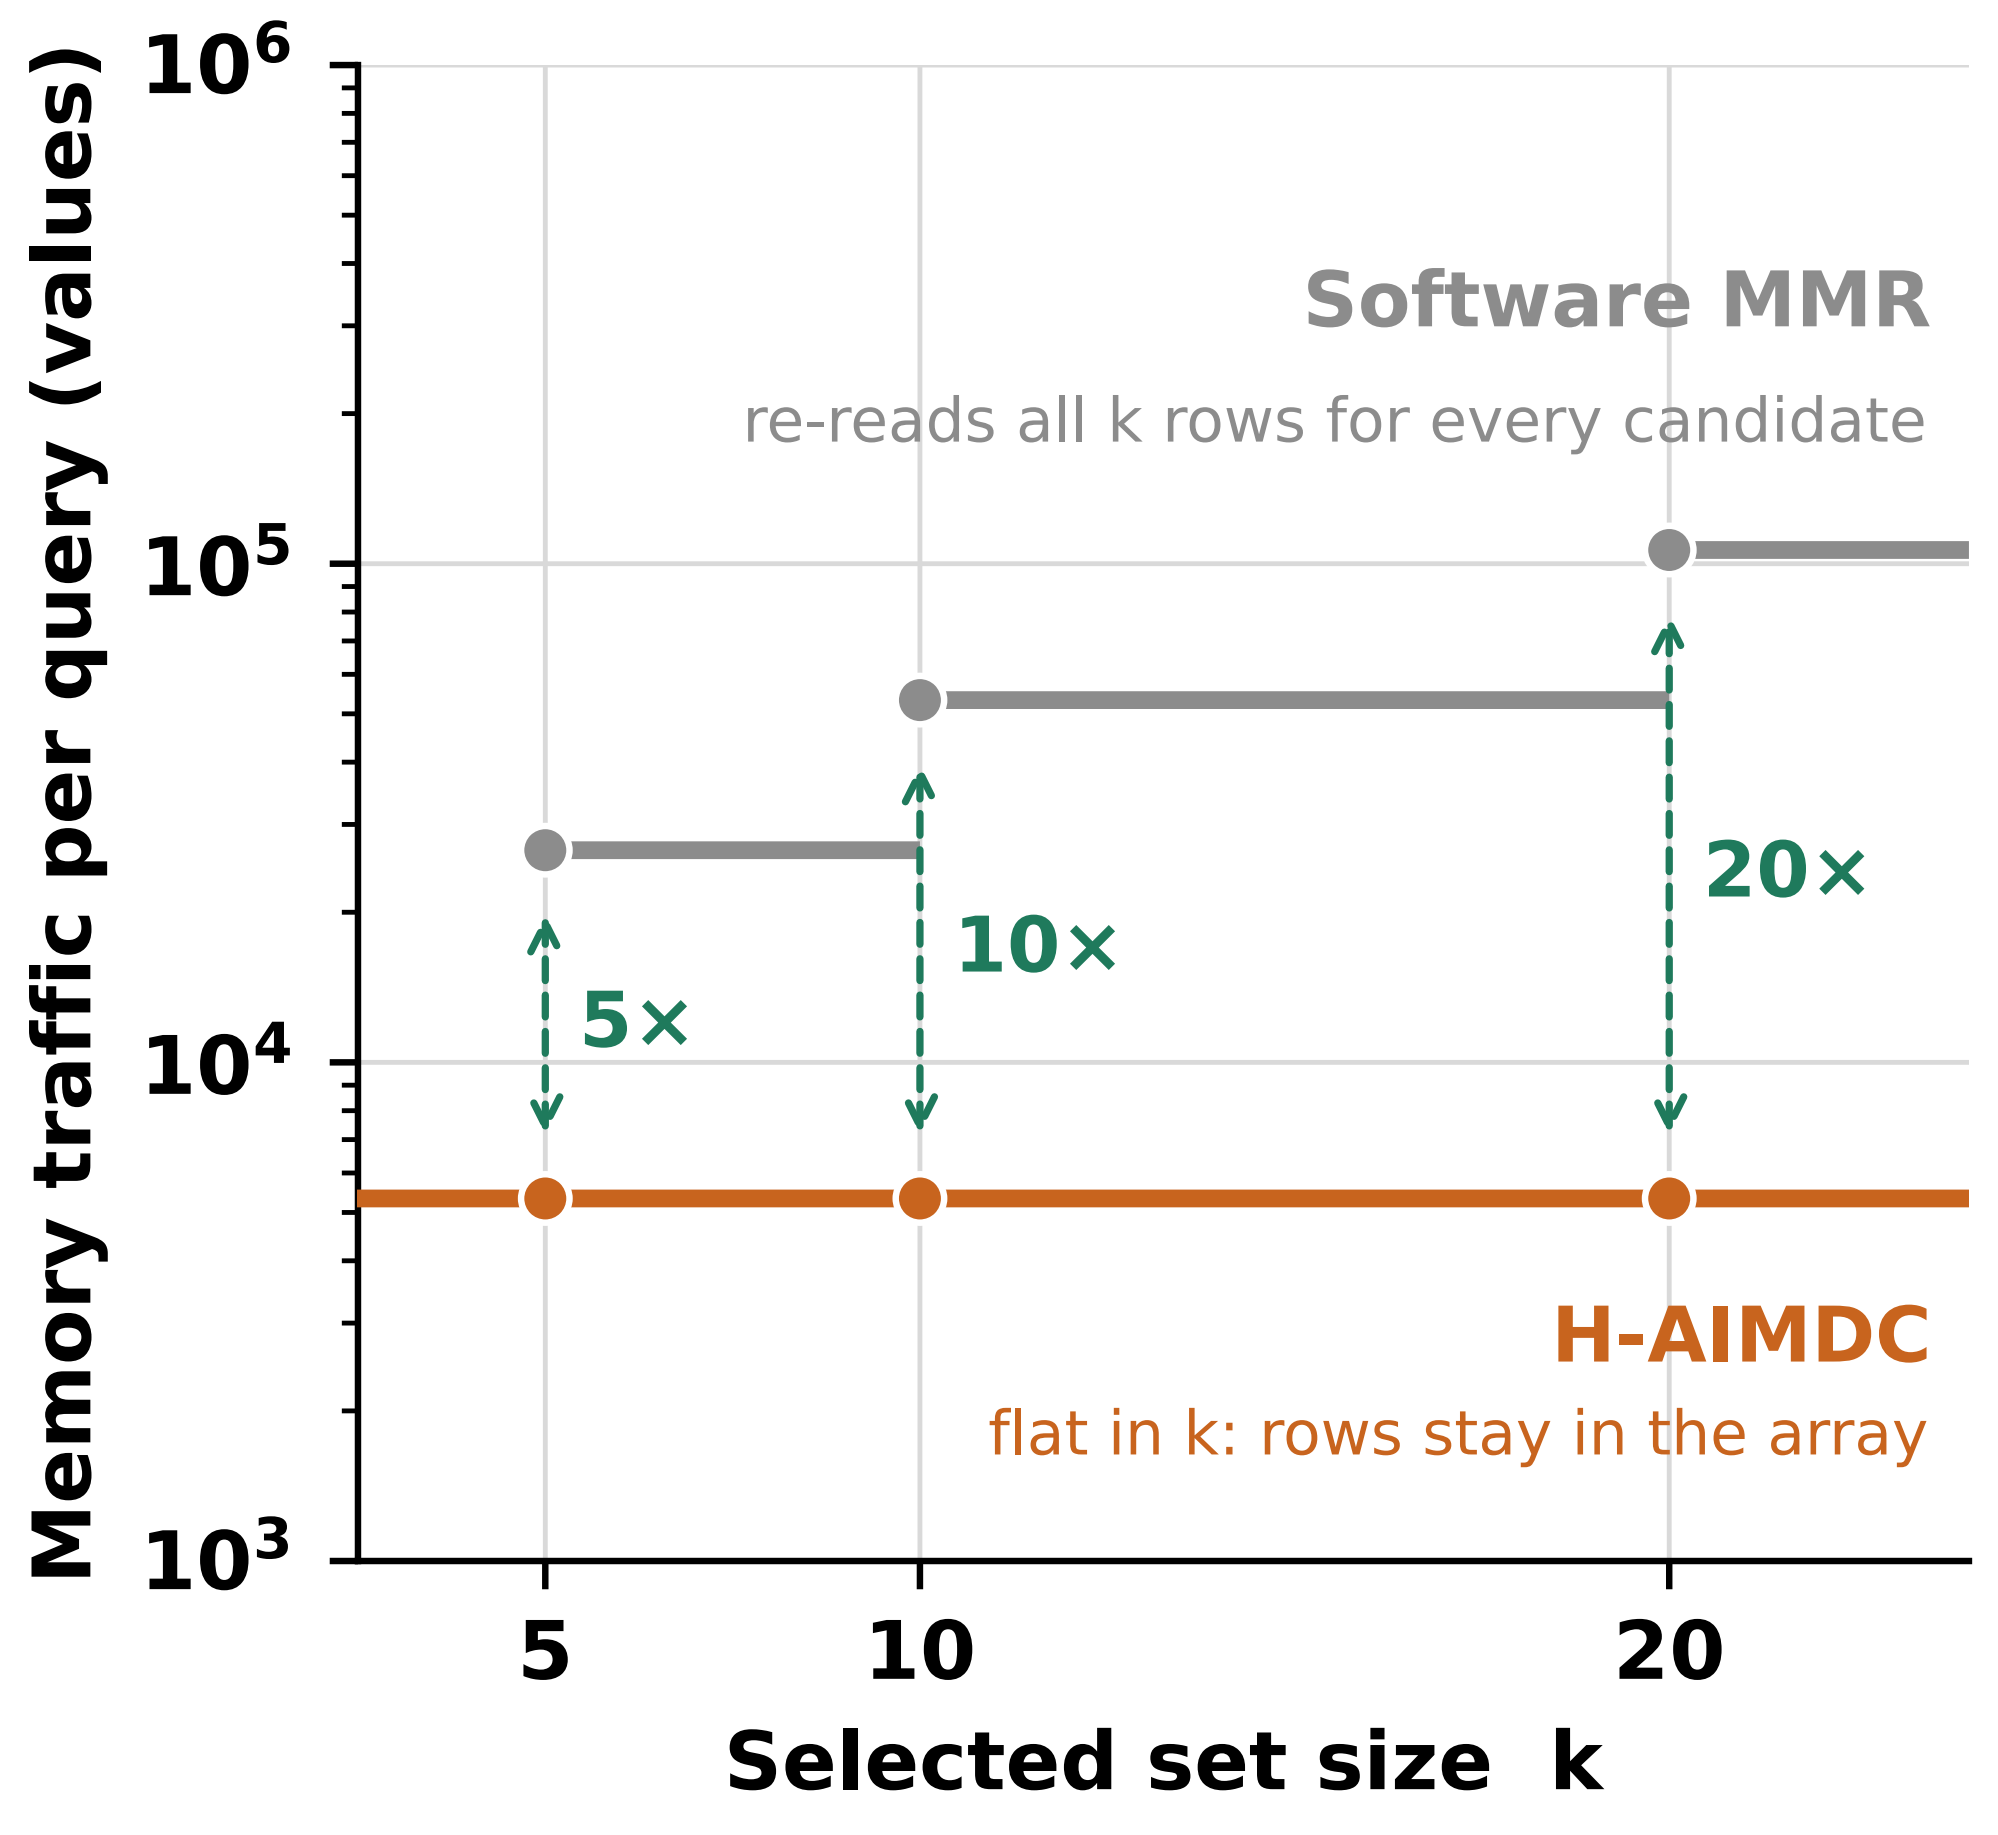
Memory traffic per query (values)
10^6
10^5
10^4
10^3
Software MMR
re-reads all k rows for every candidate
5×
10×
20×
H-AIMDC
flat in k: rows stay in the array
5
10
20
Selected set size k