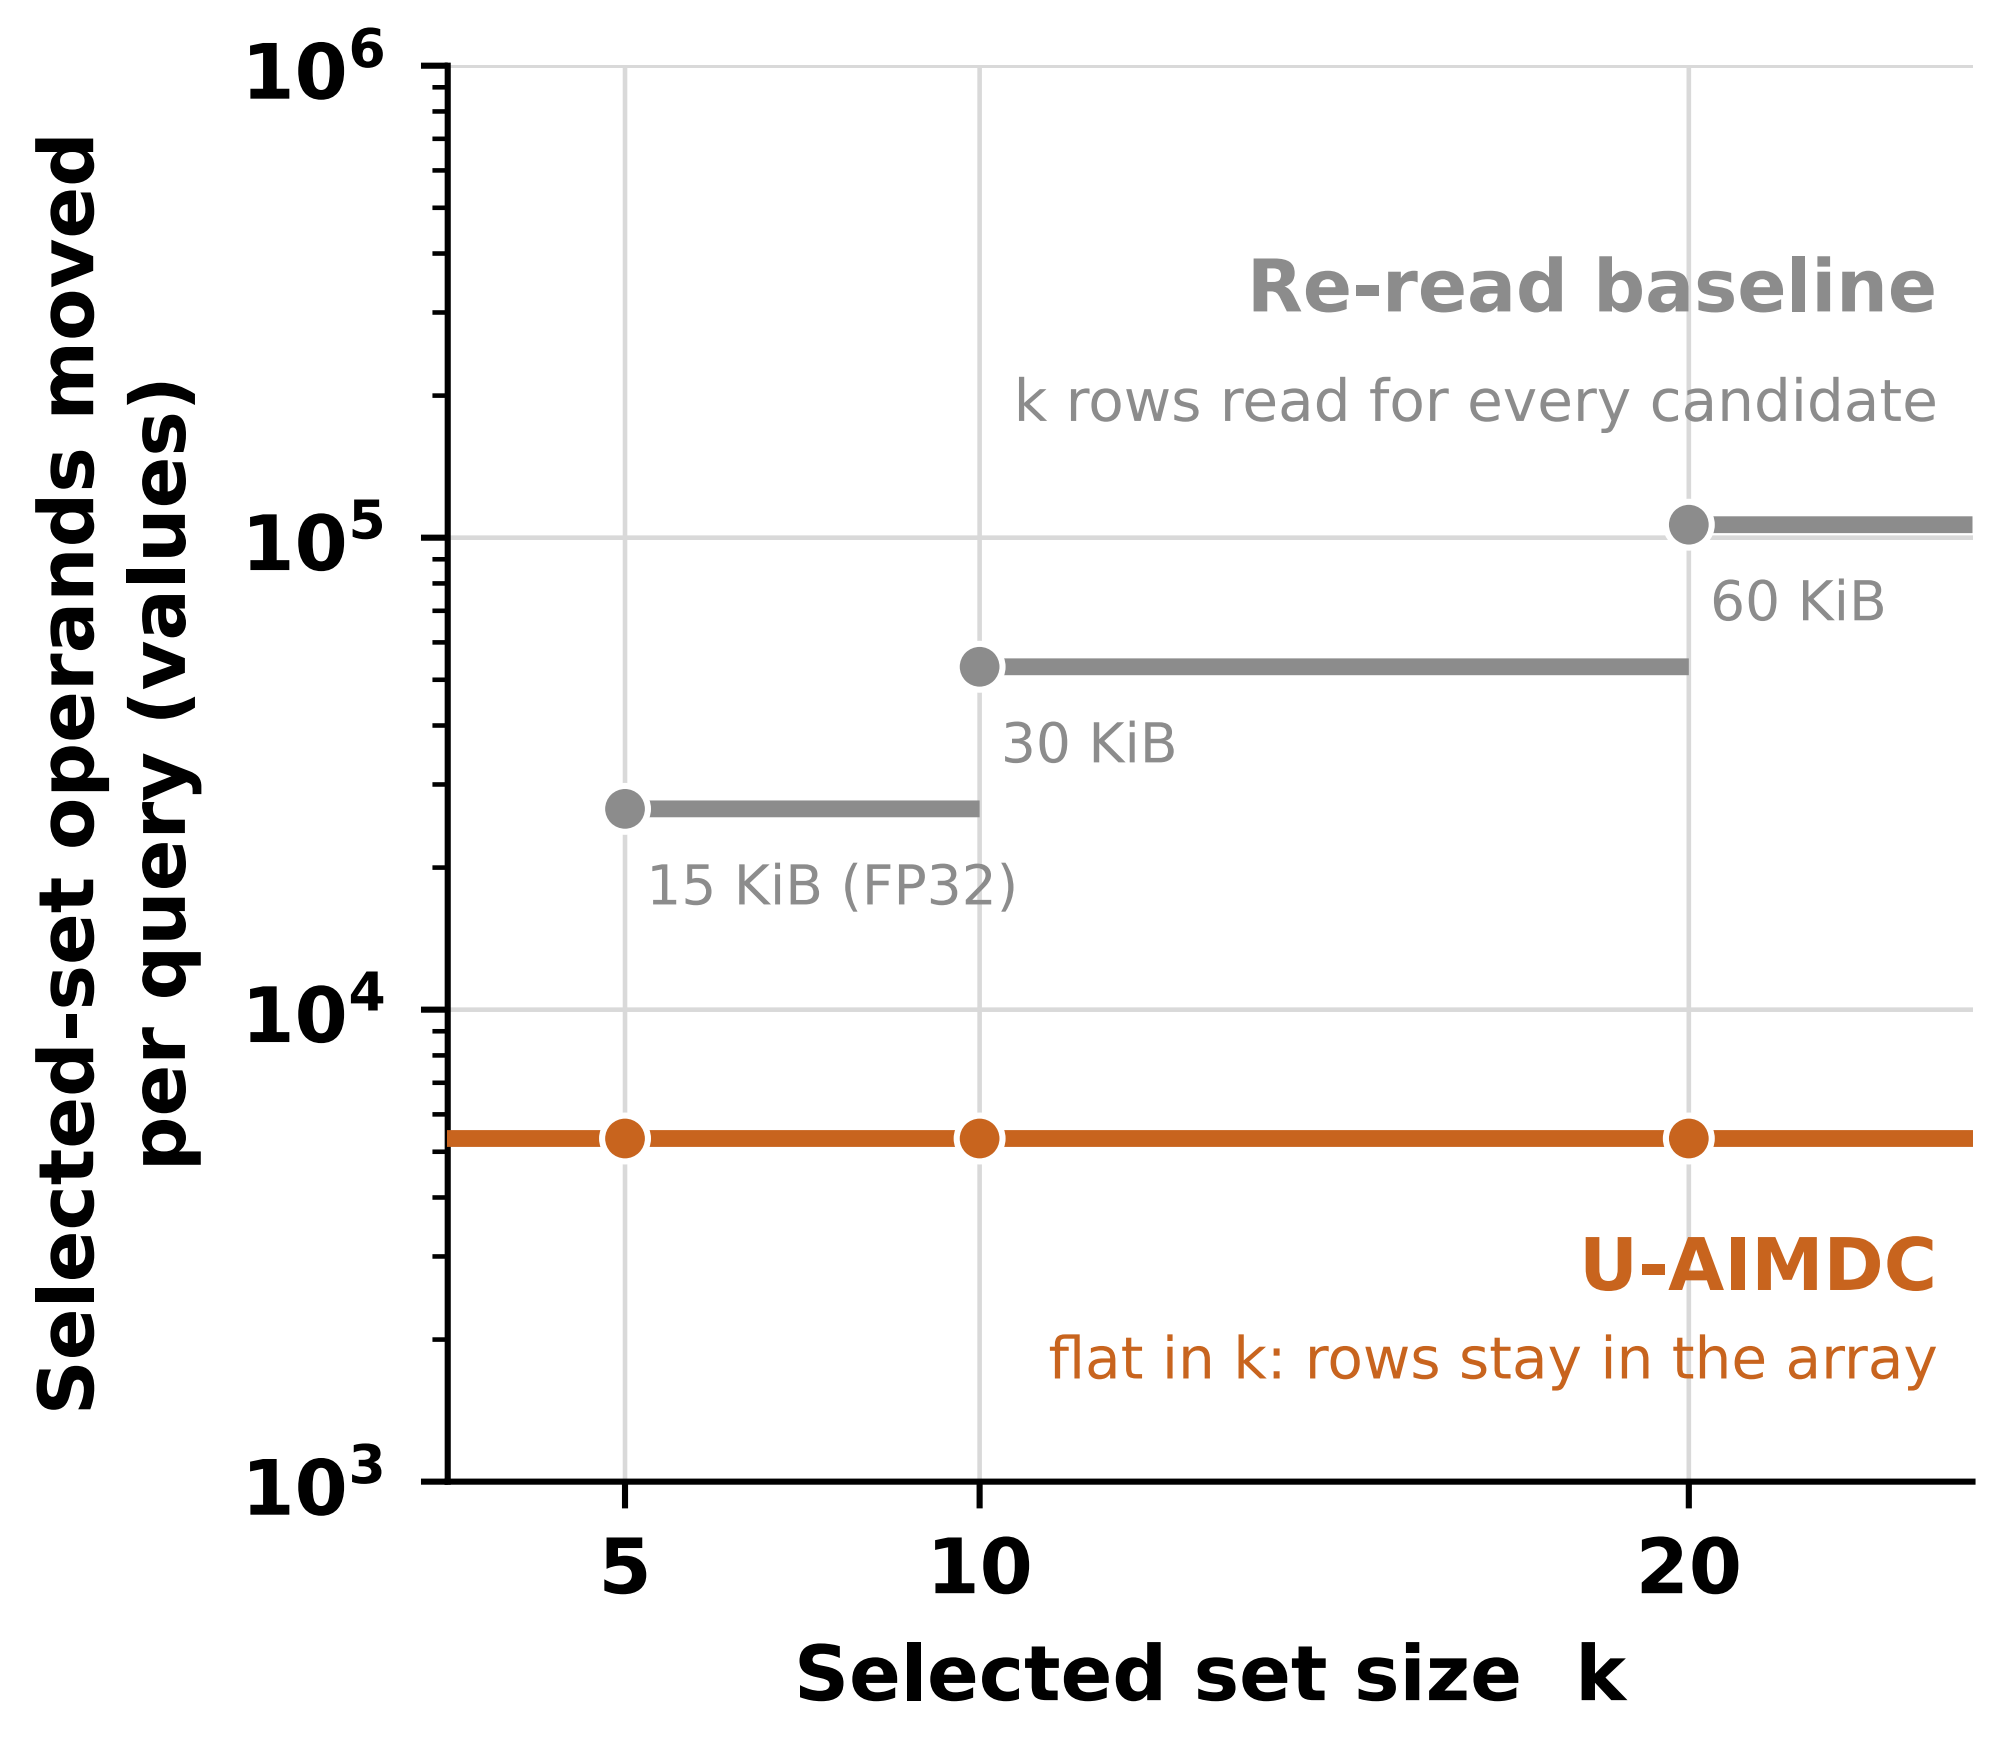
Selected-set operands moved per query (values)
10^6
10^5
10^4
10^3
Re-read baseline
k rows read for every candidate
60 KiB
30 KiB
15 KiB (FP32)
U-AIMDC
flat in k: rows stay in the array
5
10
20
Selected set size k