


1. Créez un dossier appelé learn_git.



2. CD (changer de répertoire) dans le dossier learn_git.

```
MINGW64:/c/Users/gning/Onedrive/Bureau/learn_git X
gning@DESKTOP-OQUUTM MINGW64 ~
$ cd Onedrive/
gning@DESKTOP-OQUUTM MINGW64 ~/Onedrive
$ cd Bureau/
gning@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau
$ cd learn_git
gning@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git
$ |
```

3. Créez un fichier nommé third.txt.

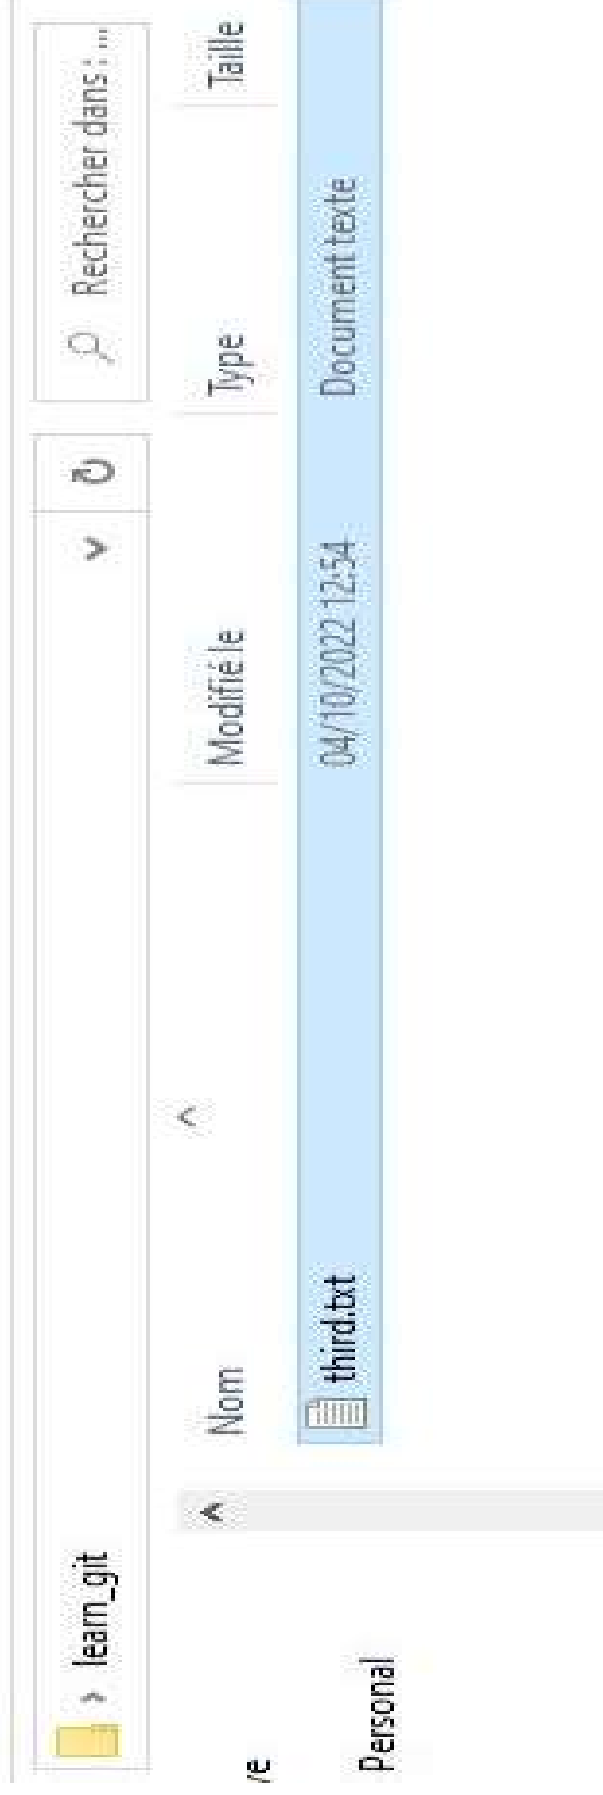

4. Initialiser un référentiel git vide.

```
gming@DESKTOP-0QUUTM\MINGW64 ~/OneDrive/Bureau/learn_git
$ git init
Initialized empty Git repository in C:/Users/gming/OneDrive/Bureau/learn_git/.git/

gming@DESKTOP-0QUUTM\MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ |
```

5. Ajoutez third.txt à la zone de préparation.

```
gn1ng@DESKTOP-QQUUTMN MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git add third.txt.txt
gn1ng@DESKTOP-QQUUTMN MINGW64 ~/Onedrive/Bureau/learn_git (main)
$
```

6. Validez avec le message "ajout de third.txt".

```
gn1ng@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git add third.txt.txt

gn1ng@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git commit -m 'adding third.txt'
[main (root-commit) ed9072f] adding third.txt
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 third.txt.txt

gn1ng@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ |
```

7. Vérifiez votre commit avec git log

```
gninge@DESKTOP-CQUUTMN MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ git log
commit ed9072fcb1e412ecf22fde10785c638aa4f92a38 (HEAD -> main)
Author: khadimflash <gningkhadim23@gmail.com>
Date:   Tue Oct 4 13:09:53 2022 +0000

    adding third.txt

gninge@DESKTOP-CQUUTMN MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ |
```

8. Créez un autre fichier appelé quatrième.txt.



9. Ajoutez quatrième.txt à la zone de préparation.

```
gn1ng@DESKTOP-0QVUTM MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ git add fourth.txt

gn1ng@DESKTOP-0QVUTM MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ |
```

10. Validez avec le message "ajout de quatrième.txt"

```
gning@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git add fourth.txt

gning@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git commit -m 'adding fourth.txt'
[main 89ffde] adding fourth.txt
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 fourth.txt

gning@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ |
```

11. Supprimez le fichier third.txt.

```
gnining@DESKTOP-DQUUTMWIN MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ git rm third.txt.txt
rm 'third.txt.txt'

gnining@DESKTOP-DQUUTMWIN MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ ls
fourth.txt

gnining@DESKTOP-DQUUTMWIN MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ git status
On branch main
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        deleted:    third.txt.txt

gnining@DESKTOP-DQUUTMWIN MINGW64 ~/OneDrive/Bureau/learn_git (main)
$ |
```

12. Ajoutez cette modification à la zone de préparation. (En utilisant la commande "git add .")

```
gn1ng@DESKTOP-0QUUT1N MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git add third.txt.txt
fatal: pathspec 'third.txt.txt' did not match any files

gn1ng@DESKTOP-0QUUT1N MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ |
```

13. Validez avec le message "removing third.txt"

```
gning@DESKTOP-DQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git commit -m 'removing third.txt'
[main 03e8152] removing third.txt
1 file changed, 0 insertions(+), 0 deletions(-)
delete mode 100644 third.txt.txt

gning@DESKTOP-DQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$
```

14. Vérifiez vos commits en utilisant git log.

```
gnining@DESKTOP-OQUUTMN MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git log
commit 03e8152c7baa4defe5fb4bFF9600465c4f61cb0b (HEAD -> main)
Author: khadimflash <gningkhadim23@gmail.com>
Date: Tue Oct 4 13:45:20 2022 +0000

    removing third.txt

commit 89ffdd1efde8a40819f7a9c777a6f2a91a484ebb5
Author: khadimflash <gningkhadim23@gmail.com>
Date: Tue Oct 4 13:21:14 2022 +0000

    adding fourth.txt

commit ed9072fcb1e412ecf22fde10785c638aa4f92a38
Author: khadimflash <gningkhadim23@gmail.com>
Date: Tue Oct 4 13:09:53 2022 +0000

    addind third.txt

gnining@DESKTOP-OQUUTMN MINGW64 ~/Onedrive/Bureau/learn_git (main)
$
```

**15. Changez vos paramètres globaux en core.pager=cat -
vous pouvez en savoir plus à ce sujet**

```
gh1ng@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git config --global core.pager cat
gh1ng@DESKTOP-OQUUTM MINGW64 ~/Onedrive/Bureau/learn_git (main)
$
```

16. Écrivez la commande appropriée pour répertorier toutes les configurations globales pour git sur votre machine.

```
gnining@DESKTOP-OQUUTM1N MINGW64 ~/Onedrive/Bureau/learn_git (main)
$ git config --global
usage: git config [<options>]

Config file location
--global
--system
--local
--worktree
-f, --file <file>
--blob <blob-id>

Action
--get
--get-all
--get-regexp
--get-urlmatch
--replace-all
--add
--unset
--unset-all
--rename-section
--remove-section
-l, --list
--fixed-value
-e, --edit
--get-color
--get-colorbool

Type
-t, --type <type>
--bool
--int
--bool-or-int
--bool-or-str
--path
--expiry-date

Other
-z, --null
--name-only
--includes
--show-origin
--show-scope
--default <value>

get value: name [value-pattern]
get all values: key [value-pattern]
get values for regexp: name-regex [value-pattern]
get value specific for the URL: section [.var] URL
replace all matching variables: name value [value-pattern]
add a new variable: name value
remove all matches: name [value-pattern]
rename section: old-name new-name
remove a section: name
list all
use string equality when comparing values to 'value-pattern'
open an editor
find the color configured: slot [default]
find the color setting: slot [stdout-is-tty]

value is given this type
value is "true" or "false"
value is decimal number
value is --bool or --int
value is --bool or string
value is a path (file or directory name)
value is an expiry date

terminate values with NUL byte
show variable names only
respect include directives on lookup
show origin of config (file, standard input, blob, command line)
show scope of config (worktree, local, global, system, command)
with --get, use default value when missing entry
```


1. Écrivez la commande appropriée pour répertorier toutes les configurations globales pour git sur votre machine.

```
PS C:\Users\gning\OneDrive\Bureau\learn_git> git remote add origin https://github.com/khadimFlash/learn_git.git
PS C:\Users\gning\OneDrive\Bureau\learn_git> git push -u origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 4 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (7/7), 644 bytes | 128.00 KiB/s, done.
Total 7 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/khadimFlash/learn_git.git
 * [new branch]    main -> main
branch 'main' set up to track 'origin/main'.
PS C:\Users\gning\OneDrive\Bureau\learn_git>
```

khadimflash / learn_git

Public

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Pin

Unwatch

main

1 branch

0 tags

Go to file

Add file

Code

khadimflash removing third.txt

03e8152 9 hours ago

3 commits

fourth.txt

adding fourth.txt

10 hours ago

Add a README

https://github.com/khadimflash/learn_git.git