





# Grokking the Coding Interview: Patterns for Coding Questions

5% completed

Search Course

interview/Bn2KLIOR0IQ)

No-repeat Substring (hard) (/courses/grokking-the-codinginterview/YMzBx1gE5EO)

Longest Substring with Same Letters after Replacement (hard)

(/courses/grokking-the-coding-interview/R8DVgjq78yR)

Longest Subarray with Ones after Replacement (hard) (/courses/grokking-the-codinginterview/B6VypRxPolJ)

Problem Challenge 1 (/courses/grokking-the-coding-interview/N8vB7OVYo2D)

Solution Raviawy Problem

# Solution Review: Problem Challenge 3

We'll cover the following

- Smallest Window containing Substring (hard)
- Solution
- Code
  - Time Complexity
  - Space Complexity

### Smallest Window containing Substring (hard) #

Given a string and a pattern, find the **smallest substring** in the given string which has **all the characters of the given pattern**.

^

#### Example 1:

Input: String="aabdec", Pattern="abc"

Output: "abdec"

Explanation: The smallest substring having all characters of the pattern is "abde

c'

#### Example 2:

## Grokking the Coding Interview: Patterns for Coding Questions

5% completed

Search Course

interview/Bn2KLIOR0IQ)

No-repeat Substring (hard) (/courses/grokking-the-coding-interview/YMzBx1qE5EO)

Longest Substring with Same Letters after Replacement (hard)

(/courses/grokking-the-coding-interview/R8DVgjq78yR)

Longest Subarray with Ones after Replacement (hard) (/courses/grokking-the-codinginterview/B6VypRxPolJ)

Problem Challenge 1 (/courses/grokking-the-codinginterview/N8vB7OVYo2D)

Solution Review: Problem

Input: String="abdbca", Pattern="abc"

Output: "bca"

Explanation: The smallest substring having all characters of the pattern is "bca"

•

### Example 3:

Input: String="adcad", Pattern="abc"

Output: ""

Explanation: No substring in the given string has all characters of the pattern.


#### Solution #

This problem follows the **Sliding Window** pattern and has a lot of similarities with Permutation in a String

(https://www.educative.io/collection/page/5668639101419520/5671464854355968/54019 34796161024/) with one difference. In this problem, we need to find a substring having all characters of the pattern which means that the required substring can have some additional characters and doesn't need to be a permutation of the pattern. Here is how we will manage these differences:

- 1. We will keep a running count of every matching instance of a character.
- 2. Whenever we have matched all the characters, we will try to shrink the window from the beginning, keeping track of the smallest substring that has all the matching characters.
- 3. We will stop the shrinking process as soon as we remove a matched character from the sliding window. One thing to note here is that we could have redundant matching characters, e.g., we might have two 'a' in the sliding window when we

## Grokking the Coding Interview: Patterns for Coding Questions

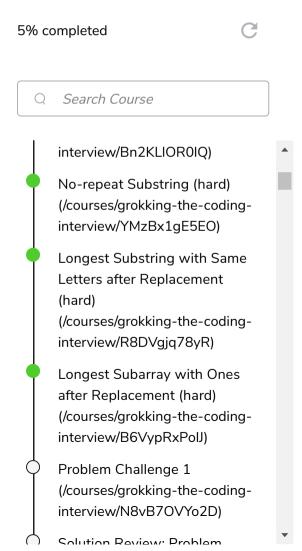

only need one 'a'. In that case, when we encounter the first 'a', we will simply shrink the window without decrementing the matched count. We will decrement the matched count when the second 'a' goes out of the window.

#### Code #

Here is how our algorithm will look; only the highlighted lines have changed from Permutation in a String

(https://www.educative.io/collection/page/5668639101419520/5671464854355968/54019 34796161024/):



## Grokking the Coding Interview: Patterns for Coding Questions

5% completed

Search Course

interview/Bn2KLIOR0IQ)

No-repeat Substring (hard) (/courses/grokking-the-codinginterview/YMzBx1gE5EO)

Longest Substring with Same Letters after Replacement (hard) (/courses/grokking-the-codinginterview/R8DVqjq78yR)

Longest Subarray with Ones after Replacement (hard) (/courses/grokking-the-codinginterview/B6VypRxPoIJ)


Problem Challenge 1 (/courses/grokking-the-coding-interview/N8vB7OVYo2D)

Solution Raviow: Problem

```
import java.util.*;
class MinimumWindowSubstring {
 public static String findSubstring(String str, String pattern) {
   int windowStart = 0, matched = 0, minLength = str.length() + 1, subStrStart = 0;
   Map<Character, Integer> charFrequencyMap = new HashMap<>();
   for (char chr : pattern.toCharArray())
     charFrequencyMap.put(chr, charFrequencyMap.getOrDefault(chr, 0) + 1);
   // try to extend the range [windowStart, windowEnd]
   for (int windowEnd = 0; windowEnd < str.length(); windowEnd++) {</pre>
     char rightChar = str.charAt(windowEnd);
     if (charFrequencyMap.containsKey(rightChar)) {
        charFrequencyMap.put(rightChar, charFrequencyMap.get(rightChar) - 1);
       if (charFrequencyMap.get(rightChar) >= 0) // count every matching of a character
          matched++:
     // shrink the window if we can, finish as soon as we remove a matched character
     while (matched == pattern.length()) {
       if (minLength > windowEnd - windowStart + 1) {
         minLength = windowEnd - windowStart + 1;
          subStrStart = windowStart;
        char leftChar = str.charAt(windowStart++);
       if (charFrequencyMap.containsKey(leftChar)) {
         // note that we could have redundant matching characters, therefore we'll decrement the
         // matched count only when a useful occurrence of a matched character is going out of the win
         if (charFrequencyMap.get(leftChar) == 0)
            matched--:
          charFrequencyMap.put(leftChar, charFrequencyMap.get(leftChar) + 1);
   }
   return minLength > str.length() ? "" : str.substring(subStrStart, subStrStart + minLength);
 }
 public static void main(String[] args) {
   System.out.println(MinimumWindowSubstring.findSubstring("aabdec", "abc"));
   System.out.println(MinimumWindowSubstring.findSubstring("abdbca", "abc"));
   System.out.println(MinimumWindowSubstring.findSubstring("adcad", "abc"));
```



## Grokking the Coding Interview: Patterns for Coding Questions

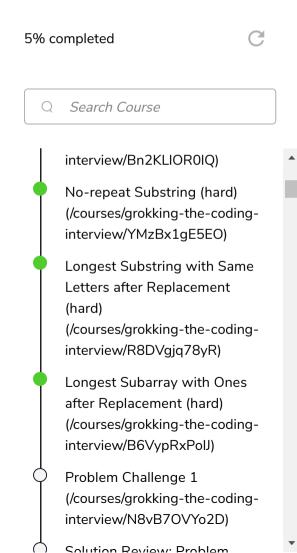




#### Time Complexity #

The time complexity of the above algorithm will be O(N+M) where 'N' and 'M' are the number of characters in the input string and the pattern respectively.

### Space Complexity #

①

The space complexity of the algorithm is O(M) since in the worst case, the whole pattern can have distinct characters which will go into the **HashMap**. In the worst case, we also need O(N) space for the resulting substring, which will happen when the input string is a permutation of the pattern.

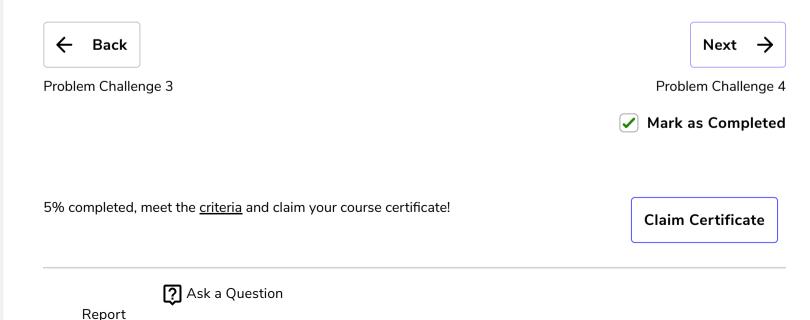

## Grokking the Coding Interview: Patterns for Coding Questions

5% completed

C

Q Search Course

interview/Bn2KLIOR0IQ)

No-repeat Substring (hard) (/courses/grokking-the-codinginterview/YMzBx1gE5EO)

Longest Substring with Same Letters after Replacement (hard) (/courses/grokking-the-coding-

(/courses/grokking-the-coding-interview/R8DVgjq78yR)

Longest Subarray with Ones after Replacement (hard) (/courses/grokking-the-codinginterview/B6VypRxPolJ)

Problem Challenge 1 (/courses/grokking-the-coding-interview/N8vB7OVYo2D)

Solution Reviews Problem

an Issue (https://discuss.educative.io/tag/solution-review-problem-challenge-3\_\_pattern-sliding-window\_\_grokking-the-coding-interview-patterns-for-coding-questions)



