

Question One [30, 3 each]
✓ 1) Which of the following created the table illustrated in Figure 1?

DAILY SPECIALS	
Monday	Hash
Tuesday	Fish


- Figure 1
- A. `<TABLE BORDER = '1'>`
`<TR COLSPAN = '2'><TH>DAILY SPECIALS</TH></TR>`
`<TR><TH>Monday</TH><TD> Hash</TD></TR>`
`<TR><TH>Tuesday</TH><TD>Fish</TD></TR>`
`</TABLE>`
- B. `<TABLE BORDER = '1'>`
`<TR><TH COLUMNS = '2'>DAILY SPECIALS</TH></TR>`
`<TR><TH>Monday</TH><TD> Hash</TD></TR>`
`<TR><TH>Tuesday</TH><TD>Fish</TD></TR>`
`</TABLE>`
- C. `<TABLE BORDER = '1'>`
`<TR><TH COLS= '2'>DAILY SPECIALS</TH></TR>`
`<TR><TH>Monday</TH><TD> Hash</TD></TR>`
`<TR><TH>Tuesday</TH><TD>Fish</TD></TR>`
`</TABLE>`
- D. `<TABLE BORDER = '1'>`
`<TR><TH COLSPAN = '2'>DAILY SPECIALS</TH></TR>`
`<TR><TH>Monday</TH><TD> Hash</TD></TR>`
`<TR><TH>Tuesday</TH><TD>Fish</TD></TR>`
`</TABLE>`

✓ 2) Which of the following tags would be a correct hyperlink to A FRAGMENT of a web page? #

- A. For more information
- Ⓐ For more information
- C. For more information
- D. none of the above

✓ 3) Which <FRAMESET> tag creates the frames displayed the Figure below?

- Ⓐ <FRAMESET COLS="10%, 20%, *">
- B. <FRAMESET = "10%, 20%, *">
- C. both A and C above
- D. none of the above

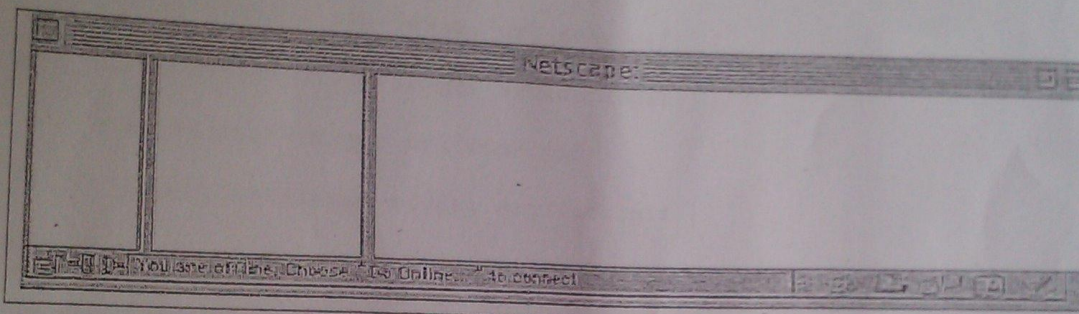

✓ 4) Which tag creates an image with different clickable areas?

- A.
- B.
- Ⓒ
- D.

✓ 5) The center point and radius of the circle are shown in the Figure below. I want to click on the circle to go to the URL circle.html. Which of the following tags could I use



- Ⓐ <AREA SHAPE = "circle" COORDS="270, 80, 45" HREF="circle.html">
- B. <AREA SHAPE = "circ" COORDS="270, 80, 45" TARGET="circle.html">
- Ⓒ <AREA SHAPE = "circle" COORDS="45, 270, 80" TARGET="circle.html">
- D. <AREA SHAPE = "cir" COORDS="45, 270, 80" HREF="circle.html">

3

✓ 6) Which style creates an italicized green font class for H1 headings:

- A. `H1.green { font-style: italic; font-color: green }`
- B. `H1.green { text-transform: italic; text-color: green }`
- C. `H1#green { text-style: italic; text-color: green }`
- ☒ D. `H1.green { font-style: italic; color: green }`

✓ 7) Assume that we have an image, `duck.gif`. We want to use this image for the bullets in an unordered list. Which option creates this style?

- ☒ A. `LI#duck { list-style-image: url(duck.gif) }`
- ☐ B. `LI#duck { list-style-image: src(duck.gif) }`
- C. `LI#duck { list-image: url(duck.gif) }`
- D. `LI#duck { list-image-style: src(duck.gif) }`

✓ 8) Which option creates a paragraph style with the text indented five pixels from the left margin.

- A. `P { indent-left: 5px }`
- B. `P { tab-left: 5px }`
- ☒ C. `P { margin-left: 5px }`
- D. `P { indent: 5 }`

✓ 9) Assume that we have a frame set contains three frames. We want to load `newFrame.html` into the last frame. The JavaScript code segment that does this is:

- A. `parent.frames[2].location = "newFrame.html";`
- B. `parent.frames[3].url = "newFrame.html";`
- ☒ C. `parent.frames[2].href = "newFrame.html";`
- ☐ D. `parent.frames[2].location.href = "newFrame.html";`

10) Which code segment correctly sets up the form for email?

- A. `<FORM NAME = "MailForm"
METHOD = "POST"
ACTION = "mailto: somone@somewhere
ENCTYPE = "text/plain">`
- B. `<FORM NAME = "MailForm"
METHOD = "GET"
ACTION = "email: somone@somewhere
ENCTYPE = "text/plain">`
- C. `<FORM NAME = "MailForm"
METHOD = "MAIL"
ACTION = "mailto: somone@somewhere
ENCTYPE = "text/plain">`
- D. `<FORM NAME = "MailForm"
METHOD = "POST"
ACTION = "mailto: somone@somewhere
ENCTYPE = "plain-text">`

Question Two [20 marks]

a) Use the HTML Document Object Model within Javascript to validate fields on a form where the required validation is : all input of type 'text' must have the following pattern DDD-CCCC-DDD, and the input named 'length' must be a real number within the range 1 - 10

```
<script language="javascript">
```

```
function validate()
```

```
{  
    var valid = false;
```

```
var name = document
```

```
var inputs = document.forms[0].elements;
```

```
var re-text = new RegExp("[a-z][a-z][a-z]-[a-z][a-z][a-z]-[a-z][a-z][a-z]");
```

```
var re-length = new RegExp("[0-9]{1,10}");
```

```
for (var i = 0; i < inputs.length; i++)
```

```
{  
    if (inputs[i].match(re-text))
```

```
{  
    valid = false;
```

```
break;
```

```
if (inputs[i].match(re-text))
```

```
{  
    if (inputs
```

```
if (inputs[i].name == "length")
```

```
if (inputs[i].name == "length")
```

```
{  
    if (inputs[i].match(re-length))
```

```
{  
    valid = true;
```

```
}
```

```
if (inputs[i].match(re-text))
```

```
{  
    valid = false true;
```

```
}
```

```
else  
    valid = false;
```

```
}
```

b) Differentiate between an HTTP GET and an HTTP POST request, and for each, give an example of appropriate use

HTTP GET is used to get data from the server
For example: use

```
<form action="test.php" method="GET">
```

```
// i.
```

```
// here is an input from the user
```

```
// for example
```

```
name="x" type="text"/>
```

Question Three [50 marks]

a) Details of library books are kept in a database, and made accessible to the students via the University library website. Each book is allocated to one category (e.g. comedy, romance, science-fiction, historical). If a user chooses one of these categories, a list of all books in that category is displayed. This list only shows the name of the author and the title, sorted into that order. The user can then choose any book from this list and the full details will be displayed.

The Book table consists of the following columns:

isbn, author, title, description, publication date, category

(i) Produce an HTML tags of the 3 pages needed to provide this functionality, indicating data, forms and links. [15]

(ii) For the middle page, write a PHP script for the section of the server side which obtains the list of all the books and displays them using html. [20]

```
<html>
```

```
<head> <title> the index books </title> </head>
```

```
<body>
```

```
<h1> The List is </h1>
```

```
<form action="books.html" method="POST">
```


b) Consider the following requirements, at the start of a session students must identify themselves and then can pick one category from the list to view from the session. If the student has previously used the system s/he can also request details of their past search including categories previously viewed.

The HTTP protocol is a stateless protocol". What does this mean and why might it be a problem in this application? In your answer give a set of data that must be maintained throughout a session for this system. [15]

? php

session_start(1);

~~\$name = \$_POST['user'];~~

~~\$pwd = \$_POST['pwd'];~~

~~if (\$POST['check'])~~

we can place a hidden input in the form and give it a value of one (1)

if the user login again there will be a check function to check the value if it is 1 then the user is logged before this time