# HTML-Part2
# Lecture – 3

Dr. Aghabi Abosaif

October 2023

# Contents


- HTML Tables
- HTML  Tag
- HTML  Tag
- HTML Attributes
- HTML Style Attribute
- HTML <nav> Tag
- HTML Comments
- HTML Forms
- HTML Multimedia

# HTML Span

- It is used for defines a section in a document by **styling** and **grouping** inline.

- A **** element which is used to color a part of a text:

# HTML Tables

- HTML tables **allow** web developers to **arrange** data into rows and columns.
- Each table cell is defined by a <td> and a </td> tag. td stands for **table data**.
- A **table cell** can contain **all sorts of HTML elements**: text, images, lists, links, other tables, etc.
- Table Rows
  - Each table row starts with a <tr> and ends with a </tr> tag.
  - tr stands for table row.
  - You can have as many rows as you like in a table; just make sure that the number of cells are the same in each row.
- Table Headers
  - Sometimes you want your cells to be table header cells. In those cases use the <th> tag instead of the <td> tag. The th stands for **table header**.

# HTML – Tables

```html
<body>
    <table>
        <tr>
            <th>StudentId</th>
            <th>StudentName</th>
            <th>Country</th>
        </tr>
        <tr>
            <td>1001</td>
            <td>Ahmed Alrayah</td>
            <td>Egypt</td>
        </tr>
        <tr>
            <td>1002</td>
            <td>Malk Aseem</td>
            <td>UAE</td>
        </tr>
        <tr>
            <td>1003</td>
            <td>John Mgdi</td>
            <td>USA</td>
        </tr>
    </table>
</body>
```

| StudentId | StudentName | Country |
|---|---|---|
| 1001 | Ahmed Alrayah | Egypt |
| 1002 | Malk Aseem | UAE |
| 1003 | John Mgdi | USA |

# HTML Span

```
<h1>Lecture Two </h1>
<h2>HTML Part2</h2>
<h3>The Template color is <span style="color: blue">blue </span>for Lecture Two</h3>
```

# Lecture Two

## HTML Part2

### The Template color is blue for Lecture Two

# HTML Div

- It defines a **division** or section within HTML document used to group the **large section** of HTML elements together.

- The ** ** tag is just like a **container unit** which is used to encapsulate other page elements.

- Also it used to **apply CSS styles** to many elements at once. For example:
  - Apply **font style** to all paragraphs at once instead of coding the **same style for each paragraph element**.

# HTML div

```html
<head>
<title>Page Title</title>

<style>
  .myDiv {
    border: 5px outset #00ff15e1;
    background-color: lightblue;
    text-align: center;
  }
  </style>
  </head>
  <body>

  <div class="myDiv">
    <h2>This is a heading in a div element</h2>
    <p>This is some text in a div element.</p>
  </div>

  </body>
```

**This is a heading in a div element**

This is some text in a div element.

# HTML Span vs. div

- Span and div are both **generic** HTML elements that group together related parts of a web page.
- However, they serve different functions.
  - A **div element** is used for block-level organization and styling of page elements.
  - A **span element** is used for inline organization and styling of page elements..

| Span Tag | div Tag |
|---|---|
| **Inline-level** element | **Block-level** element |
| Used for grouping **small** chunks of text | Used for grouping **large** chunks of texts together |
| Must not **be nested to avoid confusion** | **Usually nested** |

# HTML Attributes

- HTML5 **attributes** are **used to set various properties** of an element.

- Some attributes are defined **globally** and can be used on any element.
- while others are defined for **specific elements** only.

- Attributes may only be specified within start tags and must **never** be used in ~~**end tags**~~.

# HTML Attributes

- HTML5 attributes are **case insensitive** and may be written in all uppercase or **mixed** case, although the most common convention is to **stick with lowercase**.

- Attributes usually come in **name/value** pairs like: **name="value"**

Example:

- **href** attribute specifies the URL of the page the link goes to.
- **src** attribute specifies the path to the image to be displayed.
- **width** and **height** attributes, which specify the width and height of the image (in pixels)
- **alt** attribute for the <img> tag specifies an alternate text for an image.

# Standard Attributes-1

| Attribute | Options | Function |
|---|---|---|
| accesskey | User Defined | Specifies a keyboard shortcut to access an element. |
| align | right, left, center | Horizontally aligns tags |
| background | URL | Places an background image behind an element |
| bgcolor | numeric, hexidecimal, RGB values | Places a background color behind an element |
| class | User Defined | Classifies an element for use with Cascading Style Sheets. |
| contextmenu | Menu id | Specifies the context menu for an element. |
| data-XXXX | User Defined | Custom attributes. Authors of a HTML document can define their own attributes. Must start with "data-". |
| draggable | true,false, auto | Specifies whether or not a user is allowed to drag an element. |

# Standard Attributes-2

| Attribute | Options | Function |
|---|---|---|
| height | Numeric Value | Specifies the height of tables, images, or table cells. |
| hidden | hidden | Specifies whether element should be visible or not. |
| id | User Defined | Names an element for use with Cascading Style Sheets. |
| item | List of elements | Used to group elements. |
| itemprop | List of items | Used to group items. |
| spellcheck | true, false | Specifies if the element must have it's spelling or grammar checked. |
| style | CSS Style sheet | Specifies an inline style for an element. |
| subject | User define id | Specifies the element's corresponding item. |
| tabindex | Tab number | Specifies the tab order of an element. |
| title | User Defined | "Pop-up" title for your elements. |
| valign | top, middle, bottom | Vertically aligns tags within an HTML element. |
| width | Numeric Value | Specifies the width of tables, images, or table cells. |

# HTML Style Attribute

- The style attribute is used to **change** or **add** the style on existing HTML elements.
- There is a default style for every HTML element e.g. background color is white, text color is black etc. The style attribute can by used with any HTML tag.

- To apply style on HTML tag, you should have the basic knowledge of css properties
  - e.g. color, background-color, text-align, font-family, font-size etc.

# HTML –Style Attribute

```html
<head>
<title>Page Title</title>

<style>
  h1 {color: red;}
  p {color: blue;}
</style>
</head>
<body>

<h1> Don`t Stop Learning</h1>
<p>Life doesn`t stop Teaching</p>



  </body>
```

**Don`t Stop Learning**

Life doesn`t stop Teaching

# HTML –Style Attribute-2

```
<head>
<title>Page Title</title>
<style>
  h1 {color: rgb(251, 255, 0);
       background-color: #ff00c88e;
       font-family:times new roman
       font-size: 50 px;
       text-align:center
     }
  p {color: blue;}
</style>
</head>
<body>

<h1> Don`t Stop Learning</h1>
<p>Life doesn`t stop Teaching</p>

  </body>
```

**Don`t Stop Learning**

Life doesn`t stop Teaching

# HTML Nav Tag

- HTML **<nav>** tag is used to **represent a section** which contains **navigation links**, either within current document or to another document.

- Examples of some navigation links are **menu**, **table** of contents, **indexes**, etc

- NOT *all links of a document should be inside a <nav> element*. The **<nav>** element is intended only for major blocks of navigation links.

# HTML – Nav

```html
<body>
 <nav>
  <ul>
    <li>
      <a href="#DBCourse">Database Course </a>
    </li>
  </ul>
 </nav>

<h2>Database Course</h2>
<a name="DBCourse"></a>


  </body>
```

# HTML Comments

- You can **add comments** to your HTML source by using the following syntax

- Why Add Comments?

```
<!-- Write your comments here -->
```

# HTML Forms

- An HTML **<form>** is used **to collect user input**. The user input is most often **sent** to a **server** for **processing**.

- It is a **container** for different types of input elements,
  - such as: text fields, checkboxes, radio buttons, submit buttons, etc.

# HTML Forms
# The <input> Element

The HTML **<input>** element is the most used form element. An **<input>** element can be displayed in many ways, depending on the type attribute.

| Type | Description |
|---|---|
| <input type="text"> | Displays a single-line text input field |
| <input type="radio"> | Displays a radio button (for selecting **one** of many choices) |
| <input type="checkbox"> | Displays a checkbox (for selecting **zero** or **more** of many choices) |
| <input type="submit"> | Displays a submit button (for submitting the form) |
| <input type="button"> | Displays a clickable button |

# HTML Forms
# The <input> Element

- The **for** attribute of the **<label>** tag should be **equal** to the **id** attribute of the **<input>** element to *bind them together.*

- **The Submit Button**
  - The **<input type="submit">** defines a button for submitting the form data to a **form-handler**.
  - The **form-handler** is typically a file on the server with a script for processing input data.
  - The **form-handler** is specified in the form's action attribute.

# HTML – Forms -1

```html
<body>
  <form action="Computer.html">
    <label for="fname">First name:</label><br>
    <input type="text" id="fname" name="fname" value="Ahmed"><br>

    <label for="lname">Last name:</label><br>
    <input type="text" id="lname" name="lname" value="Mustafa"><br><br>

    <input type="submit" value="Submit">
```

```html
<p>Choose your favorite Web language:</p>

<input type="radio" id="html" name="fav_language" value="HTML">
<label for="html">HTML</label><br>

<input type="radio" id="css" name="fav_language" value="CSS">
<label for="css">CSS</label><br>

<input type="radio" id="javascript" name="fav_language" value="JavaScript">
<label for="javascript">JavaScript</label>
```

# HTML – Forms -2

```html
  <p>Choose your favorite Course:</p>
  <input type="checkbox" id="DB" name="DataBase" value="DStructure">
  <label for="DB"> Data Base Course</label><br>
  <input type="checkbox" id="WP" name="WebPage" value="WebProgramming">
  <label for="WP"> Web Programming language</label><br>
  <input type="checkbox" id="CS" name="CyberSEcurity" value="Security">
  <label for="CS"> Cyber Security Course</label>
</form>
```

# HTML – Forms-3

```html
<label for="fname">First name:</label><br>
<input type="text" id="fname" name="fname" value="Ahmed"><br>
```

```html
<form action="Computer.html">
  <input type="submit" value="Submit">
```

# HTML – Forms -4

```
<input type="checkbox" id="DB" name="DataBase" value="DStructure">
<label for="DB"> Data Base Course</label><br>
```

```
<input type="radio" id="html" name="fav_language" value="HTML">
<label for="html">HTML</label><br>
```

# HTML – Forms -4

First name:

Ahmed

Last name:

Mustafa

Submit

Choose your favorite Web language:

- HTML
- CSS
- JavaScript

Choose your favorite Course:

- Data Base Course
- Web Programming language
- Cyber Security Course

# HTML Multimedia

- Multimedia comes in **many different formats**.
- It can be almost anything you can **hear** or **see**.
  - Such as :images, music, sound, videos, records, films, animations, and more.

# HTML Video Tag

The HTML **<video>** tag is used for streaming video files such as a movie clip, song clip on the web page.

| MPEG | .mpg<br>.mpeg | MPEG. Developed by the Moving Pictures Expert Group. The first popular video format on the web. Not supported anymore in HTML. |
|---|---|---|
| WebM | .webm | WebM. Developed by Mozilla, Opera, Adobe, and Google. Supported by HTML. |
| Flash | .swf<br>.flv | Flash. Developed by Macromedia. Often requires an extra component (plug-in) to play in web browsers. |
| Ogg | .ogg | Theora Ogg. Developed by the Xiph.Org Foundation. Supported by HTML. |
| MPEG-4<br>or MP4 | .mp4 | MP4. Developed by the Moving Pictures Expert Group. Commonly used in video cameras and TV hardware. Supported by all browsers and recommended by YouTube. |

# HTML - Video Tag

```html
<video width="320" height="240" controls>
  <source src="videos/CodingKids.mp4" type="video/mp4">
    Your browser does not support the video tag.
</video>
```

```html
<video width="320" height="240" autoplay muted >
  <source src="videos/CodingKids.mp4" type="video/mp4">
    Your browser does not support the video tag.
</video>
```

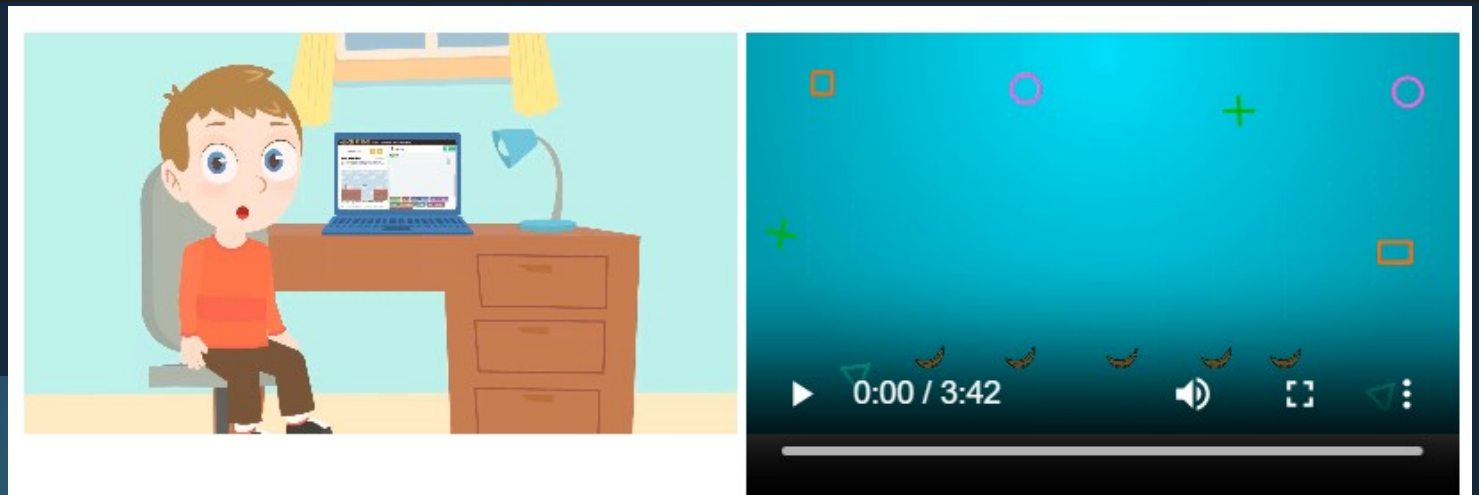

# HTML Video Tag

The `**controls** attribute adds video controls, like play, pause, and volume.

To start a video automatically, use the **autoplay** attribute

Add **muted** after **autoplay** to let your video start playing automatically (but muted)

The **<source>** element allows you to specify alternative video files which the browser may choose from.

The text between the <video> and </video> tags will only be displayed in browsers **that do not support the <video>** element.

# HTML Audio Tag

- The **controls** attribute adds audio controls, like play, pause, and volume.
- To start a audio automatically, use the **autoplay** attribute.
- Add **muted** after **autoplay** to let your audio start playing automatically (but muted).
- The <**source**> element allows you to specify alternative audio files which the browser may choose from.
- The text between the **<audio>** and **</audio>** tags will only be displayed in browsers **that do not support the <audio>** element.

# HTML – Audio Tag

```
<audio controls autoplay>
  <source src="horse.mp3" type="audio/mpeg">
Your browser does not support the audio element.
</audio>
```

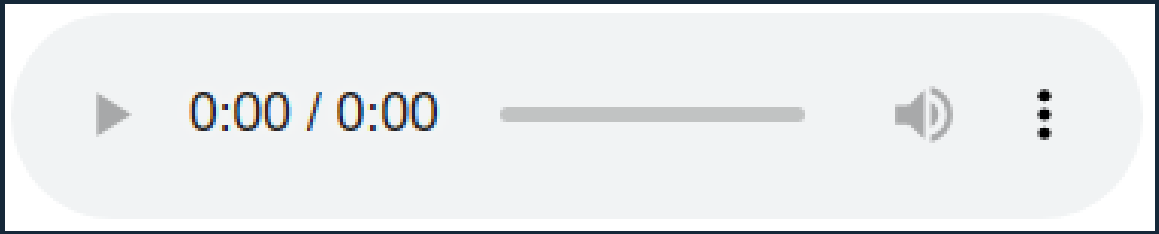

# HTML iframe Tag - HTML YouTube Videos

- HTML **Iframe** is used **to display a nested webpage** (a webpage within a webpage).
- The HTML **<iframe>** tag defines an **inline frame**, hence it is also called as an Inline frame.

- An HTML **iframe** embeds another document within the current HTML document in the **rectangular** region.

- It is possible to let YouTube play the videos in your web page.

- YouTube **Video Id** - YouTube will display an id (like tgbNymZ7vqY), when you save (or play) a video.
- You can use this **id**, and refer to your video in the HTML code.

# HTML YouTube Videos

```
<iframe width="220" height="115"
src="https://www.youtube.com/embed/X3paOmcrTjQ">
</iframe>

<iframe width="220" height="115"
src="https://www.youtube.com/watch?v=fUpChfNN5Uo">
</iframe>
```

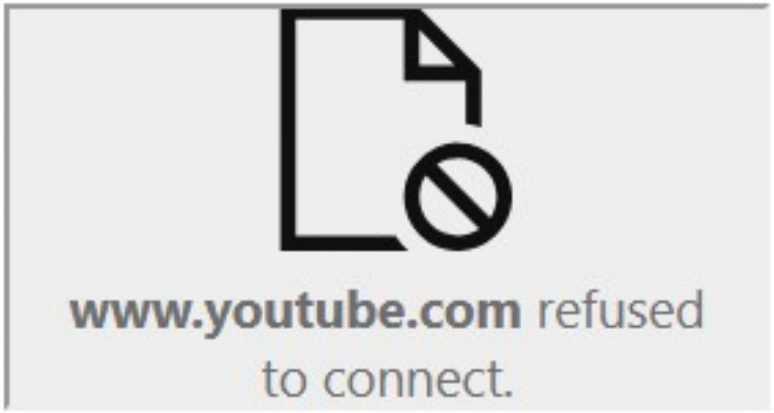

# THANKS FOR YOUR ATTENTION !