

## Connectionist Models

Consider humans:

- Neuron switching time  $\sim .001$  second
- Number of neurons  $\sim 10^{10}$
- Connections per neuron  $\sim 10^4-5$
- Scene recognition time  $\sim .1$  second
- 100 inference steps doesn't seem like enough

→ much parallel computation


Properties of artificial neural nets (ANN's):

- Many neuron-like threshold switching units
- Many weighted interconnections among units
- Highly parallel, distributed process
- Emphasis on tuning weights automatically

75

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## ALVINN drives 70 mph on highways

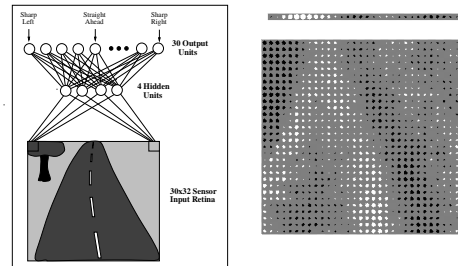

77

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## When to Consider Neural Networks

- Input is high-dimensional discrete or real-valued (e.g. raw sensor input)
- Output is discrete or real valued
- Output is a vector of values
- Possibly noisy data
- Form of target function is unknown
- Human readability of result is unimportant


Examples:

- Speech phoneme recognition [Waibel]
- Image classification [Kanade, Baluja, Rowley]
- Financial prediction

76

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Perceptron

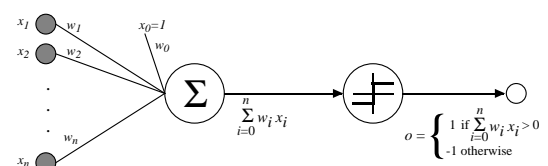

$$o(x_1, \dots, x_n) = \begin{cases} 1 & \text{if } w_0 + w_1x_1 + \dots + w_nx_n > 0 \\ -1 & \text{otherwise.} \end{cases}$$

Sometimes we'll use simpler vector notation:


$$o(\vec{x}) = \begin{cases} 1 & \text{if } \vec{w} \cdot \vec{x} > 0 \\ -1 & \text{otherwise.} \end{cases}$$

78

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Decision Surface of a Perceptron

---

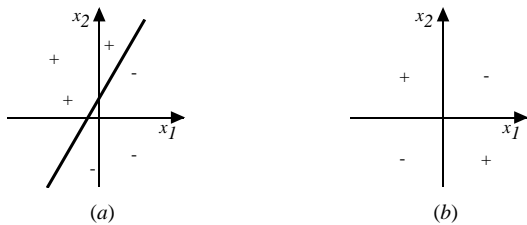

Represents some useful functions

- What weights represent  
 $g(x_1, x_2) = AND(x_1, x_2)$ ?

But some functions not representable

- e.g., not linearly separable
- Therefore, we'll want networks of these...

## Perceptron training rule

---

Can prove it will converge

- If training data is linearly separable
- and  $\eta$  sufficiently small

## Perceptron training rule

---

$$w_i \leftarrow w_i + \Delta w_i$$

where

$$\Delta w_i = \eta(t - o)x_i$$

Where:

- $t = c(\vec{x})$  is target value
- $o$  is perceptron output
- $\eta$  is small constant (e.g., .1) called *learning rate*

## Gradient Descent

---

To understand, consider simpler *linear unit*, where

$$o = w_0 + w_1x_1 + \cdots + w_nx_n$$


Let's learn  $w_i$ 's that minimize the squared error

$$E[\vec{w}] \equiv \frac{1}{2} \sum_{d \in D} (t_d - o_d)^2$$

Where  $D$  is set of training examples

## Gradient Descent

---

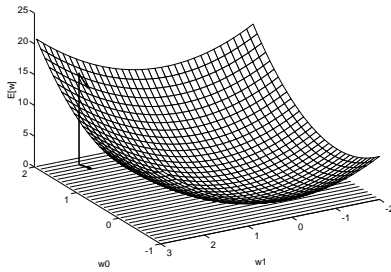

Gradient

$$\nabla E[\vec{w}] \equiv \left[ \frac{\partial E}{\partial w_0}, \frac{\partial E}{\partial w_1}, \dots, \frac{\partial E}{\partial w_n} \right]$$

Training rule:

$$\Delta \vec{w} = -\eta \nabla E[\vec{w}]$$

i.e.,

$$\Delta w_i = -\eta \frac{\partial E}{\partial w_i}$$

83

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Gradient Descent

---

GRADIENT-DESCENT(*training\_examples*,  $\eta$ )

Each training example is a pair of the form  $\langle \vec{x}, t \rangle$ , where  $\vec{x}$  is the vector of input values, and  $t$  is the target output value.  $\eta$  is the learning rate (e.g., .05).

- Initialize each  $w_i$  to some small random value
- Until the termination condition is met, Do

- Initialize each  $\Delta w_i$  to zero.

- For each  $\langle \vec{x}, t \rangle$  in *training\_examples*, Do

- \* Input the instance  $\vec{x}$  to the unit and compute the output  $o$

- \* For each linear unit weight  $w_i$ , Do

$$\Delta w_i \leftarrow \Delta w_i + \eta(t - o)x_i$$

- For each linear unit weight  $w_i$ , Do

$$w_i \leftarrow w_i + \Delta w_i$$

85

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Gradient Descent

---

$$\begin{aligned} \frac{\partial E}{\partial w_i} &= \frac{\partial}{\partial w_i} \frac{1}{2} \sum_d (t_d - o_d)^2 \\ &= \frac{1}{2} \sum_d \frac{\partial}{\partial w_i} (t_d - o_d)^2 \\ &= \frac{1}{2} \sum_d 2(t_d - o_d) \frac{\partial}{\partial w_i} (t_d - o_d) \\ &= \sum_d (t_d - o_d) \frac{\partial}{\partial w_i} (t_d - \vec{w} \cdot \vec{x}_d) \\ \frac{\partial E}{\partial w_i} &= \sum_d (t_d - o_d)(-x_{i,d}) \end{aligned}$$

84

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Summary

---

Perceptron training rule guaranteed to succeed if

- Training examples are linearly separable
- Sufficiently small learning rate  $\eta$

Linear unit training rule uses gradient descent

- Guaranteed to converge to hypothesis with minimum squared error
- Given sufficiently small learning rate  $\eta$
- Even when training data contains noise
- Even when training data not separable by  $H$

86

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Incremental (Stochastic) Gradient Descent

### Batch mode Gradient Descent:

Do until satisfied

1. Compute the gradient  $\nabla E_D[\vec{w}]$
2.  $\vec{w} \leftarrow \vec{w} - \eta \nabla E_D[\vec{w}]$

### Incremental mode Gradient Descent:

Do until satisfied

- For each training example  $d$  in  $D$ 
  1. Compute the gradient  $\nabla E_d[\vec{w}]$
  2.  $\vec{w} \leftarrow \vec{w} - \eta \nabla E_d[\vec{w}]$

$$E_D[\vec{w}] \equiv \frac{1}{2} \sum_{d \in D} (t_d - o_d)^2$$


$$E_d[\vec{w}] \equiv \frac{1}{2} (t_d - o_d)^2$$

*Incremental Gradient Descent* can approximate *Batch Gradient Descent* arbitrarily closely if  $\eta$  made small enough

87

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Sigmoid Unit

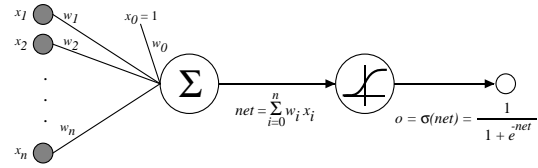

$\sigma(x)$  is the sigmoid function

$$\frac{1}{1 + e^{-x}}$$

Nice property:  $\frac{d\sigma(x)}{dx} = \sigma(x)(1 - \sigma(x))$


We can derive gradient decent rules to train

- One sigmoid unit
- *Multilayer networks* of sigmoid units  $\rightarrow$  Backpropagation

89

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Multilayer Networks of Sigmoid Units

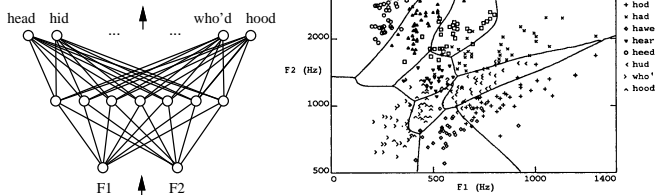

88

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Error Gradient for a Sigmoid Unit

$$\begin{aligned} \frac{\partial E}{\partial w_i} &= \frac{\partial}{\partial w_i} \frac{1}{2} \sum_{d \in D} (t_d - o_d)^2 \\ &= \frac{1}{2} \sum_d \frac{\partial}{\partial w_i} (t_d - o_d)^2 \\ &= \frac{1}{2} \sum_d 2(t_d - o_d) \frac{\partial}{\partial w_i} (t_d - o_d) \\ &= \sum_d (t_d - o_d) \left( -\frac{\partial o_d}{\partial w_i} \right) \\ &= -\sum_d (t_d - o_d) \frac{\partial o_d}{\partial net_d} \frac{\partial net_d}{\partial w_i} \end{aligned}$$

But we know:

$$\begin{aligned} \frac{\partial o_d}{\partial net_d} &= \frac{\partial \sigma(net_d)}{\partial net_d} = o_d(1 - o_d) \\ \frac{\partial net_d}{\partial w_i} &= \frac{\partial (\vec{w} \cdot \vec{x}_d)}{\partial w_i} = x_{i,d} \end{aligned}$$

So:

$$\frac{\partial E}{\partial w_i} = - \sum_{d \in D} (t_d - o_d) o_d (1 - o_d) x_{i,d}$$

90

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Backpropagation Algorithm

Initialize all weights to small random numbers.  
Until satisfied, Do

- For each training example, Do
  1. Input the training example to the network and compute the network outputs
  2. For each output unit  $k$

$$\delta_k \leftarrow o_k(1 - o_k)(t_k - o_k)$$

3. For each hidden unit  $h$

$$\delta_h \leftarrow o_h(1 - o_h) \sum_{k \in \text{outputs}} w_{h,k} \delta_k$$

4. Update each network weight  $w_{i,j}$

$$w_{i,j} \leftarrow w_{i,j} + \Delta w_{i,j}$$


where

$$\Delta w_{i,j} = \eta \delta_j x_{i,j}$$

91

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Learning Hidden Layer Representations



A target function:

Input	Output
10000000	→ 10000000
01000000	→ 01000000
00100000	→ 00100000
00010000	→ 00010000
00001000	→ 00001000
00000100	→ 00000100
00000010	→ 00000010
00000001	→ 00000001

Can this be learned??

93

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## More on Backpropagation


- Gradient descent over entire *network* weight vector
- Easily generalized to arbitrary directed graphs
- Will find a local, not necessarily global error minimum
  - In practice, often works well (can run multiple times)
- Often include weight *momentum*  $\alpha$ 
$$\Delta w_{i,j}(n) = \eta \delta_j x_{i,j} + \alpha \Delta w_{i,j}(n-1)$$
- Minimizes error over *training* examples
  - Will it generalize well to subsequent examples?
- Training can take thousands of iterations → slow!
- Using network after training is very fast

92

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Learning Hidden Layer Representations

A network:



Learned hidden layer representation:


Input	Hidden Values	Output
10000000	→ .89 .04 .08	→ 10000000
01000000	→ .01 .11 .88	→ 01000000
00100000	→ .01 .97 .27	→ 00100000
00010000	→ .99 .97 .71	→ 00010000
00001000	→ .03 .05 .02	→ 00001000
00000100	→ .22 .99 .99	→ 00000100
00000010	→ .80 .01 .98	→ 00000010
00000001	→ .60 .94 .01	→ 00000001

94

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Training

---

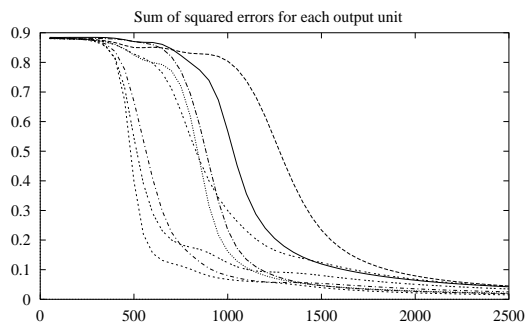


95

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Training

---

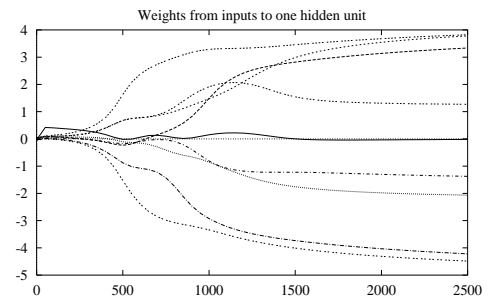


97

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Training

---

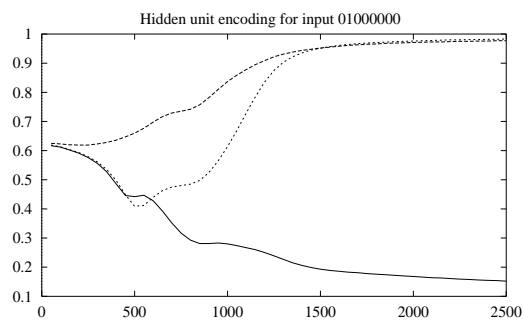

96

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Convergence of Backpropagation

---

Gradient descent to some local minimum

- Perhaps not global minimum...
- Add momentum
- Stochastic gradient descent
- Train multiple nets with different initial weights

Nature of convergence

- Initialize weights near zero
- Therefore, initial networks near-linear
- Increasingly non-linear functions possible as training progresses

98

lecture slides for textbook *Machine Learning*, T. Mitchell, McGraw Hill, 1997

## Expressive Capabilities of ANNs


Boolean functions:

- Every boolean function can be represented by network with single hidden layer
- but might require exponential (in number of inputs) hidden units

Continuous functions:

- Every bounded continuous function can be approximated with arbitrarily small error, by network with one hidden layer [Cybenko 1989; Hornik et al. 1989]
- Any function can be approximated to arbitrary accuracy by a network with two hidden layers [Cybenko 1988].



## Neural Nets for Face Recognition

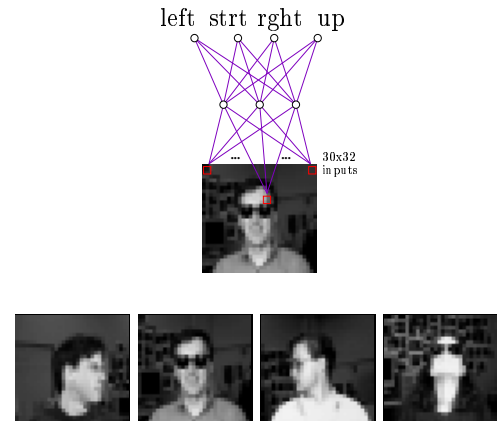


Typical input images

90% accurate learning head pose, and recognizing 1-of-20 faces

## Overfitting in ANNs

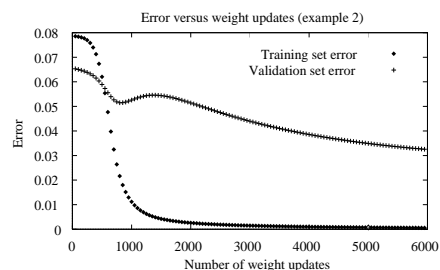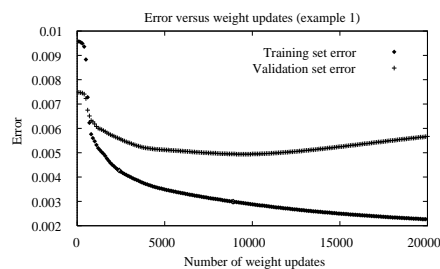

## Learned Hidden Unit Weights

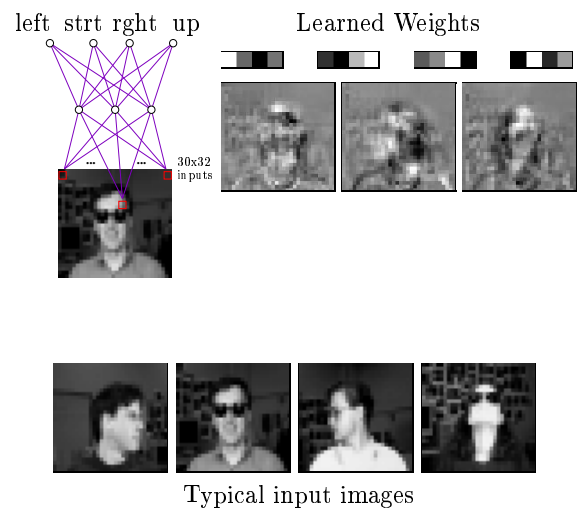

Typical input images

<http://www.cs.cmu.edu/~tom/faces.html>

## Alternative Error Functions

---

Penalize large weights:

$$E(\vec{w}) \equiv \frac{1}{2} \sum_{d \in D} \sum_{k \in \text{outputs}} (t_{kd} - o_{kd})^2 + \gamma \sum_{i,j} w_{ji}^2$$

Train on target slopes as well as values:

$$E(\vec{w}) \equiv \frac{1}{2} \sum_{d \in D} \sum_{k \in \text{outputs}} \left[ (t_{kd} - o_{kd})^2 + \mu \sum_{j \in \text{inputs}} \left( \frac{\partial t_{kd}}{\partial x_d^j} - \frac{\partial o_{kd}}{\partial x_d^j} \right)^2 \right]$$

Tie together weights:

- e.g., in phoneme recognition network

## Recurrent Networks

---

