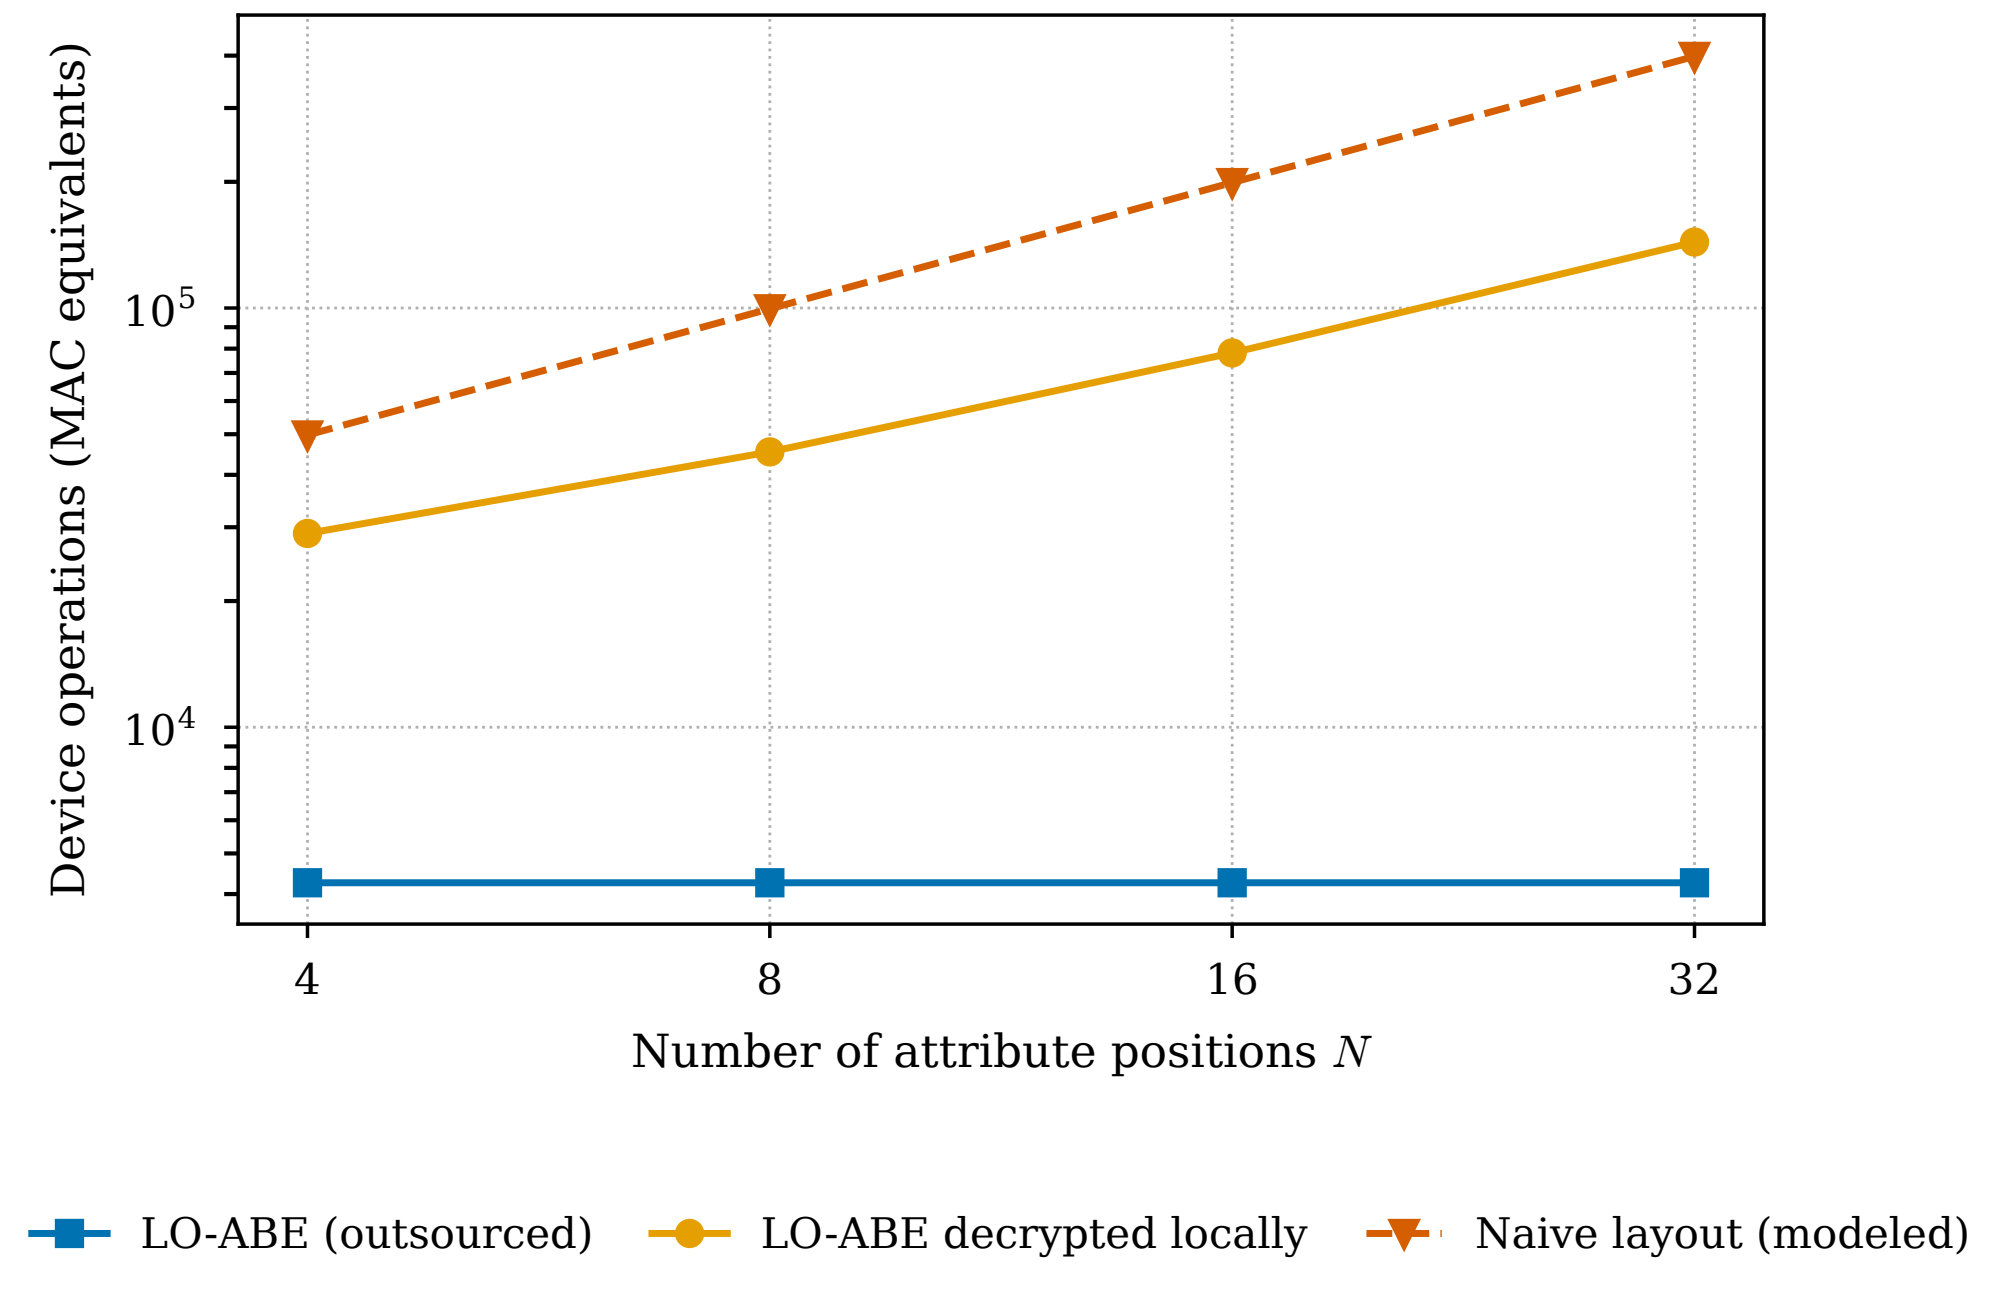
Device operations (MAC equivalents)
10^5
10^4
4
8
16
32
Number of attribute positions N
LO-ABE (outsourced)
LO-ABE decrypted locally
Naive layout (modeled)