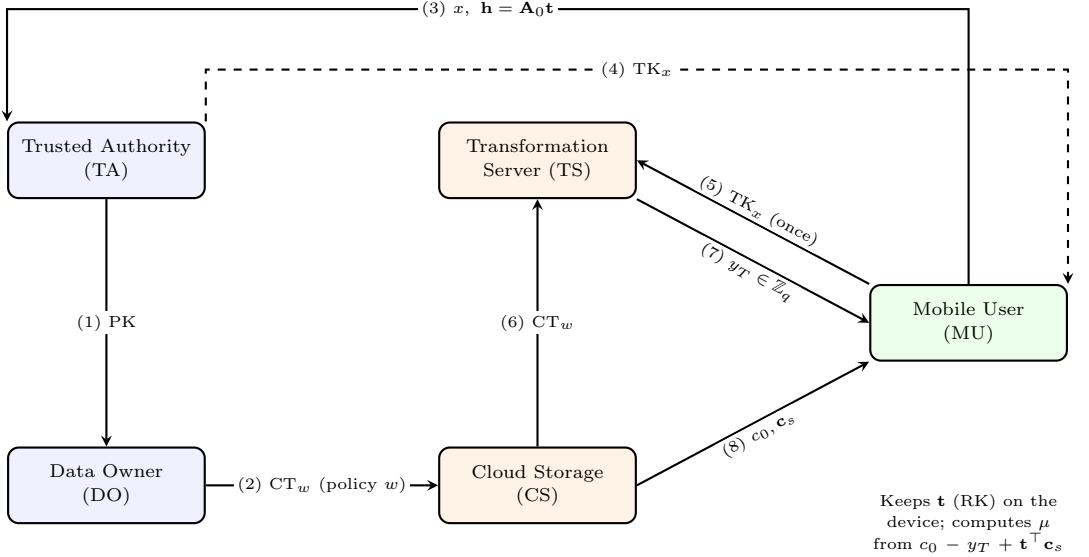

(3) x, $\mathbf{h} = \mathbf{A}_0\mathbf{t}$
(4) TK_x
Trusted Authority (TA)
Transformation Server (TS)
(5) TK_x (once)
(7) $y_T \in \mathbb{Z}_q$
Mobile User (MU)
(1) PK
(6) CT_w
Data Owner (DO)
(2) CT_w (policy w)
Cloud Storage (CS)
(8) $c_0, \mathbf{c}_s$
Keeps $\mathbf{t}$ (RK) on the device; computes μ from $c_0 - y_T + \mathbf{t}^\top \mathbf{c}_s$