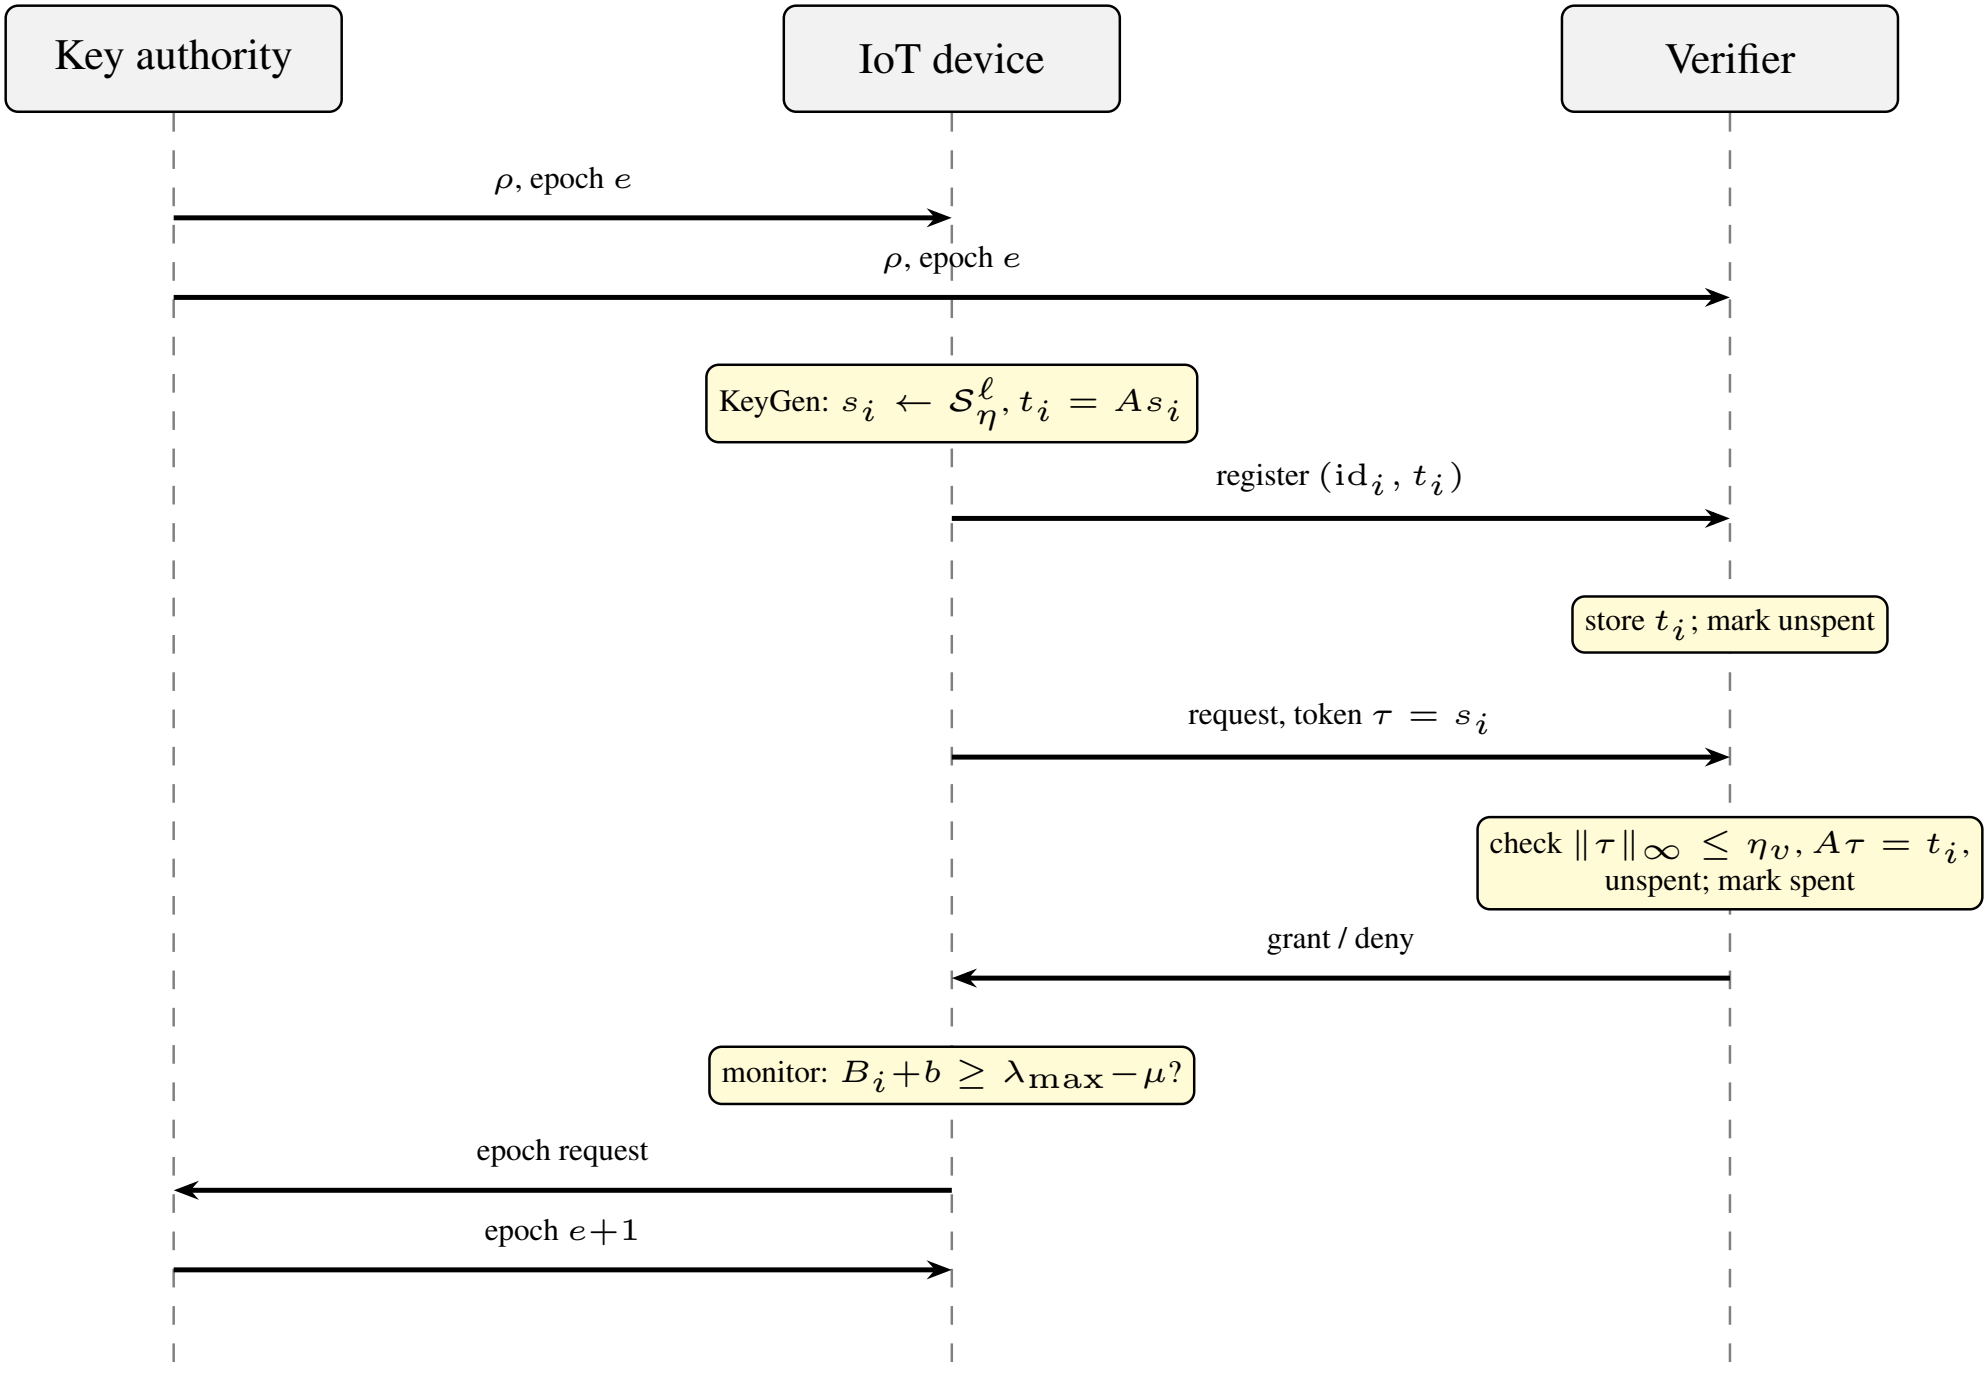
Key authority
IoT device
Verifier
ρ, epoch e
ρ, epoch e
KeyGen: $s_i \leftarrow \mathcal{S}_\eta^\ell, t_i = As_i$
register (id_i, t_i)
store t_i; mark unspent
request, token $\tau = s_i$
check $\|\tau\|_\infty \leq \eta_v$, $A\tau = t_i$, unspent; mark spent
grant / deny
monitor: $B_i + b \geq \lambda_{\max} - \mu$?
epoch request
epoch $e+1$