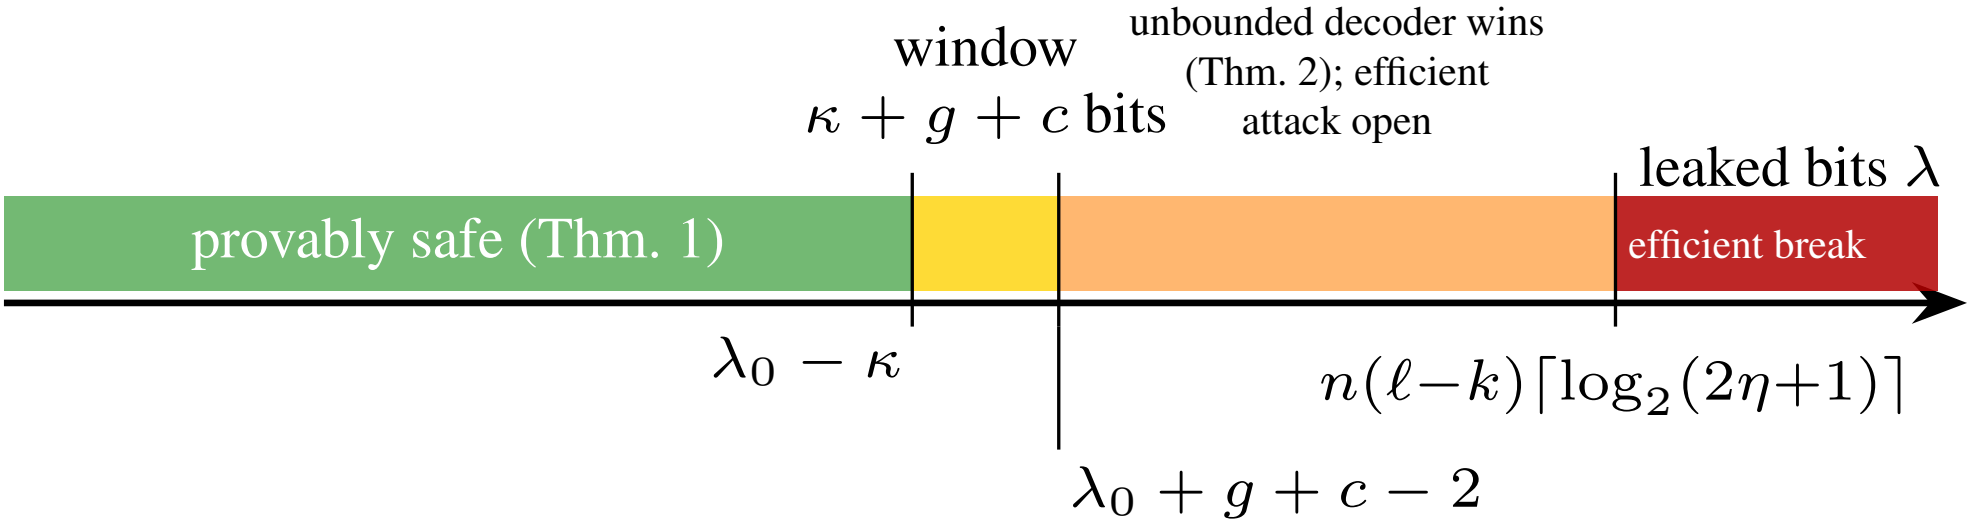
window
$\kappa + g + c$ bits
unbounded decoder wins
(Thm. 2); efficient
attack open
leaked bits $\lambda$
provably safe (Thm. 1)
efficient break
$\lambda_0 - \kappa$
$n(\ell - k)\lceil \log_2(2\eta+1) \rceil$
$\lambda_0 + g + c - 2$