



WINDOWS
Window & Door Collection

INTRODUCTION

Designed Around the Architecture


Windows and doors shape how a home looks, feels and performs.

The Atelier Window Collection brings together a considered range of aluminium window and door systems for contemporary Australian homes and architectural projects.

From large-format sliding and stacking doors to awning, casement, fixed and feature windows, each system can be configured around the requirements of the project, including opening size, glazing, frame finish, hardware and performance.

Every selection is considered as part of the wider architectural design, helping create a consistent balance of proportion, function and finish throughout the home.


Twelve aluminium systems across the Atelier Classic and Signature ranges, each configured around the opening, the glazing and the performance the project requires.

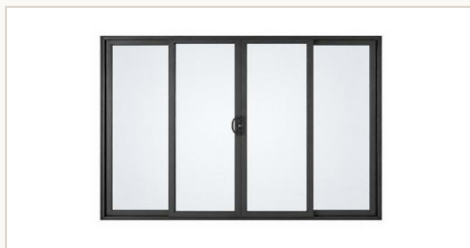

Sliding Windows & Doors

ATELIER CLASSIC · SERIES 102

Designed to Open Up the Way You Live

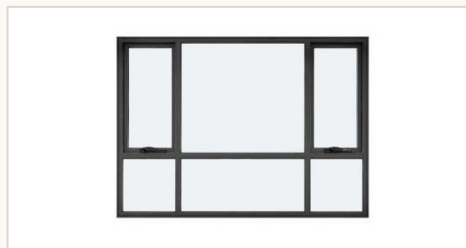

Awning Windows

ATELIER CLASSIC · SERIES 102

Natural Light Without Compromising Ventilation



Casement Doors & Windows

ATELIER CLASSIC · SERIES 102

A Clean Transition Between Indoors and Out



Pocket Sliding Doors & Windows

ATELIER CLASSIC · SERIES 102

Designed to Disappear



Glass Louvre Windows

ATELIER CLASSIC · SERIES 102


Ventilation Designed Around the Space



Sliding Doors & Windows

ATELIER CLASSIC · SERIES 86

Practical Sliding Performance for Everyday Living

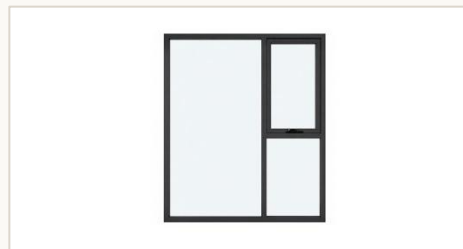

Awning Windows

ATELIER CLASSIC · SERIES 86


Practical Ventilation. Clean Contemporary Design.



Folding Doors

ATELIER CLASSIC · SERIES 75

Fold Back the Boundary

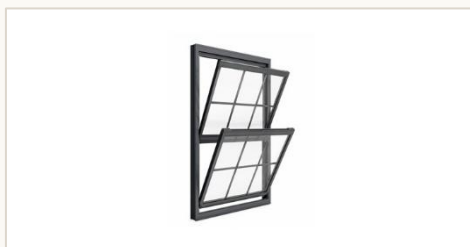

Hung Windows

ATELIER CLASSIC · SERIES 101

Vertical Ventilation. Timeless Design.



Thermal Break Sliding Doors & Windows

ATELIER SIGNATURE · SERIES 102 THERMAL
BREAK


Expansive Openings. Improved Thermal Performance.



Thermal Break Casement Doors

ATELIER SIGNATURE · SERIES 102 THERMAL
BREAK

A Refined Door with Improved Thermal Performance

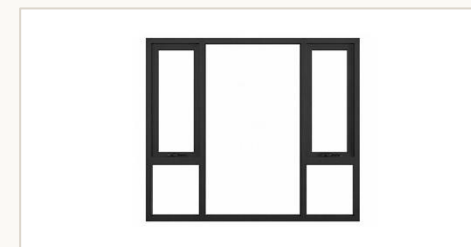

Thermal Break Awning Windows

ATELIER SIGNATURE · SERIES 102 THERMAL
BREAK

Designed for Light, Air and Everyday Comfort

Configurations shown are indicative. Every system is manufactured to approved project dimensions and specified to comply with AS 2047, AS 1288 and the project's BASIX or NatHERS requirements.

Sliding Windows & Doors

Designed to Open Up the Way You Live

The Atelier Classic Series 102 is a robust aluminium sliding door and window system designed for wide openings and contemporary Australian homes.

Its slim aluminium framing and large glazed panels maximise natural light while maintaining a clean, architectural appearance. A precision-engineered sliding track provides smooth and reliable operation, making the system ideal for connecting living areas with patios, gardens, balconies and pool areas.

SPECIFICATIONS

Product type	Aluminium sliding doors and windows
Configuration shown	Four-panel sliding system with central locking hardware
Compliance	AS 2047 and AS 1288
Aluminium grade	6063-T5 aluminium
Profile thickness	2.0 mm
System width	102 mm
Glazing option 1	5 mm toughened + 12 mm air gap + 5 mm toughened
Glazing option 2	6 mm toughened + 12 mm air gap + 6 mm toughened
Additional glazing	Other configurations to suit project requirements
Hardware	Doric locking and operating hardware
Insect screens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom colours	Available to order
Suitable applications	Living areas, patios, balconies, pool areas and large openings



Awning Windows

Natural Light Without Compromising Ventilation

The Atelier Classic Series 102 Awning Window combines expansive fixed glazing with practical operable panels. The result is a refined architectural window that brings natural light and broad views into the home while still providing controlled airflow when required.

Its strong aluminium framing, double-glazing options and dependable Doric hardware make it a versatile solution for modern Australian residential projects.

SPECIFICATIONS

Product type	Aluminium awning window system
Configuration shown	Two side awning sashes with central fixed glazing and fixed lower panels
Operation	Outward-opening awning sash
Ventilation	Controlled ventilation through side awning panels
Aluminium profile	6063-T5 aluminium
Profile thickness	2.0 mm
System width	102 mm
Glazing option 1	5 mm toughened + 12 mm air gap + 5 mm toughened
Glazing option 2	6 mm toughened + 12 mm air gap + 6 mm toughened
Other glazing	Available subject to project and performance requirements
Hardware	Doric awning-window hardware
Insect screens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Living rooms, bedrooms, stairwells, hallways and feature elevations



Casement Doors & Windows

A Clean Transition Between Indoors and Out

The Atelier Classic Series 102 Casement Door introduces natural light and open views through a refined full-height glazed design. Its slim aluminium framing and minimal hardware create a modern architectural appearance, while the robust profile and double-glazing options provide strength and dependable performance.

Designed for residential projects, the door can be customised in size, glazing, hardware, flyscreen and frame colour to complement the surrounding architecture. It is ideal for balconies, courtyards, pool areas, side access points and living spaces.

SPECIFICATIONS

Product type	Aluminium casement door
Operation	Side-hinged casement operation
Aluminium profile	6063-T5 aluminium
Profile thickness	2.0 mm
System width	102 mm
Glazing option 1	5 mm toughened + 12 mm air gap + 5 mm toughened
Glazing option 2	6 mm toughened + 12 mm air gap + 6 mm toughened
Additional glazing	Available to suit project and performance requirements
Hardware	Kinlong lever handle and locking hardware
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Balconies, patios, courtyards, pool areas, side access and living spaces



Pocket Sliding Doors & Windows

Designed to Disappear

The Atelier Classic Series 102 Pocket Sliding System allows the glazed panel to slide completely into the adjoining wall cavity, leaving the opening clear and uninterrupted.

This concealed design is ideal for projects seeking a stronger connection between indoor and outdoor living spaces without sacrificing valuable floor area. When closed, the large glazed panel introduces natural light and expansive views. When opened, the panel disappears discreetly from sight.

SPECIFICATIONS

Product type	Pocket sliding window and door
Operation	Sliding panel retracts into a concealed wall cavity
Aluminium profile	6063-T5 aluminium
Profile thickness	2.0 mm
System width	102 mm
Glazing option 1	5 mm toughened + 12 mm air gap + 5 mm toughened
Glazing option 2	6 mm toughened + 12 mm air gap + 6 mm toughened
Additional glazing	Available to suit project and performance requirements
Hardware	Doric or approved equivalent sliding hardware
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Living rooms, balconies, patios, courtyards, pool areas and entertaining spaces



Glass Louvre Windows

Ventilation Designed Around the Space

The Atelier Classic Series 102 Glass Louvre Window allows airflow to be adjusted according to changing weather and ventilation requirements.

Its horizontal glass blades can be partially or fully opened to capture passing breezes while maintaining a clean architectural appearance. The system is particularly suited to bathrooms, kitchens and living areas where natural ventilation is required without sacrificing daylight.

SPECIFICATIONS

Product type	Aluminium-framed glass louvre window
Operation	Manual handle louvre mechanism
Louvre blades	Horizontal adjustable glass blades
Standard blade glass	5 mm toughened glass
Aluminium profile	6063-T5 aluminium
Profile thickness	2.0 mm
System width	102 mm
Hardware	Kinlong manual louvre operator and blade control
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Bathrooms, kitchens, laundries, hallways, stairwells and living spaces



Sliding Doors & Windows


Practical Sliding Performance for Everyday Living

The Atelier Classic Series 86 Sliding System provides a clean and space-efficient solution for connecting living areas with balconies, patios, gardens and other outdoor spaces.

Its sliding panels operate without projecting into the room, making the system particularly suitable where furniture placement or limited floor area must be considered. Generous glazing introduces natural light and open views, while the durable aluminium frame and double-glazing options provide dependable everyday performance.

SPECIFICATIONS

Product type	Aluminium sliding doors and windows
Operation	Horizontal sliding panels on an aluminium track
Extrusion profile	6063-T5 aluminium
Profile thickness	1.6 mm
System width	86 mm
Standard glazing	5 mm toughened + 9 mm air gap + 5 mm toughened
Other glazing	Available to suit project and performance requirements
Hardware	Siegenia or Doric sliding and locking hardware
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Living areas, bedrooms, balconies, patios, courtyards and entertaining spaces

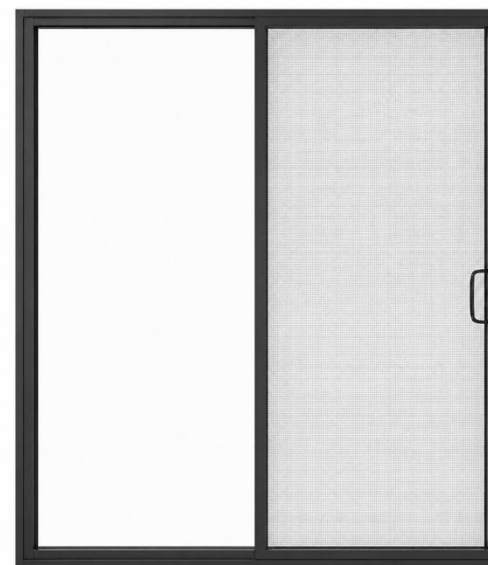

Awning Windows

Practical Ventilation. Clean Contemporary Design.

The Series 86 Awning Window provides a practical way to introduce fresh air and natural light into the home. Its top-hinged design allows the sash to open outward from the bottom, delivering controlled ventilation while maintaining a clean architectural finish.

With durable aluminium framing, double-glazing options and dependable Doric hardware, the Series 86 is suited to a wide range of contemporary Australian residential applications.

SPECIFICATIONS

Product type	Aluminium awning window
Operation	Top-hinged sash opening outward from the bottom
Extrusion profile	6063-T5 aluminium
Profile thickness	1.6 mm
System width	86 mm
Standard glazing	5 mm toughened + 9 mm air gap + 5 mm toughened
Other glazing	Available to suit project and performance requirements
Hardware	Doric operating and locking hardware
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Bedrooms, kitchens, bathrooms, laundries, living areas, hallways and feature elevations



Folding Doors

Fold Back the Boundary

The Series 75 Folding Door System allows multiple glazed panels to fold and stack compactly at the edge of the opening, creating a broad connection between internal living spaces and the outdoors.

When closed, the glazed panels provide natural light and clear views. When opened, the system reduces the obstruction across the doorway and allows living, dining and entertaining areas to function as one connected space. Its durable aluminium construction, double glazing and dependable folding hardware make it a practical choice for contemporary Australian homes.

SPECIFICATIONS

Product type	Aluminium folding door system
Operation	Multiple hinged panels fold and stack to the side of the opening
Opening direction	Inward or outward folding, subject to configuration
Configuration options	Multi-panel arrangements subject to opening dimensions
Extrusion profile	6063-T5 aluminium
Profile thickness	1.8 mm
System width	75 mm
Standard glazing	5 mm toughened + 12 mm air gap + 5 mm toughened
Hardware	LSMA folding hardware
Flyscreens	0.5 mm folding aluminium flyscreen
Standard frame colours	Matt Black, Monument and Pure White
Suitable applications	Living areas, dining rooms, patios, balconies, courtyards and covered alfresco areas



Hung Windows

Vertical Ventilation. Timeless Design.

The Series 101 Hung Window provides natural ventilation through a practical vertical sliding design. Because the sash remains within the plane of the window, it does not interfere with internal furnishings, external walkways or surrounding landscaping.

Its double-glazed construction, durable aluminium framing and refined proportions make it a versatile solution for contemporary Australian homes as well as projects seeking a more traditional window style.

SPECIFICATIONS

Product type	Aluminium hung window
Operation	Vertical sliding sash
Configuration options	Single-hung or double-hung, subject to project requirements
Extrusion profile	6063-T5 aluminium
Profile thickness	1.5 mm
System width	101 mm
Standard glazing	5 mm toughened + 12 mm air gap + 5 mm toughened
Other glazing	Available to suit project and performance requirements
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Suitable applications	Bedrooms, kitchens, living areas, hallways, upper-storey rooms and residential elevations





ATELIER SIGNATURE · SERIES 102 THERMAL BREAK

Thermal Break Sliding Doors & Windows

Expansive Openings. Improved Thermal Performance.

The Atelier Signature Series 102 Thermal Break Sliding System is designed for projects requiring expansive glazing with improved thermal performance. An insulating barrier separates the internal and external aluminium sections, reducing direct heat transfer through the frame.

Combined with suitable double glazing, this improves internal comfort, reduces unwanted heat gain or loss and helps minimise condensation on the interior frame. The result is a strong, refined sliding system for large openings with smooth operation and a clean contemporary appearance.

SPECIFICATIONS

Product type	Thermal break sliding doors and windows
Thermal barrier	Insulating polyamide barrier between internal and external aluminium
Operation	Horizontal sliding panels on a precision track
Aluminium grade	6063-T5 aluminium
Profile thickness	2.0 mm
System width	102 mm
Glazing option 1	5 mm toughened + 12 mm air gap + 5 mm toughened
Glazing option 2	6 mm toughened + 12 mm air gap + 6 mm toughened
Additional glazing	Available to suit project and performance requirements
Hardware	Doric sliding and locking hardware
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Living areas, dining rooms, balconies, patios, pool areas and large architectural openings





ATELIER SIGNATURE · SERIES 102 THERMAL BREAK

Thermal Break Casement Doors

A Refined Door with Improved Thermal Performance

The Atelier Signature Series 102 Thermal Break Casement Door creates a light-filled connection between internal and external spaces while providing improved insulation through its thermally separated aluminium frame.

When combined with suitable double glazing, the system can help reduce unwanted heat transfer, improve indoor comfort and minimise condensation on the internal frame surface. Its strong construction, clean sightlines and dependable hinged operation make it a versatile choice for modern Australian homes.

SPECIFICATIONS

Product type	Full-height thermal break casement door
Operation	Side-hinged, opening inward or outward subject to configuration
Frame construction	Thermally broken aluminium framing
Thermal barrier	Insulating polyamide barrier separating internal and external aluminium
Aluminium profile	6063-T5 aluminium
Profile thickness	2.0 mm
System width	102 mm
Glazing option 1	5 mm toughened + 12 mm air gap + 5 mm toughened
Glazing option 2	6 mm toughened + 12 mm air gap + 6 mm toughened
Additional glazing	Available to suit project and performance requirements
Hardware	Kinlong lever handle, hinges and locking hardware
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Balconies, patios, courtyards, side access, pool areas and living spaces





ATELIER SIGNATURE · SERIES 102 THERMAL BREAK

Thermal Break Awning Windows


Designed for Light, Air and Everyday Comfort

The Atelier Signature Series 102 Awning Window opens outward from the bottom to introduce fresh air while maintaining a streamlined appearance, with a thermally separated frame that improves insulation.

Its robust aluminium framing, double-glazing options and dependable Doric hardware make it a versatile solution for contemporary residential projects. The system can be customised in size, glazing, flyscreen and frame colour to complement the surrounding architecture.

SPECIFICATIONS

Product type	Full-height thermal break awning window
Operation	Top-hinged sash opening outward from the bottom
Frame construction	Thermally broken aluminium framing
Thermal barrier	Insulating polyamide barrier separating internal and external aluminium
Extrusion profile	6063-T5 aluminium
Profile thickness	1.8 mm
System width	102 mm
Glazing option 1	5 mm toughened + 12 mm air gap + 5 mm toughened
Glazing option 2	6 mm toughened + 12 mm air gap + 6 mm toughened
Other glazing	Available to suit project and performance requirements
Hardware	Doric operating and locking hardware
Flyscreens	Aluminium, fibreglass or stainless-steel mesh, or retractable screen
Standard frame colours	Matt Black, Monument and Pure White
Custom frame colours	Special powder-coat colours available to order
Suitable applications	Bedrooms, kitchens, bathrooms, laundries, living areas, hallways and feature elevations

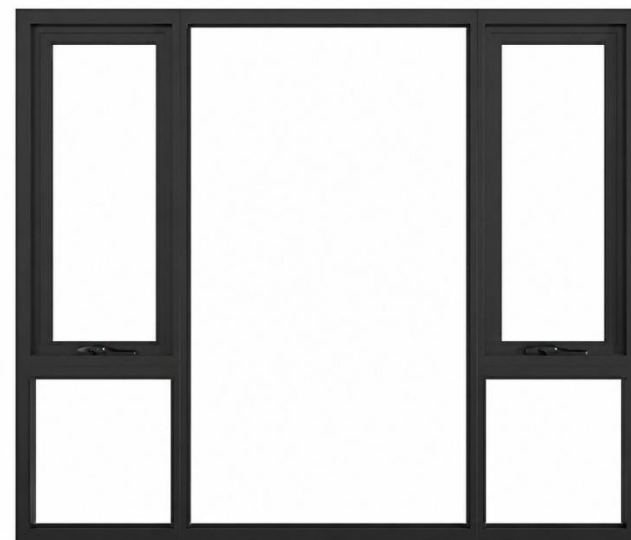

SPECIFICATION & OPTIONS

Flyscreens

Integrated protection without compromising the view.

Flyscreens are specified alongside your windows and doors, so frames, mesh and powder-coat colours arrive as one coordinated package rather than an afterthought. Every system in the collection can be screened, and the screen type follows the way the window or door operates.

Screen types

Fixed screens · Fitted to awning, casement, louvre and hung windows. The simplest and most discreet option, framed to match the window colour.

Sliding screens · For sliding doors and windows, running in a dedicated track beside the glazed panel so the opening stays usable.

Rolling and retractable screens · Housed in a slim cassette and drawn across the opening only when needed. Suited to large doors and openings where an uninterrupted view is the priority.

Mesh options

Fibreglass mesh · The everyday choice: fine, economical and easy to see through.

Aluminium mesh · A firmer mesh that holds its shape well on larger panels.

304 stainless steel mesh · The strongest and most durable option, suited to coastal locations and high-use doors.

Mesh type and frame colour are matched to each window system at specification stage.




Fixed flyscreen frames



Sliding door with retractable flyscreen



Fine mesh, clear view

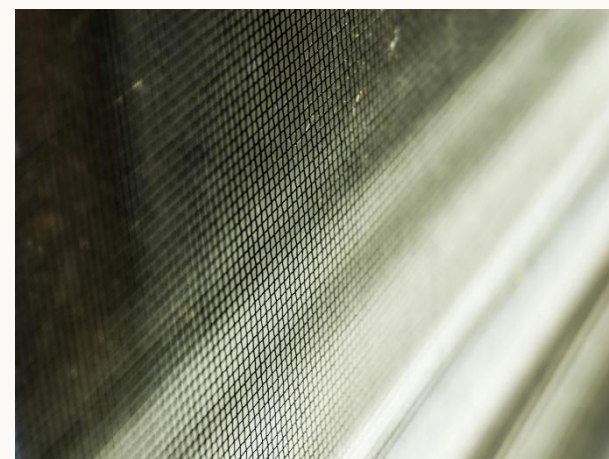

Mesh detail

SPECIFICATION & OPTIONS

Glass Options

Glazing specified for performance, comfort and compliance.

Glass is where a window earns its performance. Every Atelier system is glazed to suit the application, the orientation and the energy requirements of the project, with the combination selected to meet the project's BASIX or NatHERS requirements and the applicable requirements of AS 1288.

Double glazing · Two panes of toughened glass separated by a sealed air gap. The standard configuration across the collection is 5 mm toughened, 12 mm air gap, 5 mm toughened (9 mm gap on Series 86), with 6 mm options for larger panels, improving insulation, comfort and sound control.

Low-E glass · A low-emissivity coating that reflects heat back toward its source, reducing heat gain in summer and heat loss in winter. The usual route to meeting BASIX and NatHERS targets on exposed elevations.

Laminated glass · Two panes bonded with an interlayer. Grade A safety glass that holds together if broken, with added security, UV reduction and sound control.

Acoustic glass · Laminated glass with an acoustic interlayer, specified for bedrooms and living areas near roads, rail or flight paths.

Obscure glass · Patterned or frosted glass for bathrooms, ensuites and boundary windows where privacy is required without losing light.

Single glazing · A single pane of toughened glass for secondary and internal openings where thermal performance is not the priority.

Safety glazing · AS 1288 sets out where safety glass must be used, including doors, side panels, low-level glazing and bathrooms. The toughened and laminated glass used across the collection are Grade A safety glazing materials, and the correct type and thickness are confirmed for every opening on the shop drawings.

Energy performance · BASIX and NatHERS assessments set the glazing performance a home must achieve. Atelier reviews the assessment against the window schedule and selects the glass and frame combination for each opening so the package meets the certificate before manufacture.



Double-glazed unit within a thermally broken Series 102 frame

SPECIFICATION & OPTIONS

Installation Materials

Thought through beyond the window and door.

Options include subheads, subsills, flashings, angles, connection bars, fixing and packing components, seals, trims and timber reveals, selected to suit the window or door system and project requirements.

By considering these components at specification stage, we help reduce last-minute sourcing, site improvisation and compatibility issues, creating a more complete package that arrives ready to install.

What can be included

Subheads and subsills · Sized to the system and the opening, so the frame sits level and drains correctly.

Flashings · Head, sill and jamb flashings to suit the wall construction and cladding.


Angles and connection bars · For coupling systems side by side, stacking transoms and forming corners.

Fixing and packing components · Fixings, packers and brackets matched to the substrate.

Seals and trims · Weather seals, backing rod and finishing trims for a clean, sealed junction.

Timber reveals · Reveals and liners supplied to suit the wall thickness and internal finish.

Installation materials are confirmed on the shop drawings for each opening and can be supplied with the window and door package or omitted where the builder prefers to source locally.

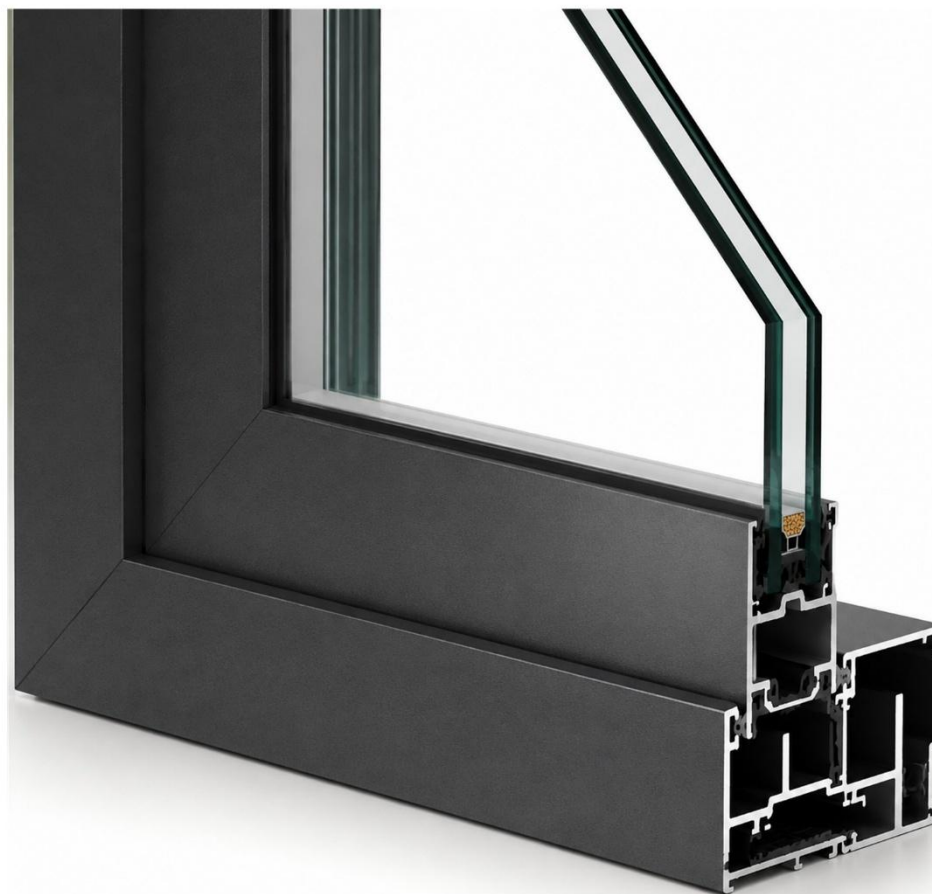

Series 102 sliding frame section



WHY ATELIER

We Know Construction.

Windows made for the opening, not just the drawing.

Buildings are not constructed to the millimetre, and a window package should never assume they are.

Atelier is run by people who understand construction. We read architectural plans, window schedules and project documentation with an understanding of how buildings are actually built — including construction tolerances, structural movement, installation clearances and the conditions surrounding each opening.

That thinking carries through to the way each window and door package is resolved. Appropriate allowances are considered around the frame so units can be installed correctly, sealed properly and operate as intended once the building is complete.

Before manufacture, the package is coordinated against the project documentation and resolved through detailed shop drawings for approval. Production is then followed by factory quality control and coordinated delivery to site.

The result is more than a window order. It is a window package considered from drawing through to installation.

What you can expect

- Sizing considered around real construction tolerances and installation requirements
- Detailed shop drawings issued for approval before manufacture
- Glazing and performance requirements coordinated against the project documentation
- AS 2047 and AS 1288 requirements addressed where applicable
- BASIX and NatHERS requirements reviewed where relevant
- Factory quality inspection prior to dispatch
- One coordinated package delivered to site



PROJECT SELECTION

Windows Designed Around Your Project

Every project has different requirements.

Once your preferred window and door systems are selected, the Atelier team reviews the project as a whole to ensure each opening is considered against the architectural design, performance requirements and surrounding finishes.

We coordinate:

- Window and door configurations
- Opening sizes and proportions
- Frame colours and powdercoat finishes
- Single, double and performance glazing
- Hardware selections
- BASIX and NatHERS requirements
- Architectural plans and window schedules
- Detailed shop drawings prior to manufacture

The result is a coordinated window and door package tailored to the project, with the key details resolved before production begins.

Start Your Window Project

Send us your architectural plans, window schedule or project information and the Atelier team can assist with system selection, glazing, finishes, shop drawings and project pricing.

From initial specification through to manufacture and delivery, Atelier coordinates the details so your windows and doors are ready for the project.

Atelier Supply Group Pty Ltd · ABN 99 696 292 001

