

Dismiss

Join GitHub today

GitHub is home to over 40 million developers working together to host and review code, manage projects, and build software together.

Sign up

Branch: master ▾

Find file

Copy path

deep-learning-specialization-coursera / 01-Neural-Networks-and-Deep-Learning / week2 / quiz.pdf



 andersy005 Add quiz for week2

f57a2b8 on Aug 12, 2017

1 contributor

Download

History

196 KB

8/12/2017

Coursera | Online Courses From Top Universities. Join for Free | Coursera

Neural Network Basics

Quiz, 10 questions

9/10 points (90%)

 **Congratulations! You passed!**

Next Item

0 / 1
points

1.

What does a neuron compute?

A neuron computes a linear function ($z = Wx + b$) followed by an activation function

A neuron computes the mean of all features before applying the output to an activation function

**This should not be selected**

No. There is no mean applied in a neuron.

A neuron computes a function g that scales the input x linearly ($Wx + b$)A neuron computes an activation function followed by a linear function ($z = Wx + b$)1 / 1
points

2.

Which of these is the "Logistic Loss"?

 $\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = y^{(i)} \log(\hat{y}^{(i)}) + (1 - y^{(i)}) \log(1 - \hat{y}^{(i)})$ **Correct**

Correct, this is the logistic loss you've seen in lecture!

 $\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = |y^{(i)} - \hat{y}^{(i)}|$  $\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = |y^{(i)} - \hat{y}^{(i)}|^2$  $\mathcal{L}^{(i)}(\hat{y}^{(i)}, y^{(i)}) = \max(0, y^{(i)} - \hat{y}^{(i)})$ <https://www.coursera.org/learn/neural-networks-deep-learning/exam/9uiEN/neural-network-basics>

1/6

8/12/2017

Coursera | Online Courses From Top Universities. Join for Free | Coursera

Neural Network Basics

Quiz, 10 questions

9/10 points (90%)

1 / 1
points

3.

Suppose `img` is a (32,32,3) array, representing a 32x32 image with 3 color channels red, green and blue. How do you reshape this into a column vector?

- ☐ `x = img.reshape((3,32*32))`
- ☐ `x = img.reshape((1,32*32,*3))`
- ☐ `x = img.reshape((32*32,3))`
- ☒ `x = img.reshape((32*32*3,1))`

Correct1 / 1
points

4.

Consider the two following random arrays "a" and "b":

```
1 a = np.random.randn(2, 3) # a.shape = (2, 3)
2 b = np.random.randn(2, 1) # b.shape = (2, 1)
3 c = a + b
```

What will be the shape of "c"?

- ☐ The computation cannot happen because the sizes don't match. It's going to be "Error"!
- ☐ `c.shape = (3, 2)`
- ☒ `c.shape = (2, 3)`

Correct

Yes! This is broadcasting. `b` (column vector) is copied 3 times so that it can be summed to each column of `a`.

<https://www.coursera.org/learn/neural-networks-deep-learning/exam/9uiEN/neural-network-basics>

2/6

8/12/2017

Coursera | Online Courses From Top Universities. Join for Free | Coursera

Neural Network Basics

Quiz, 10 questions

`c.shape = (2, 1)`**9/10 points (90%)**1 / 1
points

5.

Consider the two following random arrays "a" and "b":

```
1 a = np.random.randn(4, 3) # a.shape = (4, 3)
2 b = np.random.randn(3, 2) # b.shape = (3, 2)
```

```

1 a = np.random.randn(3, 4) # a.shape = (3, 4)
2 b = np.random.randn(4, 4) # b.shape = (4, 4)
3 c = a*b

```

What will be the shape of "c"?

- ☐ c.shape = (3, 3)
- ☒ The computation cannot happen because the sizes don't match. It's going to be "Error"!

Correct

Indeed! In numpy the "*" operator indicates element-wise multiplication. It is different from "np.dot()". If you would try "c = np.dot(a,b)" you would get c.shape = (4, 2).

- ☐ c.shape = (4, 3)
- ☐ c.shape = (4,2)



1 / 1
points

6.

Suppose you have n_x input features per example. Recall that $X = [x^{(1)} x^{(2)} \dots x^{(m)}]$. What is the dimension of X?

- ☐ $(1, m)$
- ☒ (n_x, m)

Correct

<https://www.coursera.org/learn/neural-networks-deep-learning/exam/9uiEN/neural-network-basics>

3/6

8/12/2017

Coursera | Online Courses From Top Universities. Join for Free | Coursera

Neural Network Basics

Quiz, 10 questions

(m, n_x)

9/10 points (90%)

- ☐ $(m, 1)$



1 / 1
points

7.

Recall that "np.dot(a,b)" performs a matrix multiplication on a and b, whereas "a*b" performs an element-wise multiplication.

Consider the two following random arrays "a" and "b":

```

1 a = np.random.randn(12288, 150) # a.shape = (12288, 150)
2 b = np.random.randn(150, 45) # b.shape = (150, 45)
3 c = np.dot(a,b)

```

What is the shape of c?

- ☐ c.shape = (12288, 150)
- ☐ The computation cannot happen because the sizes don't match. It's going to be "Error"!
- ☒ c.shape = (12288, 45)

Correct

Correct, remember that a np.dot(a, b) has shape (number of rows of a, number of columns of b). The sizes match because :

"number of columns of a = 150 = number of rows of b"

- ☐ c.shape = (150,150)



1 / 1
points

8.

<https://www.coursera.org/learn/neural-networks-deep-learning/exam/9uiEN/neural-network-basics>

4/6

8/12/2017

Coursera | Online Courses From Top Universities. Join for Free | Coursera

Neural Network Basics

Quiz, 10 questions

```
1 # a.shape = (3,4)
2 # b.shape = (4,1)
3
4 for i in range(3):
5     for j in range(4):
6         c[i][j] = a[i][j] + b[j]
```

9/10 points (90%)

How do you vectorize this?



c = a + b.T

Correct

- ☐ c = a.T + b.T
- ☐ c = a + b
- ☐ c = a.T + b



1 / 1
points

9.

Consider the following code:

```
1 a = np.random.randn(3, 3)
2 b = np.random.randn(3, 1)
3 c = a*b
```

What will be c? (If you're not sure, feel free to run this in python to find out).

- ☒ This will invoke broadcasting, so b is copied three times to become (3,3), and * is an element-wise product so c.shape will be (3, 3)
- ☐ This will invoke broadcasting, so b is copied three times to become (3, 3), and * invokes a matrix multiplication operation of two 3x3 matrices so c.shape will be (3, 3)
- ☐ This will multiply a 3x3 matrix a with a 3x1 vector, thus resulting in a 3x1 vector. That is, c.shape = (3,1).
- ☐ It will lead to an error since you cannot use "*" to operate on these two matrices. You need to instead use np.dot(a,b)

Correct
<https://www.coursera.org/learn/neural-networks-deep-learning/exam/9uiEN/neural-network-basics>

5/6

8/12/2017

Coursera | Online Courses From Top Universities. Join for Free | Coursera

Neural Network Basics


Quiz, 10 questions

101 points

9/10 points (90%)

10.

Consider the following computation graph.

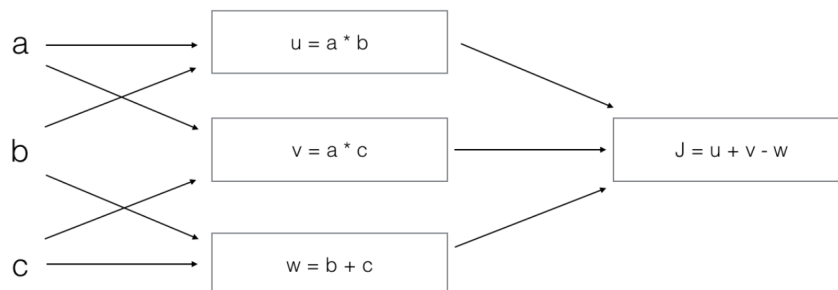

What is the output J?

- ☐ $J = (c - 1) * (b + a)$
- ☒ $J = (a - 1) * (b + c)$

CorrectYes. $J = u + v - w = a*b + a*c - (b + c) = a * (b + c) - (b + c) = (a - 1) * (b + c)$.

☐ $J = a*b + b*c + a*c$

☒ $J = a^{(1)}b + b^{(1)}c + a^{(1)}c$

☐ $J = (b - 1) * (c + a)$



