

TẠO STEAM CHO THIẾT BỊ CORE

1. Ý Tưởng:

- Không gom quá nhiều Event/Filter thành 1 stream, sau này dashboard và alert sẽ khó.
- NÊN tách thành nhiều Stream nhỏ để tiện soi log
- Tạo Indies Set giới hạn thời gian lưu log
- Ví dụ:

Loại	Stream
Interface up/down	Cisco-L3-Interface
ACL	Cisco-L3-ACL
Config change	Cisco-L3-Config
HSRP	Cisco-L3-HA
OSPF/BGP	Cisco-L3-Routing

Hay Stream cho **Cisco-L3-Security** gồm:


- ACL deny
- login fail
- port-security
- IP access-list

2. Mục tiêu:

- Định nghĩa Index Set có tên **vck_Cisco-Switch-Logs** để giới hạn thời gian lưu trữ log trên Server
- Tạo mới Stream **01_Layer 3 All Logs** gán vào Index Set **vck_Cisco-Switch-Logs**
- Tạo Stream **01_Layer 3-Sec** với nhiều Rule

3. Thực hiện:

3.1 Index Set

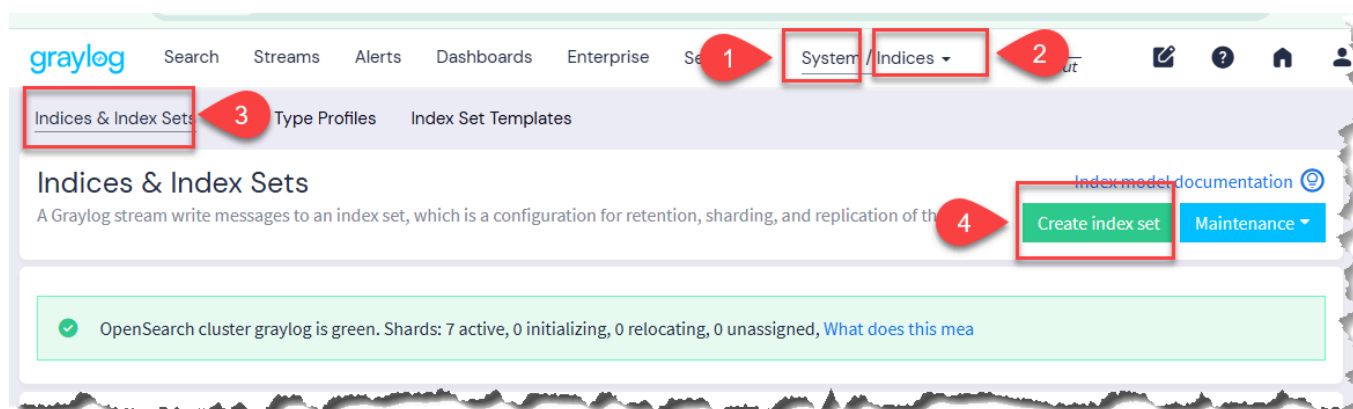

[Indices & Index Sets](#) [Field Type Profiles](#) [Index Set Templates](#)

Configure Index Set

Modify the current configuration for this index set, allowing you to customize the retention, sharding, and replication of messages coming from one or more streams.

Configuration Information

Title

Descriptive name of the index set.

Description

Add a description of this index set.

Details

Rotation & Retention

[Data Tiering](#) [Legacy \(Deprecated\)](#)

Max. days in storage

After how many days your data should be deleted.

Min. days in storage

How many days at minimum your data should be stored.

3.2 Tạo Stream, gán Index Set và tạo Rule

Editing Stream

Title

01_Layer 3 All Logs

A descriptive name of the new stream

Description (Opt.)

What kind of messages are routed into this stream?

Index Set

vck_Cisco-Switch-Logs

Messages that match this stream will be written to the configured index set.

☒ Remove matches from 'Default Stream'

Don't assign messages that match this stream to the 'Default Stream'.

Cancel

Update stream

vck_Cisco-Switch-Logs

1

0

- Tạo Rule: chỉ lọc ^Server_Room_CoreSwitch_4507.*

Edit Stream Rule

Field
source

Type
match regular expression

Value
^Server_Room_CoreSwitch_4507.*

☐ Inverted

Description (Opt.)

Result: so...
^Server_R...

Chỉ lọc thiết bị khớp

The server will try to convert to strings or numbers based on the matcher type as well as it can.

[Take a look at the matcher code on GitHub](#)

Regular expressions use Java syntax. [🔗](#)

Cancel Update Rule

- Tương tự cho các rule khác
- Nếu nhiều rule trong 1 Stream NÊN CHỌN **A message must match at least one of the following rules** tức là điều kiện **HOẶC** để khớp 1 trong các rule

Rules of Stream "01_Layer 3-Sec"

This screen is dedicated to an easy and comfortable creation and manipulation of stream rules. You can see the effect of

Nếu 1 trong các Rule khớp (HOẶC)

1. Load a message to test rules

Recent Message Message ID

Select an Input from the list below and click "Load Message" to load the most recent message received by this input with

Select an Input Load Message

2. Manage stream rules

☐ A message must match all of the following rules

☒ A message must match at least one of the following rules

VÍ DỤ

Please load a message in Step 1 above to check if it would match against these rules.

☐ message must contain %SEC-

☐ message must contain %C4K_REDUNDANCY-5-CONFIGSYNC

I'm done!

Danh sách rules

- Vào Streams sẽ thấy số lượng rule đã tạo cho mỗi Stream

graylog Search **Streams** Alerts Dashboards 3

Streams

You can route incoming messages into streams by applying rules against a stream are routed into it. A single stream.

Search for streams Filters

Bulk actions

Title	Index Set	Archiving	Rules	Pipelines	Outputs	Throughput	Status
☐ 01_Layer 3 All Logs	vck_Cisco-Switch-Logs	×	1	0	0	0 msg/s	Running
☐ 01_Layer 3-Sec	vck_Cisco-Switch-Logs	×	2	0	0	0 msg/s	Running
☐ All events	Graylog Events					0 msg/s	Running

Stream containing all events created by Graylog