

CHUẨN HÓA SOURCE

1. Mục tiêu:

- Thực hiện trên Windows với Winlogbeat
- Log đẩy về Graylog Server **source** là hostname(tên máy tính), ví dụ: `vck_lab-host_Graylog`
- Dựa vào các trường đã có như: winlogbeat_host_hostname, winlogbeat_host_ip, winlogbeat_host_mac, gl2_remote_ip để chuyển source mới **có dạng**: `hsv_ten-may-tinh_dia-chi-ip-may-tinh`. Ví dụ: **hsv_vck_lab-host_Graylog_192.168.0.40**

2. Thực hiện:

2.1 Cài Graylog Sidecar

(Tham khảo các cài trên Windows)

2.2 Pipeline:


Bước 1. Stop Services Graylog Sidecar

(thực hiện trên windows/sender)

Bước 2. Sửa nội dung Collector Configuration

System -> Sidecars -> Configuration -> chọn Beatfile config cần chỉnh -> thêm code dưới vào cuối

```
processors:  
  - add_host_metadata:  
      netinfo.enabled: true
```

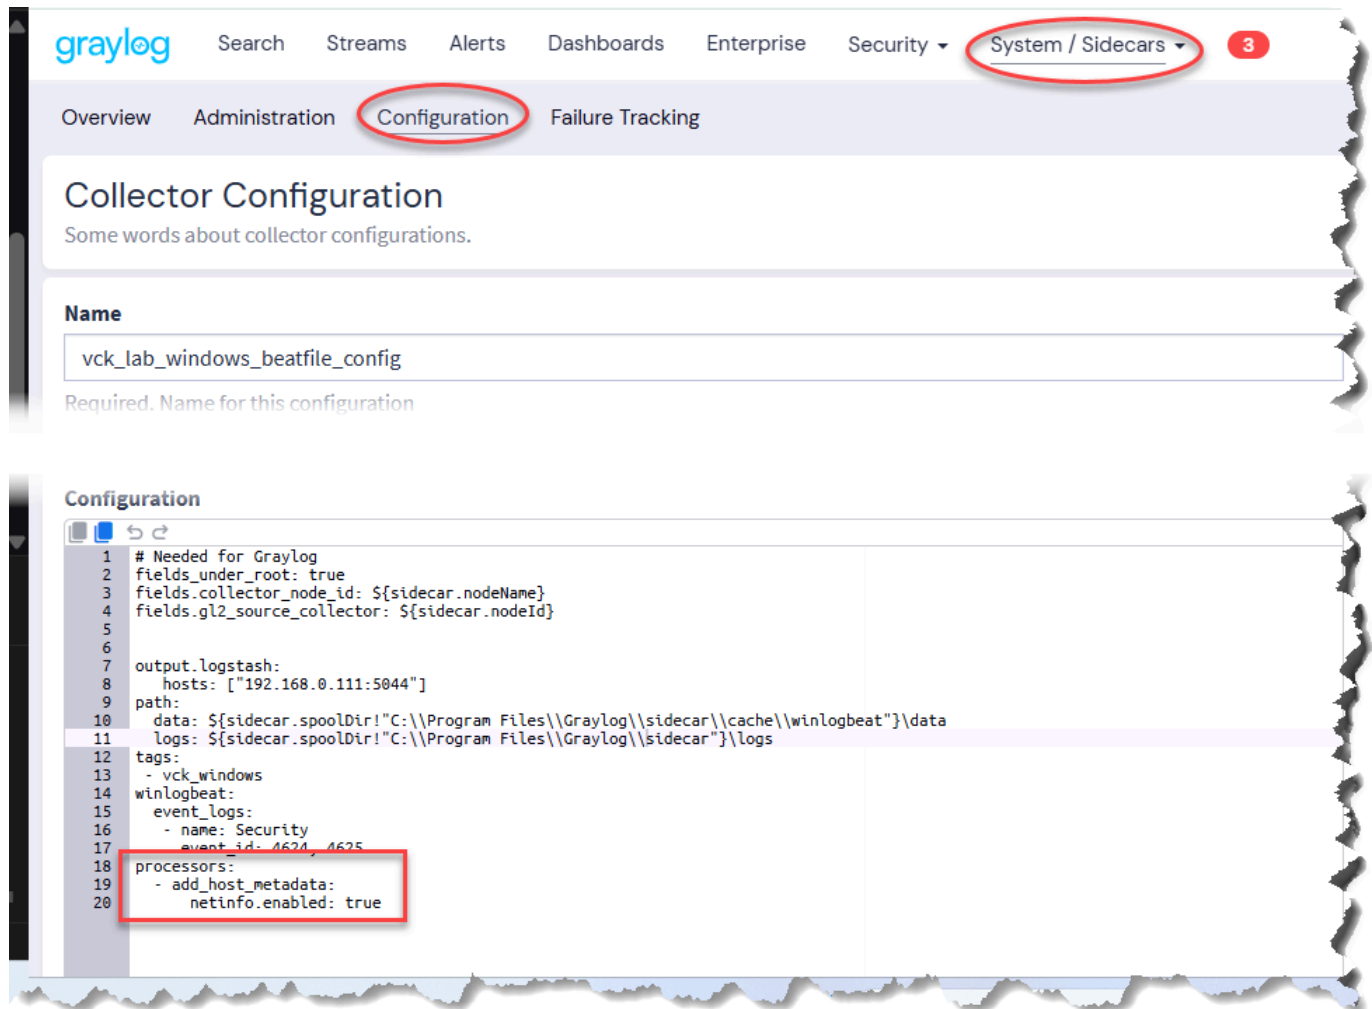


Bước 3. Start Services Graylog Sidecar

(thực hiện trên windows/sender)

Bước 4. Tạo rule Pipeline


- Tạo pipeline trống:

System -> Pipelines -> Manage rules -> Create Rule -> Ví dụ: vck_Mau

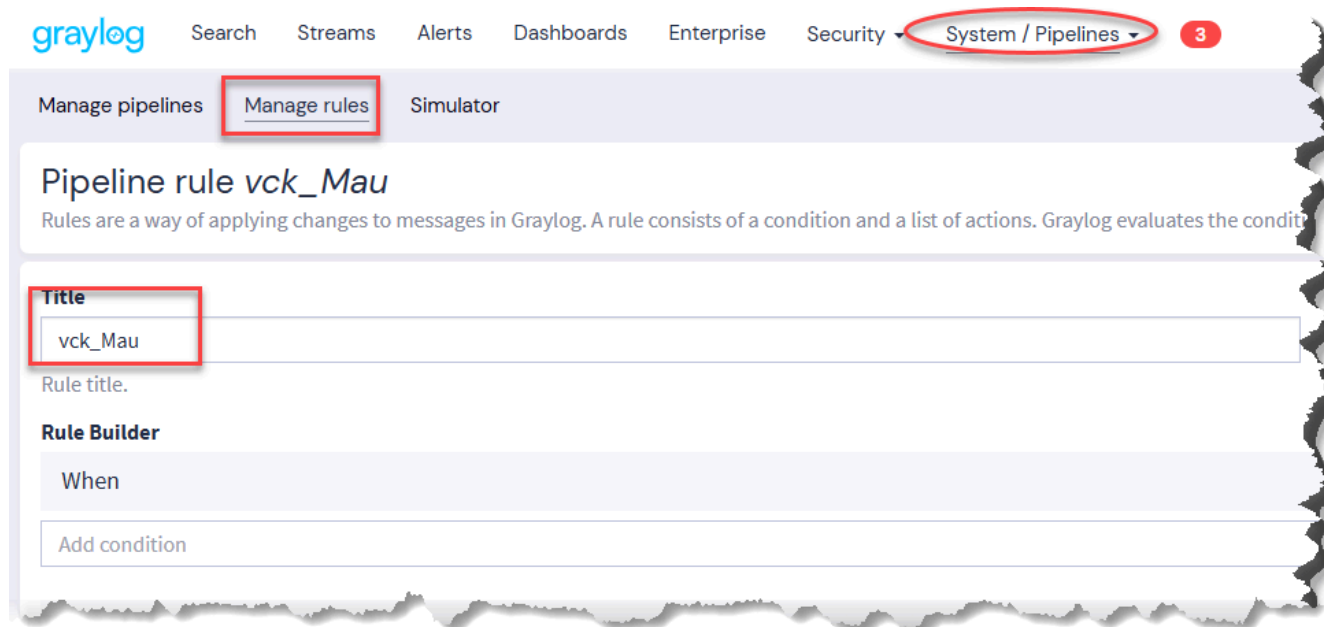

- Convert to Source Code

Edit Pipeline mẫu (vck_Mau) -> Convert to Source Code -> Creat New Rule from Code -> dán code vào (nội dung trong file pipeline code-mau.txt) -> Create Rule

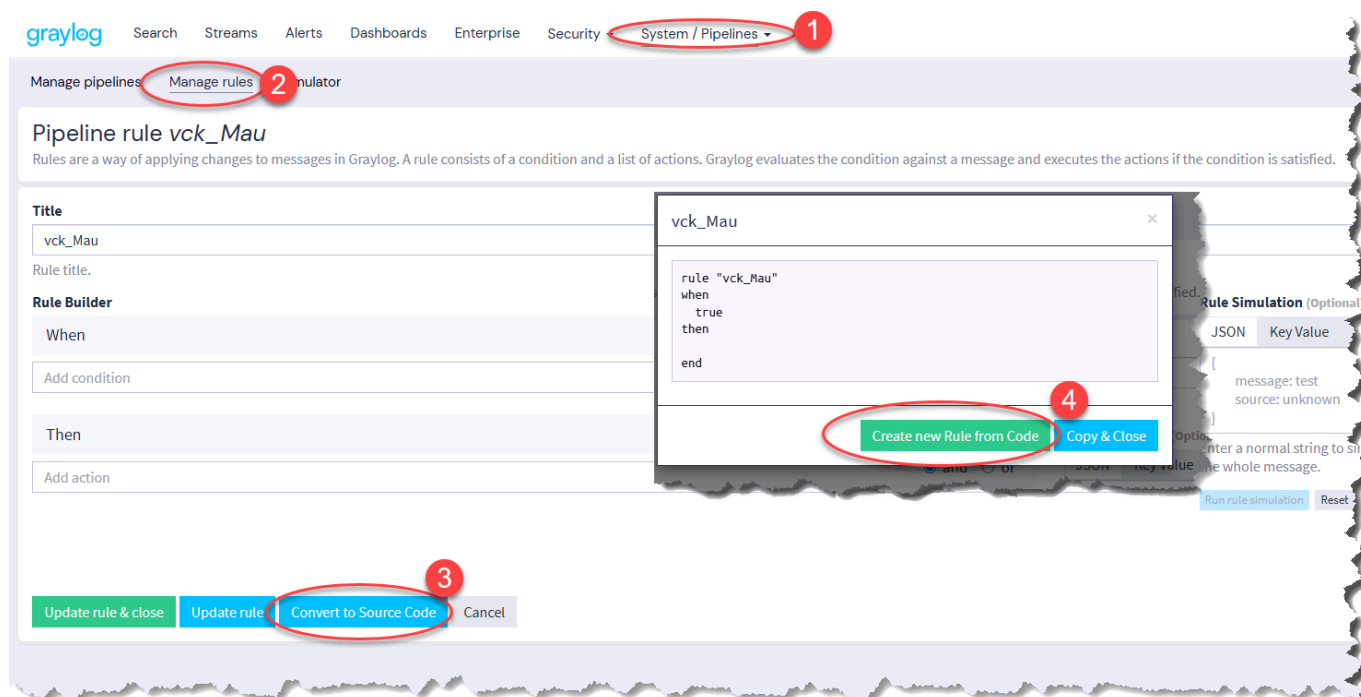

[Manage pipelines](#) [Manage rules](#) [Simulator](#)

Create pipeline rule

Rules are a way of applying changes to messages in Graylog. A rule consists of a condition and a list of actions. Graylog evaluates the con

Title

You can set the rule title in the rule source. See the quick reference for more information.

Description

Rule description (optional).

Rule source

```
1 rule "vck_normalize_source_hostname_ip"
2 when
3   has_field("winlogbeat_host_hostname") AND has_field("winlogbeat_host_ip")
4 then
5   // 1. Lấy giá trị của hostname và ip
6   let host = to_string($message.winlogbeat_host_hostname);
7   let ip = to_string($message.gl2_remote_ip);
8
9   // 2. Nối chuỗi: "hsv_" + host + "_" + ip
10  let prefix = concat("hsv_", host);
11  let final_source = concat(concat(prefix, "_"), ip);
12
13  // 3. Ghi đè vào trường source
14  set_field("source", final_source);
15 end
```

Rule source, see quick reference for more information.

Rule Simulation (Optional)

JSON Key Value Simple Message

Enter a normalized message to simulate the message field, key-value pairs or a JSON to simulate the whole message.

[Run rule simulation](#) [Reset](#)

[Create rule](#) [Cancel](#)

Dán code vào




Create rule


Cancel

Bước 5. Test Rule vừa tạo

- Copy message

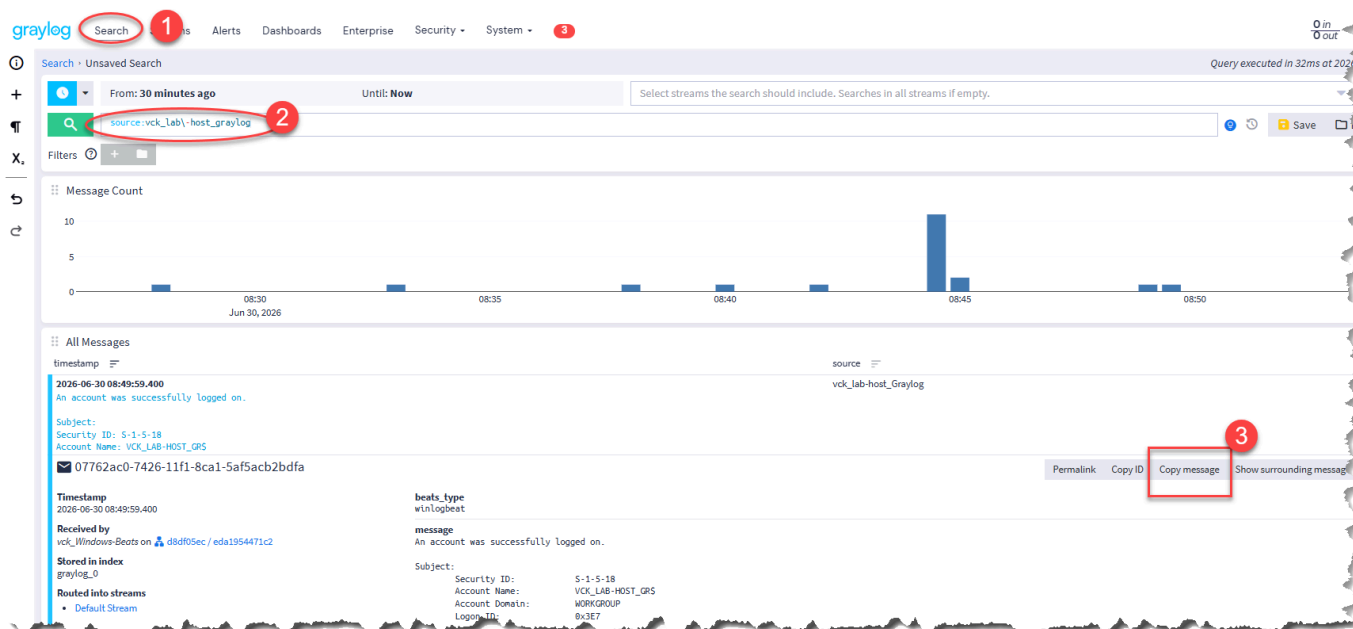

- Chạy Rule Simulation xem Source như ý chưa

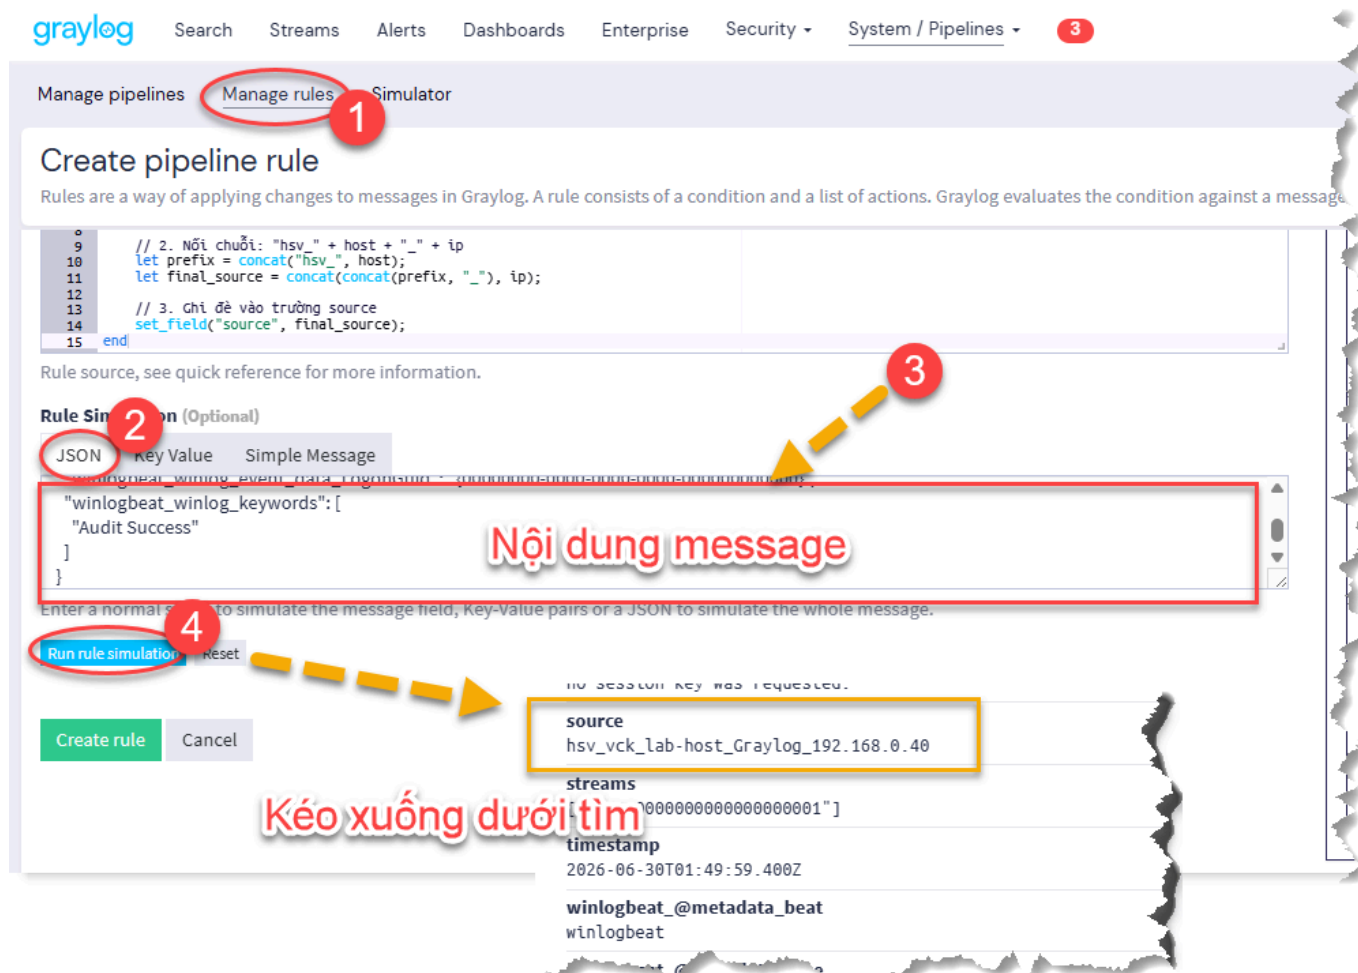

Bước 6: Map Rule Pipeline

System
-> Pipelines
-> Manage pipelines

- > Create pipeline
- > Đặt tên <vck_windows_normalization>
- > Pipeline connections -> (chọn Default Stream)
- > Stage 0 -> chọn (Rule bước trên) vck_normalize_source_hostname_ip

The screenshot shows the Graylog web interface. At the top, the navigation bar includes 'graylog', 'Search', 'Streams', 'Alerts', 'Dashboards', 'Enterprise', 'Security', and 'System / Pipelines' (annotated with a red circle and '1'). Below this, the 'Manage pipelines' tab is selected (annotated with a red circle and '2'). The main heading is 'Pipelines overview' with a subtext: 'Pipelines let you transform and process messages coming from streams. Pipelines consist of stages where rules are evaluated'. A 'Pipelines documentation' link is present (annotated with a red circle and '3'). A green 'Add new pipeline' button is highlighted (annotated with a red circle and '3').

The 'Manage pipelines' section shows a table with one pipeline: 'vck_windows_normalization' (annotated with a red box and '4'). To the right of the table are 'Edit' and 'Delete' buttons. Below the table, the 'Details' section for the selected pipeline shows: Title: vck_windows_normalization, Description: (empty), Created: an hour ago, Last modified: 9 minutes ago, Current throughput: 0 msg/s. An 'Edit pipeline details' button is on the right.

The 'Pipeline connections' section shows 'This pipeline is processing messages from the stream "Default Stream"' (annotated with a red box and '4'). An 'Edit connections' button is on the right.

The 'Pipeline Stages' section shows 'Stage 0' (annotated with a red box and '5'). Below it, a table lists the stages. The first stage is 'vck_normalize_source_hostname_ip' (annotated with a red box and '6'). The table has columns 'Title' and 'Description'.

Bước 7: Xem kết quả Pipeline

