



ANDROID STATIC ANALYSIS REPORT



 SMART Rajasthan (1.0.0)

File Name:

app-release_3_.apk

Package Name:

smart.rajasthan.gov.in


Scan Date:

June 30, 2026, 5:59 a.m.

App Security Score:

49/100 (MEDIUM RISK)

Grade:



FINDINGS SEVERITY


 HIGH

 MEDIUM

 INFO

 SECURE

 HOTSPOT

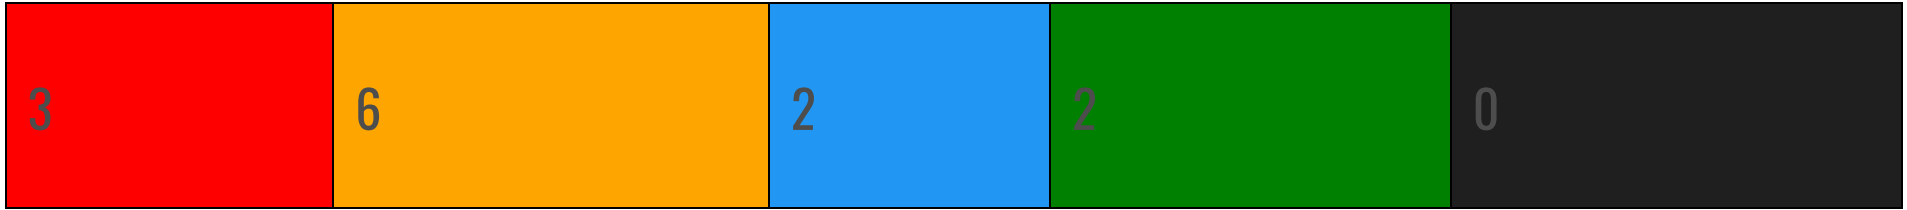

FILE INFORMATION

File Name: app-release_3_.apk
Size: 56.57MB
MD5: ce63932a0a4be3a645f152d943519614
SHA1: 5c9ff61bc5cafaed44c90a28623d6a72b4208201
SHA256: 0864f4bf83af4c3e1fc668483e849d62d0b41baebf9cad3a2e366cbc0d5e7e7

APP INFORMATION

App Name: SMART Rajasthan
Package Name: smart.rajasthan.gov.in
Main Activity: gov.rajasthan.smart.MainActivity
Target SDK: 36
Min SDK: 24
Max SDK:
Android Version Name: 1.0.0
Android Version Code: 1

APP COMPONENTS

Activities: 1
Services: 0
Receivers: 1
Providers: 1
Exported Activities: 0
Exported Services: 0
Exported Receivers: 1
Exported Providers: 0

CERTIFICATE INFORMATION

Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: C=IN, ST=Rajasthan, L=Jaipur, O=Government of Rajasthan, OU=Department of Information Technology and Communications, CN=SMART Rajasthan
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2026-06-27 12:12:42+00:00
Valid To: 2053-11-12 12:12:42+00:00
Issuer: C=IN, ST=Rajasthan, L=Jaipur, O=Government of Rajasthan, OU=Department of Information Technology and Communications, CN=SMART Rajasthan
Serial Number: 0xfb150c7cec2d8cf0
Hash Algorithm: sha256
md5: 48cd391b8d9daec210eef69e6696abba
sha1: 866ec08c9216665068c7fca778bc2c5c029fa669
sha256: 02cceda3a9c66179c06e5faf9e48a4c7ecbf8fd88950fda104ef6abc9046afcd
sha512: a33851602b49ccb7901e16a9c7b7fd24c7000f120d162101fb536eb7e1ae9c30ffea803615de9c331491c503946080f3a8ad4614686de3c70047e4e0164b094d
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 80f6084a8a70a4d759dea71a3187cc19bd489040dd953e8b21814420fa674dd4
Found 1 unique certificates

APPLICATION PERMISSIONS

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.
smart.rajabsthan.gov.in.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference

APKID ANALYSIS

FILE	DETAILS	
classes.dex	FINDINGS	DETAILS
	Compiler	r8

 BROWSABLE ACTIVITIES

ACTIVITY	INTENT
gov.rajasthan.smart.MainActivity	Schemes: smartrajasthan://, https://, Hosts: sso-callback, smarttest.rajasthan.gov.in, smart.rajasthan.gov.in, Path Prefixes: /mobile/sso-callback,

 NETWORK SECURITY

HIGH: 0 | WARNING: 1 | INFO: 0 | SECURE: 1

NO	SCOPE	SEVERITY	DESCRIPTION
1	*	secure	Base config is configured to disallow clear text traffic to all domains.
2	*	warning	Base config is configured to trust system certificates.

 CERTIFICATE ANALYSIS

HIGH: 0 | WARNING: 0 | INFO: 1

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Q MANIFEST ANALYSIS

HIGH: 2 | WARNING: 2 | INFO: 0 | SUPPRESSED: 0

NO	ISSUE	SEVERITY	DESCRIPTION
1	App can be installed on a vulnerable unpatched Android version Android 7.0, [minSdk=24]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.
2	App has a Network Security Configuration [android:networkSecurityConfig=@xml/network_security_config]	info	The Network Security Configuration feature lets apps customize their network security settings in a safe, declarative configuration file without modifying app code. These settings can be configured for specific domains and for a specific app.
3	Application Data can be Backed up [android:allowBackup] flag is missing.	warning	The flag [android:allowBackup] should be set to false. By default it is set to true and allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.
4	App Link assetlinks.json file not found [android:name=gov.rajasthan.smart.MainActivity] [android:host=https://smart.rajasthan.gov.in]	high	App Link asset verification URL (https://smart.rajasthan.gov.in/.well-known/assetlinks.json) not found or configured incorrectly. (Status Code: None). App Links allow users to redirect from a web URL/email to the mobile app. If this file is missing or incorrectly configured for the App Link host/domain, a malicious app can hijack such URLs. This may lead to phishing attacks, leak sensitive data in the URI, such as PII, OAuth tokens, magic link/password reset tokens and more. You must verify the App Link domain by hosting the assetlinks.json file and enabling verification via [android:autoVerify="true"] in the Activity intent-filter.
5	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.

</> CODE ANALYSIS

HIGH: 1 | WARNING: 2 | INFO: 2 | SECURE: 0 | SUPPRESSED: 0

NO	ISSUE	SEVERITY	STANDARDS	FILES
1	The App logs information. Sensitive	info	CWE: CWE-532: Insertion of Sensitive Information into Log File	a/a.java a0/a.java a2/b.java a2/c.java a2/k.java c1/a.java c1/c.java d0/b.java d0/c.java d0/g.java d2/d.java f/c.java f/c0.java f/h0.java f/j0.java f/k0.java f/m0.java f0/b.java f0/f.java i2/c.java i2/m.java io/flutter/embedding/engine/FlutterJNI.java io/flutter/embedding/engine/renderer/FlutterRenderer\$ImageTextureRegistryEntry.java io/flutter/embedding/engine/renderer/f.java io/flutter/plugin/editing/h.java io/flutter/plugin/editing/n.java io/flutter/plugin/platform/SingleViewPresentation.java io/flutter/plugin/platform/b.java io/flutter/plugin/platform/f0.java io/flutter/plugin/platform/j.java io/flutter/plugin/platform/o.java io/flutter/plugins/GeneratedPluginRegistrant.java io/flutter/view/AccessibilityViewEmbedder.java io/flutter/view/n.java j2/a.java l1/b.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
	information should never be logged.		OWASP MASVS: MSTG-STORAGE-3	l1/c.java o2/d.java p/e.java p/f.java p/g.java p/h.java p0/f.java p2/a.java p2/d0.java q2/c.java q2/g.java q2/h.java q2/p.java s/c.java s/l.java s0/m.java s2/e.java t2/a.java u/f.java u/j.java u/l.java u/m.java u/q.java u1/a.java u1/b.java u3/a.java v0/i.java w1/a.java x/c.java y1/c.java y1/d.java y1/f.java y1/h.java y1/j.java y1/l.java y1/p.java y1/u.java
2	The App uses an insecure Random Number Generator.	warning	CWE: CWE-330: Use of Insufficiently Random Values OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-6	f0/g.java g3/a.java g3/b.java g3/c.java h3/a.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
3	This App copies data to clipboard. Sensitive data should not be copied to clipboard as other applications can access it.	info	OWASP MASVS: MSTG-STORAGE-10	a2/b.java io/flutter/plugin/editing/e.java
4	App can read/write to External Storage. Any App can read data written to External Storage.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	o2/d.java
5	The App uses the encryption mode CBC with PKCS5/PKCS7 padding. This configuration is vulnerable to padding oracle attacks.	high	CWE: CWE-649: Reliance on Obfuscation or Encryption of Security-Relevant Inputs without Integrity Checking OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-3	f/h0.java

SHARED LIBRARY BINARY ANALYSIS

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
----	---------------	----	-----	-----------------	-------	-------	---------	---------	---------------------

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/libapp.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False info The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	arm64-v8a/libflutter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: <pre>['_fwrite_chk', '__read_chk', '__write_chk', '__memcpy_chk', '__strcpy_chk', '__pread_chk', '__strlen_chk', '__memmove_chk', '__poll_chk', '__readlink_chk']</pre>	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	x86_64/libapp.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False info The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	x86_64/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	x86_64/libflutter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: <pre>['_fwrite_chk', '_read_chk', '_write_chk', '_memcpy_chk', '_strcpy_chk', '_pread_chk', '_strlen_chk', '_memmove_chk', '_poll_chk', '_readlink_chk']</pre>	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	armeabi-v7a/libapp.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False info The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	armeabi-v7a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	armeabi-v7a/libflutter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: <pre>['_vsnprintf_chk', '__read_chk', '__memcpy_chk', '__strcpy_chk', '__strlen_chk', '__memmove_chk', '__vsprintf_chk']</pre>	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	arm64-v8a/libapp.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False info The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
11	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
12	arm64-v8a/libflutter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: <pre>['_fwrite_chk', '_read_chk', '_write_chk', '_memcpy_chk', '_strcpy_chk', '_pread_chk', '_strlen_chk', '_memmove_chk', '_poll_chk', '_readlink_chk']</pre>	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
13	x86_64/libapp.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False info The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
14	x86_64/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
15	x86_64/libflutter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: <pre>['_fwrite_chk', '_read_chk', '_write_chk', '_memcpy_chk', '_strcpy_chk', '_pread_chk', '_strlen_chk', '_memmove_chk', '_poll_chk', '_readlink_chk']</pre>	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
16	armeabi-v7a/libapp.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False info The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
17	armeabi-v7a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
18	armeabi-v7a/libflutter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Not Applicable info RELRO checks are not applicable for Flutter/Dart binaries	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk', '__read_chk', '__memcpy_chk', '__strcpy_chk', '__strlen_chk', '__memmove_chk', '__vsprintf_chk']	True info Symbols are stripped.

NIAP ANALYSIS v1.3

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
----	------------	-------------	---------	-------------

BEHAVIOUR ANALYSIS

RULE ID	BEHAVIOUR	LABEL	FILES
00013	Read file and put it into a stream	file	b0/f.java c0/h.java f0/b.java f0/f.java f0/l.java p/f.java p/g.java u3/a.java z/e0.java z/f0.java
00091	Retrieve data from broadcast	collection	y1/d.java
00063	Implicit intent(view a web page, make a phone call, etc.)	control	c1/a.java m1/m.java t2/a.java
00161	Perform accessibility service action on accessibility node info	accessibility service	io/flutter/view/AccessibilityViewEmbedder.java io/flutter/view/j.java
00209	Get pixels from the latest rendered image	collection	y1/h.java
00210	Copy pixels from the latest rendered image into a Bitmap	collection	y1/h.java
00022	Open a file from given absolute path of the file	file	c0/d.java d2/b.java io/flutter/embedding/engine/FlutterJNI.java o2/d.java z/g0.java z/k0.java z/m.java
00173	Get bounds in screen of an AccessibilityNodeInfo and perform action	accessibility service	io/flutter/view/AccessibilityViewEmbedder.java
00014	Read file into a stream and put it into a JSON object	file	u3/a.java

RULE ID	BEHAVIOUR	LABEL	FILES
00004	Get filename and put it to JSON object	file collection	u3/a.java
00191	Get messages in the SMS inbox	sms	f/c0.java
00036	Get resource file from res/raw directory	reflection	f/c0.java m1/m.java
00051	Implicit intent(view a web page, make a phone call, etc.) via setData	control	m1/m.java

🔗 ABUSED PERMISSIONS

TYPE	MATCHES	PERMISSIONS
Malware Permissions	1/25	android.permission.INTERNET
Other Common Permissions	0/44	

Malware Permissions:

Top permissions that are widely abused by known malware.

Other Common Permissions:

Permissions that are commonly abused by known malware.

! OFAC SANCTIONED COUNTRIES

This app may communicate with the following OFAC sanctioned list of countries.

DOMAIN	COUNTRY/REGION
--------	----------------

DOMAIN MALWARE CHECK

DOMAIN	STATUS	GEOLOCATION
youtrack.jetbrains.com	ok	IP: 63.33.88.220 Country: Ireland Region: Dublin City: Dublin Latitude: 53.343990 Longitude: -6.267190 View: Google Map
dartbug.com	ok	IP: 216.239.34.21 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
developer.android.com	ok	IP: 142.251.222.206 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
www.unicode.org	ok	IP: 172.67.74.23 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
crbug.com	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
smart.rajasthan.gov.in	ok	IP: 103.203.139.188 Country: India Region: Rajasthan City: Sarwar Latitude: 26.066669 Longitude: 75.000000 View: Google Map
docs.flutter.dev	ok	IP: 199.36.158.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
ns.adobe.com	ok	No Geolocation information available.
smarttest.rajasthan.gov.in	ok	No Geolocation information available.
api.flutter.dev	ok	IP: 199.36.158.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
sso.rajasthan.gov.in	ok	IP: 103.122.36.207 Country: India Region: Rajasthan City: Jaipur Latitude: 26.916670 Longitude: 75.816673 View: Google Map

DOMAIN	STATUS	GEOLOCATION
ssotest.rajasthan.gov.in	ok	IP: 103.203.137.66 Country: India Region: Rajasthan City: Jaipur Latitude: 26.916670 Longitude: 75.816673 View: Google Map
github.com	ok	IP: 20.207.73.82 Country: United States of America Region: Washington City: Redmond Latitude: 47.682899 Longitude: -122.120903 View: Google Map
developer.mozilla.org	ok	IP: 151.101.1.91 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.w3.org	ok	IP: 104.18.23.19 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
issuetracker.google.com	ok	IP: 142.251.220.110 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map



EMAILS

EMAIL	FILE
appro@openssl.org	lib/arm64-v8a/libflutter.so
appro@openssl.org	lib/x86_64/libflutter.so
_growablelist@0150898._literal _directory@16069316.fromrawpat storationinformation@39124995.fromserial _compressednode@300137193.single _imagefilter@35065589.composed _hashcollisionnode@300137193.fromcollis _bytebuffer@8027147._new _list@0150898._ofarray _growablelist@0150898._literal2 _imagefilter@35065589.blur _bigintimpl@0150898.from _file@16069316.fromrawpat _assertionerror@0150898._create _imagefilter@35065589.fromcolorf _growablelist@0150898._literal4 _list@0150898.of authenticationscheme@17463476.fromstring _growablelist@0150898._ofarray ngstreamsubscription@5048458.zoned _semanticsgeometry@27266271.root _assetmanifestbin@336287047.fromstanda _future@5048458.immediatee _uri@0150898.notsimple _colorfilter@35065589.srgbtoline _receiveportimpl@1026248.fromrawrec _list@0150898._ofgrowabl _growablelist@0150898.withcapaci _growablelist@0150898._literal7 _double@0150898.fromintege _growablelist@0150898._literal6 _growablelist@0150898._literal5 _growablelist@0150898._ofefficie _list@0150898.empty _link@16069316.fromrawpat	lib/armeabi-v7a/libapp.so

_growablelist@0150898.generate EMAIL _error@0150898._create _growablelist@0150898._literal1	FILE
_list@0150898.generate _growablelist@0150898._ofother _uri@0150898.file _future@5048458.zonevalue _headervalue@17463476.parse _growablelist@0150898._literal3 _timer@1026248.periodic _growablelist@0150898.of _timer@1026248._internal _growablelist@0150898._ofgrowabl _uri@0150898.directory _future@5048458.immediate _colorfilter@35065589.lineartosr _list@0150898._ofefficie _list@0150898._ofother _httpparser@17463476.responsepa _nativesocket@16069316.normal _invocationmirror@0150898._withtype _growablelist@0150898._literal8	
appro@openssl.org	apktool_out/lib/arm64-v8a/libflutter.so
appro@openssl.org	apktool_out/lib/x86_64/libflutter.so
_growablelist@0150898._literal _directory@16069316.fromrawpat storationinformation@39124995.fromserial _compressednode@300137193.single _imagefilter@35065589.composed _hashcollisionnode@300137193.fromcollis _bytebuffer@8027147._new _list@0150898._ofarray _growablelist@0150898._literal2 _imagefilter@35065589.blur _bigintimpl@0150898.from _file@16069316.fromrawpat _assertionerror@0150898._create _imagefilter@35065589.fromcolorf _growablelist@0150898._literal4 _list@0150898.of authenticationscheme@17463476.fromstring _growablelist@0150898._ofarray	

EMAIL	FILE
ngstreamsubscription@5048458.zoned _email@5048458.immediatee _assetmanifestbin@336287047.fromstanda _future@5048458.immediatee _uri@0150898.notsimple _colorfilter@35065589.srgbtoline _receiveportimpl@1026248.fromrawrec _list@0150898._ofgrowabl _growablelist@0150898.withcapaci _growablelist@0150898._literal7 _double@0150898.fromintege _growablelist@0150898._literal6 _growablelist@0150898._literal5 _growablelist@0150898._ofefficie _list@0150898.empty _link@16069316.fromrawpat _growablelist@0150898.generate _typeerror@0150898._create _growablelist@0150898._literal1 _list@0150898.generate _growablelist@0150898._ofother _uri@0150898.file _future@5048458.zonevalue _headervalue@17463476.parse _growablelist@0150898._literal3 _timer@1026248.periodic _growablelist@0150898.of _timer@1026248._internal _growablelist@0150898._ofgrowabl _uri@0150898.directory _future@5048458.immediate _colorfilter@35065589.lineartosr _list@0150898._ofefficie _list@0150898._ofother _httpparser@17463476.responsepa _nativesocket@16069316.normal _invocationmirror@0150898._withtype _growablelist@0150898._literal8	apktool_out/lib/armeabi-v7a/libapp.so

POSSIBLE SECRETS
VGhpcyBpcyB0aGUga2V5IGZvciBhIHNIY3VyZSBzdG9yYWdlIEFFUyBLZXkk
VGhpcyBpcyB0aGUgcHJlZml4IGZvciBCaWdJbnRlZ2Vy
VGhpcyBpcyB0aGUga2V5IGZvciBhIHNIY3XyZSBzdG9yYWdlIEFFUyBLZXkk
VGhpcyBpcyB0aGUgcHJlZml4IGZvciBhIHNIY3VyZSBzdG9yYWdlCg

 SCAN LOGS

Timestamp	Event	Error
2026-06-30 05:59:47	Generating Hashes	OK
2026-06-30 05:59:47	Extracting APK	OK
2026-06-30 05:59:47	Unzipping	OK
2026-06-30 05:59:47	Parsing APK with androguard	OK
2026-06-30 05:59:47	Extracting APK features using aapt/aapt2	OK
2026-06-30 05:59:47	Getting Hardcoded Certificates/Keystores	OK
2026-06-30 05:59:49	Parsing AndroidManifest.xml	OK

2026-06-30 05:59:49	Extracting Manifest Data	OK
2026-06-30 05:59:49	Manifest Analysis Started	OK
2026-06-30 05:59:54	Reading Network Security config from network_security_config.xml	OK
2026-06-30 05:59:54	Parsing Network Security config	OK
2026-06-30 05:59:54	Performing Static Analysis on: SMART Rajasthan (smart.rajabsthan.gov.in)	OK
2026-06-30 05:59:55	Fetching Details from Play Store: smart.rajabsthan.gov.in	OK
2026-06-30 05:59:56	Checking for Malware Permissions	OK
2026-06-30 05:59:56	Fetching icon path	OK
2026-06-30 05:59:56	Library Binary Analysis Started	OK
2026-06-30 05:59:56	Analyzing lib/arm64-v8a/libapp.so	OK
2026-06-30 05:59:56	Analyzing lib/arm64-v8a/libdatastore_shared_counter.so	OK
2026-06-30 05:59:56	Analyzing lib/arm64-v8a/libflutter.so	OK

2026-06-30 05:59:56	Analyzing lib/x86_64/libapp.so	OK
2026-06-30 05:59:56	Analyzing lib/x86_64/libdatastore_shared_counter.so	OK
2026-06-30 05:59:56	Analyzing lib/x86_64/libflutter.so	OK
2026-06-30 05:59:56	Analyzing lib/armeabi-v7a/libapp.so	OK
2026-06-30 05:59:56	Analyzing lib/armeabi-v7a/libdatastore_shared_counter.so	OK
2026-06-30 05:59:56	Analyzing lib/armeabi-v7a/libflutter.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/arm64-v8a/libapp.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/arm64-v8a/libdatastore_shared_counter.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/arm64-v8a/libflutter.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/x86_64/libapp.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/x86_64/libdatastore_shared_counter.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/x86_64/libflutter.so	OK

2026-06-30 05:59:57	Analyzing apktool_out/lib/armeabi-v7a/libapp.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/armeabi-v7a/libdatastore_shared_counter.so	OK
2026-06-30 05:59:57	Analyzing apktool_out/lib/armeabi-v7a/libflutter.so	OK
2026-06-30 05:59:57	Reading Code Signing Certificate	OK
2026-06-30 05:59:57	Running APKiD 3.0.0	OK
2026-06-30 06:00:02	Detecting Trackers	OK
2026-06-30 06:00:02	Decompiling APK to Java with JADX	OK
2026-06-30 06:00:07	Converting DEX to Smali	OK
2026-06-30 06:00:07	Code Analysis Started on - java_source	OK
2026-06-30 06:00:07	Android SBOM Analysis Completed	OK
2026-06-30 06:00:09	Android SAST Completed	OK
2026-06-30 06:00:09	Android API Analysis Started	OK

2026-06-30 06:00:14	Android API Analysis Completed	OK
2026-06-30 06:00:14	Android Permission Mapping Started	OK
2026-06-30 06:00:14	Android Permission Mapping Completed	OK
2026-06-30 06:00:15	Android Behaviour Analysis Started	OK
2026-06-30 06:00:16	Android Behaviour Analysis Completed	OK
2026-06-30 06:00:16	Extracting Emails and URLs from Source Code	OK
2026-06-30 06:00:16	Email and URL Extraction Completed	OK
2026-06-30 06:00:16	Extracting String data from APK	OK
2026-06-30 06:00:16	Extracting String data from SO	OK
2026-06-30 06:00:17	Extracting String data from Code	OK
2026-06-30 06:00:17	Extracting String values and entropies from Code	OK
2026-06-30 06:00:17	Performing Malware check on extracted domains	OK

2026-06-30 06:00:20	Saving to Database	OK
---------------------	--------------------	----

Report Generated by - MobSF v4.4.4

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

© 2026 Mobile Security Framework - MobSF | [Ajin Abraham](#) | [OpenSecurity](#).