
Notes: ***Create a Jira ticket for this assignment, work on the tasks listed below, and submit the task completion document by EOD with clear steps and required evidence (outputs/screenshots)***


1. Install git.
2. Create a repo in github with README.md and .ignore file.
3. Clone the created repo to local.
4. Create two files in local repo.
5. Commit two files and push to central Repository.
6. Create a branch in local and create a sample file and push to central.
7. Create a branch in github and clone that to local.
8. Merge the created branch with master in git local.
9. Merge the created branch with master in github by sending a pull request.
10. Create a file in local and send that to branch in github.
11. Clone only a branch from github to local.
12. Create a file with all passwords and make that untrackable with git.
13. Make a commit and make that commit reset without savings changes.
14. Revert a commited commit to the older version.
15. Push a file to stash without savings the changes and work on another file.
16. Undo the stash file and start working on that again.
17. Generate a ssh-keygen and configure into github.
18. Configure webhooks to github.
19. Basic understanding of .git file.
20. Check all the logs of git.
21. Rename the commit message.
22. Merge multiple commits into single commit.

- Installing Git using **(yum install git)**

```
Complete!
[root@ip-172-31-21-143 ec2-user]# git --version
git version 2.50.1
[root@ip-172-31-21-143 ec2-user]#
```


- Create a repo in github with README.md and .ignore file.

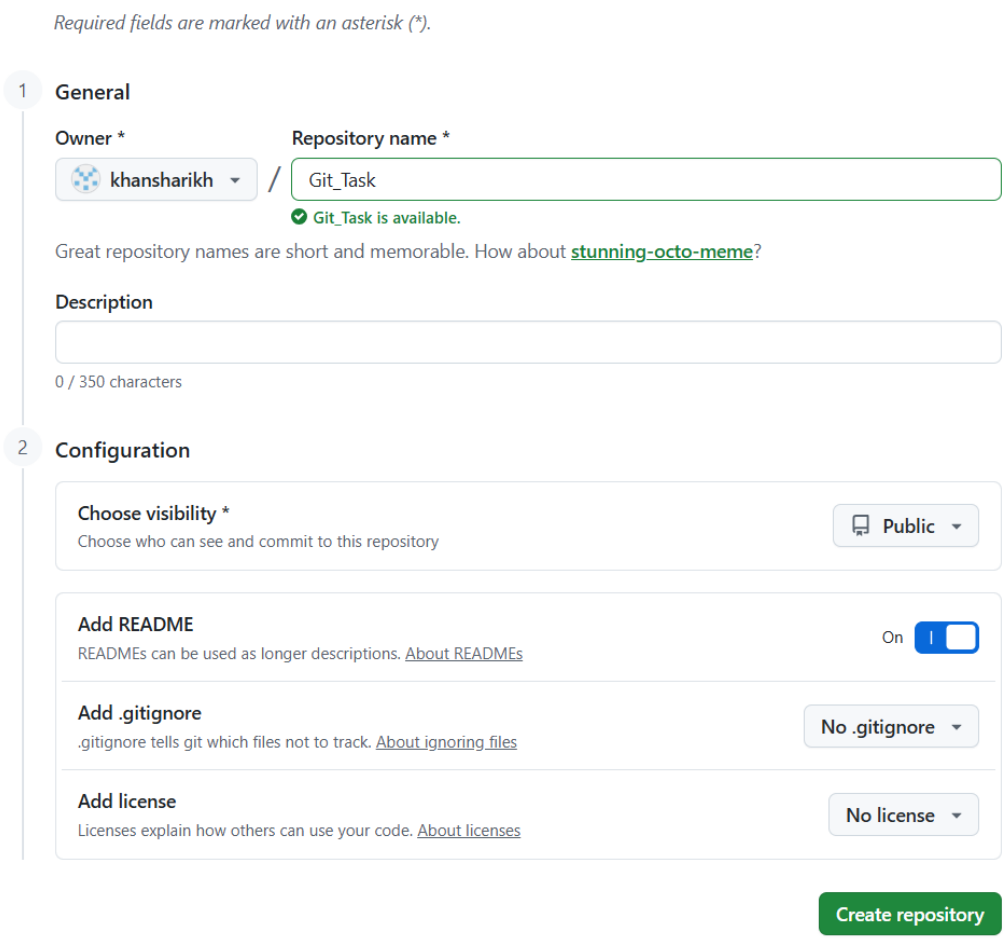

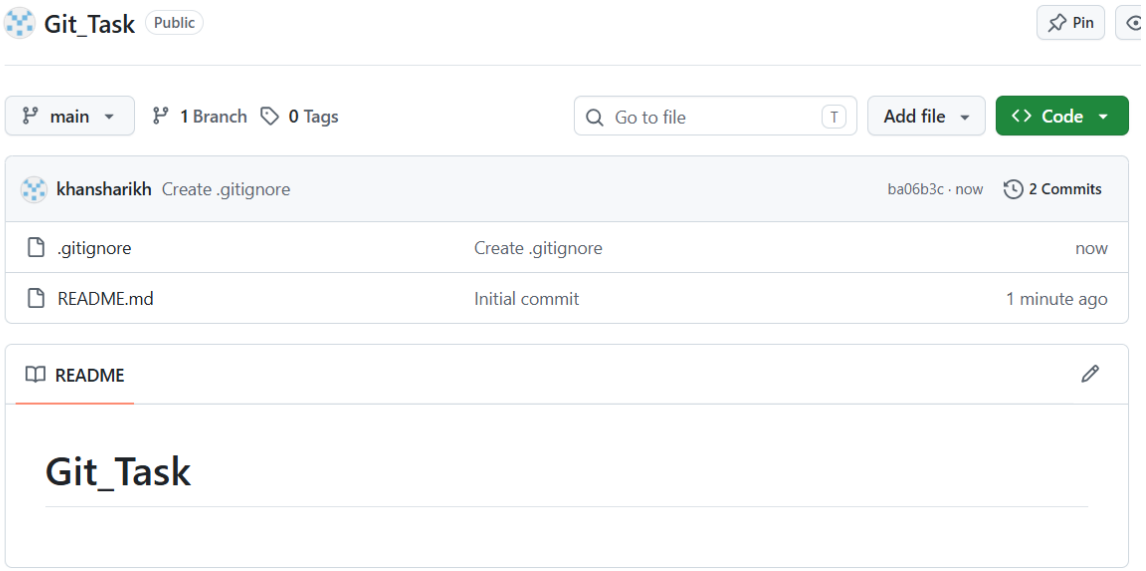

- Clone the created repo to local.

  ($ git clone <...url...>)

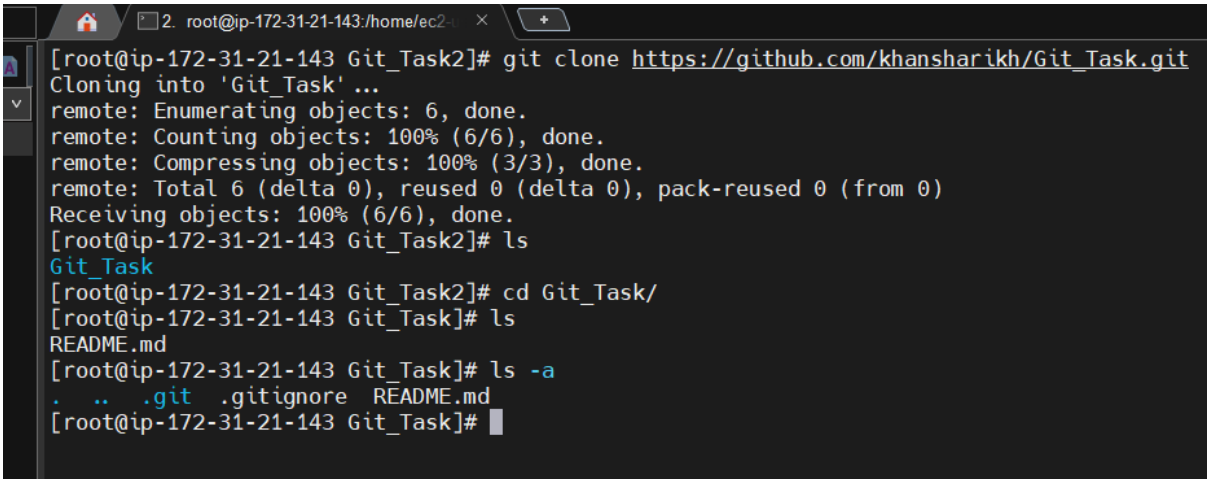

- Create two files in local repo.

  I have created two files in my working directory which are in untracked files

```
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
[root@ip-172-31-21-143 Git_Task]# touch sharikh khan
[root@ip-172-31-21-143 Git_Task]# ls
README.md  khan  sharikh
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        khan
        sharikh

nothing added to commit but untracked files present (use "git add" to track)
[root@ip-172-31-21-143 Git_Task]#
```

- Commit two files and push to central Repository.

First I did the configuration for username and user email using below commands

($ git config --global user.name "sharikh1")

($git config --global user.name "sknkkhan47@gmail.com")

Then to commit two files I have to add those files in staging area using below command

($ git add .)

Then after that my files are in tracked and in stagging area

After that I have committed those files in local git repo using below command

($ git commit -m "Two files are commited")

Creates a SSH key for github authentication

Then I have tried to add remote repo using below command


($ git remote add origin git@github.com:khansharikh/Git_Task.git)

Chekck the remote destination is added or not using below command

($ git remote -v)

After that I pushed the my local repo in my remote repo using

($ git push -u origin main)

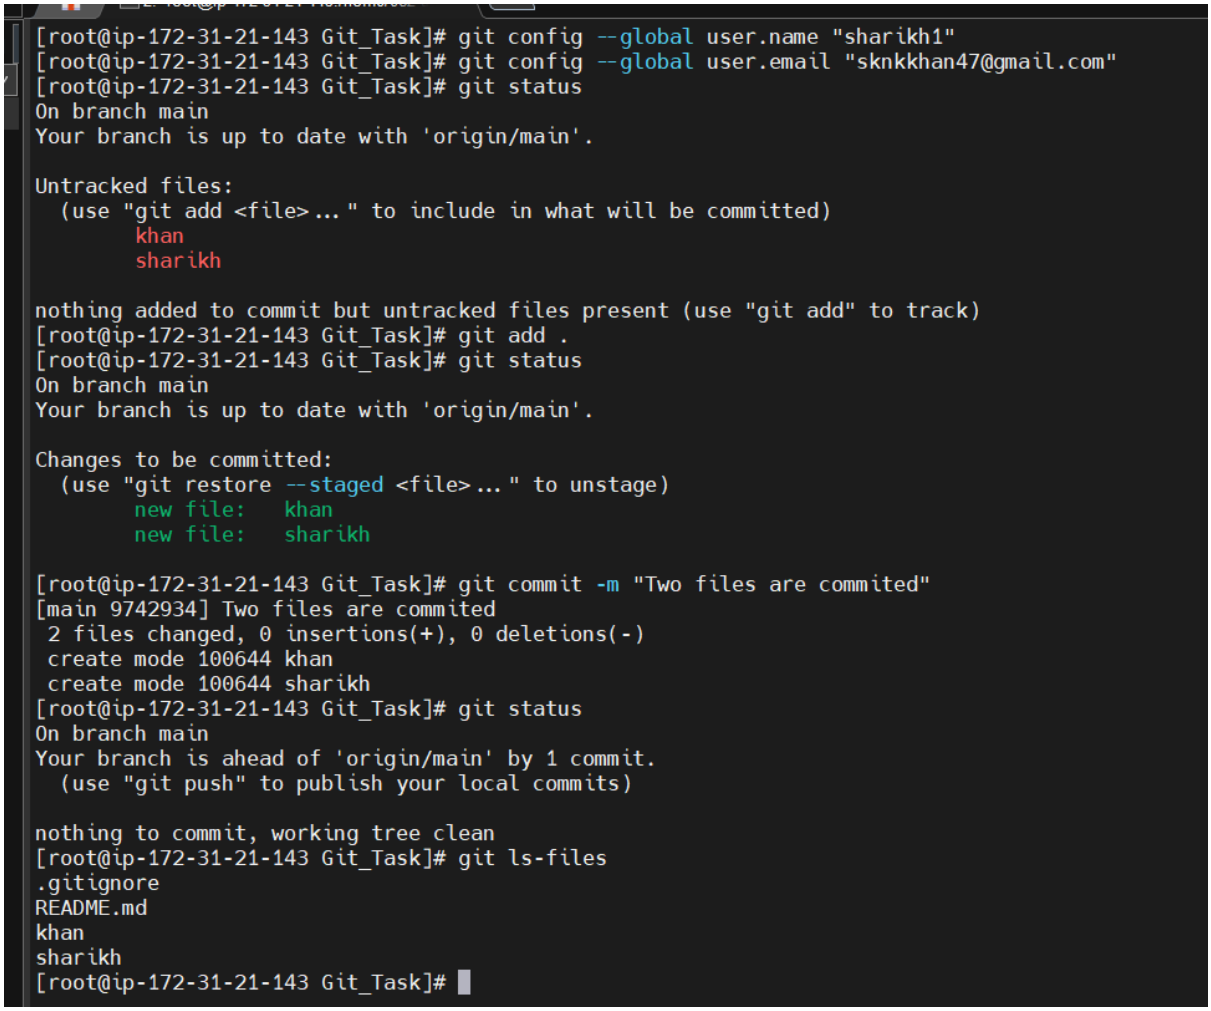

```
[root@ip-172-31-21-143 Git_Task]# git config --global user.name "sharikh1"
[root@ip-172-31-21-143 Git_Task]# git config --global user.email "sknkkhan47@gmail.com"
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is up to date with 'origin/main'.


Untracked files:
  (use "git add <file>..." to include in what will be committed)
        khan
        sharikh

nothing added to commit but untracked files present (use "git add" to track)
[root@ip-172-31-21-143 Git_Task]# git add .
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   khan
        new file:   sharikh

[root@ip-172-31-21-143 Git_Task]# git commit -m "Two files are commited"
[main 9742934] Two files are commited
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 khan
 create mode 100644 sharikh
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean
[root@ip-172-31-21-143 Git_Task]# git ls-files
.gitignore
README.md
khan
sharikh
[root@ip-172-31-21-143 Git_Task]#
```

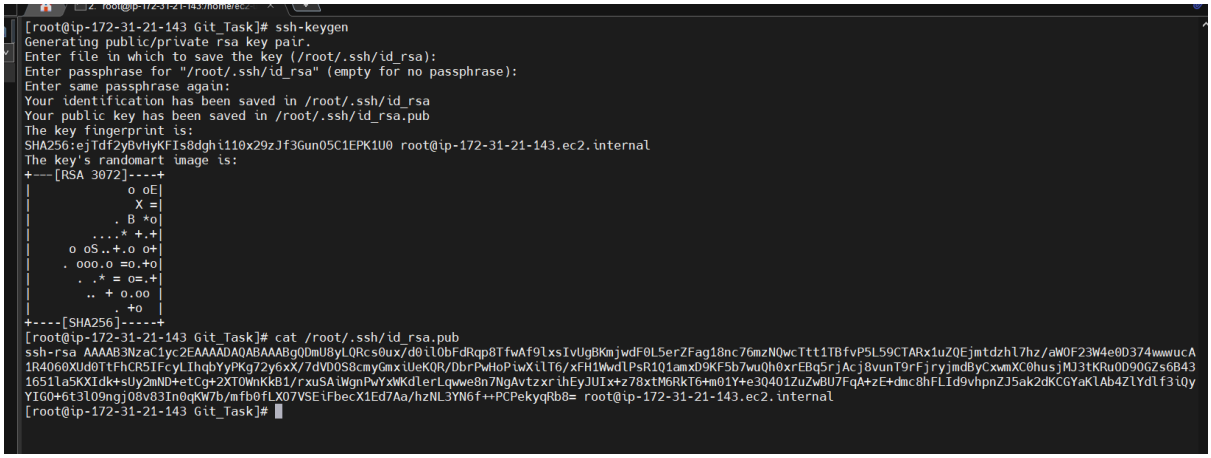

```
[root@ip-172-31-21-143 Git_Task]# ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/root/.ssh/id_rsa):
Enter passphrase for "/root/.ssh/id_rsa" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /root/.ssh/id_rsa
Your public key has been saved in /root/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:ejTdf2yBvHyKFIs8dghi110x29zJf3GunO5C1EPK1U0 root@ip-172-31-21-143.ec2.internal
The key's randomart image is:
+---[RSA 3072]----+
|            o oE|
|             X =|
|          . B *o|
|         ....* +.+|
|     o oS..+.o o+|
|    . ooo.o =o.+o|
|      . .* = o=.+|
|       .. + o.oo |
|          . +o   |
+----[SHA256]-----+
[root@ip-172-31-21-143 Git_Task]# cat /root/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAABgQDmU8yLQRcs0ux/d0il0bFdRqp8TfwAf9lxsIvUgBKmjwdF0L5erZFag18nc76mzNQwcTtt1TBfvP5L59CTARx1uZQEjmtdzhl7hz/aWOF23W4e0D374wwwucA
1R4O60XUd0TtFhCR5IFcyLIhqbYyPKg72y6xX/7dVDOS8cmyGmxiUeKQR/DbrPwHoPiwXilT6/xFH1WwdlPsR1Q1amxD9KF5b7wuQh0xrEBq5rjAcj8vunT9rFjryjmdByCxwmXC0husjMJ3tKRuOD9OGZs6B43
1651la5KXIdk+sUy2mND+etCg+2XTOWnKkB1/rxuSAiWgnPwYxWKdlerLqwwe8n7NgAvtzxrihEyJUIx+z78xtM6RkT6+m01Y+e3Q401ZuZwBU7FqA+zE+dmc8hFLId9vhpnZJ5ak2dKCGYaKlAb4ZlYdlf3iQy
YIGO+6t3lO9ngjO8v83In0qKW7b/mfb0fLXO7VSEiFbecX1Ed7Aa/hzNL3YN6f++PCPekyqRb8= root@ip-172-31-21-143.ec2.internal
[root@ip-172-31-21-143 Git_Task]#
```

Add new SSH Key

Title

Task_2

Key type

Authentication Key


Key

ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAABgQDmU8yLQRcs0ux/d0ilObFdRqp8TfwAf9lxslvUgBKmjwdF0L5erZFag18nc76mzNQwcTtt1TBfvP5L59CTARx1uZQEjmtdzhl7hz/aWOF23W4e0D374wwwucA1R4O60XUd0TtFhCR5IFcyLIhqbYyPKg72y6xX/7dVDOS8cmyGmxiUeKQR/DbrPwHoPiwXilT6/xFH1WwdlPsR1Q1amxD9KF5b7wuQh0xrEBq5rjAcj8vunT9rFjryjmdByCxwmXC0husjMJ3tKRuOD9OGZs6B431651la5KXIdk+sUy2mND+etCg+2XTOWnKkB1/rxuSAiWgnPwYxWKdlerLqwwe8n7NgAvtzxrihEyJUIx+z78xtM6RkT6+m01Y+e3Q4O1ZuZwBU7FqA+zE+dmc8hFLId9vhpnZJ5ak2dKCGYaKlAb4ZlYdlf3iQyYlGO+6t3lO9ngjO8v83In0qKW7b/mfb0fLXO7VSEiFbecX1Ed7Aa/hzNL3YN6f++PCPekyqRb8= root@ip-172-31-21-143.ec2.internal

Add SSH key

```
[root@ip-172-31-21-143 Git_Task]# git remote add origin git@github.com:khansharikh/Git_Task.git
error: remote origin already exists.
[root@ip-172-31-21-143 Git_Task]# git remote -v
origin  https://github.com/khansharikh/Git_Task.git (fetch)
origin  https://github.com/khansharikh/Git_Task.git (push)
[root@ip-172-31-21-143 Git_Task]#
```

```
2. root@ip-172-31-21-143:/home/ec2-
[root@ip-172-31-21-143 Git_Task]# git remote add origin git@github.com:khansharikh/Git_Task.git
[root@ip-172-31-21-143 Git_Task]# git remote -v
origin  git@github.com:khansharikh/Git_Task.git (fetch)
origin  git@github.com:khansharikh/Git_Task.git (push)
[root@ip-172-31-21-143 Git_Task]# git push -u origin main
The authenticity of host 'github.com (140.82.114.4)' can't be established.
ED25519 key fingerprint is SHA256:+DiY3wvvV6TuJJhbpZisF/zLDA0zPMSvHdkr4UvCOqU.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'github.com' (ED25519) to the list of known hosts.
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 323 bytes | 323.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:khansharikh/Git_Task.git
   ba06b3c..9742934  main -> main
branch 'main' set up to track 'origin/main'.
[root@ip-172-31-21-143 Git_Task]#
```

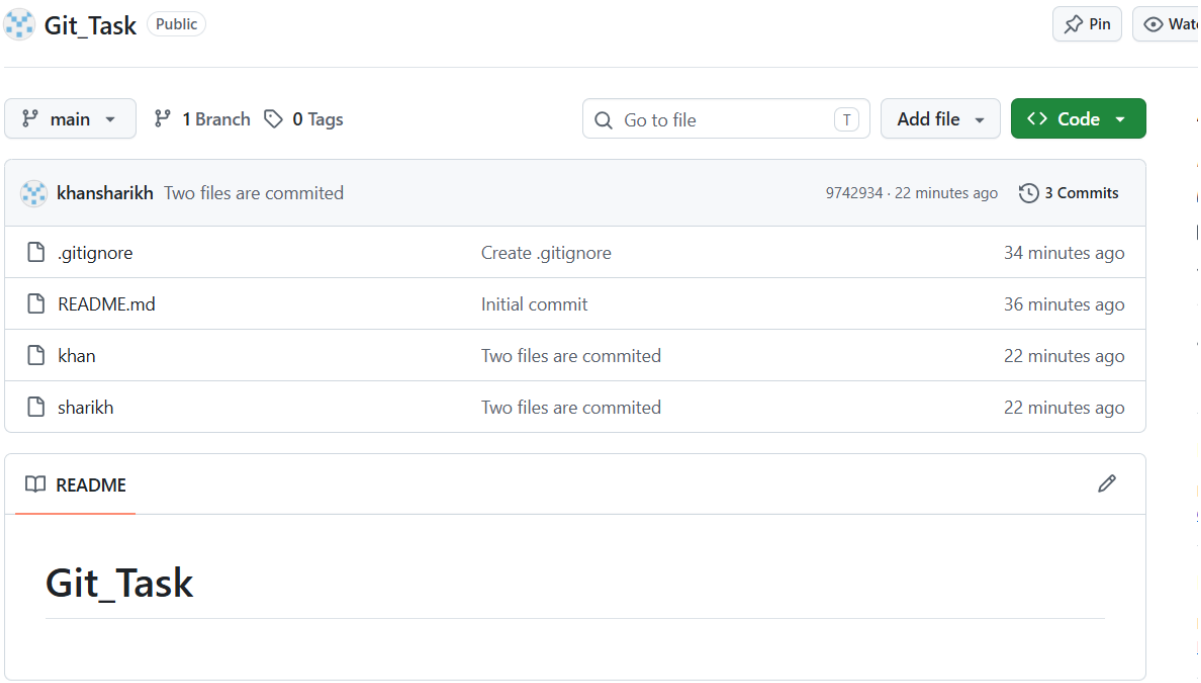

- Create a branch in local and create a sample file and push to central.

Created a Branche name release using

($ git branch release)


Then switch the branch using

($ git checkout release)

Then I have created a sample file and push it in remote repo using below commands

($ git add sample_file)


($ git push -u origin release)

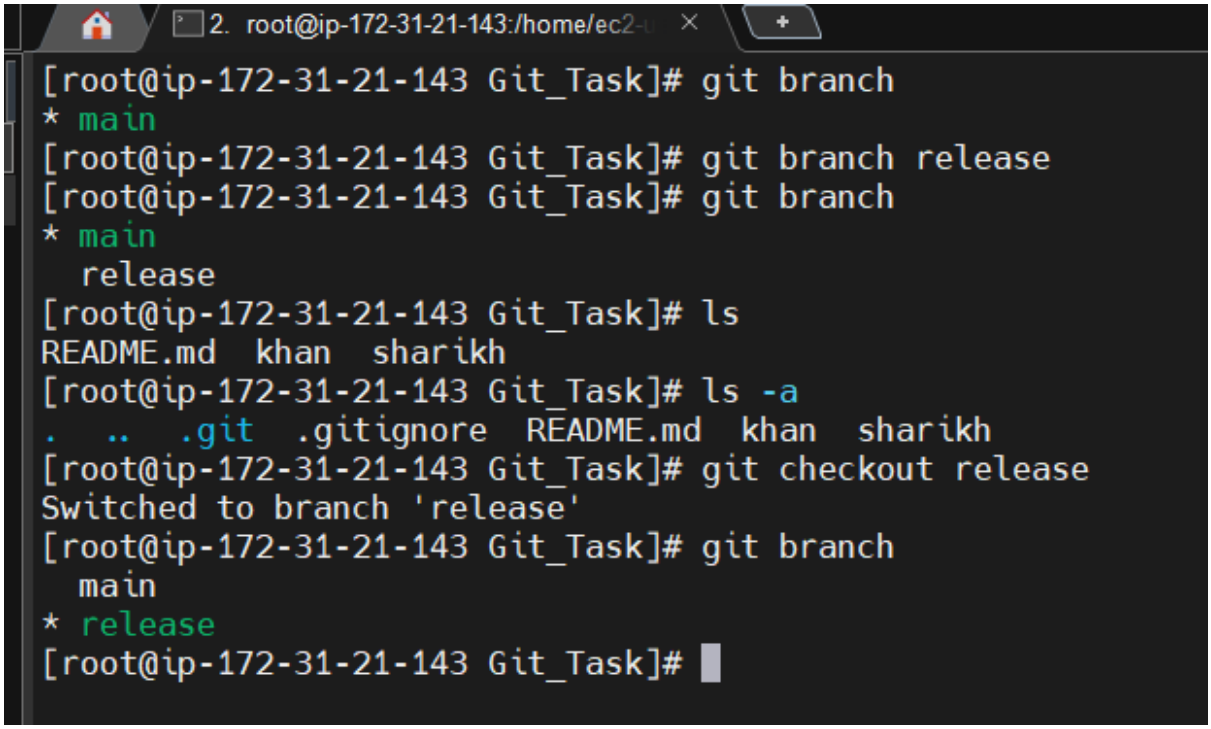
2. root@ip-172-31-21-143:/home/ec2-u
[root@ip-172-31-21-143 Git_Task]# git branch
* main
[root@ip-172-31-21-143 Git_Task]# git branch release
[root@ip-172-31-21-143 Git_Task]# git branch
* main
release
[root@ip-172-31-21-143 Git_Task]# ls
README.md khan sharikh
[root@ip-172-31-21-143 Git_Task]# ls -a
. .. .git .gitignore README.md khan sharikh
[root@ip-172-31-21-143 Git_Task]# git checkout release
Switched to branch 'release'
[root@ip-172-31-21-143 Git_Task]# git branch
main
* release
[root@ip-172-31-21-143 Git_Task]#

```
[root@ip-172-31-21-143 Git_Task]# ls
README.md  khan  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]# git status
On branch release
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        sample_file

nothing added to commit but untracked files present (use "git add" to track)
[root@ip-172-31-21-143 Git_Task]# git add sample_file
[root@ip-172-31-21-143 Git_Task]# git status
On branch release
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   sample_file


[root@ip-172-31-21-143 Git_Task]# git commit -m "Commited from release branch"
[release a4fc828] Commited from release branch
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 sample_file
[root@ip-172-31-21-143 Git_Task]# git ls-files
.gitignore
README.md
khan
sample_file
sharikh
[root@ip-172-31-21-143 Git_Task]# git push -u origin release
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 243 bytes | 243.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'release' on GitHub by visiting:
remote:      https://github.com/khansharikh/Git_Task/pull/new/release
remote:
To github.com:khansharikh/Git_Task.git
 * [new branch]      release → release
branch 'release' set up to track 'origin/release'.
[root@ip-172-31-21-143 Git_Task]#
```

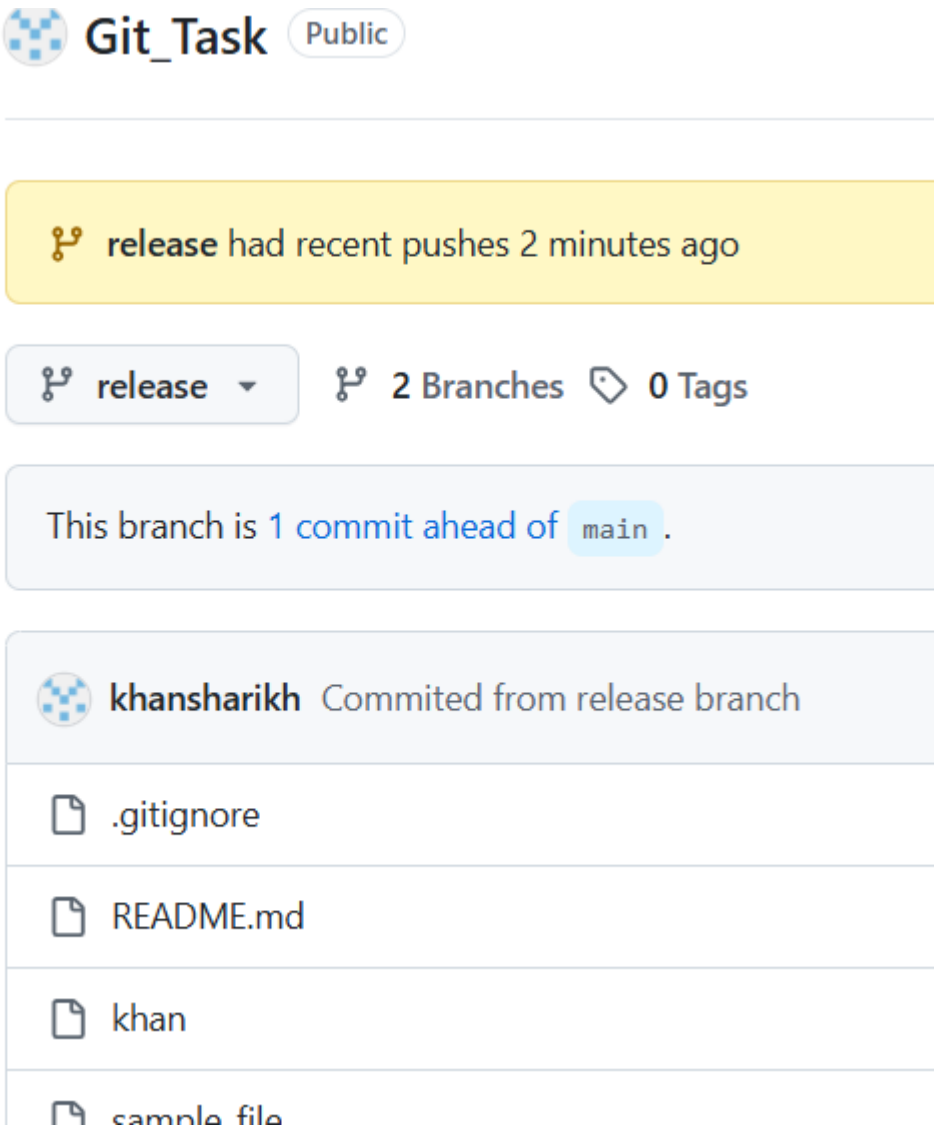


- Create a branch in github and clone that to local.

I have created a branch with name develop in github & then I have clone only this branch using below command

($ git clone -b develop git@github.com:khansharikh/Git_Task.git)

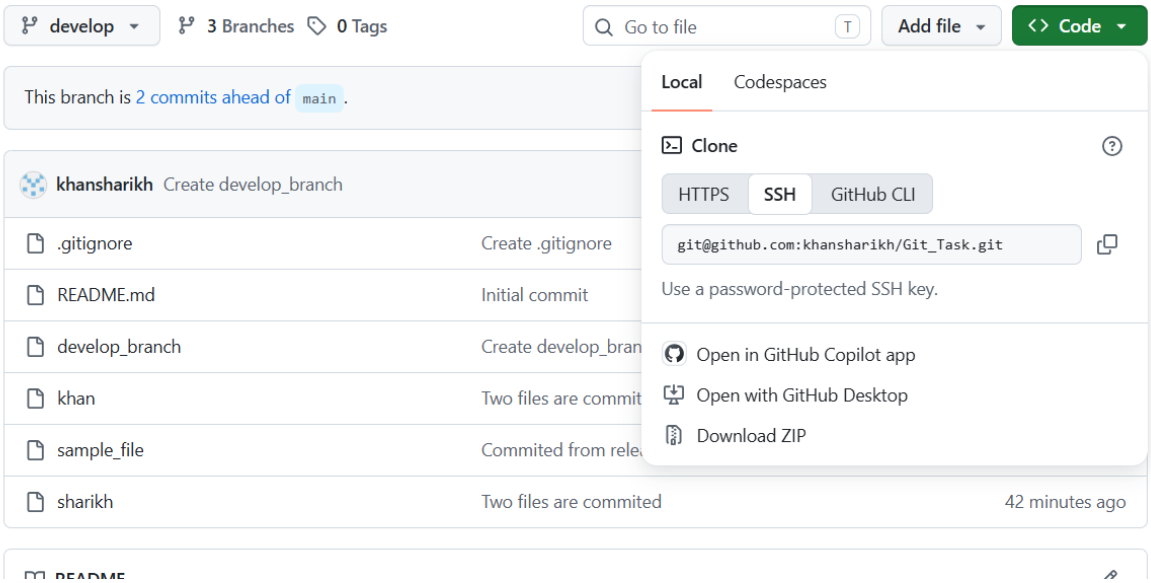

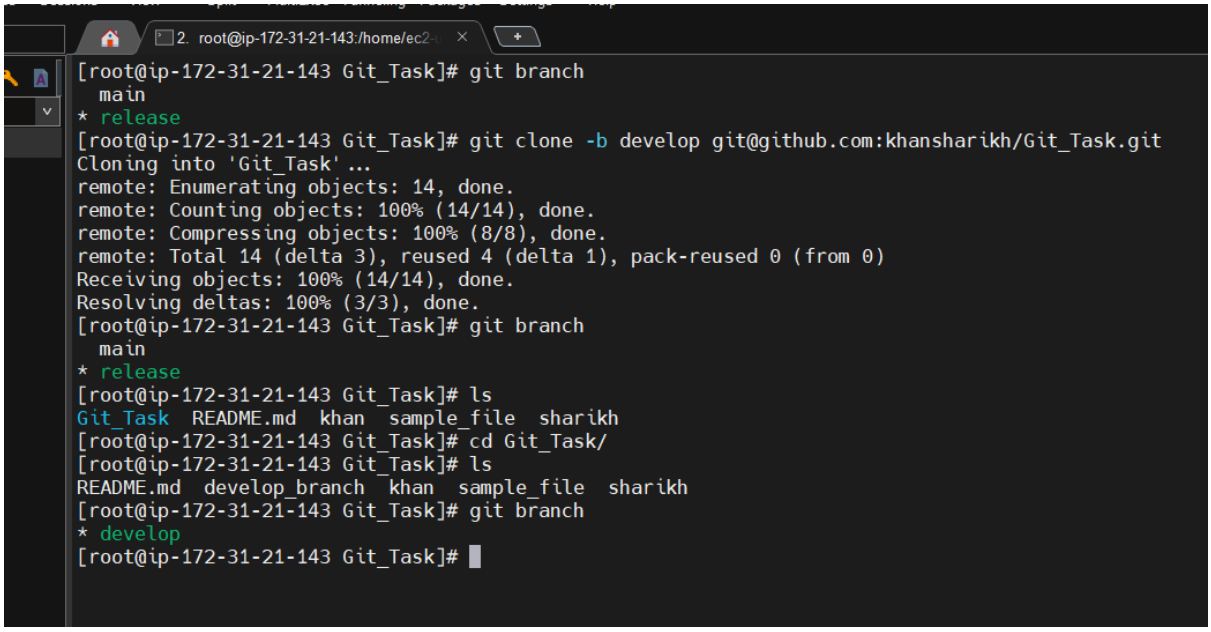

- Merge the created branch with master in git local.


For merge with master/main from main branch I have used below command


($ git merge develop)

```
[root@ip-172-31-21-143 Git_Task]# git merge develop
Updating 9742934..746a426
Fast-forward
 develop_branch | 1 +
 sample_file    | 0
 2 files changed, 1 insertion(+)
 create mode 100644 develop_branch
 create mode 100644 sample_file
[root@ip-172-31-21-143 Git_Task]# ls
README.md  develop_branch  khan  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]#
```

- Merge the created branch with master in github by sending a pull request.

I have added a user in collaborator and then raise the pull request for merge develop with main after collaborator approved my develop and main branch are merged.

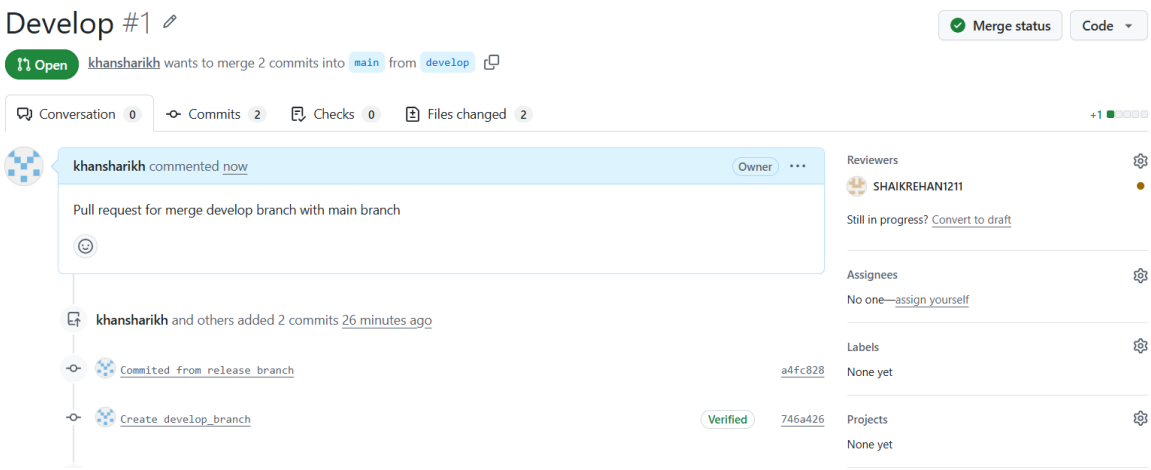

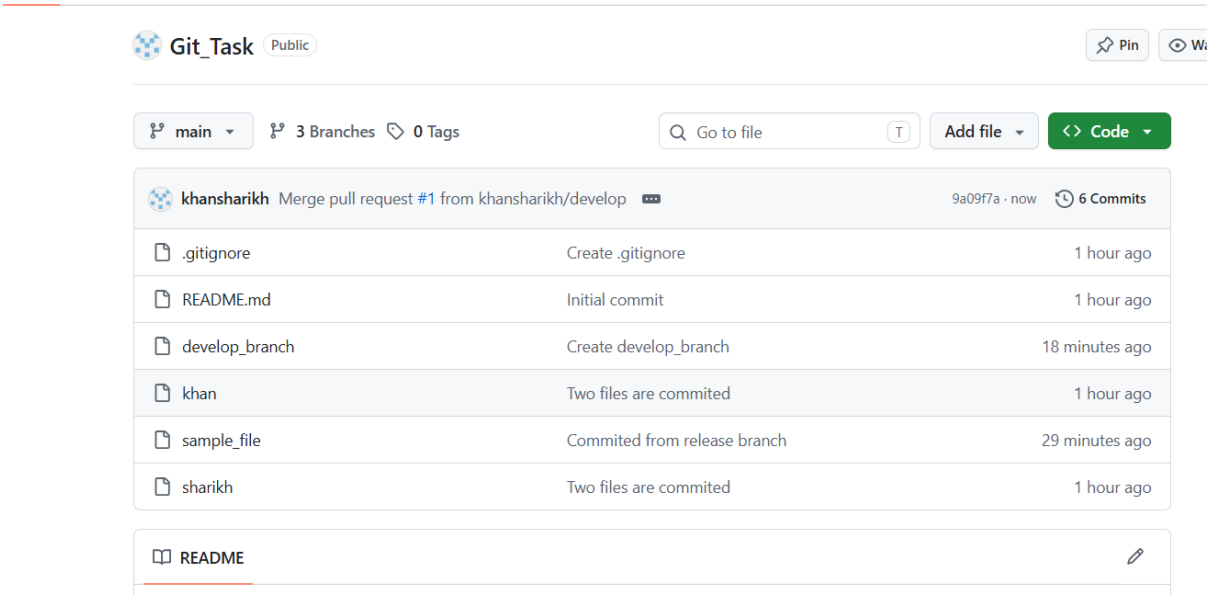

- Create a file in local and send that to branch in github.

First I have created file and add this file to stagging area and then commit it using below commands

($ git add .) & then **($ git commit -m “.....”)**

After it I have push it to remote repo release branch using

($ git push -u origin release)

```
[root@ip-172-31-21-143 Git_Task]# ls
README.md  khan  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]# touch local_file
[root@ip-172-31-21-143 Git_Task]# ls
README.md  khan  local_file  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]# git status
On branch release
Your branch is up to date with 'origin/release'.


Untracked files:
  (use "git add <file>..." to include in what will be committed)
        local_file

nothing added to commit but untracked files present (use "git add" to track)
[root@ip-172-31-21-143 Git_Task]# git add .
[root@ip-172-31-21-143 Git_Task]# git status
On branch release
Your branch is up to date with 'origin/release'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   local_file

[root@ip-172-31-21-143 Git_Task]# git commit -m "commited local file"
[release 7143457] commited local file
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 local_file
[root@ip-172-31-21-143 Git_Task]# git ls-files
.gitignore
README.md
khan
local_file
sample_file
sharikh
[root@ip-172-31-21-143 Git_Task]#
```

```
[root@ip-172-31-21-143 Git_Task]# git push -u origin release
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 238 bytes | 238.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:khansharikh/Git_Task.git
   a4fc828..7143457  release -> release
branch 'release' set up to track 'origin/release'.
[root@ip-172-31-21-143 Git_Task]#
```

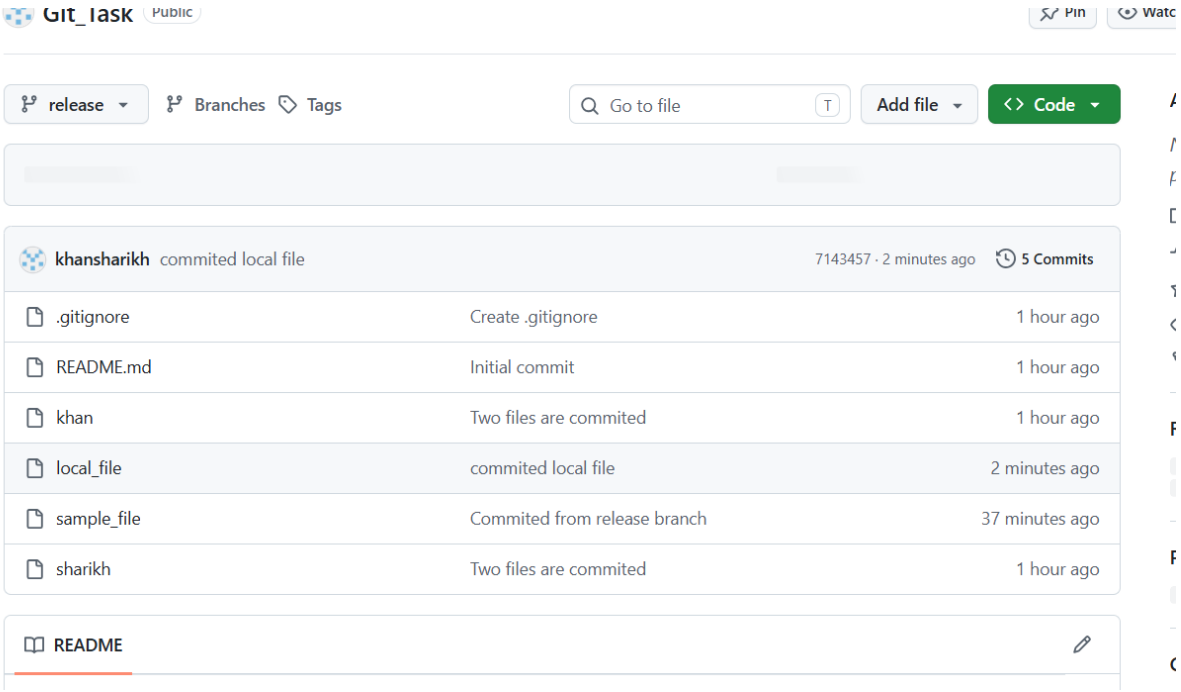

- Clone only a branch from github to local.

I used to clone a branch using command

($ git clone -b develop <.....url.....>)

After that I used fetch for fetching all the metadata of branches

($ git fetch origin)

And try to switch to that branch from my local using

($ git checkout develop)

```
* release
[root@ip-172-31-21-143 Git_Task]# git clone -b develop --single-branch git@github.com:khansharikh/Git_Task.git
Cloning into 'Git_Task'...
remote: Enumerating objects: 14, done.
remote: Counting objects: 100% (14/14), done.
remote: Compressing objects: 100% (8/8), done.
remote: Total 14 (delta 3), reused 4 (delta 1), pack-reused 0 (from 0)
Receiving objects: 100% (14/14), done.
Resolving deltas: 100% (3/3), done.
[root@ip-172-31-21-143 Git_Task]# ls
Git_Task  README.md  khan  local_file  sample_file  sharikh
```

```
* release
[root@ip-172-31-21-143 Git_Task]# git branch -a
  main
* release
  remotes/origin/HEAD → origin/main
  remotes/origin/develop
  remotes/origin/main
  remotes/origin/release
[root@ip-172-31-21-143 Git_Task]# git checkout develop
branch 'develop' set up to track 'origin/develop'.
Switched to a new branch 'develop'
[root@ip-172-31-21-143 Git_Task]# ls
Git_Task  README.md  develop_branch  khan  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]#
```

- Create a file with all passwords and make that untrackable with git.

. gitignore file is created I have mentioned in that file the file name password

Which is not tracking this file just ignoring it.

```
[root@ip-172-31-21-143 Git_Task]# ls -la
total 28
drwxr-xr-x. 3 root root   121 Oct 23 11:09 .
drwxr-xr-x. 3 root root    22 Oct 23 09:37 ..
drwxr-xr-x. 7 root root 16384 Oct 23 11:09 .git
-rw-r--r--. 1 root root    15 Oct 23 09:37 .gitignore
-rw-r--r--. 1 root root    10 Oct 23 09:37 README.md
-rw-r--r--. 1 root root     1 Oct 23 11:01 develop_branch
-rw-r--r--. 1 root root     0 Oct 23 09:41 khan
-rw-r--r--. 1 root root     0 Oct 23 10:48 sample_file
-rw-r--r--. 1 root root     0 Oct 23 09:41 sharikh
[root@ip-172-31-21-143 Git_Task]# vi password
[root@ip-172-31-21-143 Git_Task]# ls
README.md  develop_branch  khan  password  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is up to date with 'origin/main'.


nothing to commit, working tree clean
[root@ip-172-31-21-143 Git_Task]#
```

- Make a commit and make that commit reset without savings changes.

After commit I have used below command to reset

($ git reset HEAD~1)

It will rollback most recent commit and that file come back again in untracked area

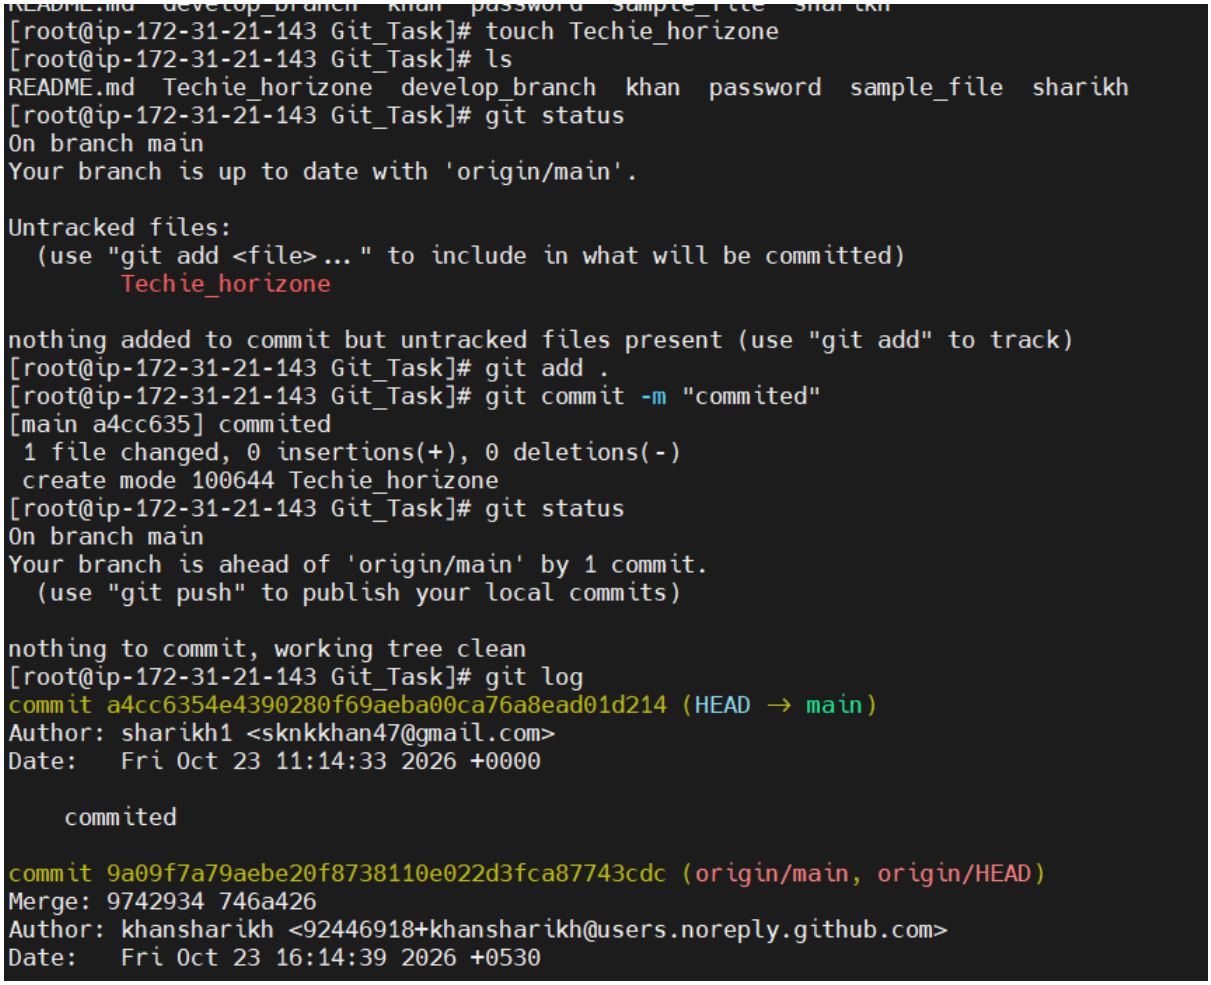

```
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean
[root@ip-172-31-21-143 Git_Task]# git reset HEAD~1
[root@ip-172-31-21-143 Git_Task]# git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        Techie_horizone

nothing added to commit but untracked files present (use "git add" to track)
[root@ip-172-31-21-143 Git_Task]# git log -3
commit 9a09f7a79aebe20f8738110e022d3fca87743cdc (HEAD -> main, origin/main, origin/HEAD)
Merge: 9742934 746a426
Author: khansharikh <92446918+khansharikh@users.noreply.github.com>
Date:   Fri Oct 23 16:14:39 2026 +0530

    Merge pull request #1 from khansharikh/develop

    Develop

commit 746a42682debdbe43d89d8d96baa24af0c63f2f4 (origin/develop, develop)
Author: khansharikh <92446918+khansharikh@users.noreply.github.com>
Date:   Fri Oct 23 15:57:23 2026 +0530

    Create develop_branch

commit a4fc82816bc136299976d2a38ca4a7ea7da819d1
Author: sharikh1 <sknkkhan47@gmail.com>
Date:   Fri Oct 23 10:16:14 2026 +0000

    Commited from release branch
[root@ip-172-31-21-143 Git_Task]#
```

- Revert a commited commit to the older version.

I have revert a committed commit using
($ git revert commit_id)
It deletes that file which was added on that commit

```
[root@ip-172-31-21-143 Git_Task]# git log -3
commit 746a42682debdbe43d89d8d96baa24af0c63f2f4 (HEAD → develop, origin/develop)
Author: khansharikh <92446918+khansharikh@users.noreply.github.com>
Date:   Fri Oct 23 15:57:23 2026 +0530

    Create develop_branch

commit a4fc82816bc136299976d2a38ca4a7ea7da819d1
Author: sharikh1 <sknkkhan47@gmail.com>
Date:   Fri Oct 23 10:16:14 2026 +0000

    Commited from release branch

commit 97429344950768d20a5b49795d70745bf74a235d
Author: sharikh1 <sknkkhan47@gmail.com>
Date:   Fri Oct 23 09:46:26 2026 +0000

    Two files are commited
[root@ip-172-31-21-143 Git_Task]# git revert 746a4268
[develop c06464b] Revert "Create develop_branch"
 1 file changed, 1 deletion(-)
 delete mode 100644 develop_branch
[root@ip-172-31-21-143 Git_Task]# ls
README.md  Techie_horizone  khan  password  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]# git log -3
commit c06464b9462bb523200f0246fc299ab4c5cc95e7 (HEAD → develop)
Author: sharikh1 <sknkkhan47@gmail.com>
Date:   Fri Oct 23 11:30:13 2026 +0000

    Revert "Create develop_branch"

    This reverts commit 746a42682debdbe43d89d8d96baa24af0c63f2f4.

commit 746a42682debdbe43d89d8d96baa24af0c63f2f4 (origin/develop)
Author: khansharikh <92446918+khansharikh@users.noreply.github.com>
Date:   Fri Oct 23 15:57:23 2026 +0530

    Create develop_branch

commit a4fc82816bc136299976d2a38ca4a7ea7da819d1
Author: sharikh1 <sknkkhan47@gmail.com>
Date:   Fri Oct 23 10:16:14 2026 +0000
```

- Push a file to stash without savings the changes and work on another file.

I tried to update ad fille then without commit I tried ti switch the branch then it gives error that local changes are not committed will be overwritten so I move that file in stash using below command

($ git stash -m “message”)

It will store my work as a stash or temporary, which I can recall again when my other work will done using

For getting our saved work

($ git stash list)

($ git stash apply <Number of that file or name>)

```
README.md  Techie_horizone  khan  password  sample_file  shar.txt
[root@ip-172-31-21-143 Git_Task]# cat Techie_horizone
[root@ip-172-31-21-143 Git_Task]# vi Techie_horizone
[root@ip-172-31-21-143 Git_Task]# echo "hi this is techie" >> Techie_horizone
[root@ip-172-31-21-143 Git_Task]# git status
On branch develop
Your branch is ahead of 'origin/develop' by 2 commits.
  (use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   Techie_horizone

no changes added to commit (use "git add" and/or "git commit -a")
[root@ip-172-31-21-143 Git_Task]# git checkout release
error: Your local changes to the following files would be overwritten by checkout:
        Techie_horizone
Please commit your changes or stash them before you switch branches.
Aborting
[root@ip-172-31-21-143 Git_Task]#
```

```
Please commit your changes or stash them before you switch branches.
Aborting
[root@ip-172-31-21-143 Git_Task]# git stash -m "stashing will continue"
Saved working directory and index state On develop: stashing will continue
[root@ip-172-31-21-143 Git_Task]# git checkout release
Switched to branch 'release'
Your branch is up to date with 'origin/release'.
[root@ip-172-31-21-143 Git_Task]# git branch
  develop
  main
* release
[root@ip-172-31-21-143 Git_Task]# ls
README.md  khan  local_file  password  sample_file  sharikh
[root@ip-172-31-21-143 Git_Task]#
```

```
[root@ip-172-31-21-143 Git_Task]# git checkout develop
Switched to branch 'develop'
Your branch is ahead of 'origin/develop' by 2 commits.
  (use "git push" to publish your local commits)
[root@ip-172-31-21-143 Git_Task]# cat Techie_horizone
[root@ip-172-31-21-143 Git_Task]# git stash list
stash@{0}: On develop: stashing will continue
[root@ip-172-31-21-143 Git_Task]# git stash apply 0
On branch develop
Your branch is ahead of 'origin/develop' by 2 commits.
  (use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   Techie_horizone

no changes added to commit (use "git add" and/or "git commit -a")
[root@ip-172-31-21-143 Git_Task]# cat Techie_horizone
hi this is techie
[root@ip-172-31-21-143 Git_Task]#
```

- Undo the stash file and start working on that again.

($ git stash pop) →will restores changes and removes the stash entry if successful.

($ git stash apply 0) → will restores changes but keeps the stash entry.

```
[root@ip-172-31-21-143 Git_Task]# git stash
Saved working directory and index state WIP on develop: 6ada6a4 commited
[root@ip-172-31-21-143 Git_Task]# git stash list
stash@{0}: WIP on develop: 6ada6a4 commited
stash@{1}: On develop: stashing will continue
[root@ip-172-31-21-143 Git_Task]# git stash pop
On branch develop
Your branch is ahead of 'origin/develop' by 2 commits.
  (use "git push" to publish your local commits)


Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   Techie_horizone


no changes added to commit (use "git add" and/or "git commit -a")
Dropped refs/stash@{0} (0d45ab67e802ad282399a5f3e91b123866339bc8)
[root@ip-172-31-21-143 Git_Task]# git stash list
stash@{0}: On develop: stashing will continue
[root@ip-172-31-21-143 Git_Task]#
```

- Generate a ssh-keygen and configure into github.\


Creates a SSH key for github authentication


ssh-keygen

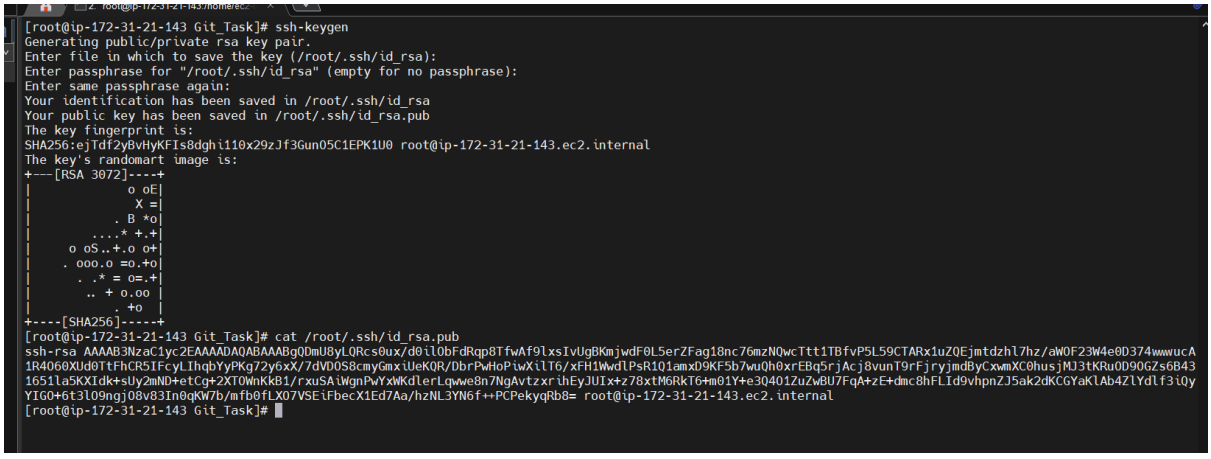

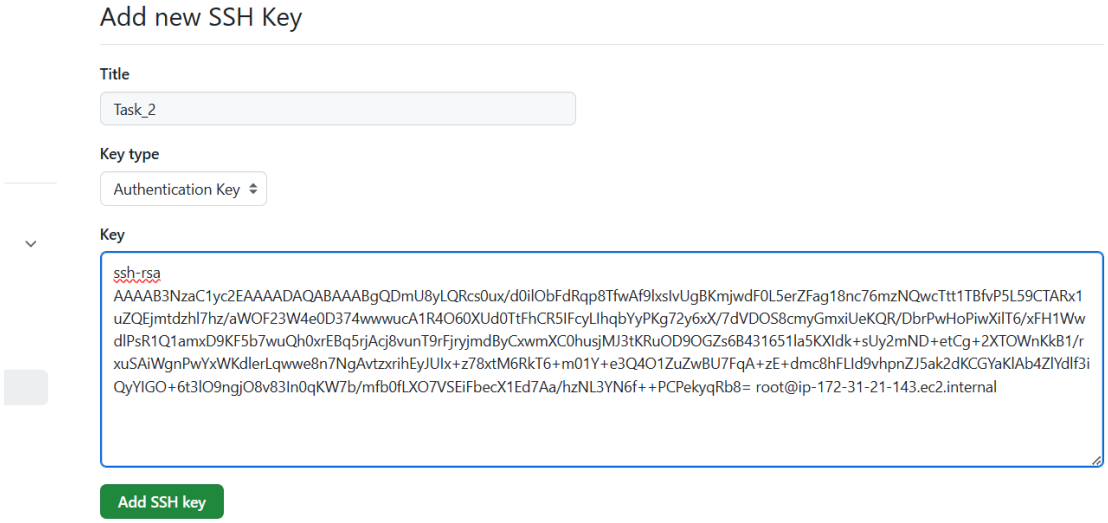

- Configure webhooks to github.

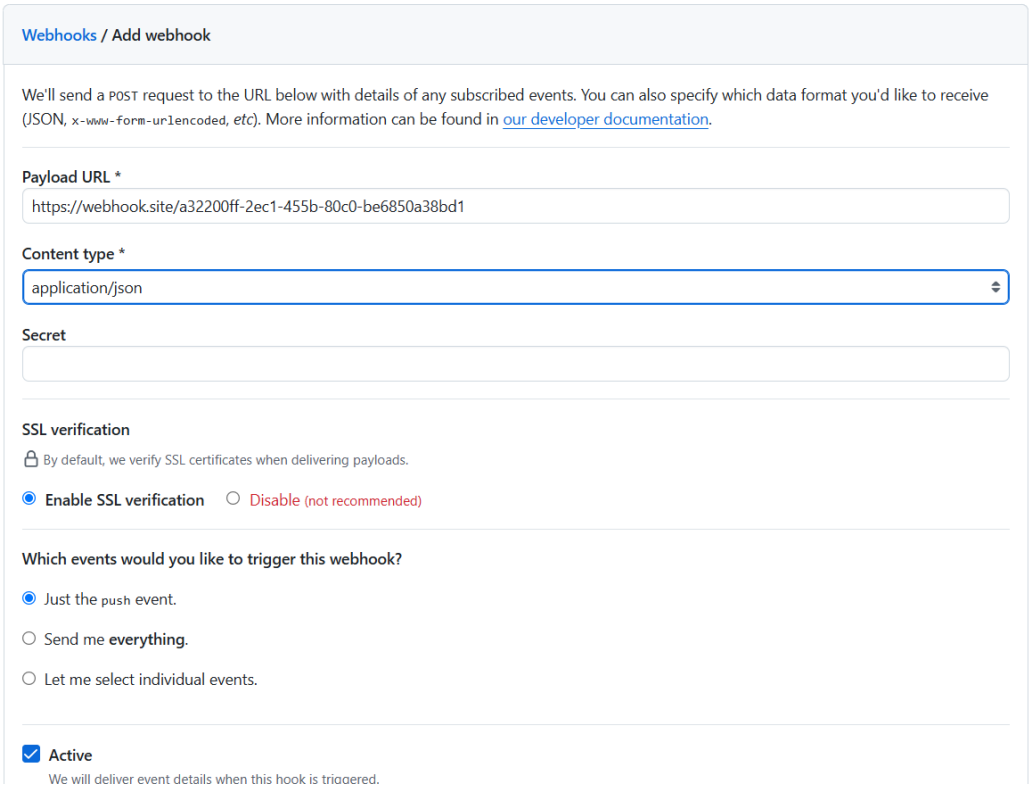

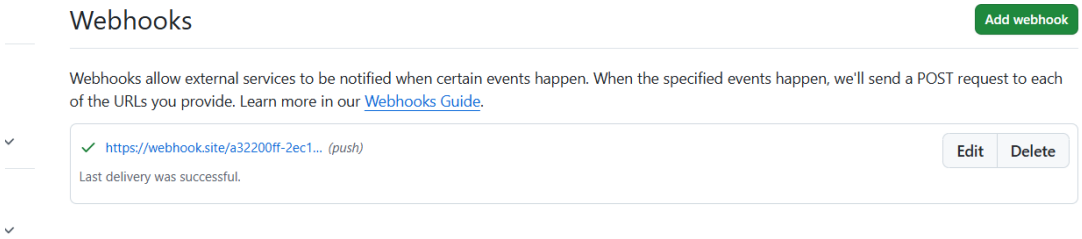

- Basic understanding of .git file.

There is multiple configuration file in .git

Objects/ → Stores Git objects, including file contents, directory trees, and commit data. Git uses these to preserve snapshots and history.


Refs/ → Stores references such as branch and tag names, which point to commits.

HEAD/→ Usually identifies the current branch, or points directly to a commit when in detached HEAD state.

Index/ → The staging area. It records what will be included in your next commit.


Config/→ Repository-specific configuration, such as remote URLs and local Git settings.

Logs/ → Records updates to references, including branch movements, when reflog recording is enabled.

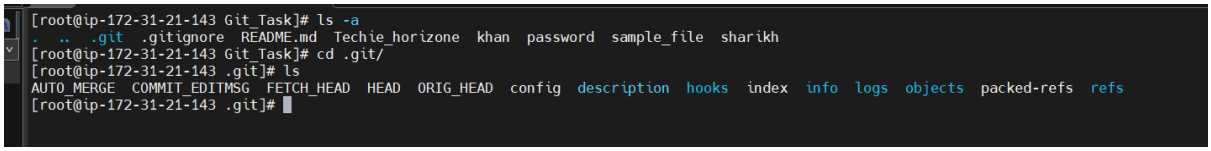


- Check all the logs of git.

($ git logs) → it will show history of commits along with details

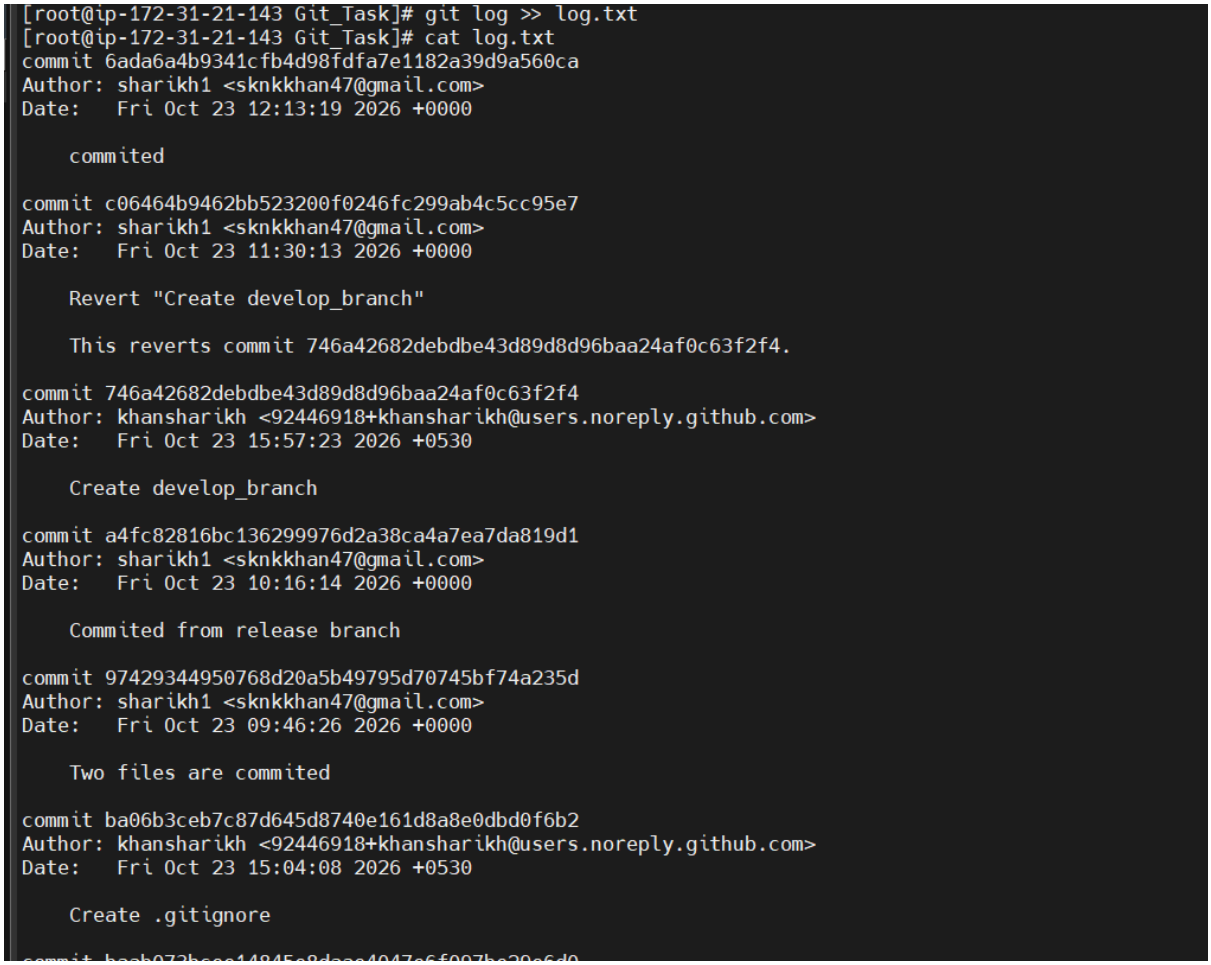

- Rename the commit message.

($ git commit --amend)

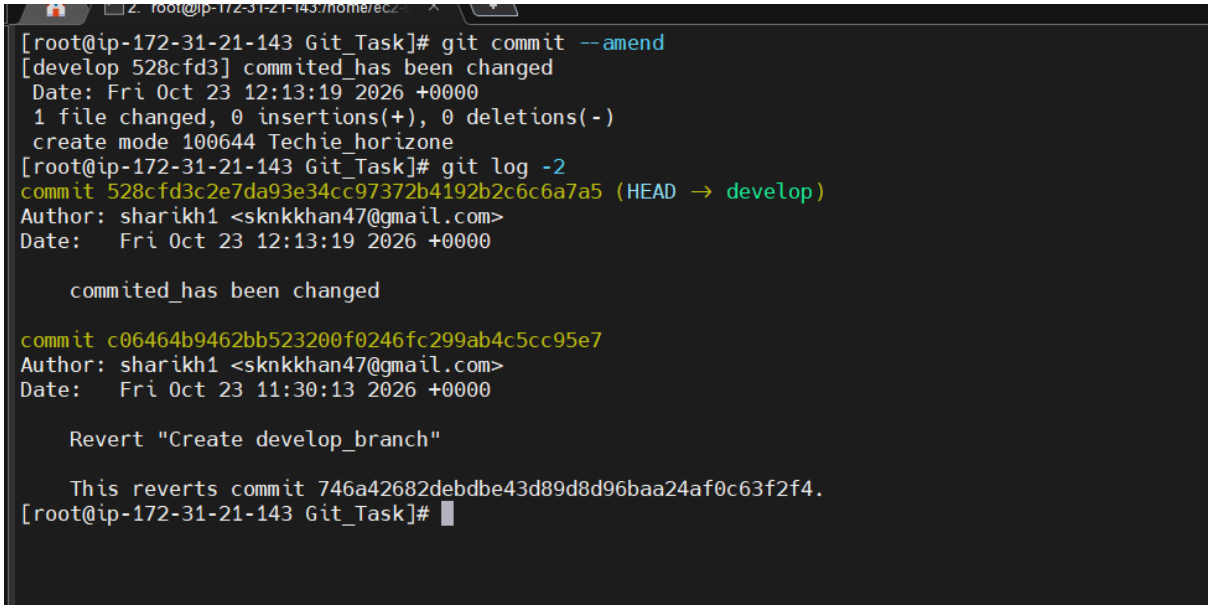


- Merge multiple commits into single commit.

I have used below command

($ git rebase -I HEAD~4)→ for make four commits into a single commit

Add squash in opened file

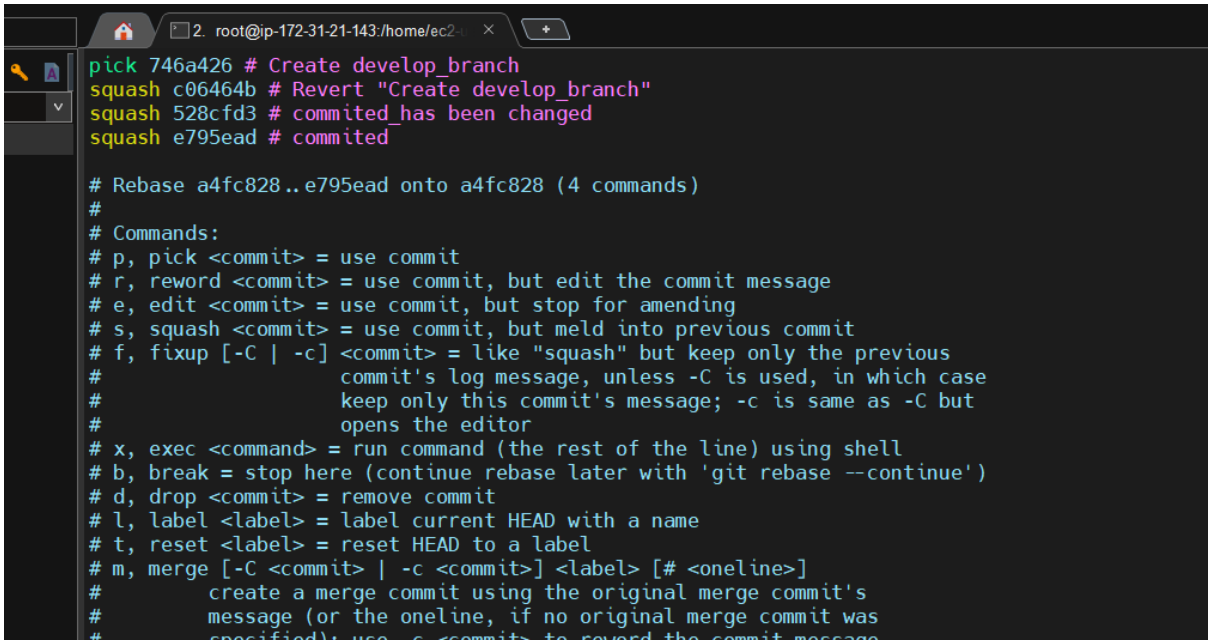
2. root@ip-172-31-21-143:/home/ec2
pick 746a426 # Create develop_branch
squash c06464b # Revert "Create develop_branch"
squash 528cfd3 # commited_has been changed
squash e795ead # commited
Rebase a4fc828..e795ead onto a4fc828 (4 commands)
#
Commands:
p, pick <commit> = use commit
r, reword <commit> = use commit, but edit the commit message
e, edit <commit> = use commit, but stop for amending
s, squash <commit> = use commit, but meld into previous commit
f, fixup [-C | -c] <commit> = like "squash" but keep only the previous
commit's log message, unless -C is used, in which case
keep only this commit's message; -c is same as -C but
opens the editor
x, exec <command> = run command (the rest of the line) using shell
b, break = stop here (continue rebase later with 'git rebase --continue')
d, drop <commit> = remove commit
l, label <label> = label current HEAD with a name
t, reset <label> = reset HEAD to a label
m, merge [-C <commit> | -c <commit>] <label> [# <oneline>]
create a merge commit using the original merge commit's
message (or the oneline, if no original merge commit was

```
[root@ip-172-31-21-143 Git_Task]# git log -4
commit 1acabf673ab397b9420283f1736531d2a5e0dab1 (HEAD → develop)
Author: khansharikh <92446918+khansharikh@users.noreply.github.com>
Date:   Fri Oct 23 15:57:23 2026 +0530

    Create develop_branch

    Revert "Create develop_branch"

    This reverts commit 746a42682debdbe43d89d8d96baa24af0c63f2f4.

    commited_has been changed

    commited

commit a4fc82816bc136299976d2a38ca4a7ea7da819d1
Author: sharikh1 <sknkkhan47@gmail.com>
Date:   Fri Oct 23 10:16:14 2026 +0000

    Commited from release branch

commit 97429344950768d20a5b49795d70745bf74a235d
Author: sharikh1 <sknkkhan47@gmail.com>
Date:   Fri Oct 23 09:46:26 2026 +0000

    Two files are commited

commit ba06b3ceb7c87d645d8740e161d8a8e0dbd0f6b2
Author: khansharikh <92446918+khansharikh@users.noreply.github.com>
Date:   Fri Oct 23 15:04:08 2026 +0530

    Create .gitignore
[root@ip-172-31-21-143 Git_Task]#
```