

Recurrent Neural Networks and Language Modelling: Part 1

Phil Blunsom

`phil.blunsom@cs.ox.ac.uk`



DEPARTMENT OF
**COMPUTER
SCIENCE**

Language models

一个序列的概率

A language model assigns a probability to a sequence of words, such that $\sum_{w \in \Sigma^*} p(w) = 1$:

Given the observed training text, how probable is this new utterance?

Thus we can compare different orderings of words (e.g. Translation):

单词的不同和顺序的不同

$$p(\text{he likes apples}) > p(\text{apples likes he})$$

or choice of words (e.g. Speech Recognition):

$$p(\text{he likes apples}) > p(\text{he licks apples})$$

History: cryptography



Language models

非常非常重要。语言模型和条件语言模型可以表达大部分的自然语言处理任务！

Much of Natural Language Processing can be structured as (conditional) language modelling:

Translation

$$p_{\text{LM}}(\text{Les chiens aiment les os} \ ||\ | \text{ Dogs love bones})$$

Question Answering

QA和Dialogue有点小区别

$$p_{\text{LM}}(\text{What do dogs love?} \ ||\ | \text{ bones.} \ | \beta)$$

Dialogue

$$p_{\text{LM}}(\text{How are you?} \ ||\ | \text{ Fine thanks. And you?} \ | \beta)$$

Language models

Most language models employ the **chain rule** to decompose the **joint probability** into a sequence of **conditional probabilities**:

$$p(w_1, w_2, w_3, \dots, w_N) = \\ p(w_1) p(w_2|w_1) p(w_3|w_1, w_2) \times \dots \times p(w_N|w_1, w_2, \dots, w_{N-1})$$

Note that this decomposition is exact and allows us to **model complex joint distributions by learning conditional distributions over the next word (w_n) given the history of words observed (w_1, \dots, w_{n-1})**.

Language models

The simple objective of modelling the next word given the observed history contains much of the complexity of natural language understanding.

Consider predicting the extension of the utterance:

$$p(\cdot | \text{There she built a})$$

With more context we are able to use our knowledge of both language and the world to heavily constrain the distribution over the next word:

$$p(\cdot | \text{Alice went to the beach. There she built a})$$

There is evidence that human language acquisition partly relies on future prediction.

Evaluating a Language Model

A good model assigns real utterances w_1^N from a language a high probability. This can be measured with cross entropy:

$$H(w_1^N) = -\frac{1}{N} \log_2 p(w_1^N)$$

Intuition 1: Cross entropy is a measure of how many bits are needed to encode text with our model.

Alternatively we can use **perplexity**:

$$\text{perplexity}(w_1^N) = 2^{H(w_1^N)}$$

Intuition 2: Perplexity is a measure of how surprised our model is on seeing each word.

Language Modelling Data

Language modelling is a **time series prediction problem** in which we must be careful to train on the past and test on the future.

If the corpus is composed of articles, it is best to ensure **the test data is drawn from a disjoint set of articles** to the training data.

Language Modelling Data

Two popular data sets for language modelling evaluation are a preprocessed version of the Penn Treebank,¹ and the Billion Word Corpus.² Both are flawed:

- the PTB is very small and has been heavily processed. As such it is not representative of natural language.
- The Billion Word corpus was extracted by first randomly permuting sentences in news articles and then splitting into training and test sets. As such train and test sentences come from the same articles and overlap in time.

The recently introduced WikiText datasets³ are a better option.

¹www.fit.vutbr.cz/~imikolov/rnnlm/simple-examples.tgz

²code.google.com/p/1-billion-word-language-modeling-benchmark/

³Pointer Sentinel Mixture Models. Merity et al., arXiv 2016

Lecture Overview

求解一句话的概率是一个任务，给这个任务填充模型和参数，就是解构这个任务。不同的模型与参数就形成不同的方法。

The rest of this lecture will survey three approaches to parametrising language models:

- With count based n-gram models we approximate the history of observed words with just the previous n words.
- Neural n-gram models embed the same fixed n-gram history in a continuous space and thus better capture correlations between histories.
- With Recurrent Neural Networks we drop the fixed n-gram history and compress the entire history in a fixed length vector, enabling long range correlations to be captured.

前两个都是n-gram，但是一个是传统的count-based，另一个是neural-based

Outline

Count based N-Gram Language Models

Neural N-Gram Language Models

Recurrent Neural Network Language Models

N-Gram Models: The Markov Chain Assumption

n-gram模型都是有mc假设！！

Markov assumption:

- only **previous** history matters
- **limited memory**: only last $k - 1$ words are included in history (older words less relevant)
- **k th order Markov model**

For instance **2-gram** language model:

$$\begin{aligned} p(w_1, w_2, w_3, \dots, w_n) &= p(w_1) p(w_2|w_1) p(w_3|w_1, w_2) \times \dots \\ &\quad \times p(w_n|w_1, w_2, \dots, w_{n-1}) \\ &\approx p(w_1) p(w_2|w_1) p(w_3|w_2) \times \dots \times p(w_n|w_{n-1}) \end{aligned}$$

The conditioning context, w_{i-1} , is called the **history**.

N-Gram Models: Estimating Probabilities

Maximum likelihood estimation for 3-grams:

$$p(w_3|w_1, w_2) = \frac{\text{count}(w_1, w_2, w_3)}{\text{count}(w_1, w_2)}$$

Collect counts over a large text corpus. Billions to trillions of words are easily available by scraping the web.

N-Gram Models: Back-Off

In our training corpus we may never observe the trigrams:

- Oxford Pimm's eater
- Oxford Pimm's drinker

If both have count 0 our smoothing methods will assign the same probability to them.

A better solution is to interpolate with the bigram probability:

- Pimm's eater
- Pimm's drinker

N-Gram Models: Interpolated Back-Off

By recursively interpolating the n-gram probabilities with the $(n - 1)$ -gram probabilities we can smooth our language model and ensure all words have non-zero probability in a given context.

A simple approach is linear interpolation:

$$p_I(w_n | w_{n-2}, w_{n-1}) = \lambda_3 p(w_n | w_{n-2}, w_{n-1}) + \lambda_2 p(w_n | w_{n-1}) + \lambda_1 p(w_n).$$

where $\lambda_3 + \lambda_2 + \lambda_1 = 1$.

A number of more advanced smoothing and interpolation schemes have been proposed, with Kneser-Ney being the most common.⁴

⁴*An empirical study of smoothing techniques for language modeling.*
Stanley Chen and Joshua Goodman. Harvard University, 1998.
research.microsoft.com/en-us/um/people/joshuago/tr-10-98.pdf

Provisional Summary

Good

- Count based n-gram models are **exceptionally scalable** and are able to be **trained on trillions of words of data**,
- fast **constant time evaluation** of probabilities at test time,
- sophisticated smoothing techniques match the empirical distribution of language.⁵

Bad

- **Large ngrams are sparse**, so **hard to capture long dependencies**,
- symbolic nature does **not capture correlations between semantically similar word distributions**, e.g. cat \leftrightarrow dog,
- similarly morphological regularities, running \leftrightarrow jumping, or gender.

⁵Heaps' Law: en.wikipedia.org/wiki/Heaps'_law

Outline

Count based N-Gram Language Models

Neural N-Gram Language Models


Recurrent Neural Network Language Models

Neural Language Models

Feed forward network

$$h = g(Vx + c)$$

$$\hat{y} = Wh + b$$



Neural Language Models


Trigram NN language model

$$h_n = g(V[w_{n-1}; w_{n-2}] + c)$$

$$\hat{p}_n = \text{softmax}(Wh_n + b)$$

$$\text{softmax}(u)_i = \frac{\exp u_i}{\sum_j \exp u_j}$$


- w_i are one hot vectors and \hat{p}_i are distributions,
- $|w_i| = |\hat{p}_i| = V$ (words in the vocabulary),
- V is usually very large $> 1e5$.



Neural Language Models: Sampling


从V中随机采样一个单词，可以得到该单词在该context下的对应概率

$$w_n | w_{n-1}, w_{n-2} \sim \hat{p}_n$$

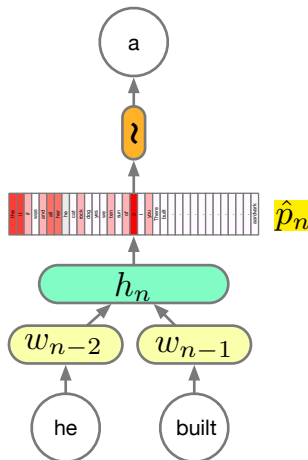


Neural Language Models: Sampling

$$w_n | w_{n-1}, w_{n-2} \sim \hat{p}_n$$




Neural Language Models: Sampling

$$w_n | w_{n-1}, w_{n-2} \sim \hat{p}_n$$

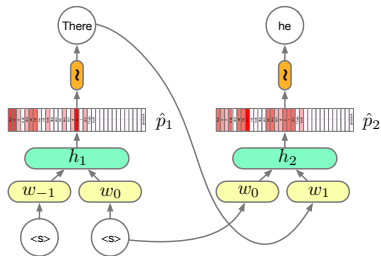


Neural Language Models: Sampling

$$w_n | w_{n-1}, w_{n-2} \sim \hat{p}_n$$

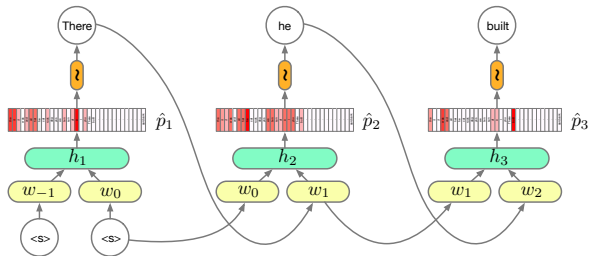

Neural Language Models: Sampling

$$w_n | w_{n-1}, w_{n-2} \sim \hat{p}_n$$

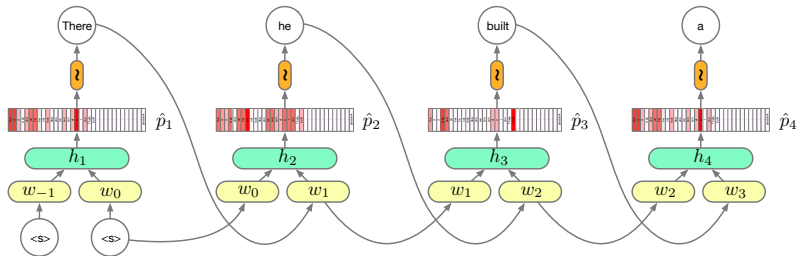

Neural Language Models: Training


The usual training objective is the cross entropy of the data given the model (MLE):

$$\mathcal{F} = -\frac{1}{N} \sum_n \text{cost}_n(w_n, \hat{p}_n)$$

The cost function is simply the model's estimated log-probability of w_n :

$$\text{cost}(a, b) = a^T \log b$$

(assuming w_i is a one hot encoding of the word)




找到 w_n 单词对应的预测概率，
这个概率就是损失，目标是基
于之前context的预测词越符合
真正的词，概率越大

Neural Language Models: Training

Calculating the gradients is straightforward with back propagation:


$$\begin{aligned}\frac{\partial \mathcal{F}}{\partial W} &= -\frac{1}{N} \sum_n \frac{\partial \text{cost}_n}{\partial \hat{p}_n} \frac{\partial \hat{p}_n}{\partial W} \\ \frac{\partial \mathcal{F}}{\partial V} &= -\frac{1}{N} \sum_n \frac{\partial \text{cost}_n}{\partial \hat{p}_n} \frac{\partial \hat{p}_n}{\partial h_n} \frac{\partial h_n}{\partial V}\end{aligned}$$



Neural Language Models: Training

Calculating the gradients is straightforward with back propagation:

$$\frac{\partial \mathcal{F}}{\partial W} = -\frac{1}{4} \sum_{n=1}^4 \frac{\partial \text{cost}_n}{\partial \hat{p}_n} \frac{\partial \hat{p}_n}{\partial W} \quad , \quad \frac{\partial \mathcal{F}}{\partial V} = -\frac{1}{4} \sum_{n=1}^4 \frac{\partial \text{cost}_n}{\partial \hat{p}_n} \frac{\partial \hat{p}_n}{\partial h_n} \frac{\partial h_n}{\partial V}$$

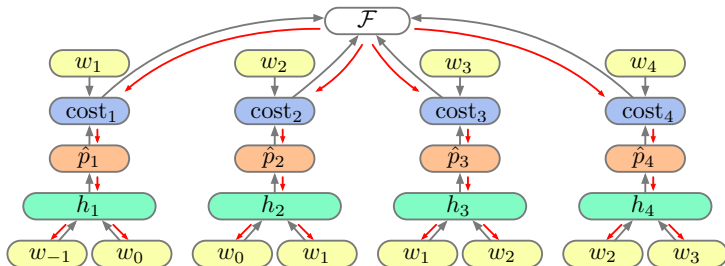

Note that calculating the gradients for each time step n is independent of all other timesteps, as such they are calculated in parallel and summed.

Comparison with Count Based N-Gram LMs

Good

- Better generalisation on unseen n-grams, poorer on seen n-grams.
Solution: direct (linear) ngram features.
- Simple NLMs are often an order magnitude smaller in memory footprint than their vanilla n-gram cousins (though not if you use the linear features suggested above!).

Bad

- The number of parameters in the model scales with the n-gram size and thus the length of the history captured.
- The n-gram history is finite and thus there is a limit on the longest dependencies that can be captured.
- Mostly trained with Maximum Likelihood based objectives which do not encode the expected frequencies of words a priori.

Outline

Count based N-Gram Language Models

Neural N-Gram Language Models


Recurrent Neural Network Language Models

Recurrent Neural Network Language Models

Feed Forward

$$h = g(Vx + c)$$


$$\hat{y} = Wh + b$$



Recurrent Network


$$h_n = g(V[x_n; h_{n-1}] + c)$$

$$\hat{y}_n = Wh_n + b$$




Recurrent Neural Network Language Models

$$h_n = g(V[x_n; h_{n-1}] + c)$$




Recurrent Neural Network Language Models

$$h_n = g(V[x_n; h_{n-1}] + c)$$

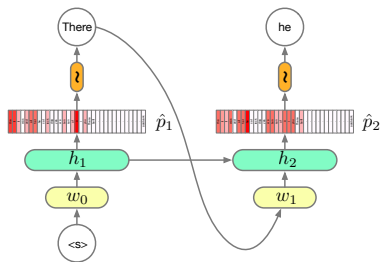


Recurrent Neural Network Language Models

$$h_n = g(V[x_n; h_{n-1}] + c)$$

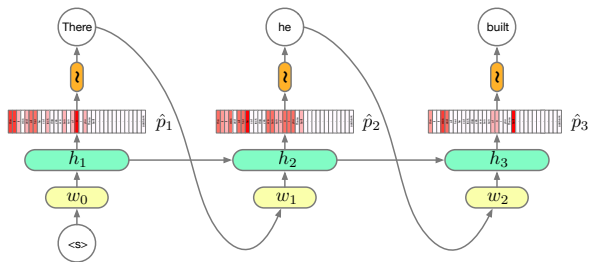

Recurrent Neural Network Language Models

$$h_n = g(V[x_n; h_{n-1}] + c)$$

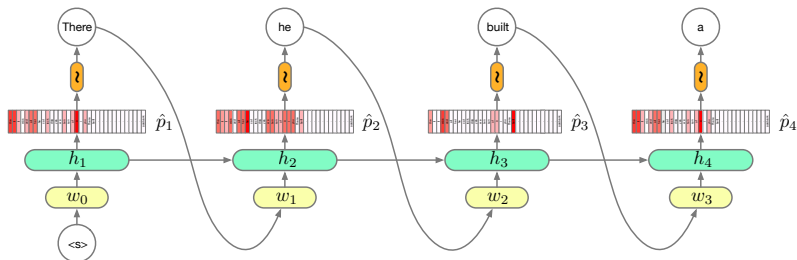


Recurrent Neural Network Language Models

Feed Forward

$$h = g(Vx + c)$$


$$\hat{y} = Wh + b$$



Recurrent Network

$$h_n = g(V[x_n; h_{n-1}] + c)$$


$$\hat{y}_n = Wh_n + b$$



Recurrent Neural Network Language Models

The unrolled recurrent network is a directed acyclic computation graph. We can run backpropagation as usual:


$$\mathcal{F} = -\frac{1}{4} \sum_{n=1}^4 \text{cost}_n(w_n, \hat{p}_n)$$

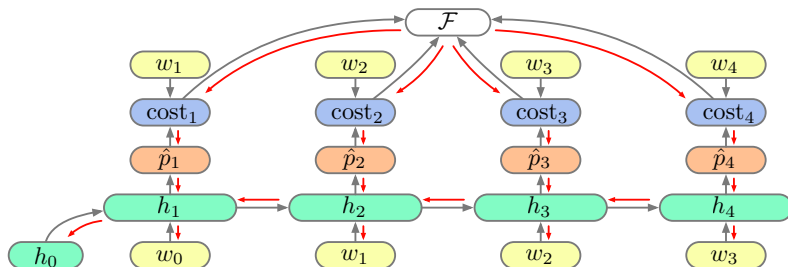

Recurrent Neural Network Language Models

This algorithm is called Back Propagation Through Time (BPTT). Note the dependence of derivatives at time n with those at time $n + \alpha$:


$$\frac{\partial \mathcal{F}}{\partial h_2} = \frac{\partial \mathcal{F}}{\partial \text{cost}_2} \frac{\partial \text{cost}_2}{\partial \hat{p}_2} \frac{\partial \hat{p}_2}{\partial h_2} + \frac{\partial \mathcal{F}}{\partial \text{cost}_3} \frac{\partial \text{cost}_3}{\partial \hat{p}_3} \frac{\partial \hat{p}_3}{\partial h_3} \frac{\partial h_3}{\partial h_2} + \frac{\partial \mathcal{F}}{\partial \text{cost}_4} \frac{\partial \text{cost}_4}{\partial \hat{p}_4} \frac{\partial \hat{p}_4}{\partial h_4} \frac{\partial h_4}{\partial h_3} \frac{\partial h_3}{\partial h_2}$$

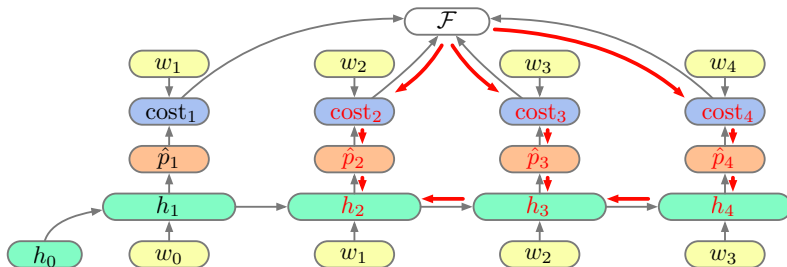

Recurrent Neural Network Language Models

If we break these dependencies after a **fixed number of timesteps** we get **Truncated** Back Propagation Through Time (TBPTT):


$$\mathcal{F} = -\frac{1}{4} \sum_{n=1}^4 \text{cost}_n(w_n, \hat{p}_n)$$

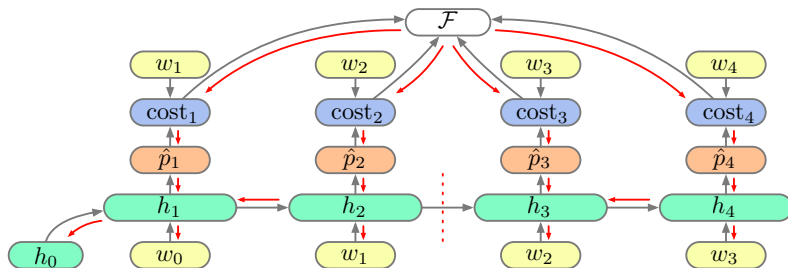

Recurrent Neural Network Language Models

If we break these dependencies after a fixed number of timesteps we get **Truncated** Back Propagation Through Time (TBPTT):

$$\frac{\partial \mathcal{F}}{\partial h_2} \approx \frac{\partial \mathcal{F}}{\partial \text{cost}_2} \frac{\partial \text{cost}_2}{\partial \hat{p}_2} \frac{\partial \hat{p}_2}{\partial h_2}$$

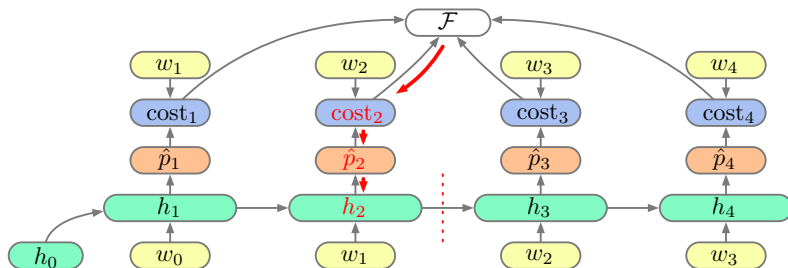

RNNs: Minibatching and Complexity

Mini-batching on a GPU is an effective way of speeding up big matrix vector products. RNNLMs have two such products that dominate their computation: the recurrent matrix V and the softmax matrix W .

Complexity:

BPTT Linear in the length of the longest sequence.

Minibatching can be inefficient as the sequences in a batch may have different lengths.



实现的时候只能用最长的序列作为模型的step size

TBPTT Constant in the truncation length T .

Efficient for mini-batching as all sequences have length T .



More on this in the GPU lecture next week.

Comparison with N-Gram LMs

Good

- RNNs can represent **unbounded dependencies**, unlike models with a fixed n-gram order.
- RNNs **compress histories of words into a fixed size hidden vector**.
- The **number of parameters does not grow with the length of dependencies captured**, but they do grow with the amount of information stored in the hidden layer.

Bad

- RNNs are **hard to learn** and often will not discover long range dependencies present in the data (more on this next lecture).
- Increasing the size of the hidden layer, and thus memory, **increases the computation and memory quadratically**.
- Mostly trained with Maximum Likelihood based objectives which do **not encode the expected frequencies of words a priori**.

Bias vs Variance in LM Approximations

The main issue in language modelling is **compressing the history** (a string). This is useful beyond language modelling in classification and representation tasks (more next week).

- With n -gram models we approximate the history with only the last n words.
- With recurrent models (RNNs, next) we compress the unbounded history into a fixed sized vector.

We can view this progression as the classic Bias vs. Variance tradeoff in ML. **N-gram models are biased but low variance. RNNs decrease the bias considerably, hopefully at a small cost to variance.**

Consider predicting the probability of a sentence by how many times you have seen it before. This is an unbiased estimator with (extremely) high variance.

References

Textbook

Deep Learning, Chapter 10.

www.deeplearningbook.org/contents/rnn.html

Blog Posts

Andrej Karpathy: The Unreasonable Effectiveness of Recurrent Neural Networks

karpathy.github.io/2015/05/21/rnn-effectiveness/

Yoav Goldberg: The unreasonable effectiveness of Character-level Language Models

nbviewer.jupyter.org/gist/yoavg/d76121dfde2618422139

Stephen Merity: Explaining and illustrating orthogonal initialization for recurrent neural networks.

smerity.com/articles/2016/orthogonal_init.html

In the next lecture I will discuss the architectural and algorithmic solutions to issues encountered when training RNNs.



DEPARTMENT OF
**COMPUTER
SCIENCE**