Lecture → 10 Hoisting

How java code runs ⇒ Execution Context

1. Memory allocation
2. Execution thread

```
1   var a = 10;
2   var b = 20;
3
4   function addNumber(num1,num2){
5       var sum = num1+num2;
6       return sum;
7   }
8
9   var sumResult1 = addNumber(a,b);
10  var sumResult2 = addNumber(4,5);
11  console.log(sumResult1,sumResult2);
```

GEC (Global Execution Context)

Memory | Execution

a = undefined | a = 10

b = undefined | b = 20

addNumber = { whole code } | addNumber = { whole code }

sumResult1 = undefined

sumResult2 = undefined

Variable is allocated memory allocation →

Memory | Execution

num1 = undefined | num1 = 10

num2 = undefined | num2 = 20

sum = undefined | sum = 30

return

I st step

II nd step


returning

Memory | Execution

num1 = undefined | num1 = 10

num2 = undefined | num2 = 20

sum = undefined | sum = 30

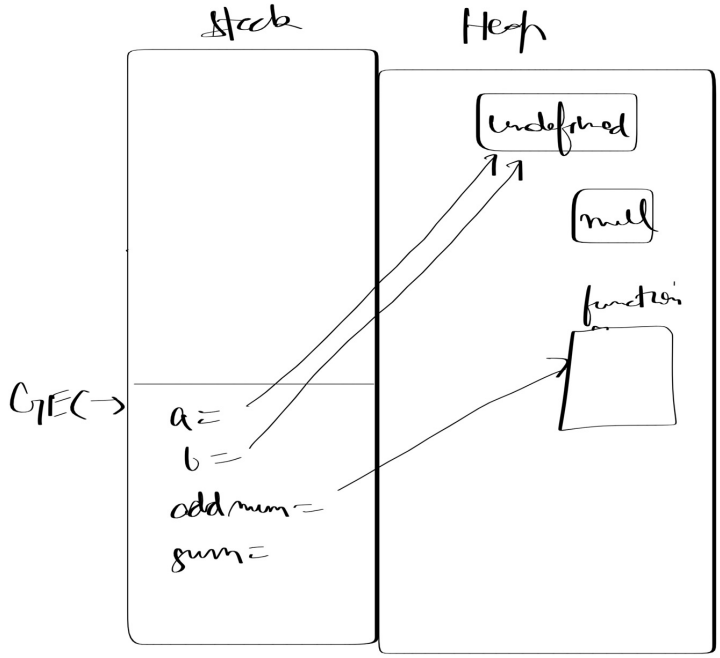

This is for var

But in case of let and const

// let const

// Memory Allocation

// a = < uninitialized > (Temporal Dead Zone)

i.e

```
let a = 10;
console.log(a);
```

✓

```
console.log(a);
let a = 10;
```

✗ give error

Before coming execution phase JS knows what variables are kept in the code is already known

Hoisting