
Day 11 =>

Linked HashSet

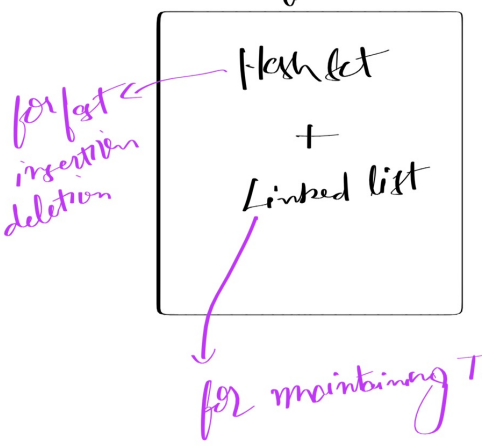

- stores unique elements
- maintain the order
- gives constant-time performance for add, remove and contains operations


Internal (Linked HashSet)

↓

Linked HashMap


↓

Doubly linked list

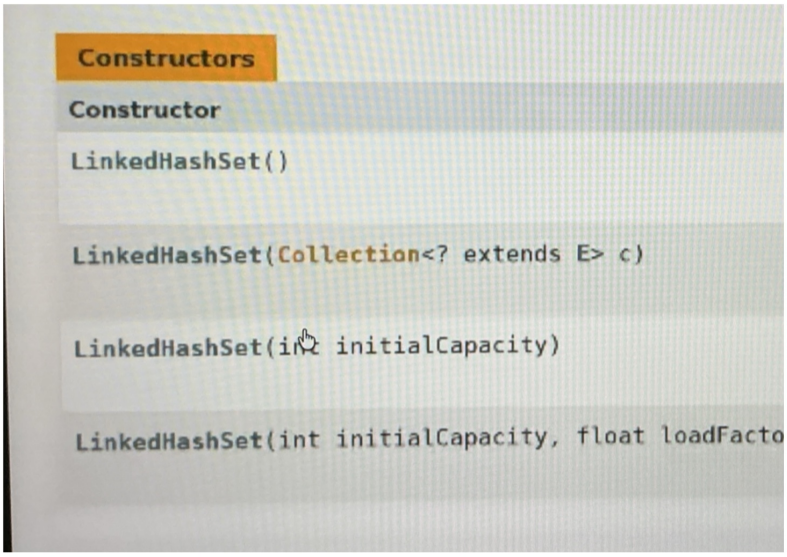

Note => ① The initial capacity is 16 only and the load factor is 0.75 or 75% after which the size will be doubled.

② Linked HashSet is little slower than HashSet as it maintains the Linked list for order

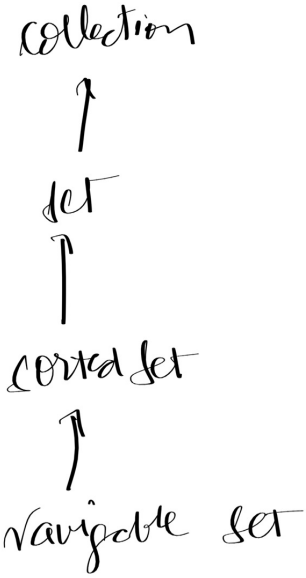

Sorted set
- → subinterface of set
- → stores element in sorted order

extra methods =>

first(), last()

- headSet(E toElement)
- subSet(from, to)
- tailSet(E fromElement)

→ range view elements
if changes in subsets will reflect change in actual

Comparator()

① headSet(1,5) → gives view of elements less than 5 [1,5)

② subSet(1,5) → gives view of elements from 1 to 5
but 1 is included and 5 excluded
& [from, to)

③ tailSet(5) → gives view of elements >= 5

Navigable Set (add navigation methods to move → and ←)

- ceiling(E e) → return the least element in this set ≥ e
- floor(E e) → return the greatest element ≤ e
- descendingIterator()
- descendingSet()
- headSet(E toElement, boolean inclusive)
  - similar to previous headSet() only difference that we can predict whether we call include
- lower()
- higher()
- pollFirst(), pollLast()
- descendingSet()