



Fullstack Web Development

Session 2 | Week 2/Day 1 | 120 min

CSS - Part01

Instructor: Ms. Liev Nova



090667393



What is CSS?

CSS stands for **Cascading Style Sheets**.

- **CSS** is used to **style and format HTML elements** on a web page.
- It controls how elements are **displayed on the screen**, such as colors, fonts, spacing, and layout.
- CSS helps **save time** because one stylesheet can control the design of **multiple web pages at once**.
- **External stylesheets** are stored in **.css files** and can be linked to **HTML pages**.

What is CSS?

CSS stands for **Cascading Style Sheets**.

- **Example**

```
<p style="color: blue;">Hello World</p>
```

HTML

```
p {  
    color: blue;  
}
```

CSS

What is CSS?

CSS stands for **Cascading Style Sheets**.

- **Example**

```
<p style="color: blue;">Hello World</p>
```

HTML

```
p {  
    color: blue;  
}
```

CSS

What is CSS?

CSS stands for **Cascading Style Sheets**.

- **Example**

Without CSS

A Table

Full Name	Gender	Phone Number
Sok Dara	Male	092 332 4342
Sok Pisey	Female	090 384 923
Sovan Makara	Male	010 938 843
Samnang Rithy	Male	092 499 399
Touch Sreyneang	Female	093 394 393
Khouch Soheak	Male	093 493 393

With CSS

A Table

Full Name	Gender	Phone Number
Sok Dara	Male	092 332 4342
Sok Pisey	Female	090 384 923
Sovan Makara	Male	010 938 843
Samnang Rithy	Male	092 499 399
Touch Sreyneang	Female	093 394 393
Khouch Soheak	Male	093 493 393

CSS Syntax

A **CSS rule** is made of two main parts:

- **Selector**
 - The Selector targets the **HTML element** you want to style.
- **Declaration Block**
 - Contains one or more CSS declarations.
 - Each declaration ends with a semicolon (;).

Each **declaration** includes:


- a **property**
- a **value**

The property and value are separated by a **colon (:)**.

CSS Syntax

A **CSS rule** is made of two main parts:

- **Example**

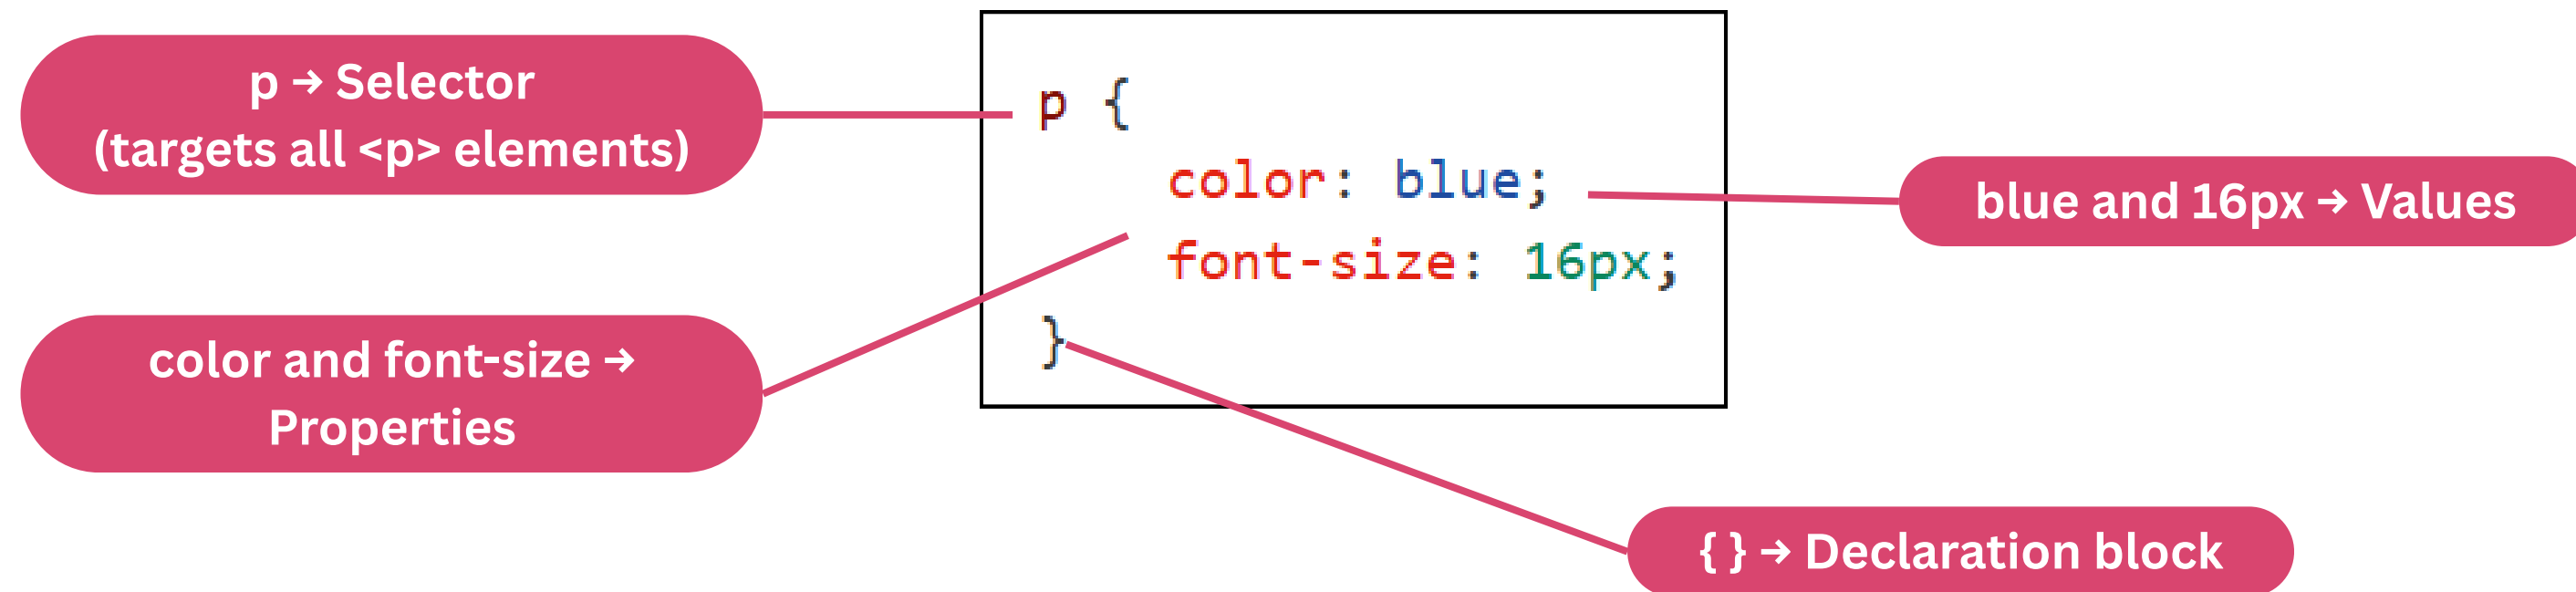

How to Add CSS

There are **three ways to add CSS** to a web page:

1. Inline CSS

- **CSS** is written **inside the HTML tag** using the **style** attribute.
- It affects only that **specific element**.
- Not recommended for large projects because it is **harder to manage**.

• Example:

```
<p style="color: blue;">Hello World</p>
```

*Only this **<p>** element will appear **blue**.*

How to Add CSS

There are **three ways to add CSS** to a web page:

2. Internal CSS

- **CSS** is written inside a `<style>` tag.
- The `<style>` tag is placed in the `<head>` **section** of the HTML document.
- It can style **multiple elements on the same page**.

- **Example:**

```
<head>
  <style>
    p {
      color: blue;
      font-size: 16px;
    }
  </style>
</head>
```

*All `<p>` elements in the page will have **blue** text and 16px font size.*

How to Add CSS

There are **three ways to add CSS** to a web page:

3. External CSS

- **CSS** is written in a **separate .css file**.
- The file is linked to HTML using the **<link> tag**.
- This method is **best for large websites**.

• Example:

```
<head>
  <link rel="stylesheet" href="Week02_Day01_Lab01.css">
</head>
```

in .html file

in .css file

```
p {
  color: blue;
  font-size: 16px;
}
```

Using **!important**

!important is used to **force a CSS rule to override other styles**.

- **Example:**

```
p {  
    color: blue !important;  
}
```

*This will make the paragraph **blue even if another style tries to change it**.*

- **Note:** Use **!important** carefully because it can make CSS **harder to manage**.

CSS Selectors

CSS selectors are used to **target HTML elements** so you can style them.

There are several types of **CSS selectors**:

1. Universal Selector
2. Simple Selectors
3. Combinator Selectors
4. Pseudo-class Selectors
5. Pseudo-element Selectors
6. Attribute Selectors

CSS Selectors

1. Universal Selector (*)

Selects **all elements** on the page.

- **Example:**

```
* {  
    margin: 0;  
    padding: 0;  
}
```

Often used to reset default styles.

2. Type / Element Selector

Select elements by **tag name**.

- **Example:**

```
p {  
    color: blue;  
}
```

*Styles **all** **<p>** elements.*

CSS Selectors

3. Class Selector (**.classname**)

Select elements with a **specific class**.

- **Example:**

```
.text {  
    color: red;  
}
```

4. ID Selector (**#idname**)

Select elements with a **specific id**.

- **Example:**

```
#title {  
    font-size: 24px;  
}
```

CSS Selectors

5. Group Selector (**selector1, selector2**)

Apply the **same styles to multiple selectors**.

- **Example:**

```
h1,  
h2,  
h3 {  
    font-family: Arial, sans-serif;  
}
```

Styles ***all*** *h1, h2, h3 elements*.

CSS Selectors

6. Combinator Selectors

Select elements based on the **relationship between elements**.

It is something that explains the relationship between the selectors.

Selector	Description	Example
E F	Descendant (all F inside E)	div p
E > F	Child (direct child F of E)	div > p
E + F	Adjacent sibling (F immediately after E)	h1 + p
E ~ F	General sibling (all F after E)	h1 ~ p

CSS Selectors

6. Combinator Selectors

Select elements based on the **relationship between elements**.

It is something that explains the relationship between the selectors.

- Example: *div p*

```
div p {  
  color: green;  
}
```

CSS

HTML

```
<div>  
  <p>Paragraph inside div</p>  
  <section>  
    <p>Another paragraph inside div</p>  
  </section>  
</div>  
  
<p>Paragraph outside div</p>
```

Paragraph inside div
Another paragraph inside div
Paragraph outside div

Display

selects all *<p>* elements inside *<div>*, including those nested in other elements.

CSS Selectors

6. Combinator Selectors

Select elements based on the **relationship between elements**.

It is something that explains the relationship between the selectors.

- Example: *div > p*

```
div > p {  
  color: red;  
}
```

CSS

HTML

```
<div>  
  <p>Direct child paragraph</p>  
  <section>  
    <p>Nested paragraph</p>  
  </section>  
</div>
```

Direct child paragraph

Nested paragraph

Display

selects **only** *<p>* elements that are direct children of *<div>*, not nested deeper inside other elements.

CSS Selectors

6. Combinator Selectors

Select elements based on the **relationship between elements**.

It is something that explains the relationship between the selectors.

- Example: ***h1 + p***

```
h1+p {  
    color: green;  
}
```

CSS

```
<h1>Heading</h1>  
<p>First paragraph after heading</p>  
<p>Second paragraph</p>
```

HTML

Heading

First paragraph after heading

Second paragraph

Display

selects **the first *<p>* element immediately after *<h1>***.

CSS Selectors

6. Combinator Selectors

Select elements based on the **relationship between elements**.

It is something that explains the relationship between the selectors.

- Example: ***h1 ~ p***

```
h1 ~ p {  
    color: purple;  
}
```

CSS

```
<h1>Heading</h1>  
<p>First paragraph</p>  
<p>Second paragraph</p>  
<div>Some content</div>  
<p>Third paragraph</p>
```

HTML

Heading

First paragraph

Second paragraph

Some content

Third paragraph

Display

selects **all *<p>* elements that appear after *<h1>* and share the same parent.**

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:

Selector	Example	Description
[attr]	[disabled]	Elements with the attribute
[attr=value]	[type="text"]	Elements with specific value
[attr~=value]	[class~="btn"]	Class contains a word
[attr =value]	[lang =en]	Attribute value equals value or starts with value-
[attr^=value]	[href^="https"]	Attribute starts with value
[attr\$=value]	[src\$=".jpg"]	Attribute ends with value
[attr*=value]	[title*="book"]	Attribute contains value

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:

- Example: **[attr] – Attribute Selector**

```
[disabled] {  
  background-color: lightgray;  
}
```

CSS

```
<input type="text" disabled>  
<input type="text">
```

HTML



Display

selects all elements that have the **disabled** attribute.

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:


- **Example: `[attr=value]` — Exact Value Selector**

```
input[type="text"] {  
  border: 2px solid blue;  
}
```

CSS

```
<input type="text" placeholder="Enter name">  
<input type="password">
```

HTML

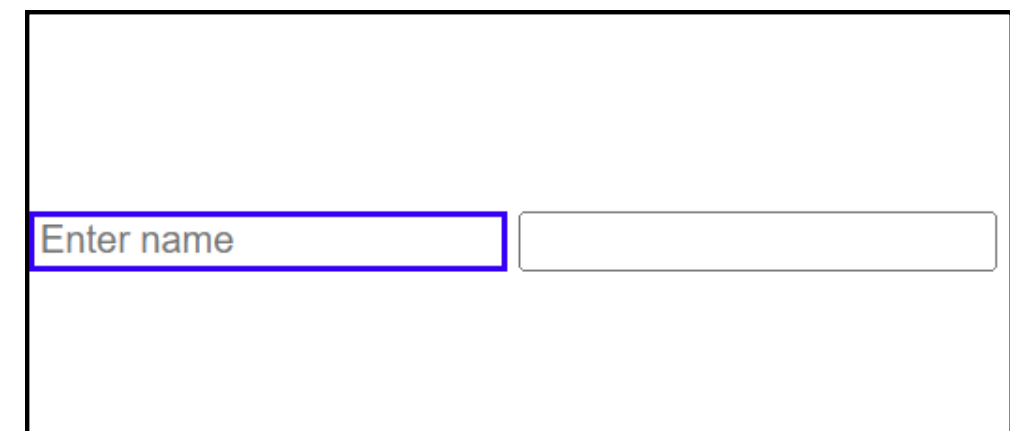

Display

elects all `<input>` elements where `type="text"`.

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:


- **Example: `[attr~=value]` – Contains Word Selector**

```
[class~="btn"] {  
  background-color: green;  
  color: white;  
}
```

CSS

```
<button class="btn primary">Submit</button>  
<button class="btn danger">Delete</button>  
<p class="text">Normal text</p>
```

HTML

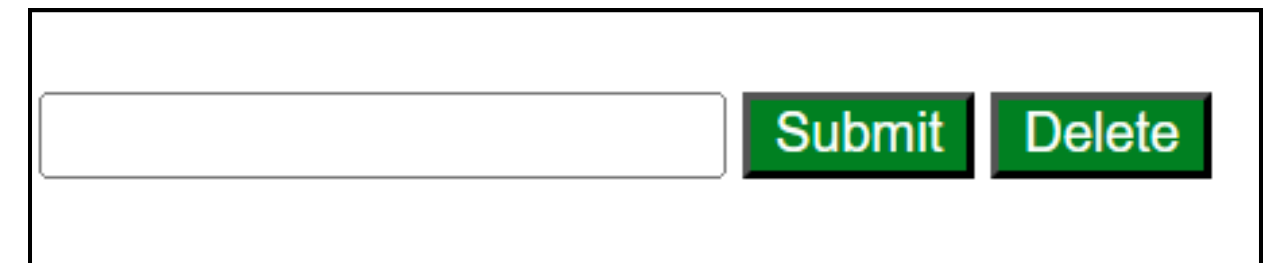

Display

selects **elements** where the attribute contains the word **btn** in a space-separated list.

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:

- **Example: `[attr|=value]` — Exact or Hyphen Selector**

```
[lang|"en"] {  
    color: blue;  
}
```

CSS

```
<p lang="en">Hello</p>  
<p lang="en-US">Hello (United States)</p>  
<p lang="en-GB">Hello (United Kingdom)</p>  
<p lang="fr">Bonjour</p>
```

HTML

Normal text

Hello

Hello (United States)

Hello (United Kingdom)

Bonjour

Display

selects elements where the attribute is **exactly en** or **starts with en-**.

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:

- **Example: `[attr^=value]` — Starts With Selector**

```
a[href^="https"] {  
  color: green;  
}
```

CSS

```
<a href="https://example.com">Secure Link</a>  
<a href="http://example.com">Normal Link</a>
```

HTML

Secure Link Normal Link

Display

selects **elements** where the attribute value starts with **https**.

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:

- **Example: `[attr$=value]` — Ends With Selector**

```
img[src$=".jpg"] {  
  border: 3px solid red;  
}
```

CSS

```
  

```

HTML



Display

selects **elements** where the attribute value ends with **.jpg**.

CSS Selectors

7. Attribute Selectors

To style HTML elements that have specific attributes or attribute values.

Select elements by **attribute or value**:

- **Example: `[attr*=value]` – Contains Selector**

```
[title*="book"] {  
    color: orange;  
}
```

CSS

```
<p title="storybook">Story</p>  
<p title="notebook">Notes</p>  
<p title="pen">Pen</p>
```

HTML

Story
Notes
Pen

Display

Selects **elements** where the attribute value contains the word **book** anywhere.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

Selector	Example	Description
:link	a:link	Selects all unvisited links
:visited	a:visited	Selects all visited links
:hover	a:hover	When mouse hovers
:active	a:active	When element is active
:focus	input:focus	When input is focused

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

Selector	Example	Description
:first-child	p:first-child	First child element
:last-child	p:last-child	Last child element
:nth-child(n)	li:nth-child(2)	Select nth child
:not(selector)	:not(.skip)	Select all except specified selector

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:link**

```
a:link {  
    color: blue;  
}
```

CSS

```
<a href="https://example.com">Visit Example</a>
```

HTML

Visit Example

Display

selects **all unvisited links**.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:visited**

```
a:visited {  
    color: purple;  
}
```

CSS

```
<a href="https://example.com">Visit Example</a>
```

HTML

Visited Example

Display

selects **links that the user has already visited**.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:hover**

```
a:hover {  
    color: red;  
}
```

CSS

```
<a href="https://example.com">Visit Example</a>
```

HTML

Visited Example

Display

selects an element when the **mouse pointer is placed over it**.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:active**

```
a:active {  
    color: green;  
}
```

CSS

```
<a href="https://example.com">Visit Example</a>
```

HTML

Visited Example

Display

selects the element **while it is being clicked**.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:focus**

```
<input type="text" placeholder="Enter name">
```

HTML

CSS

```
input:focus {  
    border: 2px solid blue;  
}
```

Enter name

Display

selects an input field **when the user clicks or tabs into it.**

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:first-child**

```
p:first-child {  
    color: red;  
}
```

CSS

```
<div>  
    <p>First paragraph</p>  
    <p>Second paragraph</p>  
</div>
```

HTML

First paragraph
Second paragraph

Display

selects the first child element inside a parent.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:last-child**

```
p:last-child {  
  color: greenyellow;  
}
```

CSS

```
<div>  
  <p>First paragraph</p>  
  <p>Second paragraph</p>  
</div>
```

HTML

First paragraph
Second paragraph

Display

selects the **last child element inside a parent**.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:nth-child(n)**

```
li:nth-child(2) {  
  color: green;  
}
```

CSS

```
<ul>  
  <li>Item 1</li>  
  <li>Item 2</li>  
  <li>Item 3</li>  
</ul>
```

HTML

- Item 1
- Item 2
- Item 3

Display

selects the **nth child element of a parent**.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- Example: **:not(selector)**

```
p:not(.skip) {  
    color: black;  
}
```

CSS

```
<p>Normal paragraph</p>  
<p class="skip">Skip this paragraph</p>
```

HTML

Normal paragraph
Skip this paragraph

Display

selects all **<p>** elements except those with class **skip**.

CSS Selectors

8. Pseudo-class Selectors

A pseudo-class is used to define a special state of an element.

Select elements based on **state or position**:

- **Important Notes**

- Order for link styles
 - `a:link`
 - `a:visited`
 - `a:hover`
 - `a:active`
- `a:hover` must come after `a:link` and `a:visited`.
- `a:active` must come after `a:hover`.

- **Case Sensitivity**

- Pseudo-class names are not case-sensitive.
 - `a:hover` vs. `a:HOVER`
- **Both work the same way.**

CSS Selectors

9. Pseudo-elements

A CSS pseudo-element is used to style specified parts of an element.

Select and style **parts of an element**:

Selector	Example	Description
::first-letter	p::first-letter	First letter of element
::first-line	p::first-line	First line of element
::before	p::before	Insert content before element
::after	p::after	Insert content after element
::selection	p::selection	Part of text selected by user

CSS Selectors

9. Pseudo-elements

A CSS pseudo-element is used to style specified parts of an element.

Select and style **parts of an element**:

- Example: **::first-letter**

```
p::first-letter {  
  font-size: 30px;  
  color: red;  
}
```

CSS

```
<p>Hello World!</p>
```

HTML

Hello World!

Display

First letter **H** is bigger and red.

CSS Selectors

9. Pseudo-elements

A CSS pseudo-element is used to style specified parts of an element.

Select and style **parts of an element**:

- Example: **::first-letter**

```
p::first-line {  
  font-weight: bold;  
}
```

CSS

```
<p>  
  First line paragraph,  
<br>  
  Second paragraph  
</p>
```

HTML

First line paragraph,
Second paragraph

Display

Makes **only the first line** of a paragraph bold.

CSS Selectors

9. Pseudo-elements

A CSS pseudo-element is used to style specified parts of an element.

Select and style **parts of an element**:

- Example: **::before** and **::after**

★ First line paragraph,
Second paragraph ★

Display

```
<p>  
    First line paragraph,  
<br>  
    Second paragraph  
</p>
```

HTML

```
p::before {  
    content: "★ ";  
    color: gold;  
}  
  
p::after {  
    content: " ★";  
    color: gold;  
}
```

CSS

Adds **stars** before and after the paragraph.

CSS Size Units

CSS uses length units to define sizes of text, elements, spacing, ...

There are **two main** types: Absolute units and Relative units.

1. Absolute Lengths
2. Relative Lengths

CSS Size Units

CSS uses length units to define sizes of text, elements, spacing, ...

There are **two main** types: Absolute units and Relative units.

1. Absolute Lengths

Unit	Description	Example
cm	centimeters	width: 10cm;
mm	millimeters	height: 50mm;
in	inches (1in = 96px = 2.54cm)	width: 2in;
px	pixels (1px = 1/96th of 1in)	font-size: 16px;
pt	points (1pt = 1/72 of 1in)	font-size: 12pt;
pc	picas (1pc = 12pt)	margin: 2pc;

CSS Size Units

CSS uses length units to define sizes of text, elements, spacing, ...

There are **two main** types: Absolute units and Relative units.

2. Relative Lengths

Unit	Description	Example
em	Relative to the font-size of the element (2em = 2 × current font)	font-size: 2em;
ex	Relative to the x-height of the current font (rarely used)	height: 3ex;
ch	Relative to the width of the "0" (zero)	width: 20ch;
rem	Relative to the font-size of the root element	font-size: 1.5rem;
vw	1% of the viewport width	width: 50vw;
vh	1% of the viewport height	height: 100vh;

CSS Size Units

CSS uses length units to define sizes of text, elements, spacing, ...

There are **two main** types: Absolute units and Relative units.

2. Relative Lengths

Unit	Description	Example
vmin	1% of the smaller dimension of viewport	font-size: 5vmin;
vmax	1% of the larger dimension of viewport	font-size: 5vmax;
%	Relative to the parent element	width: 80%;

Note:

- **Absolute units** are fixed sizes. They do not scale based on screen size or font.
- **Relative units** scale based on font size, parent element, or viewport, making layouts more flexible.

CSS Size Units

CSS uses length units to define sizes of text, elements, spacing, ...


- **Example**

CSS

```
p {  
  font-size: 2em;      /* 2 × current font-size */  
  width: 50%;          /* 50% of parent element */  
  margin: 10px;        /* fixed size in pixels */  
}  
  
div {  
  width: 80vw;          /* 80% of viewport width */  
  height: 50vh;         /* 50% of viewport height */  
}
```

```
<div>  
  <h1>Heading</h1>  
  <p>First paragraph after heading</p>  
  <p>Second paragraph</p>  
</div>
```

HTML

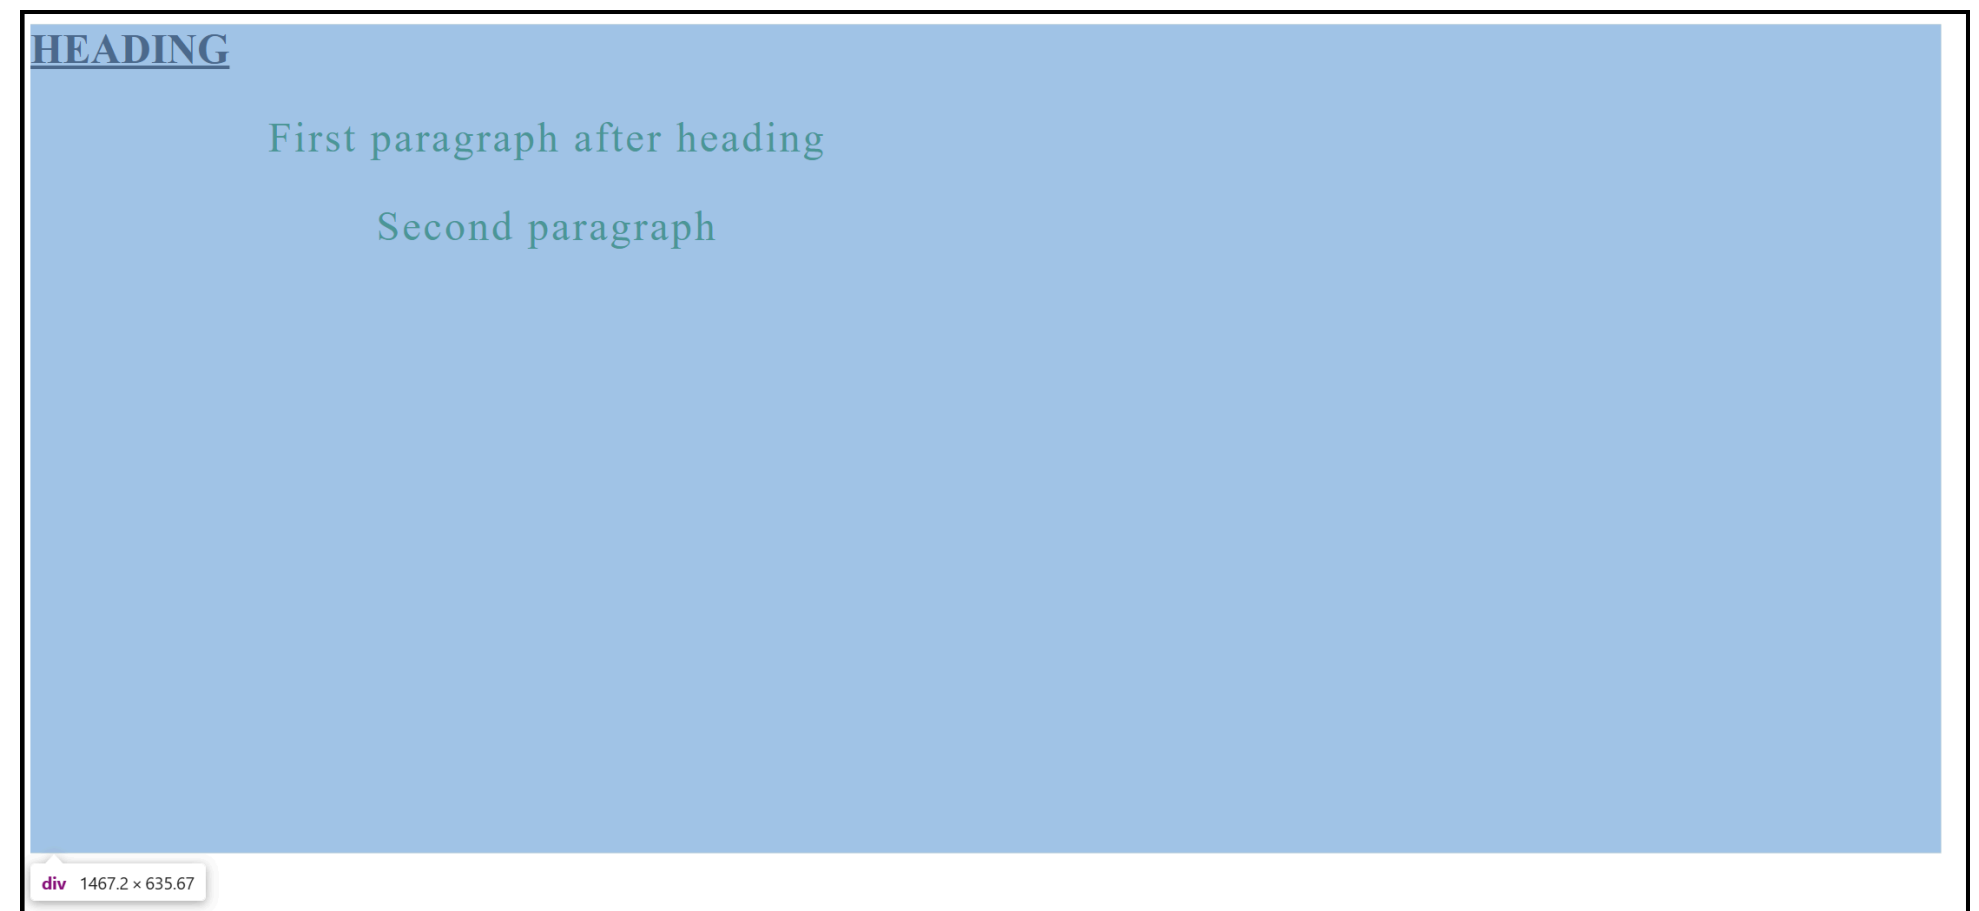

Display

CSS Text

CSS provides many properties to format and style text in HTML.

1. Text Color

Property	Values	Description
color	color name (red), HEX (#ff0000), RGB (rgb(255,0,0)), HSL (hsl(0,100%,50%))	Sets the text color

2. Text Alignment

Property	Values	Description
text-align	left, right, center, justify, start, end	Aligns text horizontally within its container

CSS Text

CSS provides many properties to format and style text in HTML.

Common Text Properties

- Example: Change color and alignment

```
p {  
  color: green;  
  text-align: center;  
}
```

CSS

```
<h1>Heading</h1>  
<p>First paragraph after heading</p>  
<p>Second paragraph</p>
```

HTML

Display

Heading

First paragraph after heading

Second paragraph

CSS Text

CSS provides many properties to format and style text in HTML.

3. Text Decoration

Property	Values	Description
text-decoration	none, underline, overline, line-through, blink	Adds lines or removes default decorations from text
text-decoration-color	color	Changes color of the decoration line
text-decoration-style	solid, dashed, dotted, double, wavy	Sets style of the decoration line

CSS Text

CSS provides many properties to format and style text in HTML.

4. Text Decoration

Property	Values	Description
text-transform	none, capitalize, uppercase, lowercase, full-width	Changes letter casing

CSS Text

CSS provides many properties to format and style text in HTML.

Common Text Properties

- Example: Decoration and transformation

```
h1 {  
  text-decoration: underline;  
  text-transform: uppercase;  
}
```

CSS

```
<h1>Heading</h1>
```

HTML

Display

HEADING

CSS Text

CSS provides many properties to format and style text in HTML.

5. Text Spacing

Property	Values	Description
letter-spacing	normal, length (2px, 0.1em)	Adjusts space between letters
word-spacing	normal, length (5px)	Adjusts space between words
line-height	normal, number (1.5), length (20px)	Sets height of each line
text-indent	length (30px), percentage	Indents the first line of a block

CSS Text

CSS provides many properties to format and style text in HTML.

Common Text Properties

- Example: Indent, line height, and letter spacing

Display

First paragraph after heading

Second paragraph

```
p {  
  text-indent: 40px;  
  line-height: 1.8;  
  letter-spacing: 2px;  
}
```

CSS

```
<p>First paragraph after heading</p>  
<p>Second paragraph</p>
```

HTML

CSS Text

CSS provides many properties to format and style text in HTML.

6. Text Wrapping & Overflow

Property	Values	Description
white-space	normal, nowrap, pre, pre-wrap, pre-line	Controls how text wraps or preserves spaces
overflow-wrap	normal, break-word	Handles line breaking for long words
word-break	normal, break-all, keep-all	Determines line breaking rules

CSS Text

CSS provides many properties to format and style text in HTML.

7. Text Direction & Alignment

Property	Values	Description
direction	ltr, rtl, inherit	Sets text reading direction
unicode-bidi	normal, embed, bidi-override	Works with direction for complex text layout

8. Text Shadow

Property	Values	Description
text-shadow	none, h-shadow v-shadow blur color	Adds shadow behind text

- **Example:** *2px 2px 5px gray (2px horizontal, 2px vertical, 5px blur, gray color)*

CSS Text

CSS provides many properties to format and style text in HTML.

9. Letter & Word Case Control

Property	Values	Description
font-variant	normal, small-caps	Displays small capital letters
font-variant-caps	normal, small-caps, all-small-caps, petite-caps, uncase, titling-caps	More detailed control for capitalization

10. Link Text Decoration

Property	Values	Description
text-decoration	none, underline	Commonly used with a:link, a:visited, a:hover, a:active

Favicon

What is a Favicon?

A favicon is a **small icon** displayed next to the page title in a browser tab.

Benefits:

- Improves website branding
- Makes tabs easier to identify
- Appears in bookmarks and browser history

Favicon

Adding a Favicon

Favicons are added using the `<link>` tag in the `<head>` section of your HTML.

- **Example code:**

```
<head>
  <title>My Page Title</title>
  <link rel="icon" type="image/x-icon" href="/images/favicon.ico">
</head>
```

`rel="icon"` → tells the browser this is a favicon

`href="/images/favicon.ico"` → path to the favicon file


`type="image/x-icon"` → file type of the favicon

Favicon

Adding a Favicon

Favicons are added using the `<link>` tag in the `<head>` section of your HTML.

- **Example in real:**

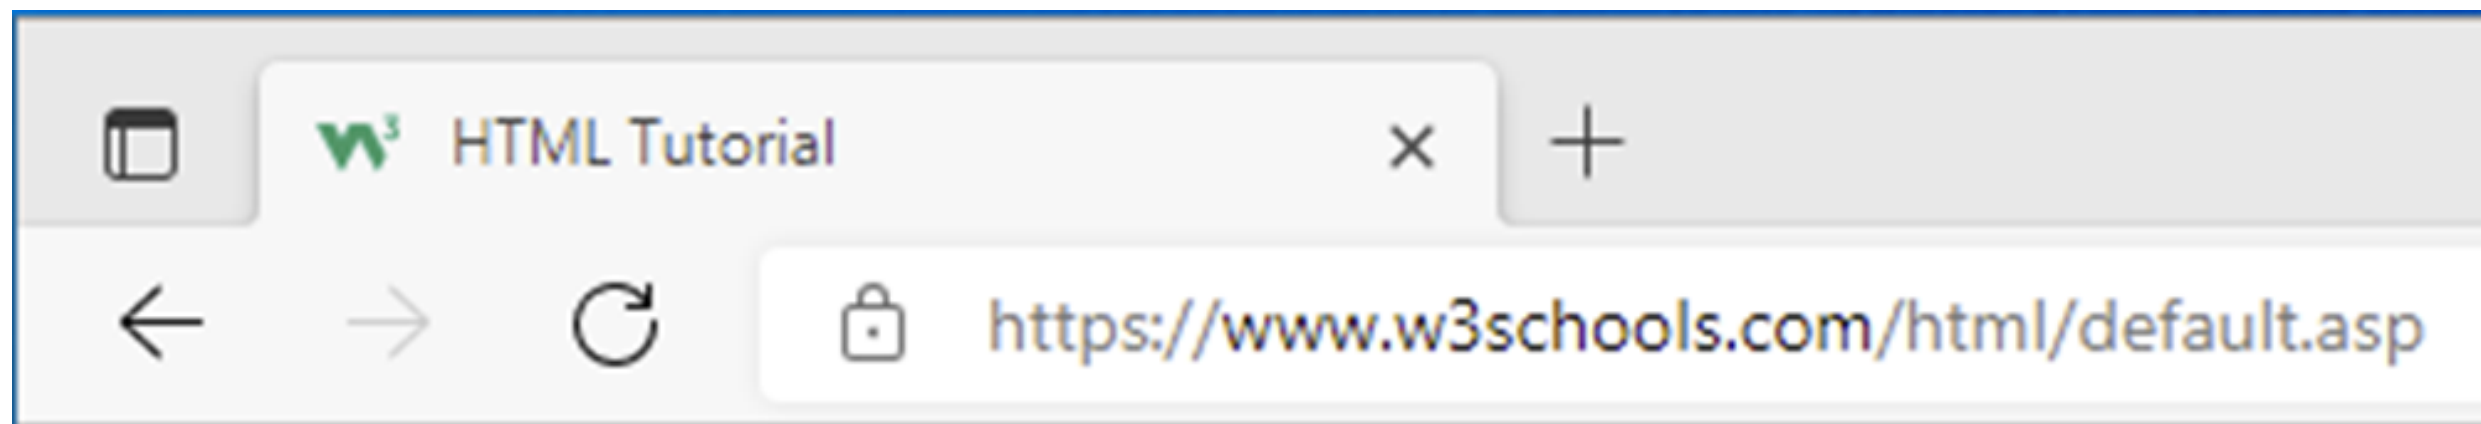

- Use a 16×16 or 32×32 px icon for best display
- Use .ico, .png, or .svg formats

CSS Icons

What Are Icons?

Icons are small graphical symbols used in websites to represent actions, objects, or ideas.

Examples:

- Menu
- Search
- Home
- User
- Settings

Icons help improve:

- Visual communication
- User interface design
- Navigation clarity

CSS Icons

Icon Libraries

Icons can be added to a webpage using **icon libraries**.

An icon library provides **ready-to-use icons** that can be inserted into HTML.

Popular icon libraries include:

- Font Awesome
- Bootstrap Icons
- Google Material Icons

CSS Icons

Font Awesome Icons

Font Awesome is one of the most popular icon libraries for web development.

Features:

- Thousands of icons
- Easy to use
- Scalable vector icons
- Customizable with CSS

CSS Icons

Font Awesome Icons

Font Awesome is one of the most popular icon libraries for web development.

How to use **Font Awesome**:

- Include the Library
 - To use **Font Awesome icons**, add the **script link** inside the **<head>** section.
 - **Example**

```
<head>  
  <script src="https://kit.fontawesome.com/a076d05399.js" crossorigin="anonymous"></script>  
</head>
```

CSS Icons

Font Awesome Icons

Font Awesome is one of the most popular icon libraries for web development.

How to use **Font Awesome**:

- Add Icons in HTML
 - Icons are added using the `<i>` tag with specific classes.
 - **Icon Example**

```
<body>

  <i class="fas fa-cloud"></i>
  <i class="fas fa-heart"></i>
  <i class="fas fa-car"></i>
  <i class="fas fa-file"></i>
  <i class="fas fa-bars"></i>

</body>
```



CSS Fonts

CSS Fonts control how text appears on a webpage.

Using CSS, we can change:

- Font type
- Font size
- Font thickness
- Font style
- Font spacing

These properties help improve **readability and visual design**.

CSS Fonts

Property: **font-family**

The **font-family** property in CSS is used to **define which font will be used to display text** on a webpage.

It allows developers to specify:

- Primary font
- Alternative fonts (fallbacks)
- Generic font family

If the browser cannot load the first font, it will **use the next available font in the list.**

CSS Fonts

Syntax

font1 → First preferred font


font2 → Used if Arial is unavailable

sans-serif → Generic fallback font

```
selector {  
  font-family: font1, font2, generic-family;  
}
```

CSS Fonts

Example: `font-family`

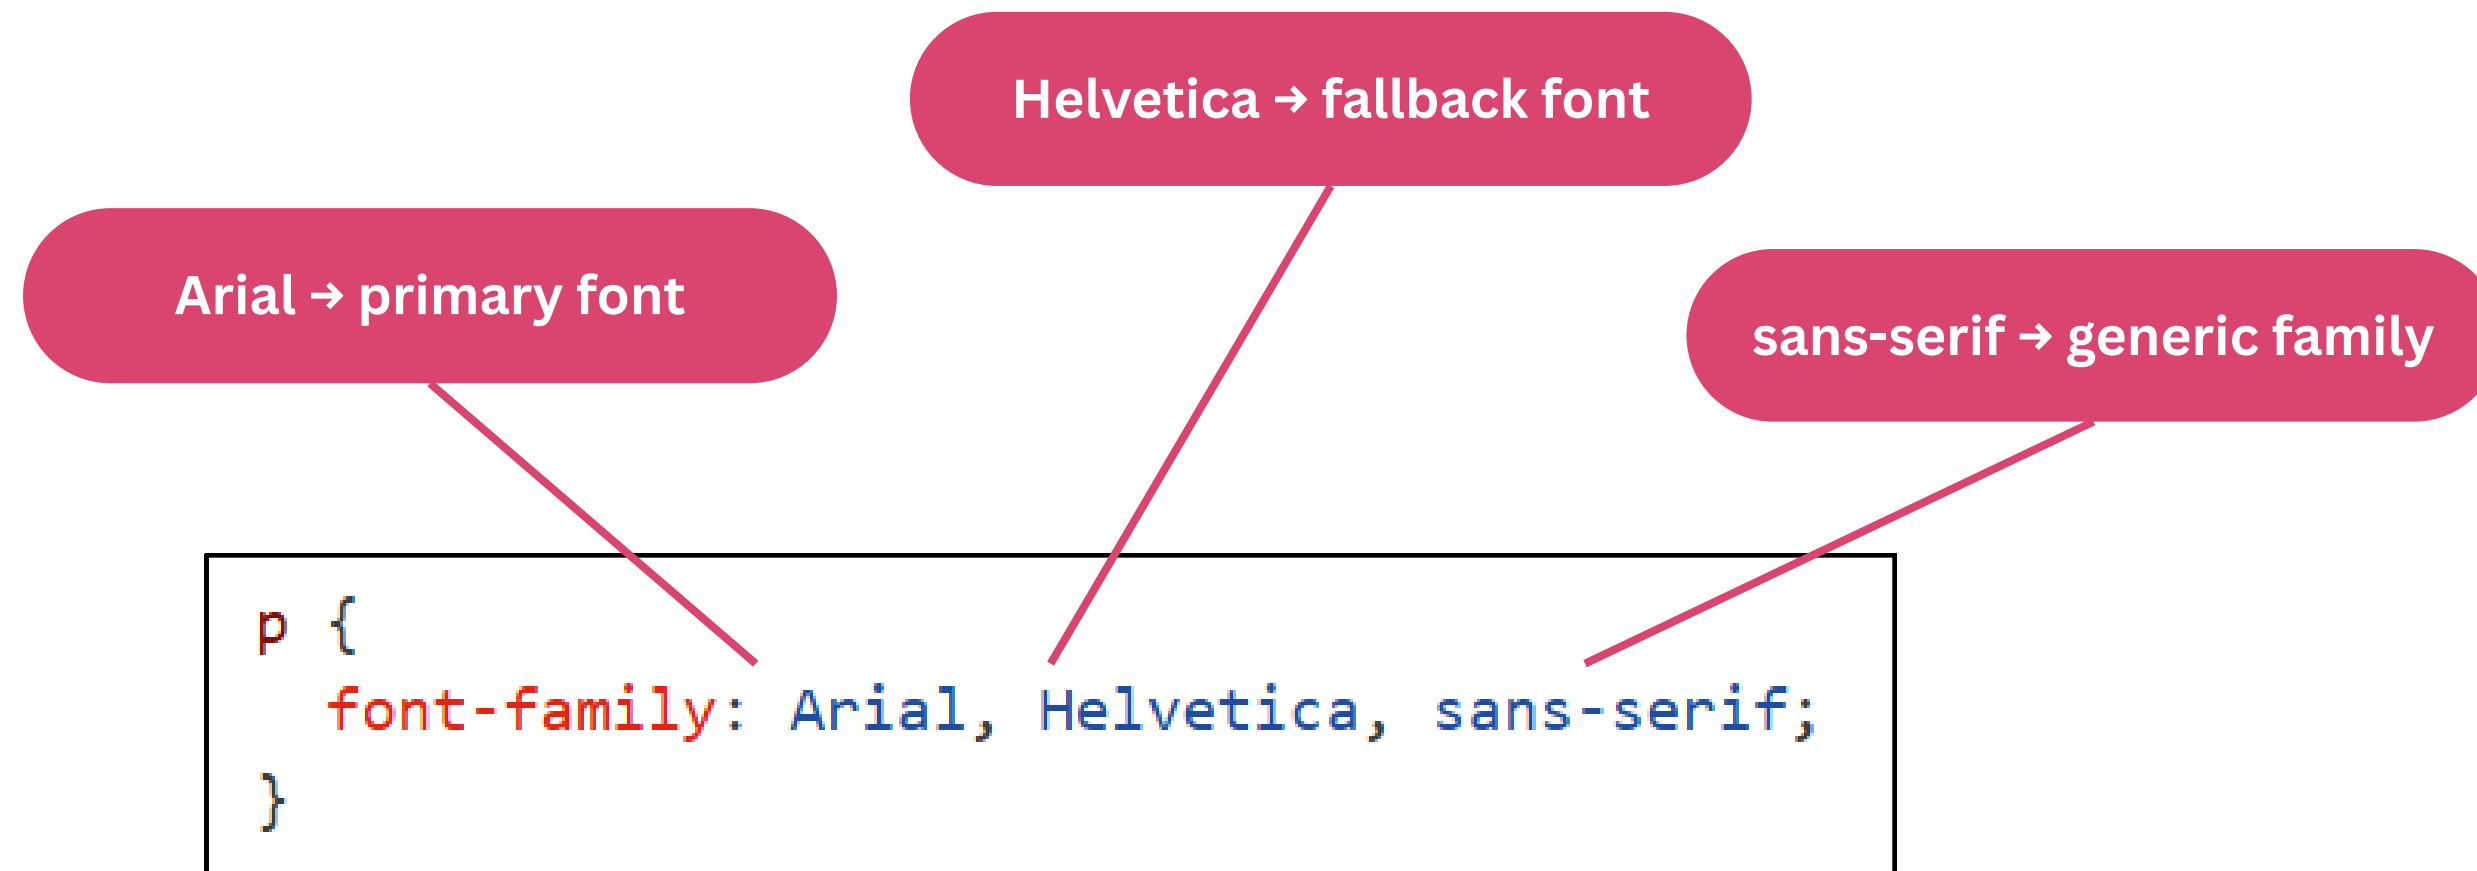

Output: The text inside the `<p>` **element** will appear using **Arial** or another available fallback font.

CSS Fonts

CSS provides **generic font families** that work on all browsers.

Common types:

- serif
- sans-serif
- monospace
- cursive
- fantasy

Example:

```
body {  
    font-family: serif;  
}
```


CSS Fonts

Font Size

Property: **font-size**

The **font-size** property controls the **size of the text**.

Common Units:

- **px** – pixels
- **em** – relative to parent element
- **rem** – relative to root element
- **%** – percentage size

Example:

```
h1 {  
    font-size: 32px;  
}
```

```
p {  
    font-size: 16px;  
}
```

CSS Fonts

Font style

Property: **font-style**

The **font-style** specifies whether text should appear **normal** or **italic**.

Values:

- **normal**
- **italic**
- **oblique**

Example:

```
p {  
    font-style: italic;  
}
```

CSS Fonts

Font Weight

Property: **font-weight**

The **font-weight** property controls the **thickness (boldness)** of text.

Values:

- **normal**
- **bold**
- **lighter**
- **bolder**
- **100 – 900**

Example:

```
h1 {  
    font-weight: bold;  
}
```

CSS Fonts

Font Variant

Property: **font-variant**

The **font-variant** property is used to display text in **small capital letters**.

Values:

- **normal**
- **small-caps**

Example:

```
p {  
    font-variant: small-caps;  
}
```

CSS Fonts

Font Shorthand

CSS allows combining multiple font properties into one line.

Example:

```
p {  
  font: italic bold 16px Arial, sans-serif;  
}
```

Order:

1. font-style
2. font-weight
3. font-size
4. font-family



THANK YOU

For your attention !

