Rebinding a parameter

`x = 10; tweak(x) # inside: a = 20`

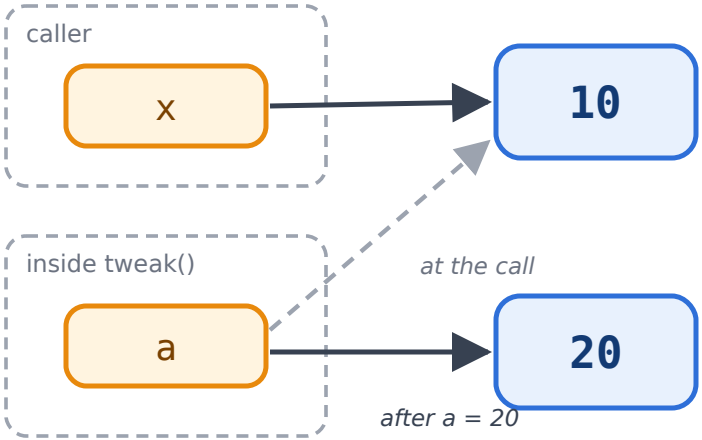

Only the local name a moves;
x in the caller still refers to 10.

Mutating a shared object

`greeting(people) # inside: names[0] = …`

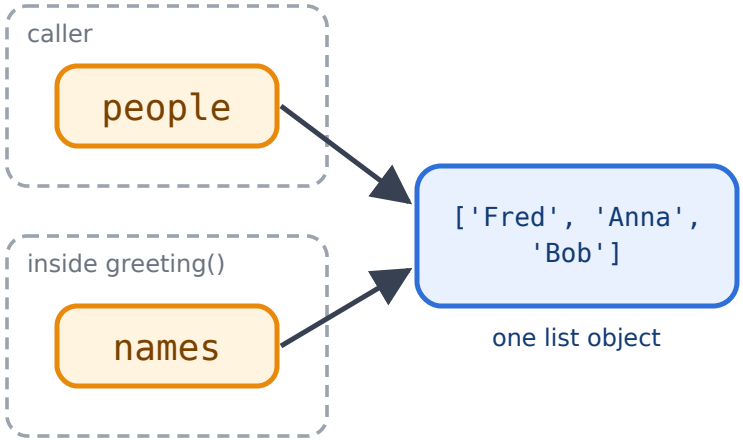

Both names refer to the same list, so a change made inside the function is seen by the caller.