

Nama : Khoerul Akbr
NPM : 51421607
Kelas : 4IA28
Materi : VCS & Git
Praktikum : Rekayasa Perangkat Lunak 2

Activity Pertemuan 7

Github Repositories

The screenshot displays a GitHub repository interface for 'Pertemuan7_RPL' (Public). The repository has 2 branches, 1 tag, and 4 commits. The commit history shows three recent commits by user 'Timun71':

- commit ketiga (c93f316) - 30 minutes ago - 4 Commits
- README.md - mengubah dokumentasi menjadi README - 47 minutes ago
- test.txt - commit ketiga - 30 minutes ago

The selected file is 'README', which contains the following content:

pertemuan 7

Khoerul Akbar (51421607)

berisi latihan menggunakan git

1. berisi kode pertemuan 1
2. latihan kolaborasi pada file test.txt

The right sidebar shows repository statistics: 0 stars, 1 watching, and 0 forks. It also includes sections for 'About' (no description), 'Releases' (no releases published), and 'Packages' (no packages published).

Branches

khoerulakbar / Pertemuan7_RPL

Q Type to search

+ ▾

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Branches

New branch

Overview

Yours

Active

Stale

All

Q Search branches...

Default

Branch	Updated	Check status	Behind Ahead	Pull request
main	29 minutes ago		Default	

Your branches

Branch	Updated	Check status	Behind Ahead	Pull request
folder-b	8 minutes ago		0 0	

Active branches

Branch	Updated	Check status	Behind Ahead	Pull request
folder-b	8 minutes ago		0 0	

Tags

khoerulakbar / Pertemuan7_RPL

Q Type to search

+ ▾

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Releases

Tags

Tags

v1.0.0

3 minutes ago

c93f316

zip

tar.gz

© 2024 GitHub, Inc.

Terms

Privacy

Security

Status


Docs

Contact


Manage cookies

Do not share my personal information

Folder A

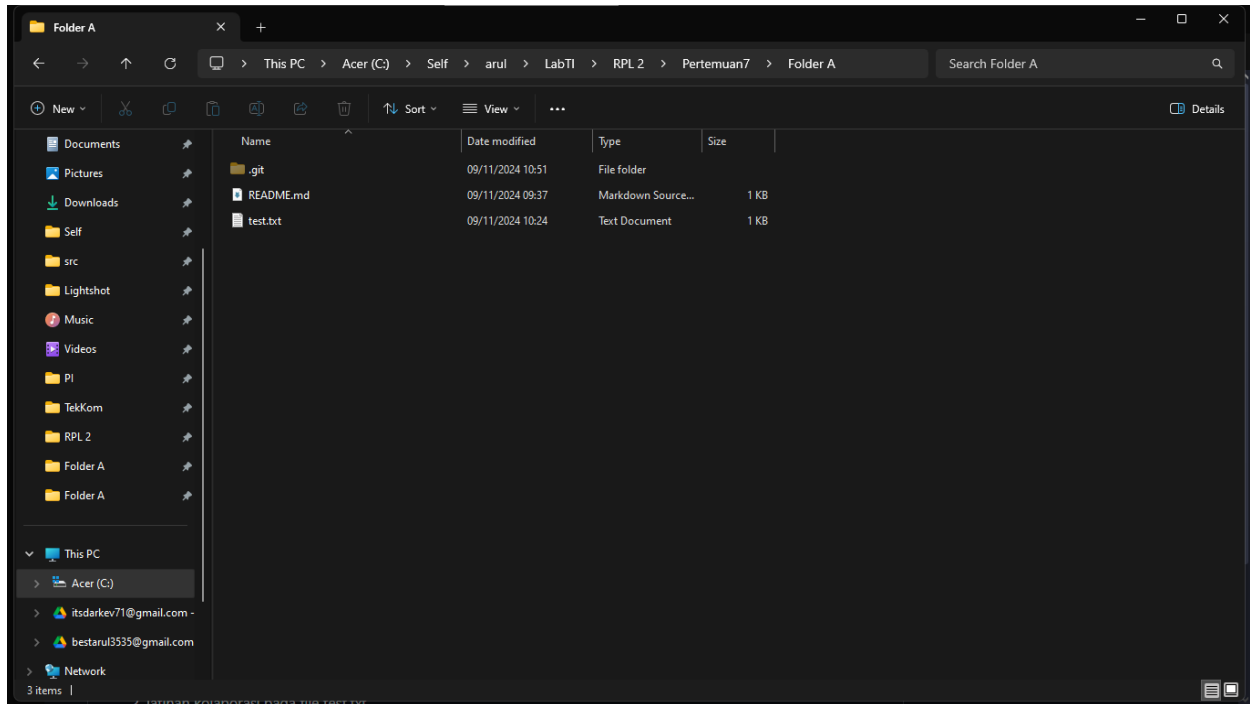

Folder B

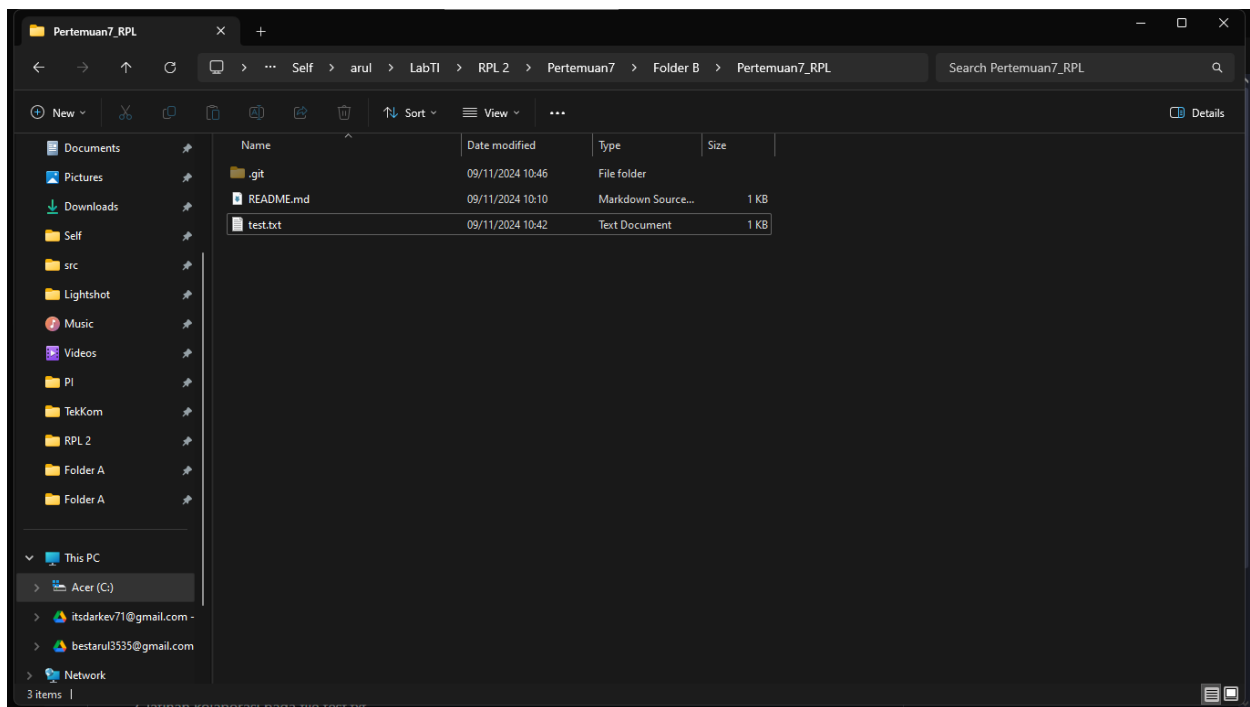

Gits bash

Folder A

```
MINGW64/c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A
besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A
$ git init
Initialized empty Git repository in C:/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A
./git/

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (master)
$ git commit -m "commit pertama"
On branch master

Initial commit

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    dokumentasi.md
    test.txt

nothing added to commit but untracked files present (use "git add" to track)

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (master)
$ git add .
warning: in the working copy of 'dokumentasi.md', LF will be replaced by CRLF the
next time Git touches it

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (master)
$ git commit -m "commit pertama"
[master (root-commit) b6f9e01] commit pertama
2 files changed, 9 insertions(+)
create mode 100644 dokumentasi.md
create mode 100644 test.txt

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (master)
$ git branch -M main

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git remote add origin https://github.com/khoerulakbar/Pertemuan7_RPL.git

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git push -u origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 386 bytes | 96.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/khoerulakbar/Pertemuan7_RPL.git
 * [new branch] main -> main
branch 'main' set up to track 'origin/main'.

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git add README.md
warning: in the working copy of 'README.md', LF will be replaced by CRLF the nex
```

```
MINGW64/c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A
besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git commit -m "mengubah dokumentasi menjadi README"
[main 2a3afb7] mengubah dokumentasi menjadi README
1 file changed, 8 insertions(+)
create mode 100644 README.md

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git push
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 299 bytes | 149.00 KiB/s, done.
Total 2 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/khoerulakbar/Pertemuan7_RPL.git
 b6f9e01..2a3afb7 main -> main

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git pull
Already up to date.

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git pull
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 3 (delta 1), reused 3 (delta 1), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 250 bytes | 2.00 KiB/s, done.
From https://github.com/khoerulakbar/Pertemuan7_RPL
  2a3afb7..6d5b1a8 main -> origin/main
Updating 2a3afb7..6d5b1a8
Fast-forward
 test.txt | 4 +++
 1 file changed, 3 insertions(+), 1 deletion(-)

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git add .

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git commit -m "commit ketiga"
[main c93f316] commit ketiga
2 files changed, 3 insertions(+), 9 deletions(-)
delete mode 100644 dokumentasi.md

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git fetch

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git push
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 4 threads
```

Folder B

```
MINGW64/c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL
besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B
$ git clone https://github.com/khoerulakbar/Pertemuan7_RPL.git
Cloning into 'Pertemuan7_RPL'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 0), reused 6 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (6/6), done.

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B
$ ls
Pertemuan7_RPL/

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B
$ cd Pertemuan7_RPL/

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git add .

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git commit -m "commit kedua"
[main 6d5b1a8] commit kedua
1 file changed, 3 insertions(+), 1 deletion(-)

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git push origin main
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 270 bytes | 135.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/khoerulakbar/Pertemuan7_RPL.git
 2a3afb7..6d5b1a8 main -> main

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git pull
Already up to date.

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git add .

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git commit -m "menghapus dokumentasi"
error: pathspec 'menghapus dokumentasi' did not match any file(s) known to git
```

```
MINGW64/c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL
besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git commit -m "menghapus dokumentasi"
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git commit -m "menghapus dokumentasi"
On branch main
Your branch is up to date with 'origin/main'.

Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    deleted:    dokumentasi.md

no changes added to commit (use "git add" and/or "git commit -a")

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git push
Everything up-to-date

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git pull
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 283 bytes | 16.00 KiB/s, done.
From https://github.com/khoerulakbar/Pertemuan7_RPL
  6d5b1a8..c93f316 main -> origin/main
Updating 6d5b1a8..c93f316
Fast-forward
 dokumentasi.md | 8 -----
 test.txt       | 4 +++
 2 files changed, 3 insertions(+), 9 deletions(-)
 delete mode 100644 dokumentasi.md

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git branch
 * main

besta@Dake MINGW64 /c/Self/aru/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git branch folder-b
```

```
MINGW64/c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A
Counting objects: 100% (5/5), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 303 bytes | 151.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/khoerulakbar/Pertemuan7_RPL.git
  6d5b1ab..c93f316  main -> main

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git pull
Already up to date.

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git push
Everything up-to-date

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git branch
* main

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git fetch
From https://github.com/khoerulakbar/Pertemuan7_RPL
 * [new branch]      folder-b -> origin/folder-b

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git checkout folder-b
Switched to a new branch 'folder-b'
branch 'folder-b' set up to track 'origin/folder-b'.

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (folder-b)
$ git branch
git: 'branch' is not a git command. See 'git --help'.

The most similar command is
  branch

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (folder-b)
$ git branch
* folder-b
  main

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (folder-b)
$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git tag -a v1.0.0 -m "versi 1 baru"

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ git push origin v1.0.0
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 167 bytes | 83.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/khoerulakbar/Pertemuan7_RPL.git
  * [new tag]      v1.0.0 -> v1.0.0

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder A (main)
$ |

MINGW64/c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL
besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git branch
* main

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git branch folder-b

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git branch
  folder-b
* main

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
main)
$ git checkout folder-b
Switched to branch 'folder-b'

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
folder-b)
$ git add .

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
folder-b)
$ git commit -m "branch baru"
On branch folder-b
nothing to commit, working tree clean

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
folder-b)
$ git push origin folder-b
error: src refspec folder-b does not match any
error: failed to push some refs to 'https://github.com/khoerulakbar/Pertemuan7_
RPL.git'

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
folder-b)
$ git push origin folder-b
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'folder-b' on GitHub by visiting:
remote:   https://github.com/khoerulakbar/Pertemuan7_RPL/pull/new/folder-b
To https://github.com/khoerulakbar/Pertemuan7_RPL.git
  * [new branch]      folder-b -> folder-b

besta@DaKe MINGW64 /c/Self/arul/LabTI/RPL 2/Pertemuan7/Folder B/Pertemuan7_RPL (
folder-b)
$
```