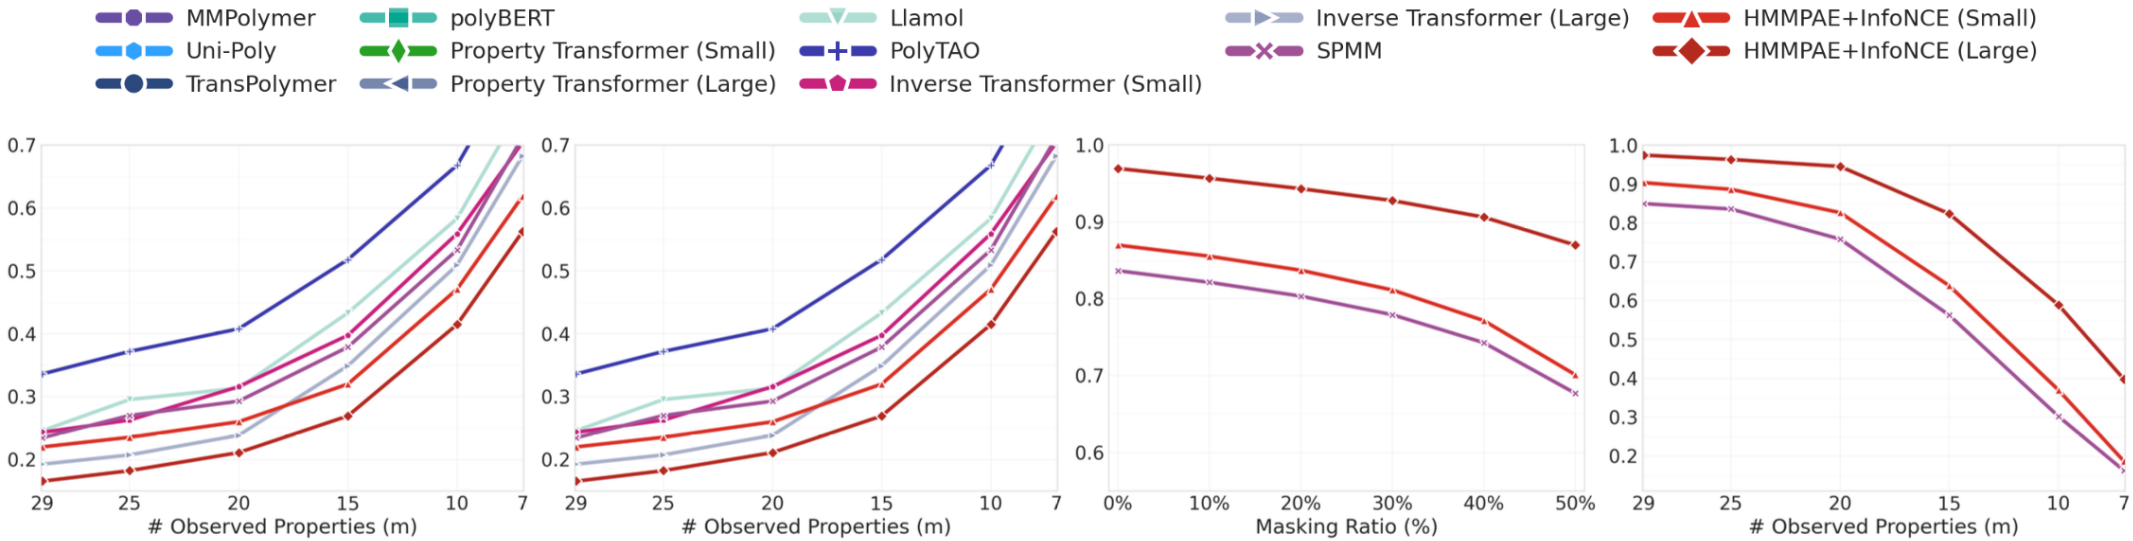

(a) Prop. RMSE (↓) *(b)* Target RMSE (↓) *(c)* PSMILES→Prop. (↑) *(d)* Prop.→PSMILES (↑)

Figure A. Experimental results on the large-scale synthetic polyOne dataset. (a) Prop. RMSE measures the prediction error against ground-truth values in the property prediction. (b) Target RMSE evaluates the deviation of properties of generated polymers from the input target conditions in the inverse design. (c–d) Top-1 cross-modal retrieval accuracy for (c) PSMILES → Property and (d) Property → PSMILES. The x-axis indicates the degree of input incompleteness at evaluation.