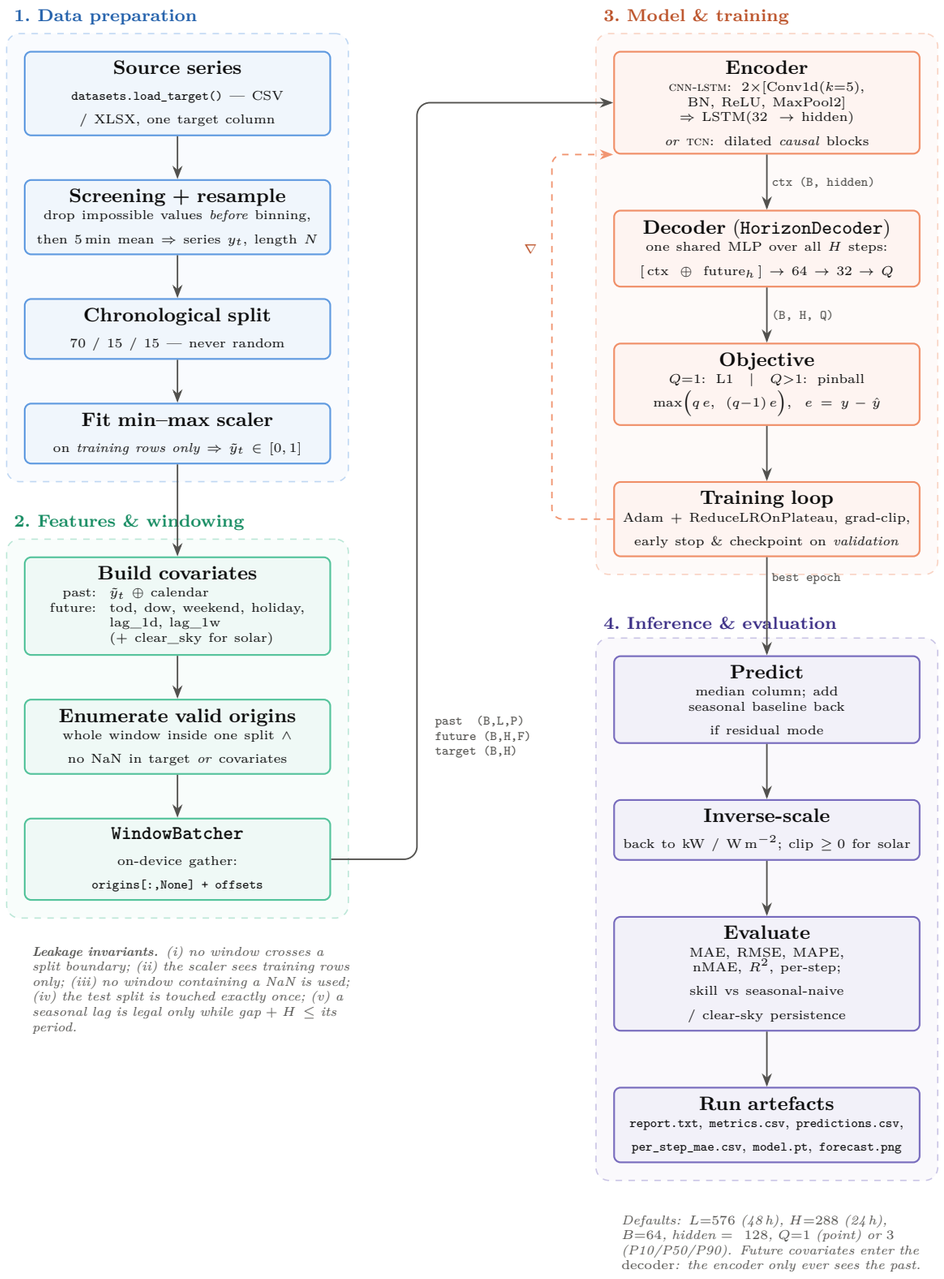


Leakage invariants. *(i) no window crosses a split boundary; (ii) the scaler sees training rows only; (iii) no window containing a NaN is used; (iv) the test split is touched exactly once; (v) a seasonal lag is legal only while gap + H ≤ its period.*

Defaults: L=576 (48 h), H=288 (24 h), B=64, hidden = 128, Q=1 (point) or 3 (P10/P50/P90). Future covariates enter the decoder*: the encoder only ever sees the past.*