




ORACLE ARCS

ACCOUNT RECONCILIATION CLOUD SERVICE

API AND AUTOMATION LAYER

Automate • Integrate • Monitor

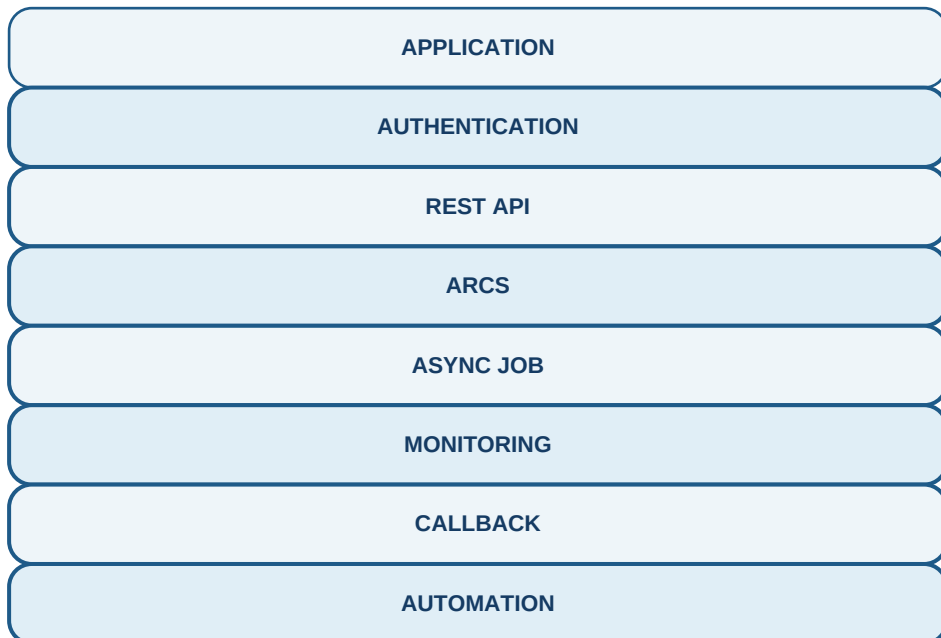

BISP Trainings • www.bisptrainings.com • Call Us: +91 769-409-5404

01 | API COMMAND CENTER

A visual operational view of API activity, job health and automation reliability.



Illustrative Training Data


Numbers shown are deliberately illustrative and are not production measurements.

Command-center signals

Observe Request volume • running jobs • duration	Control Failures • retries • error queue	Decide Continue pipeline • investigate • recover
--	--	--

02 | API ARCHITECTURE

The integration path from client request to operational result.

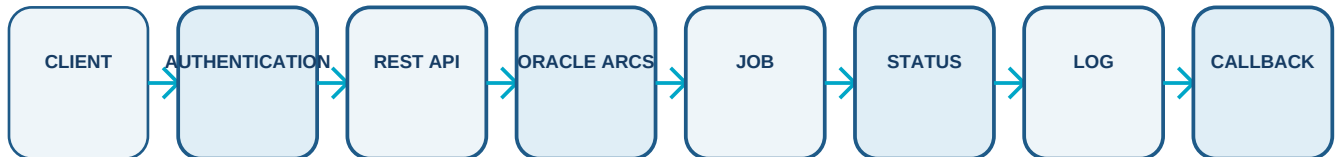


API architecture concept — validate environment-specific implementation details before production use.

Architecture layers

Client/Application → initiates the request. Authentication → establishes the access context. REST API → exposes the requested operation. ARCS → performs the business operation. Job → represents asynchronous work where applicable. Status/Log → provides monitoring evidence. Callback → can signal the next automation step.

03 | API CAPABILITY MAP

Major capability areas supplied in the training brief.

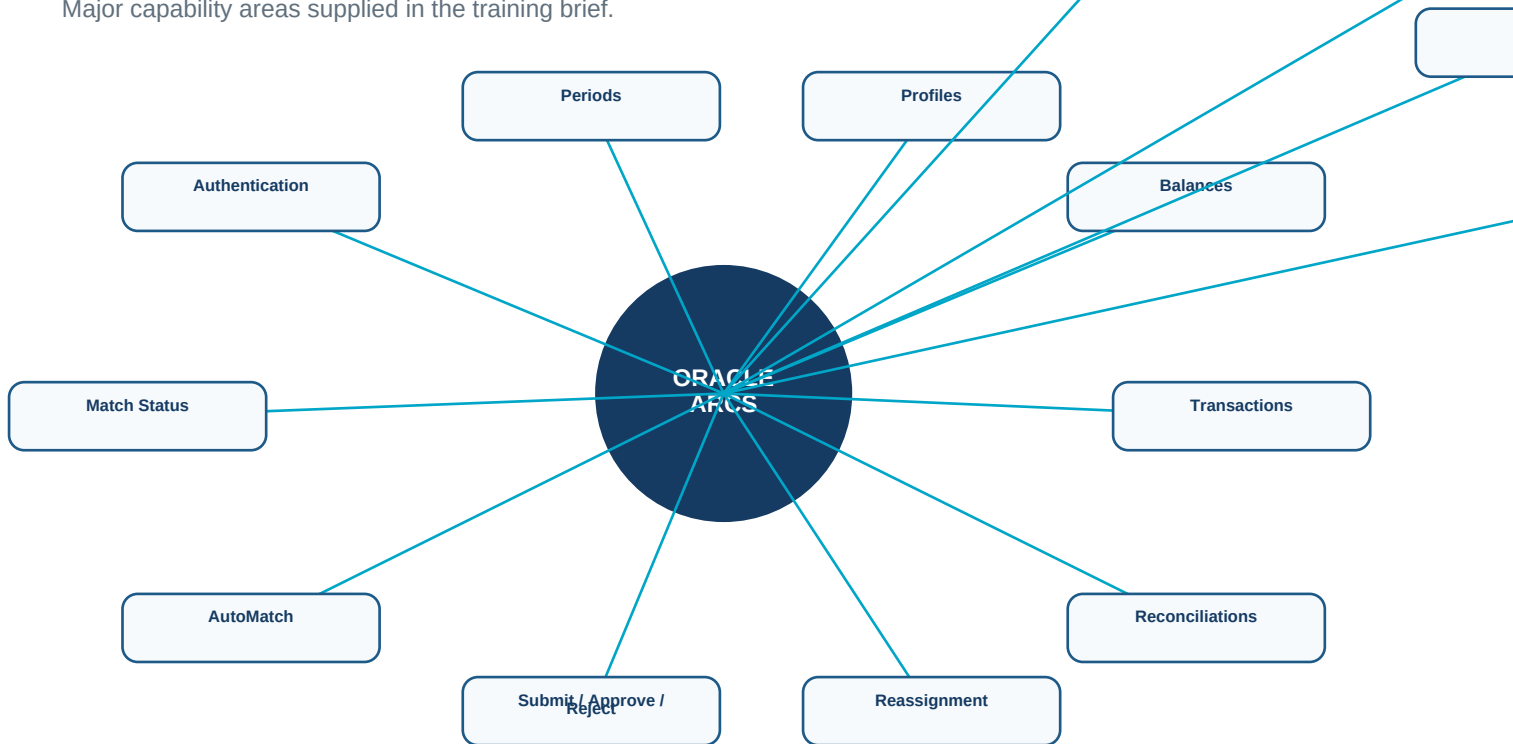

Source note: the supplied brief identifies these API areas; exact endpoint names, payload fields and environment-specific behavior should be validated against the applicable Oracle documentation.

04 | ASYNC JOB LIFECYCLE

Asynchronous processing separates request acceptance from background execution.

JOB LIFECYCLE



Why this pattern matters


- Capture a stable job reference.
- Monitor instead of assuming completion.
- Read logs when troubleshooting.

05 | JOB API VISUAL

Endpoint paths are reproduced exactly as supplied; they are not independently claimed here as verified official endpoint syntax.

Supplied endpoint	Visual role	Purpose in supplied brief
POST /jobs	CREATE	Create Job
GET /jobs/{jobId}	MONITOR	Get Job Status
POST /jobs/{jobId}/cancel	CANCEL	Cancel Job
GET /jobs/{jobId}/log	INSPECT	Read Job Log


JOB CONTROL

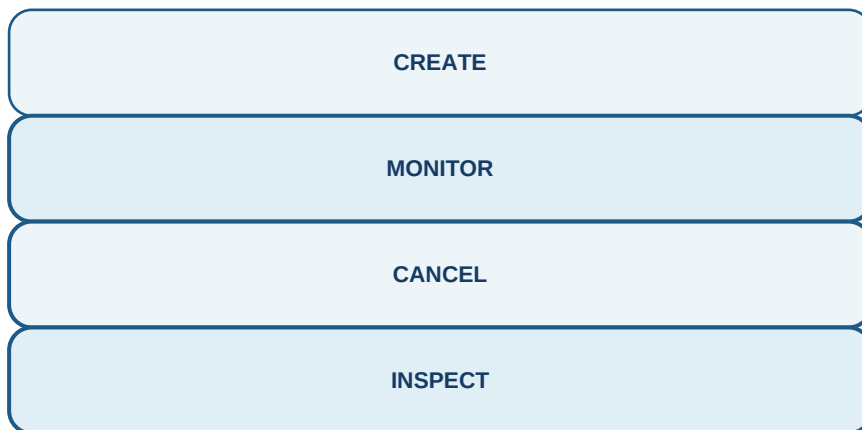

06 | API AUTOMATION PIPELINE

A dependency-driven sequence for a reconciliation automation scenario.

PIPELINE ORCHESTRATION

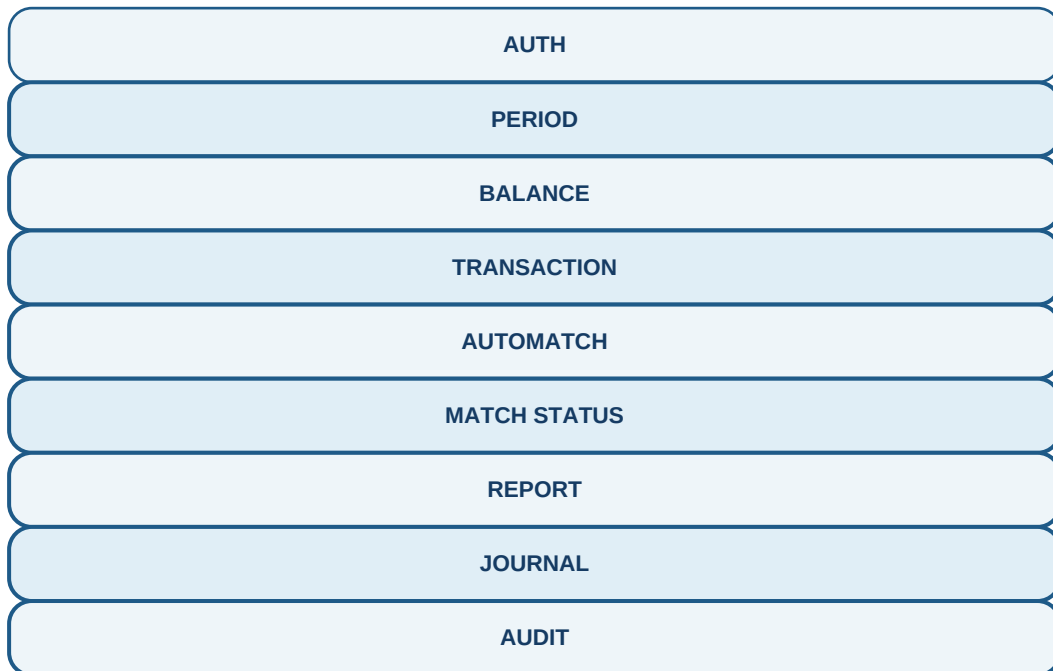

Pipeline gate logic


- Authenticate before protected operations.
- Check period readiness before loading.
- Load balances and transactions before AutoMatch.

07 | SCHEDULER

Use a scheduling layer to initiate repeatable automation patterns.

Recurring data/job cycle	Operational consolidation	Controlled monthly processing	High-control close workflow


SCHEDULED AUTOMATION

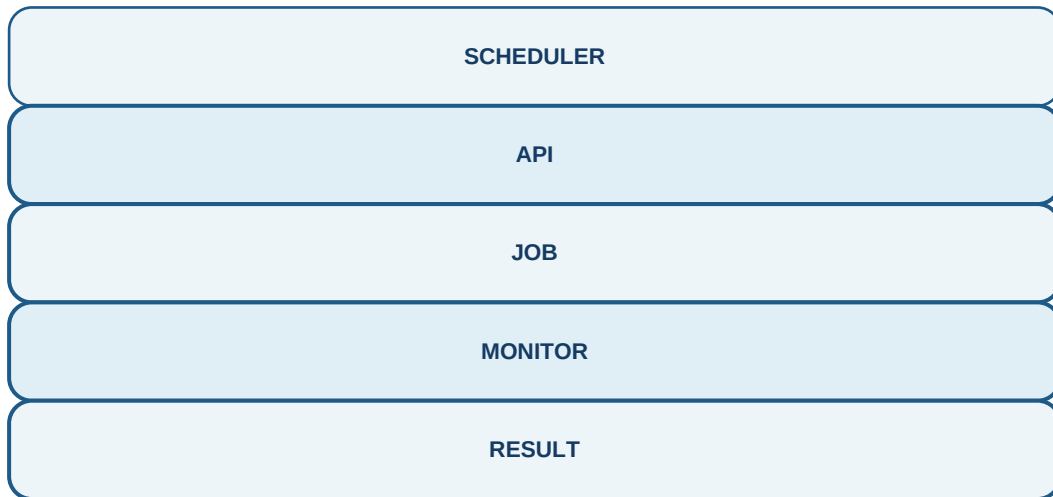

The supplied brief lists Daily, Weekly, Monthly and Period-End as scheduling scenarios. Exact scheduler implementation is an architecture decision and should be validated for the target environment.

08 | WEBHOOK / CALLBACK

A callback/webhook pattern can connect an event outcome to the next external process.

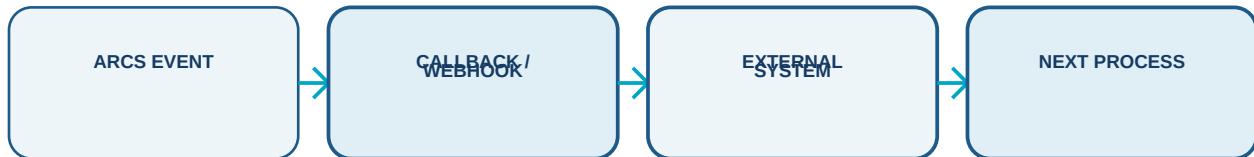

API architecture concept — validate environment-specific implementation details before production use.


Architecture concept

- Event occurs.
- Notification is sent to the configured receiver.
- External system validates the event/result.

Important: The supplied brief explicitly asks for webhooks and success/failure callbacks, but this page presents the pattern as an architecture concept rather than claiming undocumented ARCS webhook mechanics.

09 | RETRY + ERROR QUEUE

Recovery design should distinguish recoverable failures from failures requiring investigation.

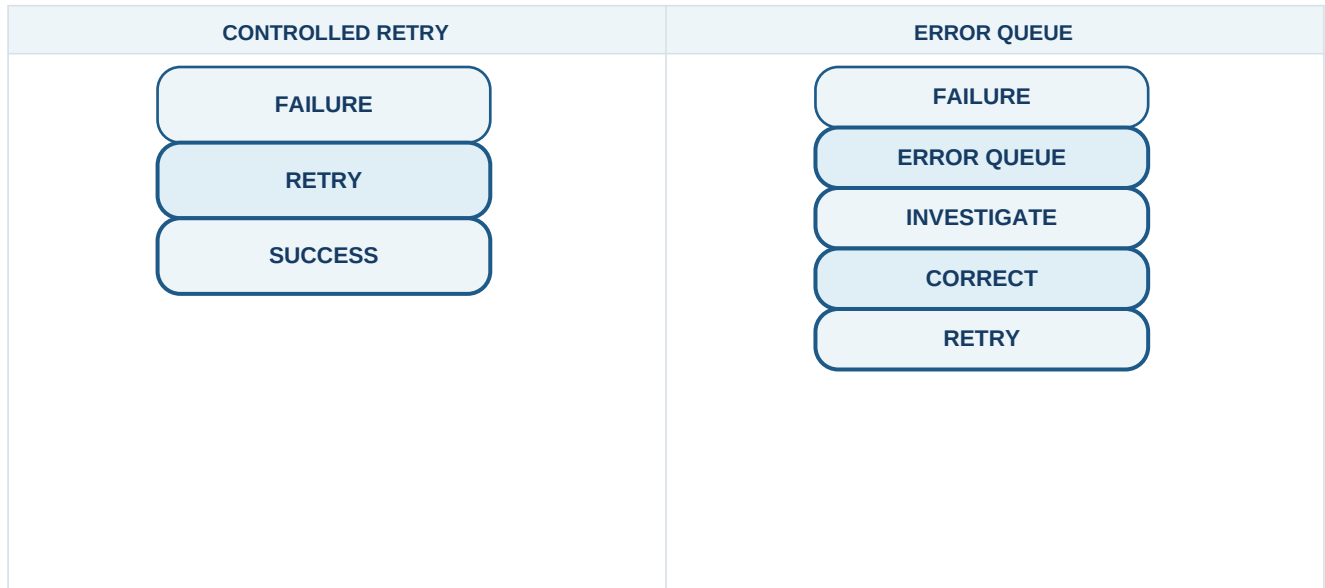


Examples in the supplied brief: authentication failure • invalid data • mapping issue • job failure • connection issue.

Do not invent exact retry counts; use an approved retry policy and route persistent failures to controlled investigation.

10 | IDEMPOTENCY

Idempotency helps an enterprise automation design handle duplicate submissions safely.

DUPLICATE-SAFE REQUEST PATTERN

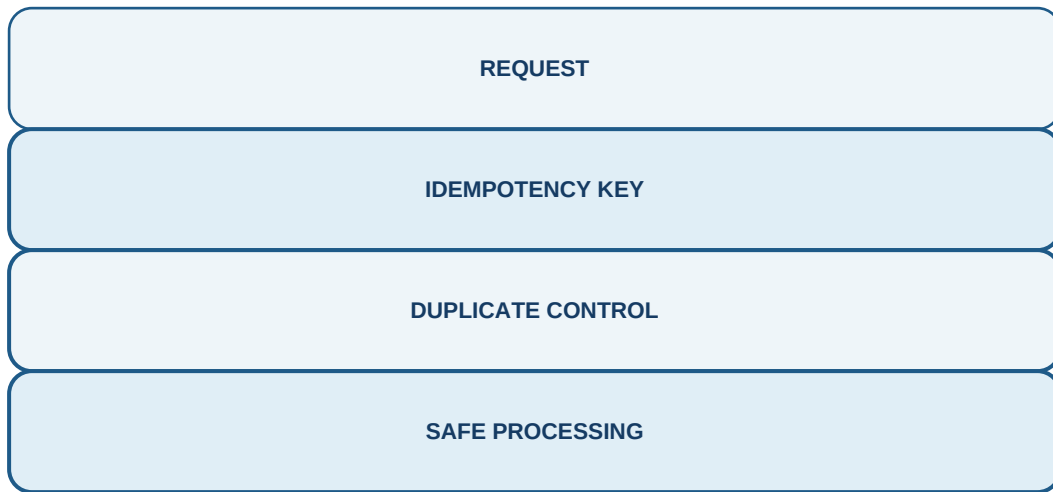

Practical scenario


- A pipeline retries after a network interruption.
- The same business request may be submitted again.
- The idempotency key provides a design mechanism to detect duplicates.

Source boundary: This page explains the concept requested in the brief. It does not invent an Oracle ARCS-specific idempotency implementation.

11 | JOB DEPENDENCY

Dependencies turn individual jobs into a controlled execution graph.

GENERIC DEPENDENCY CHAIN

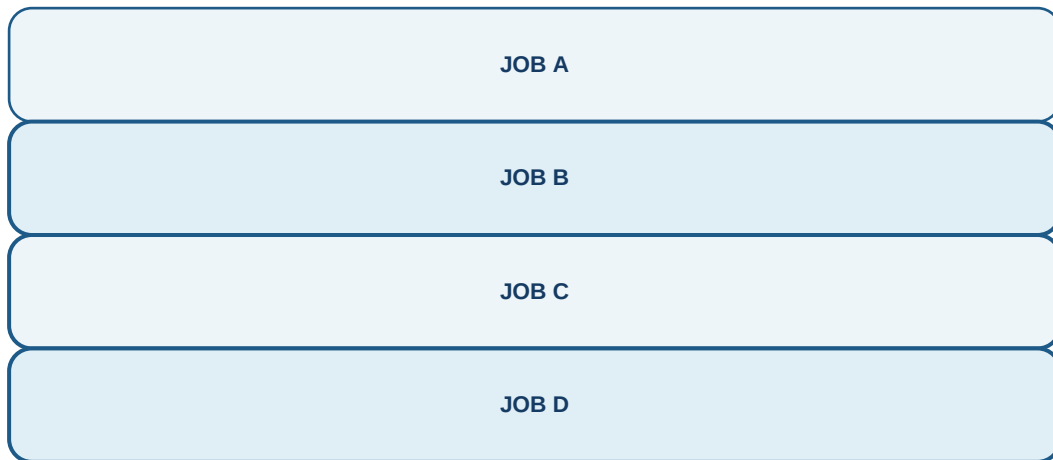







Illustrative ARCS automation example

Balance → Transactions → AutoMatch → Report

Each downstream step is gated by the outcome of its prerequisite. If a prerequisite fails, the pipeline should stop, recover or route the failure rather than blindly continue.

12 | API MONITORING DASHBOARD

Illustrative Training Data — visual operational signals for API automation.

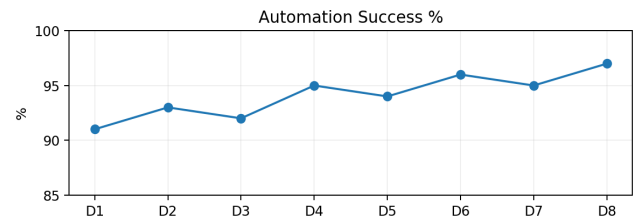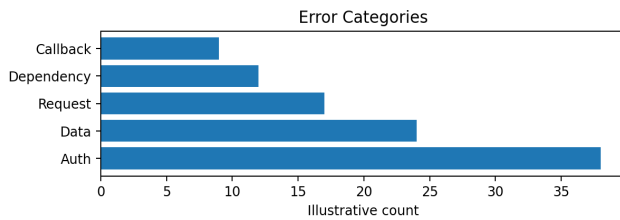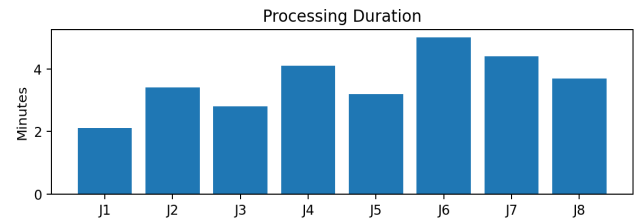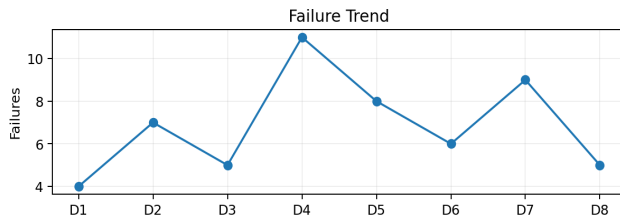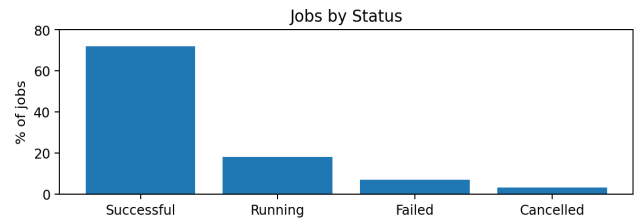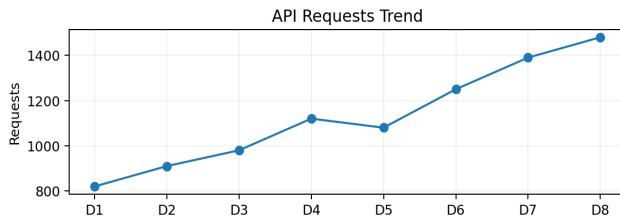

13 | API LOG

A compact operational record for job monitoring and troubleshooting.


Job ID	API	Start	End	Duration	Status	Error	Retry	Log
JOB-1001	Balance Import	08:00	08:03	3m	Success	—	0	Available
JOB-1002	Transaction Import	08:04	08:08	4m	Success	—	0	Available
JOB-1003	AutoMatch	08:09	08:12	3m	Success	—	1	Available
JOB-1004	Report	08:13	08:14	1m	Failed	Timeout	2	Available
JOB-1005	Journal Export	08:15	08:17	2m	Running	—	0	Available



14 | END-TO-END SCENARIO

Illustrative Bank + GL automation scenario.

BANK + GL AUTOMATION

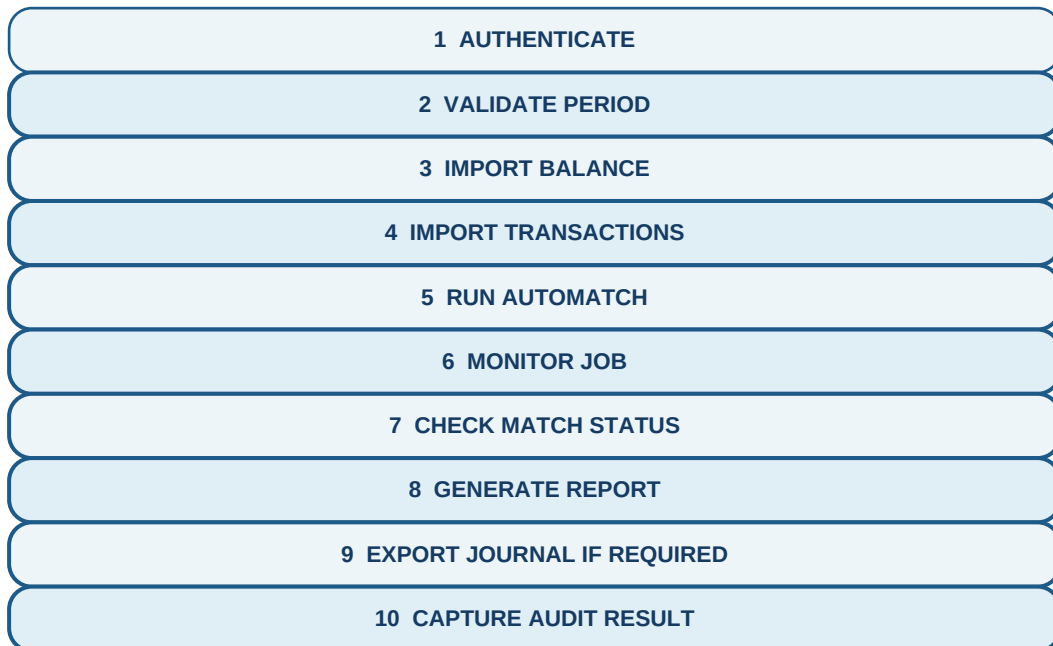

Outcome

- Repeatable data ingestion.
- Automated matching trigger.
- Status-based downstream decisions.

15 | TROUBLESHOOTING

Error matrix for first-response investigation.

Problem	Possible Cause	Investigation	Resolution
Authentication	Credential/access issue	Review access context and response	Correct approved access configuration
Request	Invalid/unsupported request	Compare request with approved API contract	Correct request
Job	Processing failure	Check status and job log	Resolve issue; controlled retry
Timeout	Long-running/connectivity issue	Check asynchronous job state	Monitor job; recover as designed
Duplicate	Repeated submission	Check idempotency design	Handle duplicate safely
Data	Invalid/incomplete input	Inspect rejected records/logs	Correct source data
Dependency	Prerequisite failed	Review upstream job	Resolve upstream failure
Callback	Receiver unavailable	Review callback outcome/log	Restore receiver and safely re-drive


Investigation rule: first identify whether the issue is access, request, processing, dependency, data or downstream notification. Then apply the approved recovery pattern.

16 | BEST PRACTICES

Enterprise automation is strongest when security, validation, monitoring and recovery are designed together.

DO	DON'T
✓ Secure authentication ✓ Validate before processing ✓ Monitor async jobs ✓ Maintain logs ✓ Use controlled retries ✓ Design dependencies ✓ Handle failures ✓ Use idempotency where appropriate ✓ Maintain auditability ✓ Separate environments	✗ Hard-code sensitive credentials ✗ Send unvalidated data ✗ Assume async success ✗ Discard logs ✗ Retry indefinitely ✗ Ignore dependencies ✗ Hide failures ✗ Allow duplicate processing ✗ Lose traceability ✗ Mix environments

CONTROL LOOP

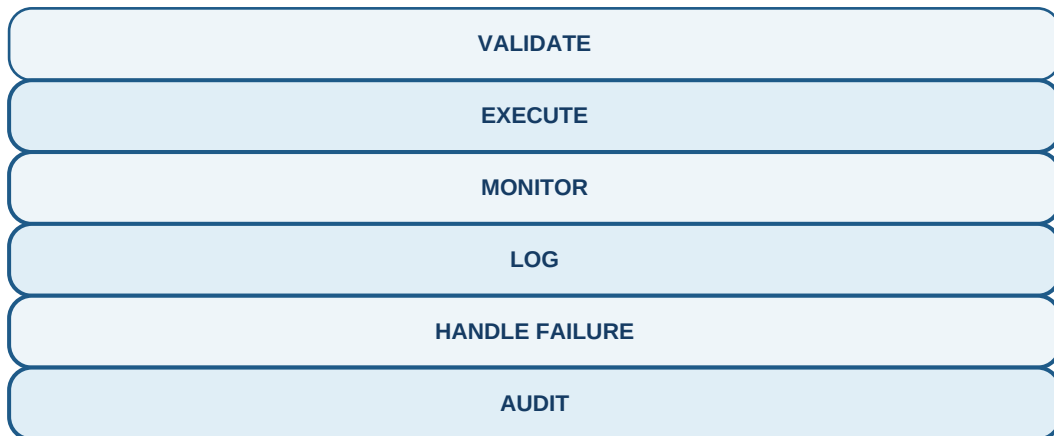

17 | INTERVIEW QUESTIONS

12 original questions with concise answers and practical framing.

1. Why is asynchronous processing useful? It allows a request to return a job reference while work continues in the background. Scenario: apply the concept inside a controlled API pipeline.	7. What is a callback used for? To signal a next system action after processing reaches an outcome. Scenario: apply the concept inside a controlled API pipeline.
2. What is the role of a job ID? It provides a reference for tracking asynchronous processing. Scenario: apply the concept inside a controlled API pipeline.	8. What should a monitoring dashboard show? Requests, job status, duration, retries, errors and success rate. Scenario: apply the concept inside a controlled API pipeline.
3. Why verify endpoint syntax before production? The supplied paths are source-provided and should be validated against the applicable Oracle documentation/version. Scenario: apply the concept inside a controlled API pipeline.	9. Why are dependencies important? They prevent downstream work from running before prerequisites are successful. Scenario: apply the concept inside a controlled API pipeline.
4. What is pipeline orchestration? Coordinating multiple operations with sequencing and dependencies. Scenario: apply the concept inside a controlled API pipeline.	10. What is a controlled retry? A retry governed by approved policy and failure analysis. Scenario: apply the concept inside a controlled API pipeline.
5. Why use an error queue? To isolate persistent failures for investigation and controlled recovery. Scenario: apply the concept inside a controlled API pipeline.	11. What is a job log useful for? Operational evidence and troubleshooting. Scenario: apply the concept inside a controlled API pipeline.
6. What is idempotency? A design approach that safely handles duplicate submissions. Scenario: apply the concept inside a controlled API pipeline.	12. Why separate environments? To reduce deployment and operational risk across development, test and production. Scenario: apply the concept inside a controlled API pipeline.

18 | CERTIFICATION PRACTICE

20 original MCQs • Not copied from Oracle certification exams.

1. Which sequence best represents the supplied asynchronous pattern?

- A. Job ID → POST → Log → Request
- B. POST Request → Job Created → Job ID → Monitor
- C. Log → Callback → POST → Job ID
- D. Report → Cancel → Authenticate → POST

Correct: B Why: The supplied lifecycle starts with a request, creates a job and returns a job ID for monitoring.

2. Which capability is explicitly listed?

- A. Balance import
- B. Network topology export
- C. Database cloning
- D. Code compilation

Correct: A Why: Balance import is a supplied API capability.

3. What should happen before a dependent job runs?

- A. Ignore upstream status
- B. Validate prerequisite outcome
- C. Delete the log
- D. Disable monitoring

Correct: B Why: Dependency logic requires the prerequisite to be checked.

4. What is the purpose of an error queue?

- A. Store successful jobs
- B. Isolate failed work for investigation and correction
- C. Replace authentication
- D. Create periods

Correct: B Why: The error queue pattern isolates failed work.

5. Which supplied path is used to get a job?

- A. GET /job/status/all
- B. GET /jobs/{jobId}
- C. POST /status/job
- D. PUT /job/run

Correct: B Why: This path is explicitly supplied in the brief.

6. What does the source brief say about supplied endpoint paths?

- A. They are verified official syntax
- B. They should not silently be presented as verified official syntax
- C. They are fictional
- D. They should be replaced

Correct: B Why: The brief explicitly instructs this source-discipline rule.

7. Which step follows transaction import in the illustrative pipeline?

- A. AutoMatch
- B. Delete period
- C. User creation
- D. Theme change

Correct: A Why: The supplied pipeline places AutoMatch after transaction import.

8. What is a job log useful for?

- A. Troubleshooting and operational visibility
- B. Replacing authorization
- C. Formatting reports
- D. Changing UI themes

Correct: A Why: The job flow includes reading the log.

9. Which is a requested dashboard KPI?

- A. Error Queue
- B. Font Size
- C. Screen Resolution
- D. Keyboard Layout

Correct: A Why: Error Queue is explicitly listed.

10. Which is a best practice?

- A. Infinite retries
- B. Maintain logs
- C. Skip validation
- D. Mix environments

Correct: B Why: Maintain logs is explicitly included.

19 | CERTIFICATION PRACTICE

20 original MCQs • Not copied from Oracle certification exams.

11. What is the conceptual role of an idempotency key?

- A. Duplicate-safe processing
- B. Report formatting
- C. Period naming
- D. Email branding

Correct: A Why: The supplied visual is request → idempotency key → duplicate control.

12. Which capability is supplied?

- A. Reassignment
- B. Browser history
- C. CSS export
- D. Desktop backup

Correct: A Why: Reassignment is listed.

13. What can a scheduler initiate?

- A. Repeatable API/job automation
- B. Document styling
- C. Hardware replacement
- D. UI redesign

Correct: A Why: The source shows scheduler → API → job → monitor → result.

14. Which status is explicitly listed?

- A. Submitted
- B. QueuedForReviewX
- C. ArchivedForever
- D. ReconciledPlus

Correct: A Why: Submitted is shown in the supplied status sequence.

15. What does a callback pattern support?

- A. Next system action after processing
- B. Column formatting
- C. Password storage
- D. UI animation

Correct: A Why: The supplied callback flow ends in a next system action.

16. Which is part of the Bank + GL scenario?

- A. Run AutoMatch
- B. Rebuild server
- C. Change UI theme
- D. Install browser

Correct: A Why: Run AutoMatch is explicitly included.

17. Which chart is requested?

- A. Failure Trend
- B. Keyboard Usage
- C. Browser Theme
- D. Desktop Wallpaper

Correct: A Why: Failure Trend is one of the requested charts.

18. Which troubleshooting category is listed?

- A. Dependency Failure
- B. Font Failure
- C. Mouse Failure
- D. Screen Failure

Correct: A Why: Dependency Failure is in the source list.

19. What is the purpose of controlled retries?

- A. Retry indefinitely
- B. Retry according to approved logic and route persistent failures appropriately
- C. Avoid logs
- D. Skip analysis

Correct: B Why: The source asks for retry plus error-queue handling.

20. Which capability supports downstream integration?

- A. Journal export
- B. Desktop export
- C. Browser export
- D. Keyboard export

Correct: A Why: Journal export is a supplied capability.

20 | API CHEAT SHEET

One-page operational reference for the API and Automation Layer.

CORE AUTOMATION LOOP



Authenticate and authorize before API requests.	Use periods, profiles, balances, transactions, reconciliations and workflow capabilities as required.	Capture job ID; monitor status; inspect logs; track KPIs.	Use controlled retry, error queue, dependency and idempotency patterns.

Production readiness checklist

- ✓ Verify endpoint syntax and payloads against applicable Oracle documentation
- ✓ Secure credentials and access
- ✓ Validate inputs
- ✓ Monitor asynchronous jobs
- ✓ Maintain logs and auditability
- ✓ Design dependencies and recovery paths
- ✓ Separate environments
- ✓ Label illustrative architecture patterns as such



ORACLE ARCS

API AND AUTOMATION LAYER

Automate • Integrate • Monitor

AUTHENTICATE

INTEGRATE

ORCHESTRATE

MONITOR

RECOVER

AUDIT

BISP Trainings
www.bisptrainings.com
Call Us: +91 769-409-5404