

WEEK 3 - INTERNSHIP ASSIGNMENT TOPIC:

Superstore SQL Analysis

Step 1: Setup Data –


Import the Superstore dataset into a table named `superstore_raw`.

Create these 3 tables from it:

`customers` `orders`

`products`

Insert data into these tables using `SELECT DISTINCT`.

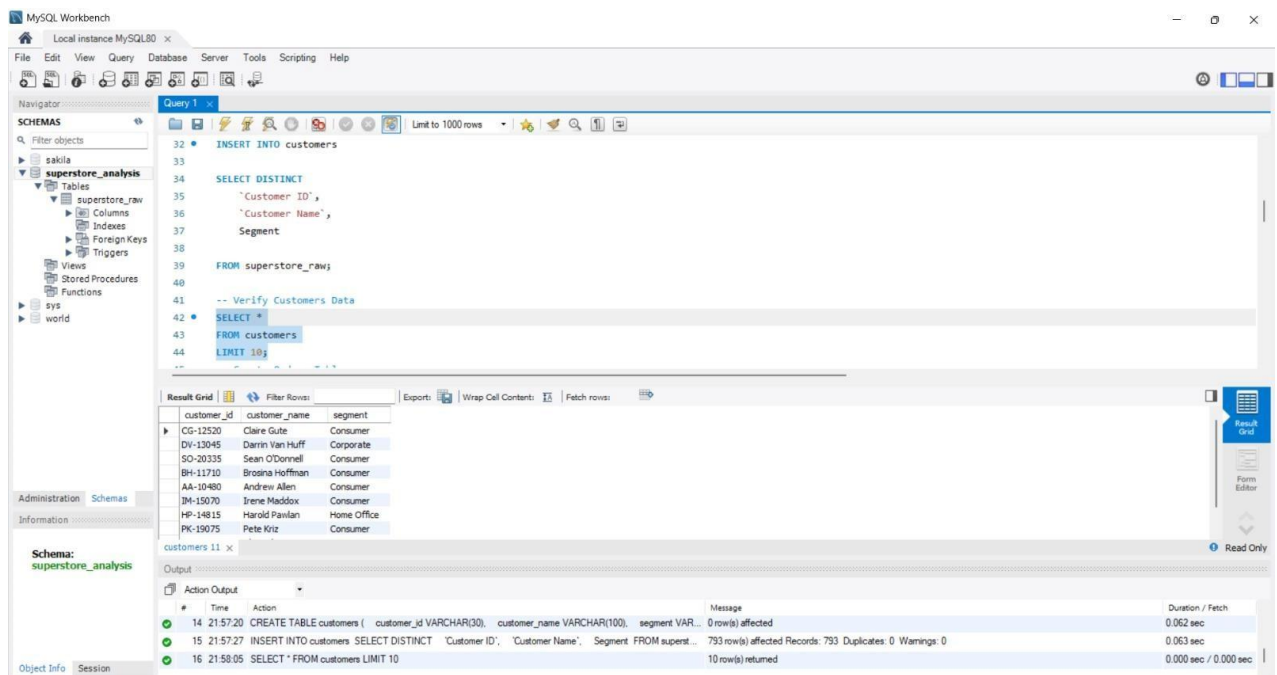

The screenshot displays the MySQL Workbench interface. The left sidebar shows the 'Schemas' pane with a tree view containing 'sakila', 'superstore_analysis', and 'world'. The 'superstore_analysis' schema is expanded, showing 'superstore_raw' as a table. The main query editor contains the following SQL code:

```
32 INSERT INTO customers
33
34 SELECT DISTINCT
35     'Customer ID',
36     'Customer Name',
37     Segment
38
39 FROM superstore_raw;
40
41 -- Verify Customers Data
42 SELECT *
43 FROM customers
44 LIMIT 10;
```

The 'Result Grid' at the bottom shows the first 10 rows of the 'customers' table:

customer_id	customer_name	segment
CG-12520	Claire Gube	Consumer
DV-13045	Darin Van Huff	Corporate
SO-20335	Sean O'Donnell	Consumer
BH-11710	Brosna Hoffman	Consumer
AA-10480	Andrew Allen	Consumer
IM-15070	Irene Maddox	Consumer
HP-14815	Harold Pavilan	Home Office
PK-19075	Pete Kriz	Consumer

The 'Action Output' pane at the bottom shows the execution results of the queries:

#	Time	Action	Message	Duration / Fetch
14	21:57:20	CREATE TABLE customers (customer_id VARCHAR(30), customer_name VARCHAR(100), segment VAR...	0 row(s) affected	0.062 sec
15	21:57:27	INSERT INTO customers SELECT DISTINCT 'Customer ID', 'Customer Name', Segment FROM superst...	793 row(s) affected Records: 793 Duplicates: 0 Warnings: 0	0.063 sec
16	21:58:05	SELECT * FROM customers LIMIT 10	10 row(s) returned	0.000 sec / 0.000 sec

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila

superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

```

72      'Customer ID',
73      Sales,
74      Quantity,
75      Discount,
76      Profit
77
78 FROM superstore_raw;
79
80 -- Verify Orders Data
81
82 * SELECT *
83 FROM orders
84 LIMIT 10;

```

Result Grid

row_id	order_id	order_date	ship_date	ship_mode	customer_id	sales	quantity	discount	profit
1	CA-2016-152156	11/8/2016	11/11/2016	Second Class	CG-12520	261.96	2	0	41.9136
2	CA-2016-152156	11/8/2016	11/11/2016	Second Class	CG-12520	791.94	3	0	219.582
3	CA-2016-138688	6/12/2016	6/16/2016	Second Class	DV-13045	14.62	2	0	6.8714
4	US-2015-108966	10/11/2015	10/18/2015	Standard Class	SO-20335	957.5775	5	0.45	-383.031
5	US-2015-108966	10/11/2015	10/18/2015	Standard Class	SO-20335	22.368	2	0.2	2.5164
6	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	48.86	7	0	14.1694
7	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	7.28	4	0	1.9656
8	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	907.152	6	0.2	90.7152

orders 12 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
19	22:01:20	CREATE TABLE orders (row_id INT, order_id VARCHAR(50), order_date VARCHAR(50), ship_date VA...	0 row(s) affected	0.032 sec
20	22:01:56	INSERT INTO orders SELECT DISTINCT 'Row ID', 'Order ID', 'Order Date', 'Ship Date', 'Ship Mod...	9694 row(s) affected Records: 9694 Duplicates: 0 Warnings: 0	0.203 sec
21	22:02:30	SELECT * FROM orders LIMIT 10	10 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila

superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

```

101      'Product ID',
102      Category,
103      'Sub-Category',
104      'Product Name'
105
106 FROM superstore_raw;
107
108 -- Verify Products Data
109
110 * SELECT *
111 FROM products
112 LIMIT 10;
113

```

Result Grid

product_id	category	sub_category	product_name
FUR-BO-10001798	Furniture	Bookcases	Bush Somerset Collection Bookcase
FUR-CH-10000454	Furniture	Chairs	Hon Deluxe Fabric Upholstered Stacking Chairs,...
OFF-LA-10000240	Office Supplies	Labels	Self-Adhesive Address Labels for Typewriters b...
FUR-TA-10000577	Furniture	Tables	Bretford CR4500 Series Slim Rectangular Table
OFF-ST-10000760	Office Supplies	Storage	Eldon Fold N Roll Cart System
FUR-FU-10001487	Furniture	Furnishings	Eldon Expressions Wood and Plastic Desk Acces...
OFF-AR-10002833	Office Supplies	Art	Neveel 322
TEC-PH-10002275	Technology	Phones	Mitel 5320 IP Phone VoIP phone

products 13 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
24	22:06:27	CREATE TABLE products (product_id VARCHAR(50), category VARCHAR(50), sub_category VARCHAR...	0 row(s) affected	0.256 sec
25	22:06:33	INSERT INTO products SELECT DISTINCT 'Product ID', 'Category', 'Sub-Category', 'Product Name' F...	1842 row(s) affected Records: 1842 Duplicates: 0 Warnings: 0	0.313 sec
26	22:07:03	SELECT * FROM products LIMIT 10	10 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila
superstore_analysis
 Tables
 superstore_raw
 Columns
 Indexes
 ForeignKeys
 Triggers
 Views
 Stored Procedures
 Functions
 sys
 world

Query 1

```

101      "Product ID",
102      Category,
103      "Sub-Category",
104      "Product Name"
105
106 FROM superstore_raw;
107
108 -- Verify Products Data
109
110 * SELECT *
111 FROM products
112 LIMIT 10;
113

```

Result Grid

product_id	category	sub_category	product_name
FUR-BO-10001798	Furniture	Bookcases	Bush Somerset Collection Bookcase
FUR-CH-10000454	Furniture	Chairs	Hon Deluxe Fabric Upholstered Stacking Chairs,...
OFF-LA-10000240	Office Supplies	Labels	Self-Adhesive Address Labels for Typewriters b...
FUR-TA-10000577	Furniture	Tables	Bretford CR4500 Series Slim Rectangular Table
OFF-ST-10000760	Office Supplies	Storage	Eldon Fold 'N' Roll Cart System
FUR-FU-10001487	Furniture	Furnishings	Eldon Expressions Wood and Plastic Desk Acces...
OFF-AR-10002833	Office Supplies	Art	Newell 322
TEC-PH-10002275	Technology	Phones	Mitel 5320 IP Phone VoIP phone

products 13 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
24	22:06:27	CREATE TABLE products (product_id VARCHAR(50), category VARCHAR(50), sub_category VARCHAR(50), product_name VARCHAR(255))	0 row(s) affected	0.266 sec
25	22:06:33	INSERT INTO products SELECT DISTINCT Product ID, Category, Sub-Category, Product Name FROM superstore_raw	1842 row(s) affected Records: 1842 Duplicates: 0 Warnings: 0	0.313 sec
26	22:07:03	SELECT * FROM products LIMIT 10	10 row(s) returned	0.000 sec / 0.000 sec

Step 2: Perform Required Queries –

Query 1 : Find orders greater than average sales -

Orders Above Average Sales –

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila
superstore_analysis
 Tables
 superstore_raw
 Columns
 Indexes
 ForeignKeys
 Triggers
 Views
 Stored Procedures
 Functions
 sys
 world

Query 1

```

113 SHOW TABLES;
114
115 -- Step 2: Perform Required Queries
116 -- Query 1 : Find orders greater than average sales.
117 -- Orders Above Average Sales
118
119 * SELECT *
120 FROM orders
121 WHERE sales >
122 (
123     SELECT AVG(sales)
124     FROM orders
125 )
126

```

Result Grid

row_id	order_id	order_date	ship_date	ship_mode	customer_id	sales	quantity	discount	profit
1	CA-2016-152156	11/8/2016	11/11/2016	Second Class	CO-12520	261.96	2	0	41.9136
2	CA-2016-152156	11/8/2016	11/11/2016	Second Class	CO-12520	731.94	3	0	219.982
4	US-2015-108966	10/11/2015	10/18/2015	Standard Class	SO-20335	957.5775	5	0.45	-383.031
8	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	907.152	6	0.2	90.7152
11	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	1706.184	9	0.2	85.3092
12	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	911.424	4	0.2	68.3568
14	CA-2016-161389	12/9/2016	12/10/2016	Standard Class	PH-15070	407.976	3	0.2	132.9922
17	CA-2014-105893	11/11/2014	11/18/2014	Standard Class	PK-19075	665.88	6	0	13.3176

orders 15 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
26	22:07:03	SELECT * FROM products LIMIT 10	10 row(s) returned	0.000 sec / 0.000 sec
27	22:07:44	SHOW TABLES	4 row(s) returned	0.015 sec / 0.000 sec
28	22:13:32	SELECT * FROM orders WHERE sales > (SELECT AVG(sales) FROM orders) LIMIT 0, 1000	1000 row(s) returned	0.016 sec / 0.016 sec

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila
 superstore_analysis
 Tables
 superstore_raw
 Columns
 Indexes
 Foreign Keys
 Triggers
 Views
 Stored Procedures
 Functions
 sys
 world

Query 1

Limit to 1000 rows

```

113 SHOW TABLES;
114
115 -- Step 2: Perform Required Queries
116 -- Query 1 : Find orders greater than average sales.
117 -- Orders Above Average Sales
118
119 SELECT *
120 FROM orders
121 WHERE sales >
122 (
123   SELECT AVG(sales)
124   FROM orders
125 )
  
```

Result Grid

row_id	order_id	order_date	ship_date	ship_mode	customer_id	sales	quantity	discount	profit
1	CA-2016-152156	11/8/2016	11/11/2016	Second Class	CG-12520	261.96	2	0	41.9136
2	CA-2016-152156	11/8/2016	11/11/2016	Second Class	CG-12520	731.94	3	0	219.582
4	US-2015-108966	10/11/2015	10/18/2015	Standard Class	SO-20335	957.5775	5	0.45	-383.031
8	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	907.152	6	0.2	90.7152
11	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	1706.184	9	0.2	85.3092
12	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	911.424	4	0.2	68.3568
14	CA-2016-161389	12/9/2016	12/10/2016	Standard Class	PH-13070	407.976	3	0.2	132.5922
17	CA-2014-105893	11/11/2014	11/18/2014	Standard Class	PK-19075	665.88	6	0	13.1176

Schema: superstore_analysis

Object Info Session

Output

Action Output

#	Time	Action	Message	Duration / Fetch
26	22:07:03	SELECT * FROM products LIMIT 10	10 row(s) returned	0.000 sec / 0.000 sec
27	22:07:44	SHOW TABLES	4 row(s) returned	0.015 sec / 0.000 sec
28	22:13:32	SELECT * FROM orders WHERE sales > (SELECT AVG(sales) FROM orders) LIMIT 0, 1000	1000 row(s) returned	0.016 sec / 0.016 sec

Query 2: Highest Sales Order Per Customer - Using Correlated Subquery –

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila
 superstore_analysis
 Tables
 superstore_raw
 Columns
 Indexes
 Foreign Keys
 Triggers
 Views
 Stored Procedures
 Functions
 sys
 world

Query 1

Limit to 1000 rows

```

133
134
135 -- Query 2: Highest Sales Order Per Customer
136 -- Using Correlated Subquery
137
138 SELECT *
139 FROM orders o
140
141 WHERE sales =
142 (
143   SELECT MAX(sales)
144   FROM orders
145   WHERE customer_id = o.customer_id
146 )
  
```

Result Grid

row_id	order_id	order_date	ship_date	ship_mode	customer_id	sales	quantity	discount	profit
2	CA-2016-152156	11/8/2016	11/11/2016	Second Class	CG-12520	731.94	3	0	219.582
4	US-2015-108966	10/11/2015	10/18/2015	Standard Class	SO-20335	957.5775	5	0.45	-383.031
11	CA-2014-115812	6/9/2014	6/14/2014	Standard Class	BH-11710	1706.184	9	0.2	85.3092
25	CA-2015-106320	9/25/2015	9/30/2015	Standard Class	EB-13870	1044.63	3	0	240.2649
29	US-2015-150630	9/17/2015	9/21/2015	Standard Class	TB-21520	3083.43	7	0.5	-1665.0522
36	CA-2016-117590	12/8/2016	12/10/2016	First Class	GH-14665	1097.544	7	0.2	123.4737
39	CA-2015-117415	12/27/2015	12/31/2015	Standard Class	SN-20710	532.3992	3	0.32	-46.9764

Schema: superstore_analysis

Object Info Session

Output

Action Output

#	Time	Action	Message	Duration / Fetch
34	22:37:28	SELECT customer_id, order_id, sales FROM orders o WHERE sales = (SELECT MAX(sales) FROM orders)	Error Code: 2013. Lost connection to MySQL server during query	30.015 sec
35	22:42:22	SELECT * FROM orders o WHERE sales = (SELECT MAX(sales) FROM orders) WHERE customer_id = ...	795 row(s) returned	12.828 sec / 64.063 sec

Query 3: Total Sales Per Customer - Using CTE –

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila

superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

Limit to 1000 rows

```

143 -- Query 3: Total Sales Per Customer
144 -- Using CTE
145
146 WITH customer_sales AS
147 (
148     SELECT
149         customer_id,
150         SUM(sales) AS total_sales
151     FROM orders
152     GROUP BY customer_id
153 )
154
155 SELECT *
156 FROM customer_sales;

```

Result Grid

customer_id	total_sales
CG-12520	1148.7800000000002
DV-13045	1119.4830000000002
SO-20335	2602.5750000000001
BH-11710	6255.3510000000001
AA-10480	1782.872
JM-15070	4930.4739 1782.872
HP-14815	1990.314
PK-19075	8158.654

Schema: superstore_analysis

Object Info Session

Output

Action Output

#	Time	Action	Message	Duration / Fetch
35	22:42:22	SELECT * FROM orders WHERE sales = (SELECT MAX(sales) FROM orders WHERE customer_id = ...	793 row(s) returned	12.828 sec / 64.063 sec
36	22:46:13	WITH customer_sales AS (SELECT customer_id, SUM(sales) AS total_sales FROM orders GR...	793 row(s) returned	0.016 sec / 0.000 sec

Query 4: Customers Above Average Sales –

Using CTE + Subquery –

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila

superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

Limit to 1000 rows

```

158 -- Query 4: Customers Above Average Sales
159 -- Using CTE + Subquery
160
161 WITH customer_sales AS
162 (
163     SELECT
164         customer_id,
165         SUM(sales) AS total_sales
166     FROM orders
167     GROUP BY customer_id
168 )
169
170 SELECT *
171 FROM customer_sales
172 WHERE total_sales >
173

```

Result Grid

customer_id	total_sales
BH-11710	6255.3510000000001
JM-15070	4930.4739999999999
PK-19075	8158.654
TB-21520	4720.628
MA-17560	4280.6209999999999
SN-20710	3127.9592000000007
LC-16930	4481.162
DA-10864	7817.1110000000004

Schema: superstore_analysis

Object Info Session

Output

Action Output

#	Time	Action	Message	Duration / Fetch
36	22:46:13	WITH customer_sales AS (SELECT customer_id, SUM(sales) AS total_sales FROM orders GR...	793 row(s) returned	0.016 sec / 0.000 sec
37	22:46:15	WITH customer_sales AS (SELECT customer_id, SUM(sales) AS total_sales FROM orders GR...	793 row(s) returned	0.000 sec / 0.000 sec

Query 5: Customer Ranking -

Using RANK() –

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

sakila
superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

Limit to 1000 rows

179 -- Query 5: Customer Ranking
180 -- Using RANK()
181
182 WITH customer_sales AS
183 (
184 SELECT
185 customer_id,
186 SUM(sales) AS total_sales
187 FROM orders
188 GROUP BY customer_id
189)
190
191 SELECT
192 customer_id,
193 total_sales,
194

Result Grid

Filter Rows:

Exports

Wrap Cell Contents

customer_id	total_sales	sales_rank
SM-20320	25043.05	1
TC-20980	19017.847999999998	2
RB-19360	15117.339	3
TA-21385	14995.62	4
AP-10105	14355.610999999997	5
SC-20095	14142.339999999999	6
KL-16645	14071.917	7
LA-16645	13871.707000000000	8

Result 22

Output

Action Output

Time Action Message Duration / Fetch

37 22.4813 WITH customer_sales AS (SELECT customer_id, SUM(sales) AS total_sales FROM orders GR... 299 row(s) returned 0.000 sec / 0.000 sec

Query 6: Row Number Per Customer –

Using ROW_NUMBER() –

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

sakila
superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

Limit to 1000 rows

201 -- Query 6: Row Number Per Customer
202 -- Using ROW_NUMBER()
203
204 SELECT
205 customer_id,
206 order_id,
207 sales,
208
209 ROW_NUMBER() OVER
210 (
211 PARTITION BY customer_id
212 ORDER BY sales DESC
213) AS row_num
214
215 FROM orders;

Result Grid

Filter Rows:

Exports

Wrap Cell Contents

customer_id	order_id	sales	row_num
AA-10315	CA-2016-103982	3930.072	1
AA-10315	CA-2014-128055	673.568	2
AA-10315	CA-2016-103982	431.976	3
AA-10315	CA-2017-147039	362.94	4
AA-10315	CA-2014-128055	52.88	5
AA-10315	CA-2016-103982	41.72	6
AA-10315	CA-2015-121391	26.96	7
AA-10315	CA-2014-138100	14.94	8
AA-10315	CA-2014-138100	14.56	9
AA-10315	CA-2017-147039	11.54	10
AA-10315	CA-2016-103982	2.304	11
AA-10375	CA-2016-131065	499.98	1

Result 23


Output

Action Output

Time Action Message Duration / Fetch


Query 7: Top 3 Customers -

Using Window Function –

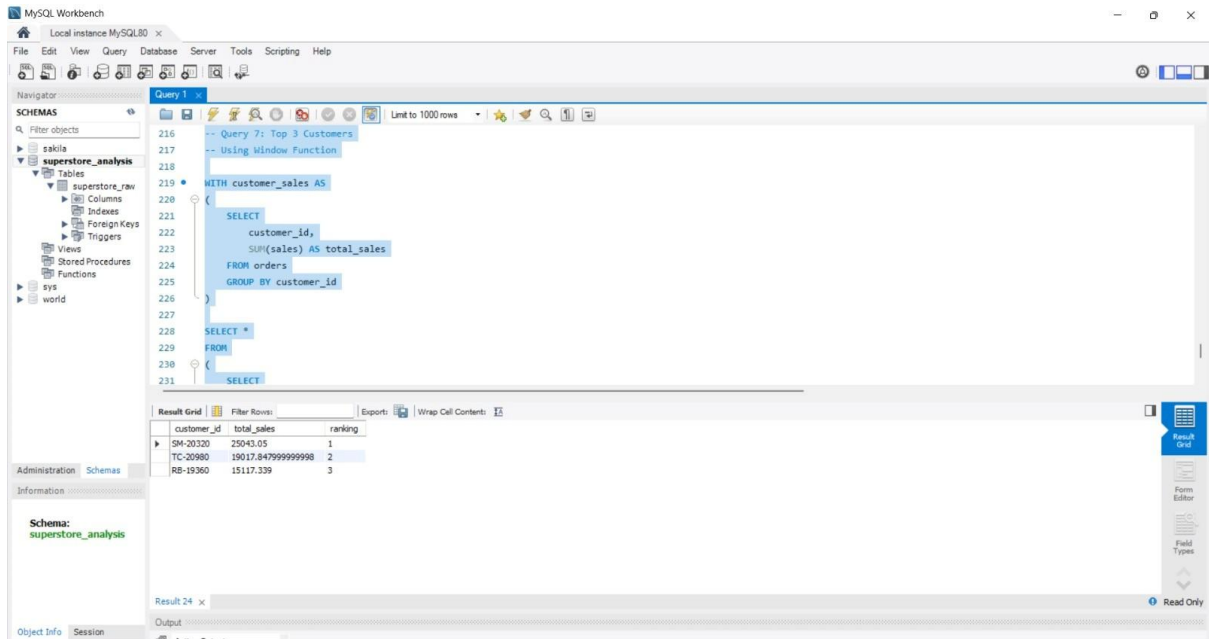

Final Combined Query – JOIN +

CTE + Window Function –

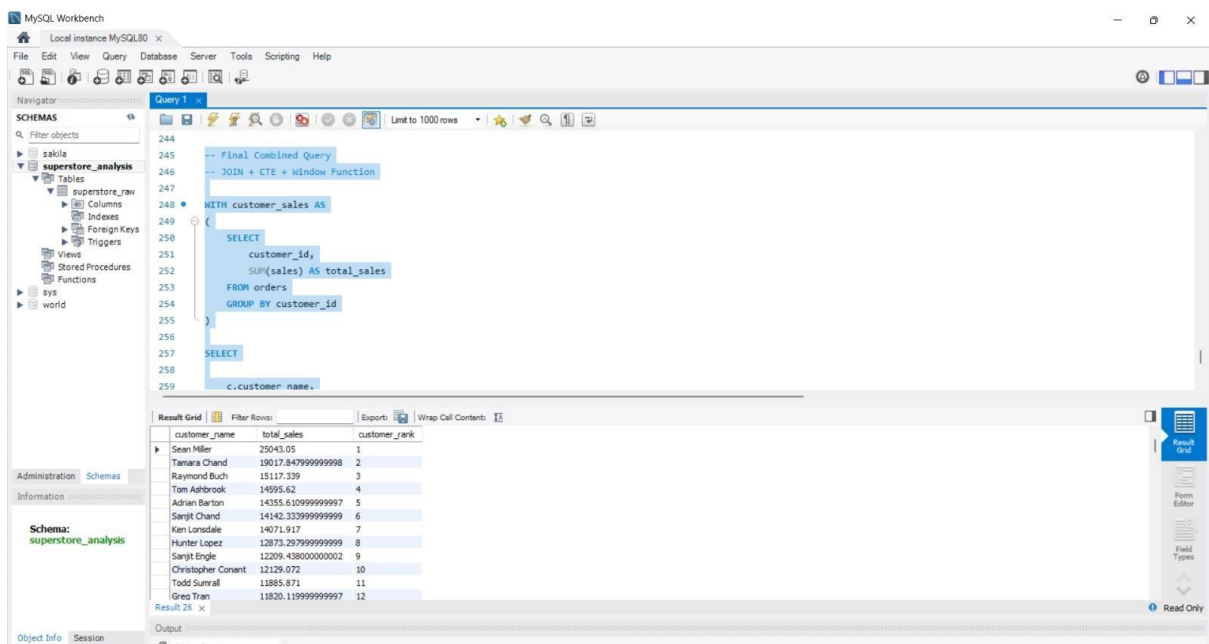

Mini Project: Customer Sales Insights –

Top 5 Customers –

The screenshot shows the MySQL Workbench interface with a query editor and a result grid. The query is as follows:

```
-- Top 5 Customers
WITH customer_sales AS
(
  SELECT
    customer_id,
    SUM(sales) AS total_sales
  FROM orders
  GROUP BY customer_id
)
SELECT *
FROM customer_sales
ORDER BY total_sales DESC
```

The result grid displays the following data:

customer_id	total_sales
SM-20320	25043.05
TC-20980	19017.847999999998
RB-19360	15117.339
TA-21385	14595.62
AB-10105	14355.610999999997

Bottom 5 Customers –

Customers Who Made Only One Order –

The screenshot shows the MySQL Workbench interface with a query editor and a result grid. The query is as follows:

```
-- Bottom 5 Customers
WITH customer_sales AS
(
  SELECT
    customer_id,
    SUM(sales) AS total_sales
  FROM orders
  GROUP BY customer_id
)
SELECT *
FROM customer_sales
ORDER BY total_sales ASC
```

The result grid displays the following data:

customer_id	total_sales
TS-21085	4.833
LD-16855	5.304
MG-18205	12.32
CJ-11875	16.52
RS-19870	22.328

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

```

308
309 ORDER BY total_sales ASC
310
311 LIMIT 5;
312 -- Customers who Made Only One Order
313
314 SELECT
315     customer_id,
316     COUNT(order_id) AS total_orders
317 FROM orders
318 GROUP BY customer_id
319
320 HAVING COUNT(order_id) = 1;
321
322

```

Result Grid

customer_id	total_orders
JR-15700	1
MG-18205	1
AO-10810	1
LD-16855	1
CI-11875	1
RE-19405	1

Schema: superstore_analysis

Object Info Session

Above Average Customers –

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

superstore_analysis

Tables

superstore_raw

Columns

Indexes

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

```

322 HAVING COUNT(order_id) = 1;
323
324 -- Above Average Customers
325
326 WITH customer_sales AS
327 (
328     SELECT
329         customer_id,
330         SUM(sales) AS total_sales
331     FROM orders
332     GROUP BY customer_id
333 )
334
335 SELECT *
336 FROM customer_sales
337

```

Result Grid

customer_id	total_sales
BH-11710	6255.351000000001
JM-15070	4930.473999999999
PK-19075	8158.654
TB-21520	4730.628
MA-17560	4280.620999999999
JN-20710	3127.9592000000007
LC-16930	4481.162
RA-19885	3832.3139999999994
ES-14080	4648.516
KM-16720	4905.472000000001
KD-16270	8282.358
JE-15745	6400.454999999999

Schema: superstore_analysis

Object Info Session

Highest Order Value Per Customer –

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

sakila

superstore_analysis

Tables

superstore_raw

Columns

Indices

Foreign Keys

Triggers

Views

Stored Procedures

Functions

sys

world

Query 1

Limit to 1000 rows

```
339 (
340 SELECT AVG(total_sales)
341 FROM customer_sales
342 );
343 -- Highest Order Value Per Customer
344
345 * SELECT
346 customer_id,
347 MAX(sales) AS highest_order_value
348
349 FROM orders
350
351 GROUP BY customer_id;
```

Result Grid

customer_id	highest_order_value
CG-12520	731.94
DV-13045	721.875
SO-20335	957.5775
BH-11710	1706.184
AA-10460	479.97
JH-15070	1819.86
HP-14815	1242.9
PK-19075	4305.552
AG-10270	1336.44
LN-21425	877.06

Administration Schemas

Information

Schema: superstore_analysis

Output

Action Output

#	Time	Action	Message	Duration / Fetch
46	23:18:15	WITH customer_sales AS (SELECT customer_id, SUM(sales) AS total_sales FROM orders GR...	299 row(s) returned	0.015 sec / 0.000 sec
47	23:19:42	SELECT customer_id, MAX(sales) AS highest_order_value FROM orders GROUP BY customer_id LIMIT 0...	793 row(s) returned	0.016 sec / 0.000 sec

Object Info Session