


LAB -2

.gitignore is a special file you put in your Git repository root to tell Git which files or folders it should ignore

Why use .gitignore?

-> To avoid committing unnecessary files like logs, build artifacts, temporary files, IDE configs, etc.

-> Keeps your repo clean and avoids pushing sensitive or bulky files to remote.

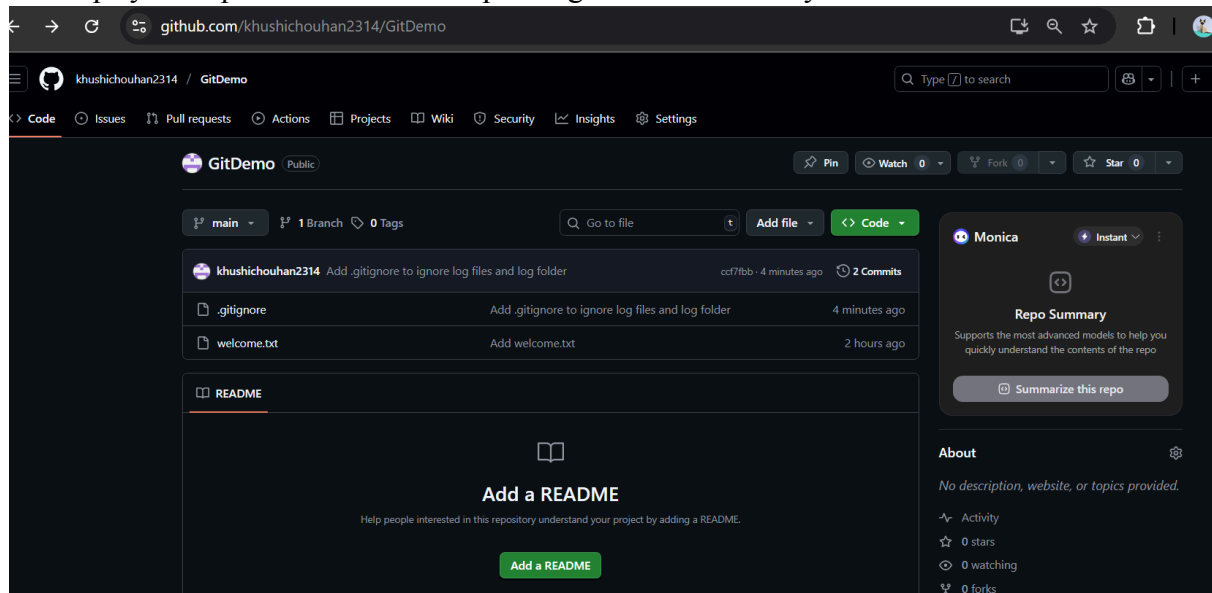

```
Command Prompt X Command Prompt X Command Prompt X + v
Microsoft Windows [Version 10.0.26100.4652]
(c) Microsoft Corporation. All rights reserved.

C:\Users\KIIT>cd C:\Users\KIIT\GitDemo

C:\Users\KIIT\GitDemo>git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

C:\Users\KIIT\GitDemo>echo some logs > app.log

C:\Users\KIIT\GitDemo>mkdir log

C:\Users\KIIT\GitDemo>echo error message > log\error.log

C:\Users\KIIT\GitDemo>echo # Ignore log files and log folder > .gitignore

C:\Users\KIIT\GitDemo>echo *.log >> .gitignore

C:\Users\KIIT\GitDemo>echo /log/ >> .gitignore

C:\Users\KIIT\GitDemo>type .gitignore
# Ignore log files and log folder
*.log
/log/

C:\Users\KIIT\GitDemo>git add .gitignore

C:\Users\KIIT\GitDemo>git commit -m "Add .gitignore to ignore log files and log folder"
[main cc77bb] Add .gitignore to ignore log files and log folder
1 file changed, 3 insertions(+)
create mode 100644 .gitignore

C:\Users\KIIT\GitDemo>git rm --cached *.log
fatal: pathspec '*.log' did not match any files

C:\Users\KIIT\GitDemo>git rm -r --cached log
fatal: pathspec 'log' did not match any files

C:\Users\KIIT\GitDemo>git push origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 306 bytes | 115.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/khushichouhan2314/GitDemo.git
```