

Question 1

Mongodb connection


```
C:\Users\pkhus\Downloads\Assignment 2 node\Assignment 2node\blog-management-api\blog-managemen

> blog-management-api@1.0.0 dev
> nodemon server.js


[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node server.js`
◇ injected env (5) from .env // tip: 📄 custom filepath { path: '/custom/path/.env' }
MongoDB connected successfully
Server running on http://localhost:5000
```

Api


running

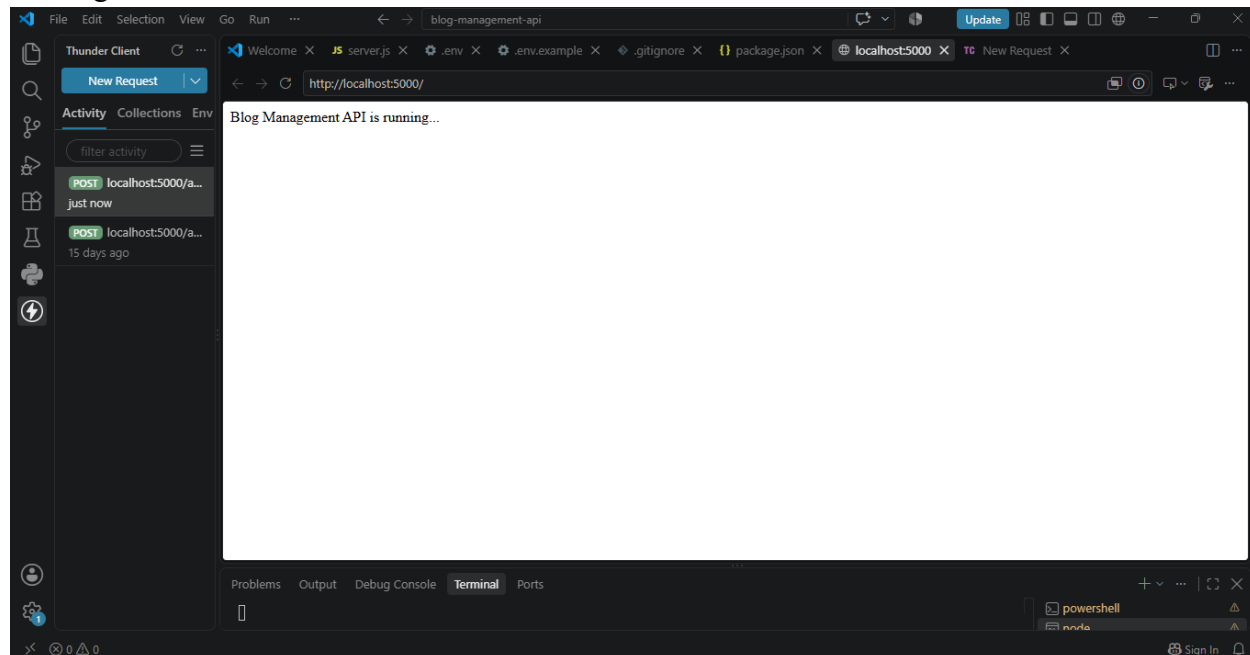

Post :- <http://localhost:5000/api/auth/register>

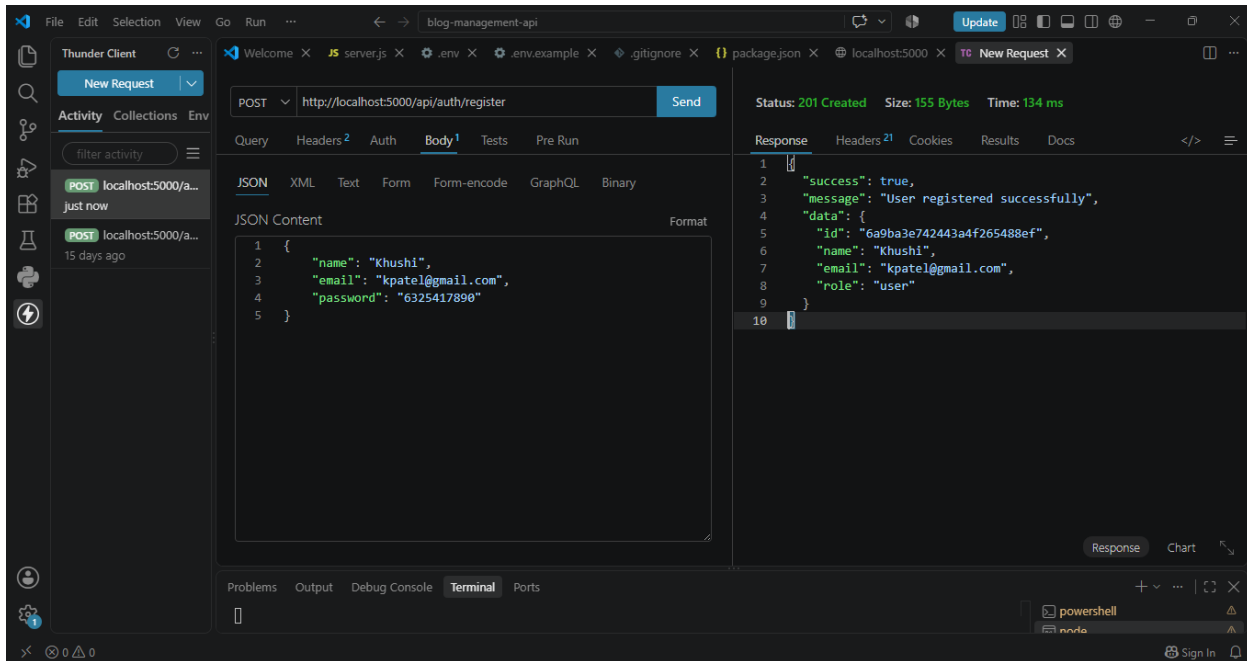


Post:- <http://localhost:5000/api/auth/login>

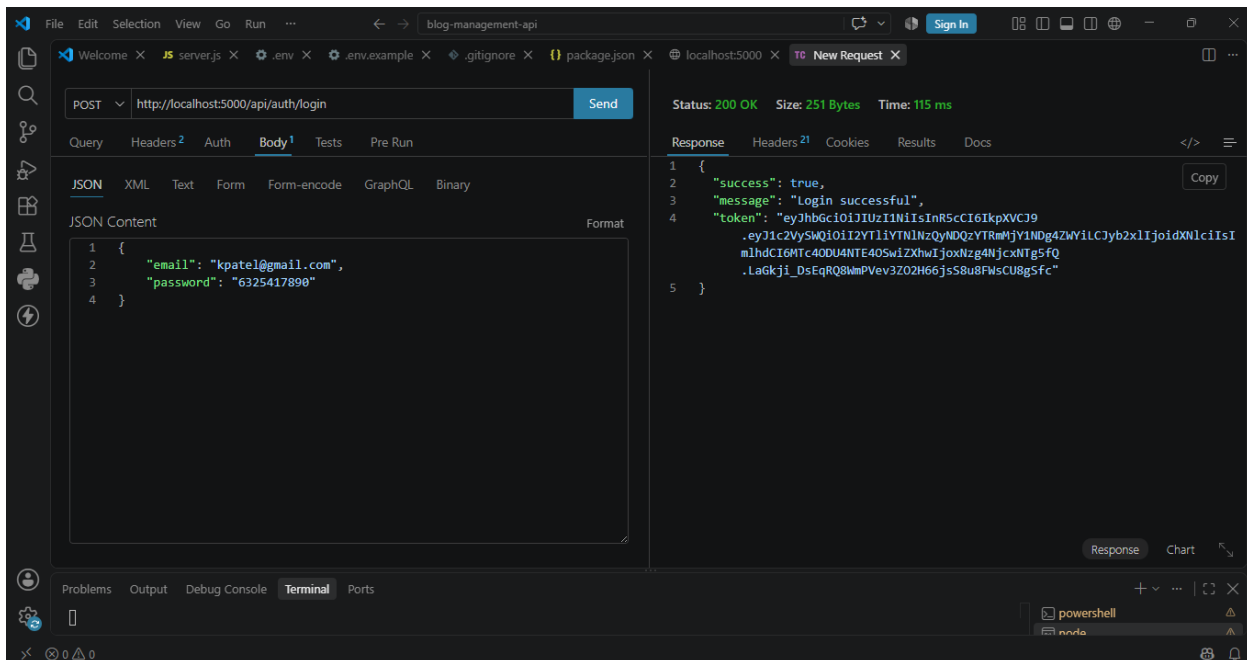


Profile Test:-

GET:- <http://localhost:5000/api/auth/profile>

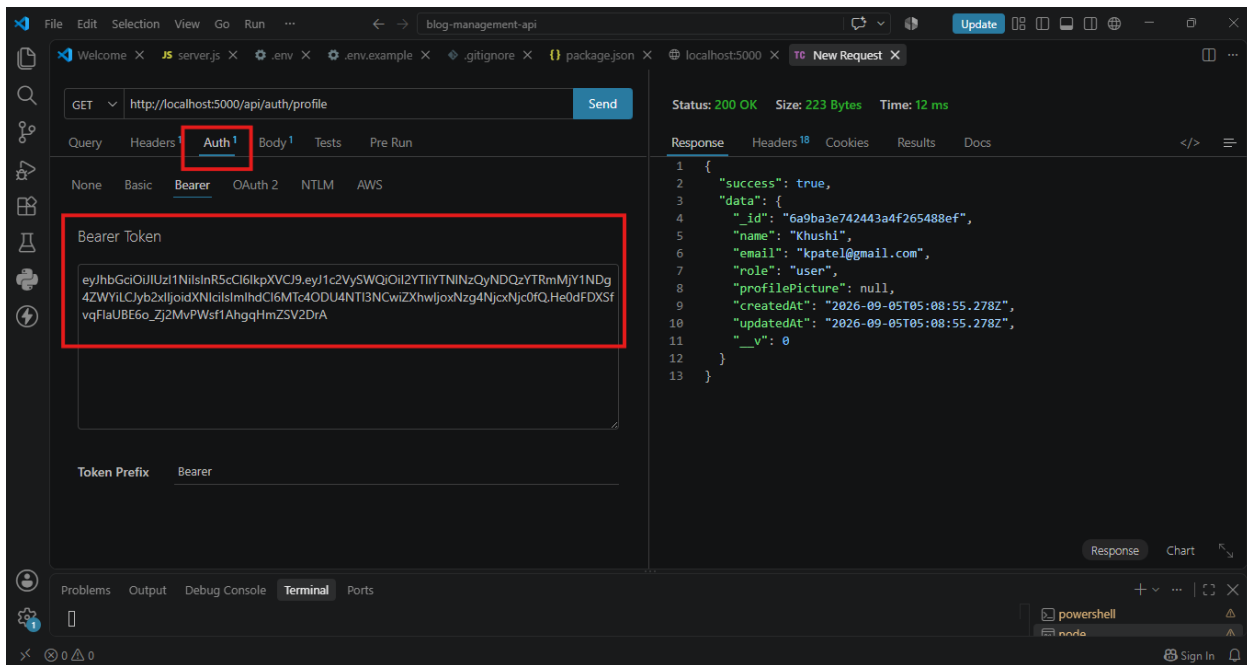


Create Blog Post

POST:- <http://localhost:5000/api/posts>

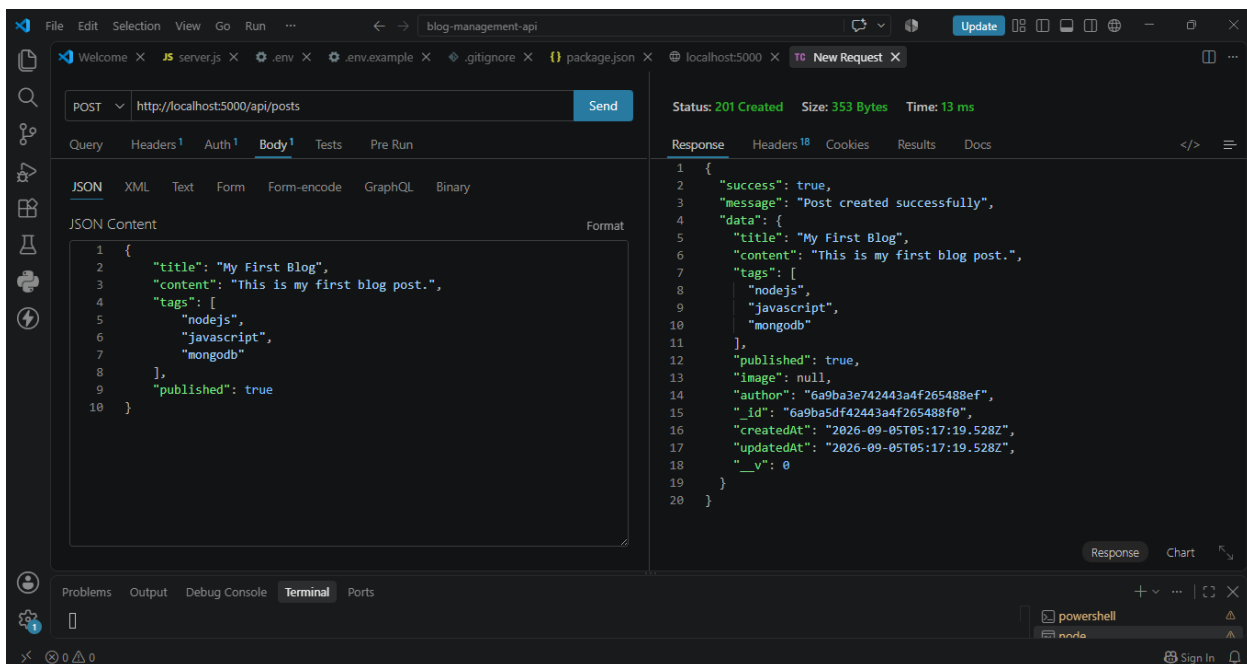


Get All Own Posts

GET:- <http://localhost:5000/api/posts>

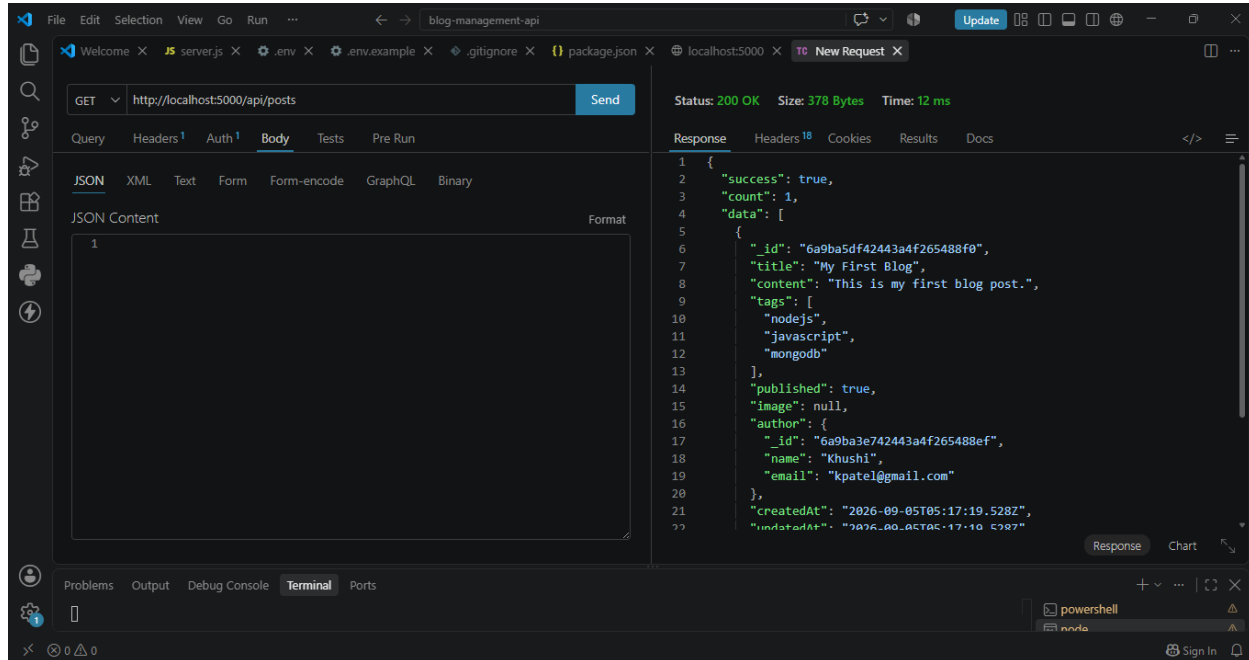

Get Single Post

GET:- <http://localhost:5000/api/posts/6a9ba5df42443a4f265488f0>

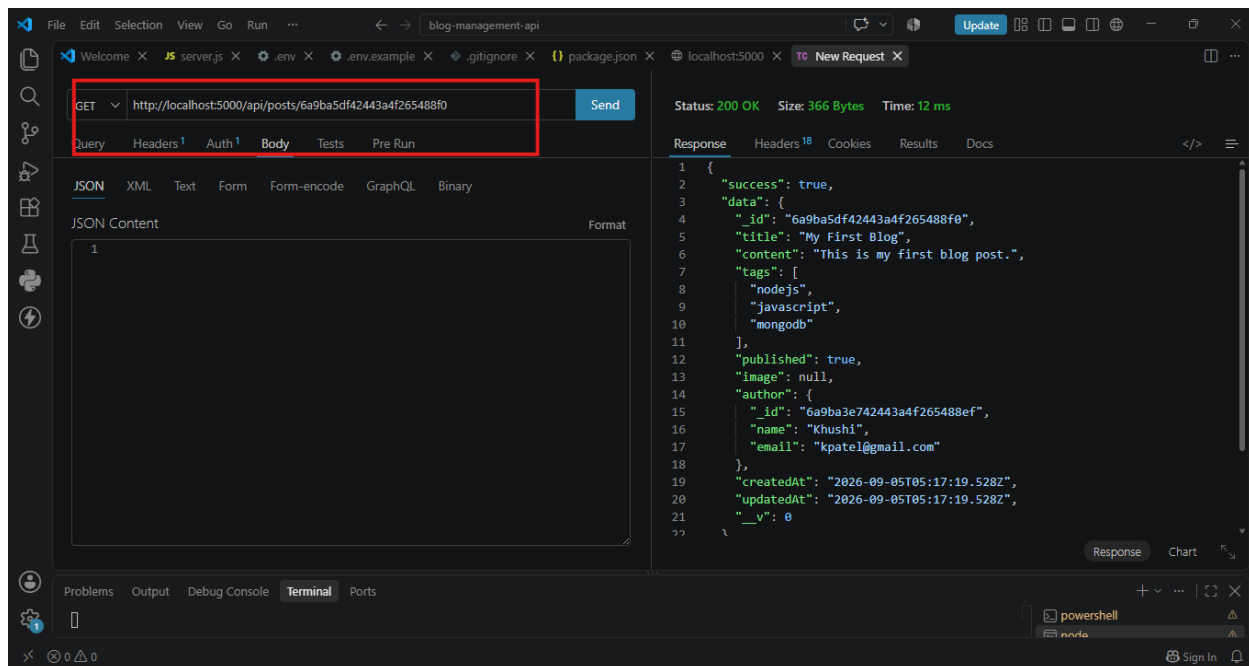

Update Post

PUT:- <http://localhost:5000/api/posts/6a9ba5df42443a4f265488f0>


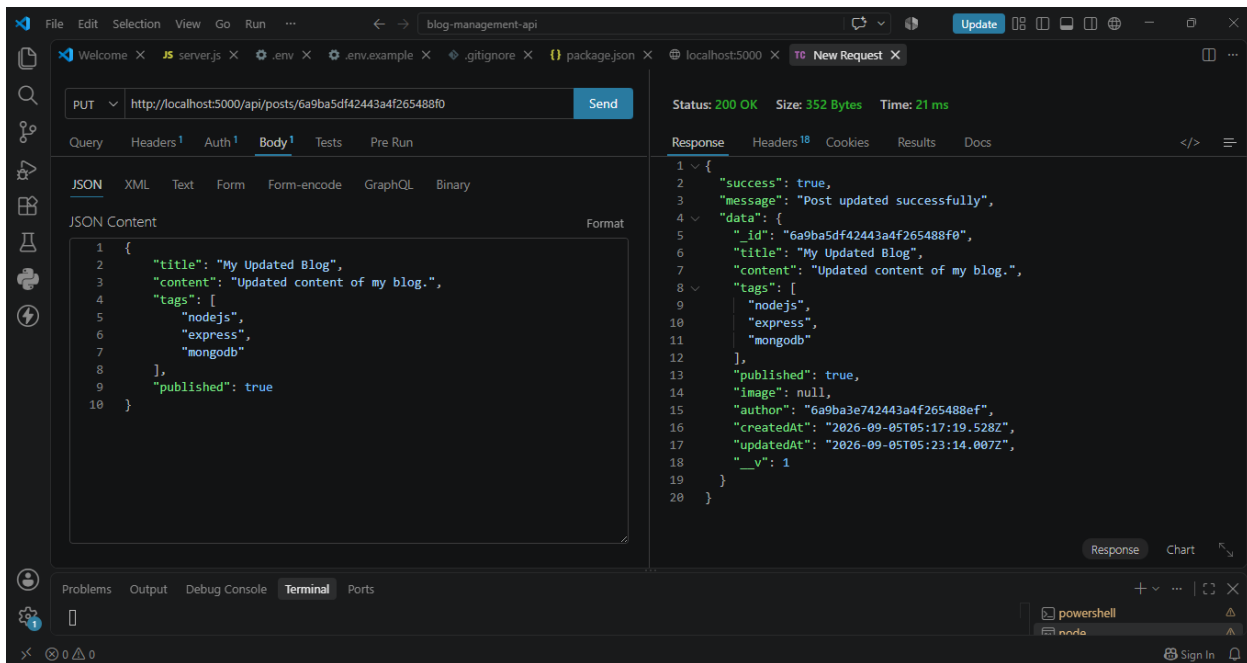



Image Upload

POST:- <http://localhost:5000/api/posts/6a9ba5df42443a4f265488f0/image>

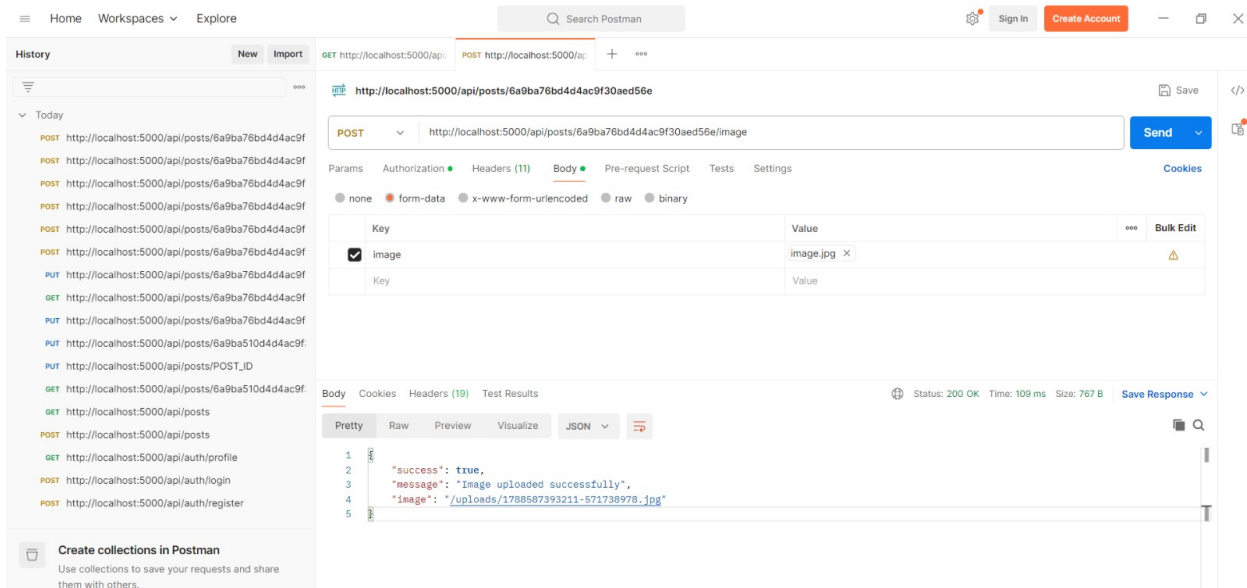


Delete Post

DELETE:- <http://localhost:5000/api/posts/6a9ba5df42443a4f265488f0>

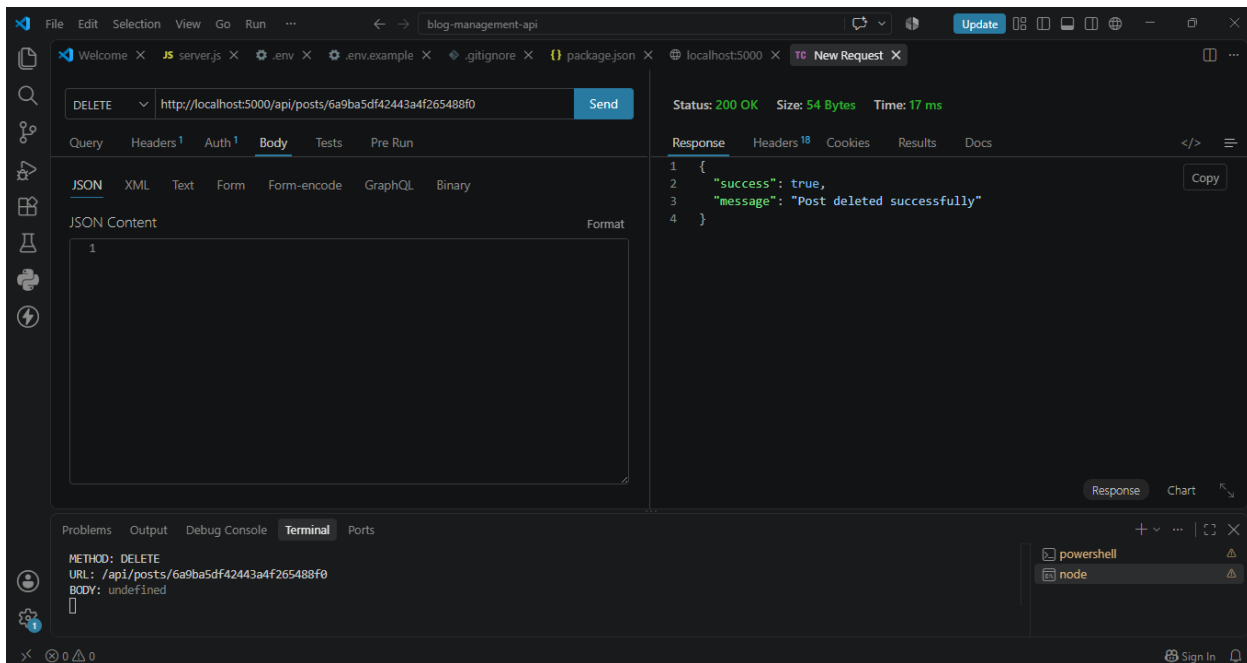


EJS View


Login:-

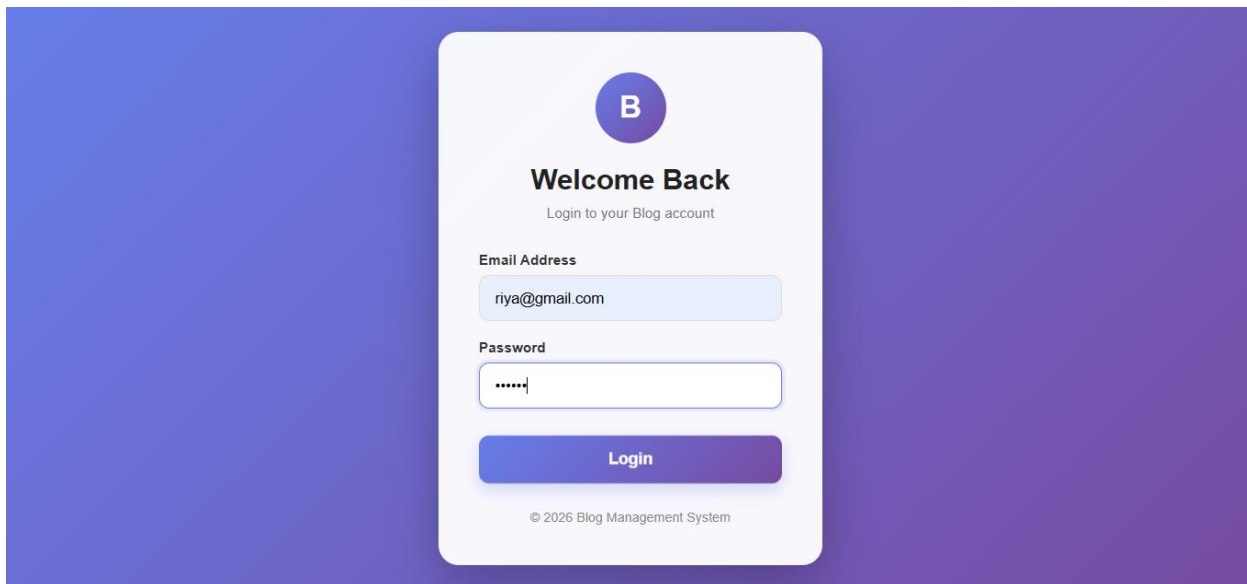

Dashboard:-

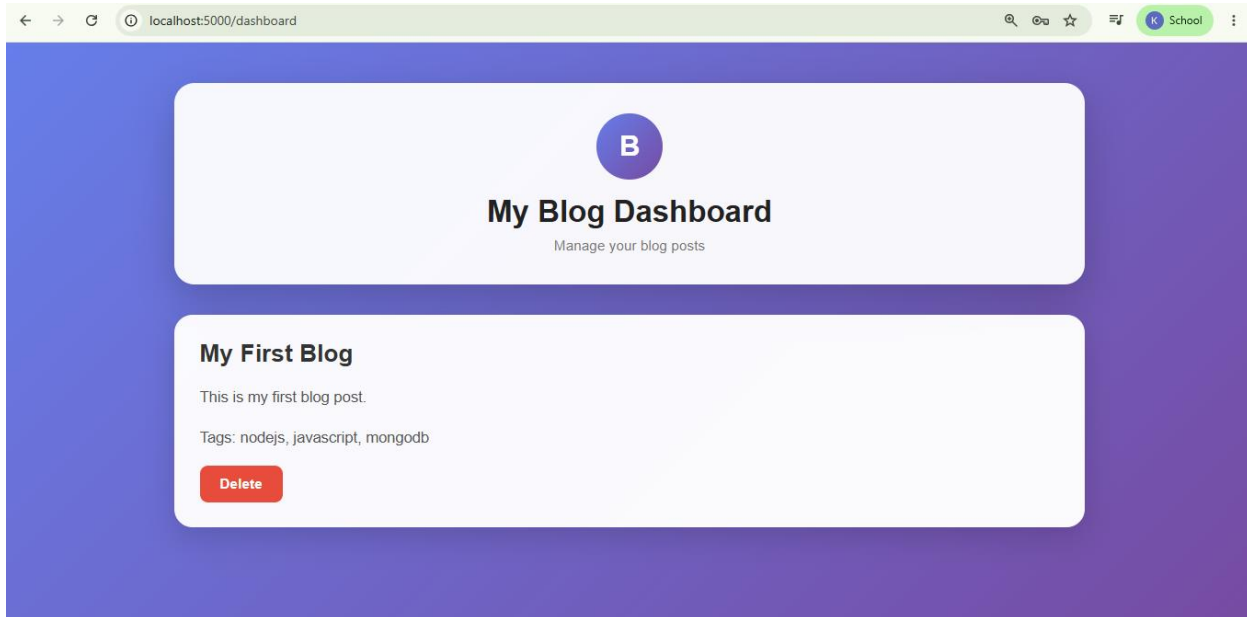

Post create

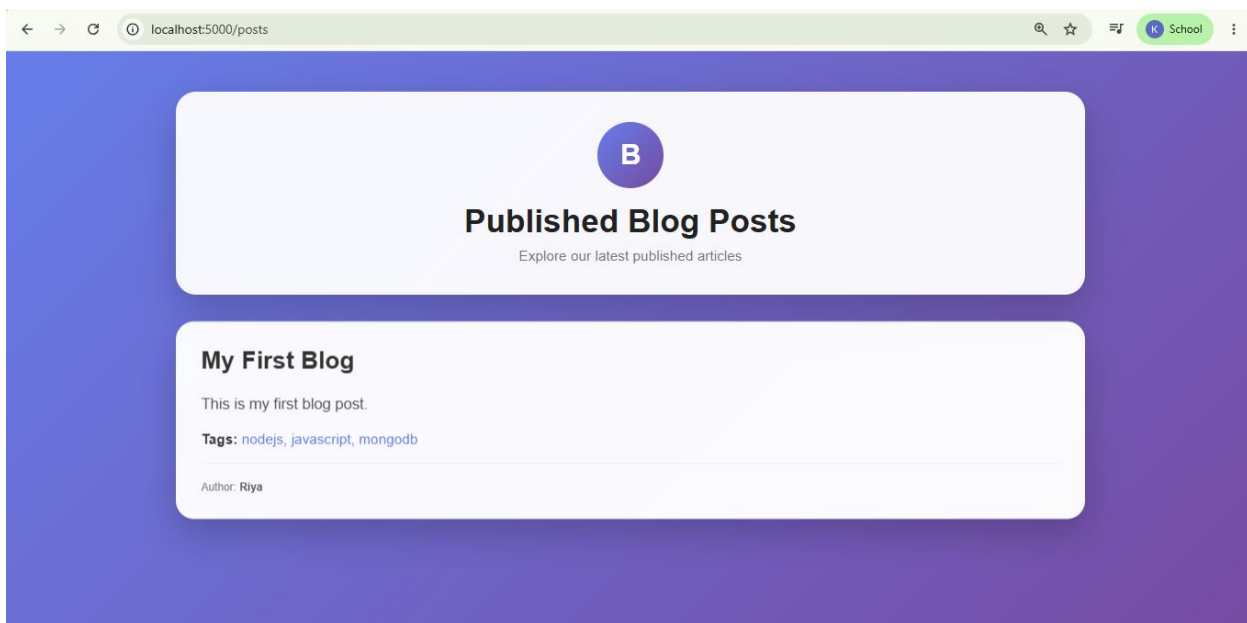

Secure Signup for Bookstore Customers



The screenshot shows a web browser with the address bar displaying 'localhost:5000/dashboard'. The page content includes a purple header, a main area with a 'My Blog Dashboard' title and a 'Manage your blog posts' button, and a footer area with 'No posts found.' The right side of the image shows the browser's developer tools, specifically the Network tab. A request to 'posts' is selected, and the 'Headers' sub-tab is active. The 'Request Headers' section is expanded, showing various headers like 'Accept', 'Accept-Encoding', 'Accept-Language', 'Authorization', 'Connection', 'Host', 'If-None-Match', 'Sec-CH-UA', and 'User-Agent'. The 'Authorization' header value is highlighted with a red box.

local:localhost:5000/dashboard

My Blog Dashboard

Manage your blog posts

No posts found.

Elements Console Sources Network Performance

Filter

All Fetch/XHR Doc CSS JS Font Img Media Manifest Socket Wasm Other

20 ms 40 ms 60 ms 80 ms 100 ms

Name	X	Headers	Preview	Response	Initiator	Timing																
posts	X	- X-Frame-Options - X-Permitted-Cross-Domain-Policies - X-Xss-Protection	- none 0	SAMEORIGIN																		
▼ Request Headers																						
☐ Raw <table> <tr> <td>Accept</td> <td>*/*</td> </tr> <tr> <td>Accept-Encoding</td> <td>gzip, deflate, br, zstd</td> </tr> <tr> <td>Accept-Language</td> <td>en-IN,en;q=0.9,gu-IN;q=0.8,gu;q=0.7,en-GB;q=0.6,en-US;q=0.5</td> </tr> <tr> <td>Authorization</td> <td>Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VybmQ1Ij2YTg4MmIjYjY0OGVzY2VhbnYyY4OGh3ZDViLCJyb2x1IjoiaW1lc1IsIm1hdCI6MTc0ODU5MTExYywiZXN1IjoxIjz4NjIc3NTEzfQ.zBz3rqxLHPH0EmbnIc36SpP2MnyxV0140GH4IV71oU</td> </tr> <tr> <td>Connection</td> <td>keep-alive</td> </tr> <tr> <td>Host</td> <td>localhost:5000</td> </tr> <tr> <td>If-None-Match</td> <td>W/"24-YA2aaqoHn765gtFFK4UBGqVP1w"</td> </tr> <tr> <td>Sec-CH-UA</td> <td>"Chromium";v="152", "NotA_Brand";v="24", "Google Chrome";v="152"</td> </tr> </table>							Accept	*/*	Accept-Encoding	gzip, deflate, br, zstd	Accept-Language	en-IN,en;q=0.9,gu-IN;q=0.8,gu;q=0.7,en-GB;q=0.6,en-US;q=0.5	Authorization	Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VybmQ1Ij2YTg4MmIjYjY0OGVzY2VhbnYyY4OGh3ZDViLCJyb2x1IjoiaW1lc1IsIm1hdCI6MTc0ODU5MTExYywiZXN1IjoxIjz4NjIc3NTEzfQ.zBz3rqxLHPH0EmbnIc36SpP2MnyxV0140GH4IV71oU	Connection	keep-alive	Host	localhost:5000	If-None-Match	W/"24-YA2aaqoHn765gtFFK4UBGqVP1w"	Sec-CH-UA	"Chromium";v="152", "NotA_Brand";v="24", "Google Chrome";v="152"
Accept	*/*																					
Accept-Encoding	gzip, deflate, br, zstd																					
Accept-Language	en-IN,en;q=0.9,gu-IN;q=0.8,gu;q=0.7,en-GB;q=0.6,en-US;q=0.5																					
Authorization	Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VybmQ1Ij2YTg4MmIjYjY0OGVzY2VhbnYyY4OGh3ZDViLCJyb2x1IjoiaW1lc1IsIm1hdCI6MTc0ODU5MTExYywiZXN1IjoxIjz4NjIc3NTEzfQ.zBz3rqxLHPH0EmbnIc36SpP2MnyxV0140GH4IV71oU																					
Connection	keep-alive																					
Host	localhost:5000																					
If-None-Match	W/"24-YA2aaqoHn765gtFFK4UBGqVP1w"																					
Sec-CH-UA	"Chromium";v="152", "NotA_Brand";v="24", "Google Chrome";v="152"																					

1 / 2 requests

Question 4

Defining Customer and Admin Roles

The image shows a development environment with VS Code and MongoDB Compass. In VS Code, the `User.js` file defines a Mongoose schema for users. The `role` field is highlighted with a red box, showing an enum with values `"user"` and `"admin"`, and a default value of `"user"`.

```
const userSchema = new mongoose.Schema({
  email: {
    type: String,
    unique: true,
    lowercase: true,
    trim: true
  },
  password: {
    type: String,
    required: true
  },
  role: {
    type: String,
    enum: ["user", "admin"],
    default: "user"
  },
  profilePicture: {
    type: String,
    default: null
  },
  timestamps: true
});



module.exports = mongoose.model("User", userSchema);
```

MongoDB Compass displays the `users` collection with three documents. The `role` field is highlighted with a red box for each document.

_id	name	email	password	role	profilePicture	__v
6a885b52548f3efb688bad6	Khushi	khushi@gmail.com	52b5105tl2svxTs8tp32ozb8.WVubNfpBlFHGcf2jZgECLPGGAJAXFIqfs	admin	null	0
6a9ba3e742443a4f265488ef	Khushi	kpatel@gmail.com	123456	user	null	0
6a9baa7842443a4f265488f1	Riya					

Question 5

Admin-Only Access to the Inventory Dashboard

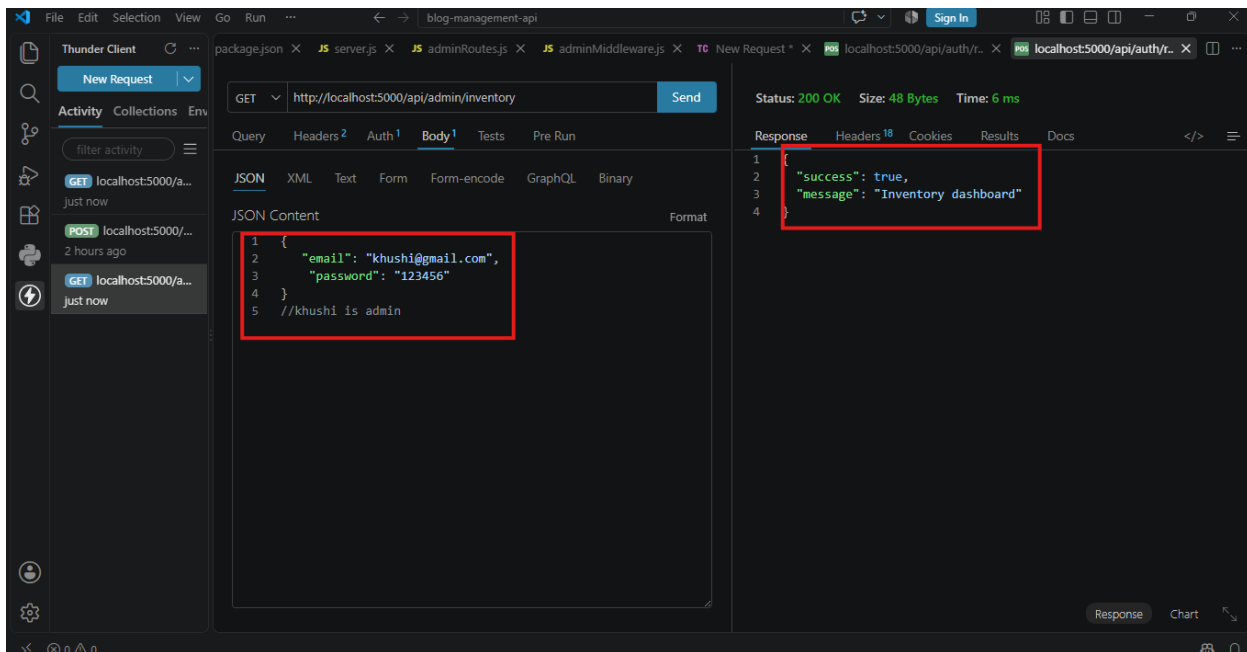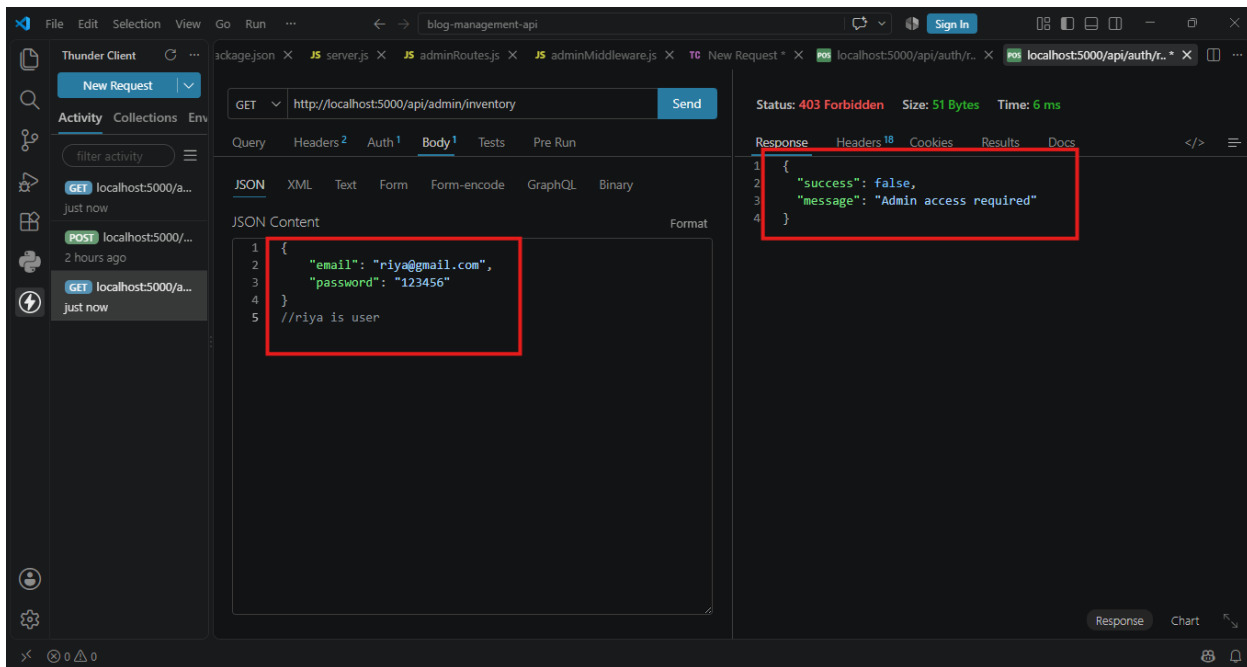

Question 6

Cancelling an Order — Customer or Admin Only

