

[Assignment: 2]

[subject: WDD]


Name : Prajapati Khyati

Roll no : 1305

Div : c

Q-1


Code

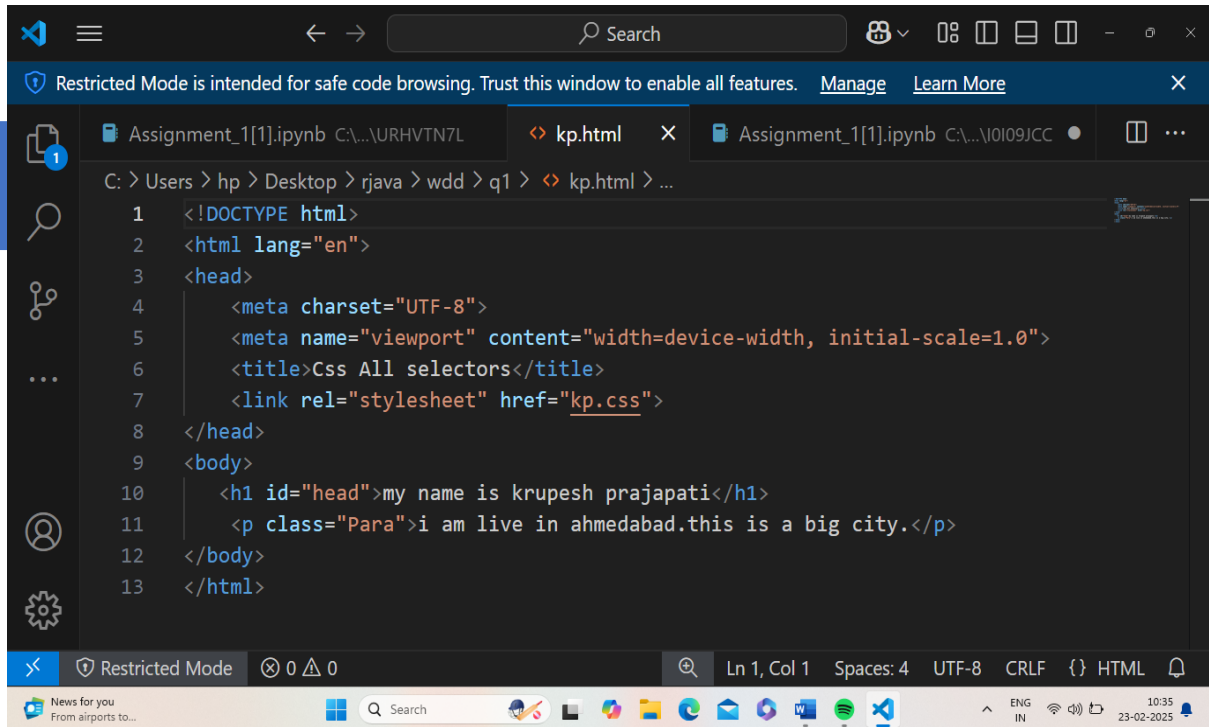

The screenshot shows the Visual Studio Code editor in Restricted Mode. The file explorer on the left shows the file 'kp.html' selected. The editor displays the following HTML code:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Css All selectors</title>
7   <link rel="stylesheet" href="kp.css">
8 </head>
9 <body>
10   <h1 id="head">my name is krupesh prajapati</h1>
11   <p class="Para">i am live in ahmedabad.this is a big city.</p>
12 </body>
13 </html>
```

The status bar at the bottom indicates 'Ln 1, Col 1', 'Spaces: 4', 'UTF-8', 'CRLF', and 'HTML'.

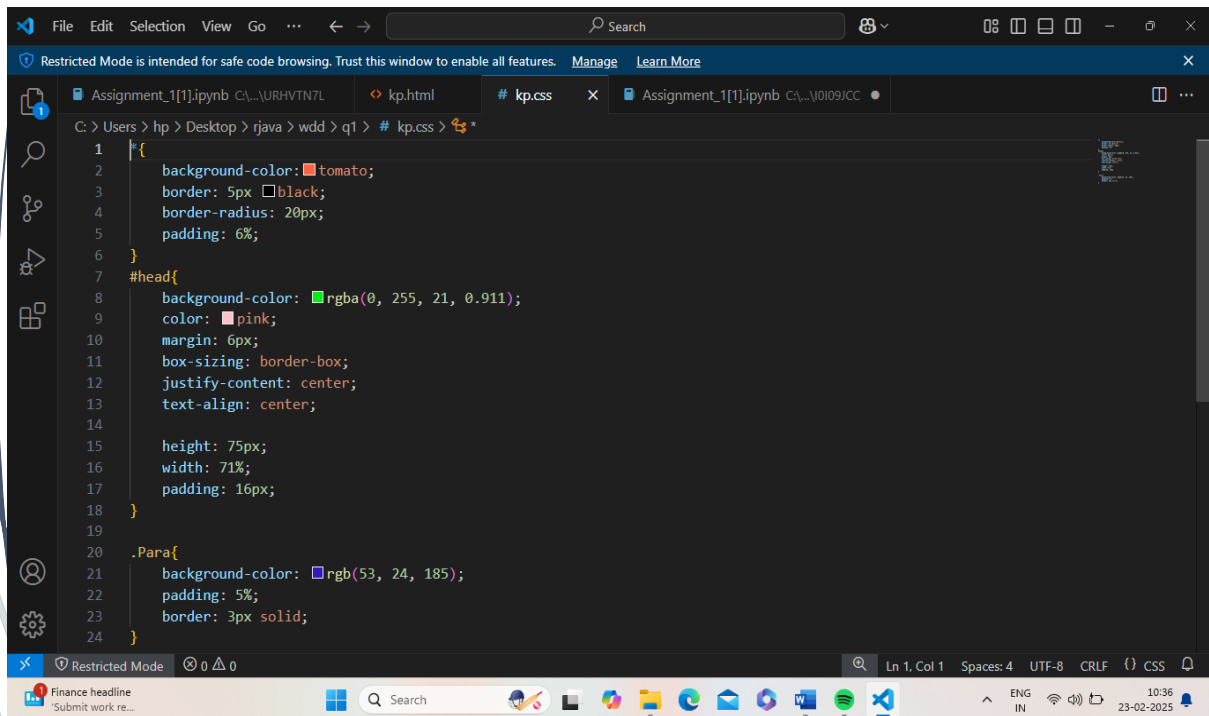

The screenshot shows the Visual Studio Code editor in Restricted Mode. The file explorer on the left shows the file 'kp.css' selected. The editor displays the following CSS code:

```
1 {
2   background-color: tomato;
3   border: 5px solid black;
4   border-radius: 20px;
5   padding: 6%;
6 }
7 #head{
8   background-color: rgba(0, 255, 21, 0.911);
9   color: pink;
10  margin: 6px;
11  box-sizing: border-box;
12  justify-content: center;
13  text-align: center;
14
15  height: 75px;
16  width: 71%;
17  padding: 16px;
18 }
19
20 .Para{
21   background-color: rgb(53, 24, 185);
22   padding: 5%;
23   border: 3px solid;
24 }
```


The status bar at the bottom indicates 'Ln 1, Col 1', 'Spaces: 4', 'UTF-8', 'CRLF', and 'CSS'.

Name : Prajapati Khyati

Roll no : 1305

Div : c

Output

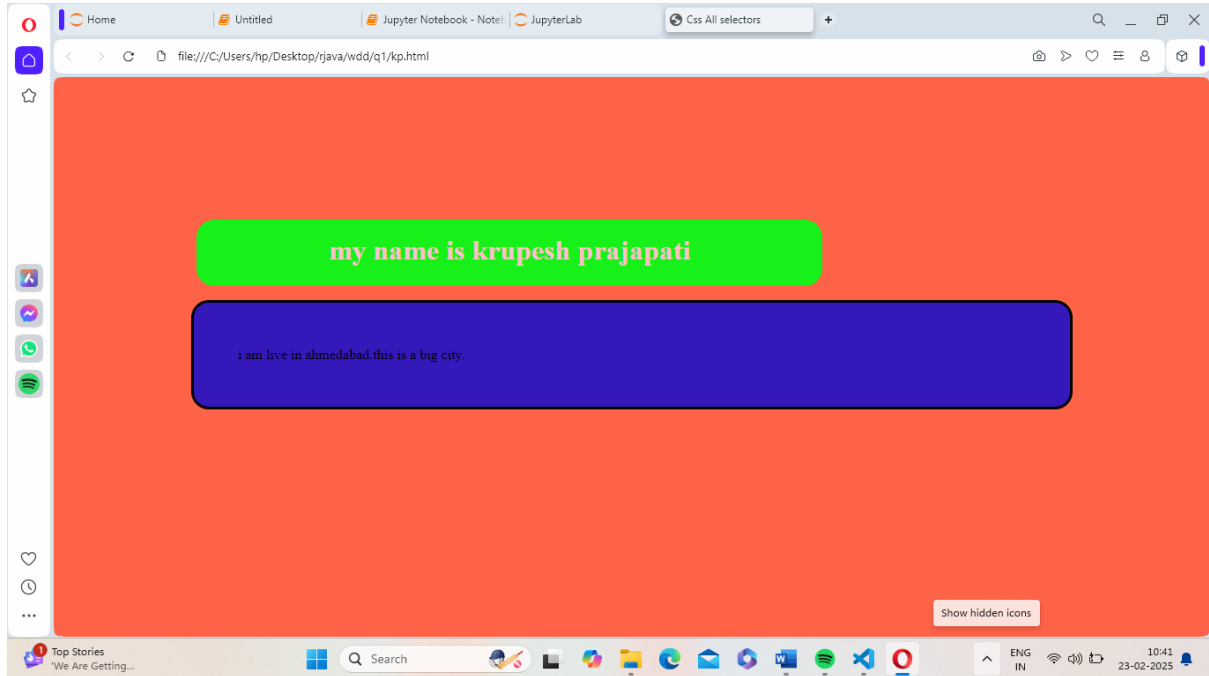


Name : Prajapati Khyati

Roll no : 1305

Div : c

Q-2


Code

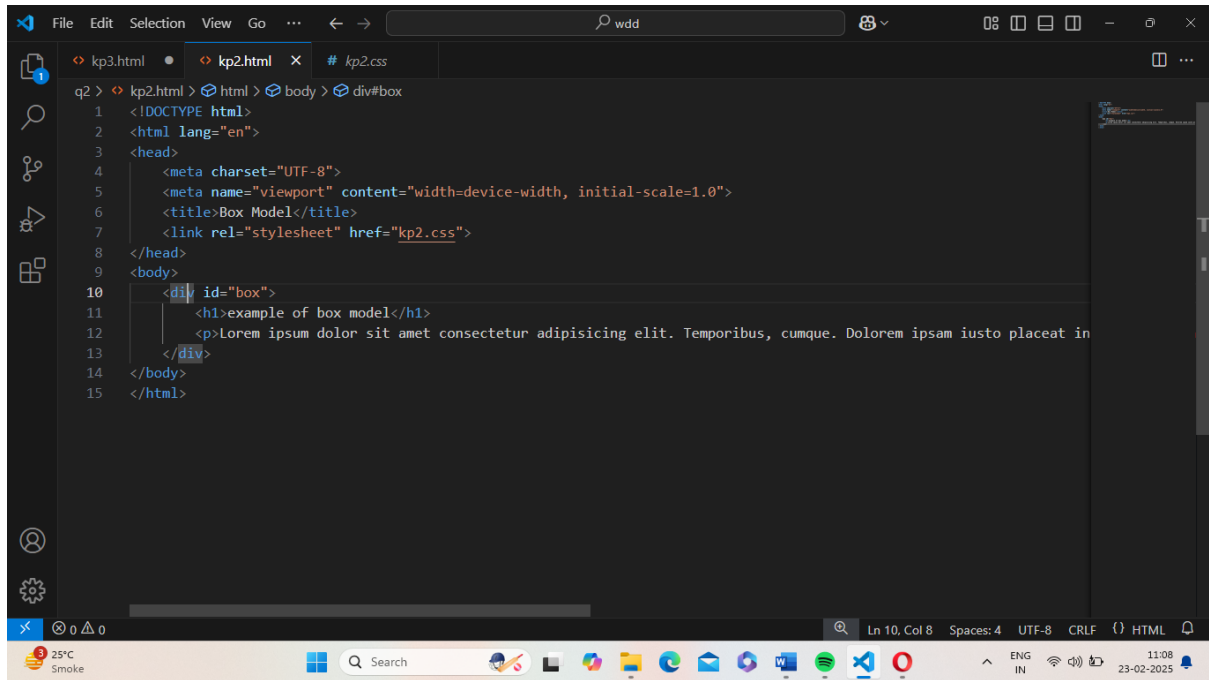

The screenshot shows the Visual Studio Code editor with three files open: kp3.html, kp2.html, and kp2.css. The active file is kp2.html, which contains the following HTML code:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Box Model</title>
7   <link rel="stylesheet" href="kp2.css">
8 </head>
9 <body>
10  <div id="box">
11    <h1>example of box model</h1>
12    <p>Lorem ipsum dolor sit amet consectetur adipisicing elit. Temporibus, cumque. Dolorem ipsam iusto placeat in
13  </div>
14 </body>
15 </html>
```

The status bar at the bottom indicates the cursor is at Line 10, Column 8, with 4 spaces, UTF-8 encoding, and CRLF line endings. The system tray shows a temperature of 25°C and the date 23-02-2025.

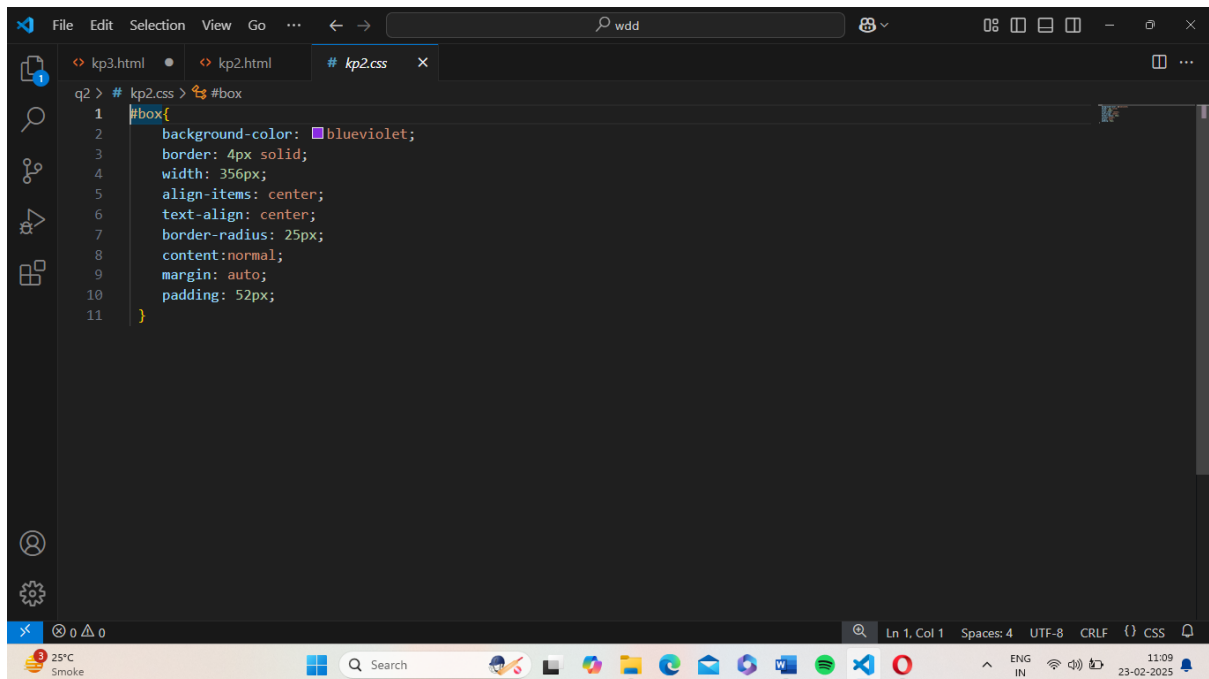

The screenshot shows the Visual Studio Code editor with the same three files open. The active file is kp2.css, which contains the following CSS code for the #box selector:

```
1 #box{
2   background-color: blueviolet;
3   border: 4px solid;
4   width: 356px;
5   align-items: center;
6   text-align: center;
7   border-radius: 25px;
8   content:normal;
9   margin: auto;
10  padding: 52px;
11 }
```


The status bar at the bottom indicates the cursor is at Line 1, Column 1, with 4 spaces, UTF-8 encoding, and CRLF line endings. The system tray shows a temperature of 25°C and the date 23-02-2025.

Name : Prajapati Khyati

Roll no : 1305

Div : c

Output

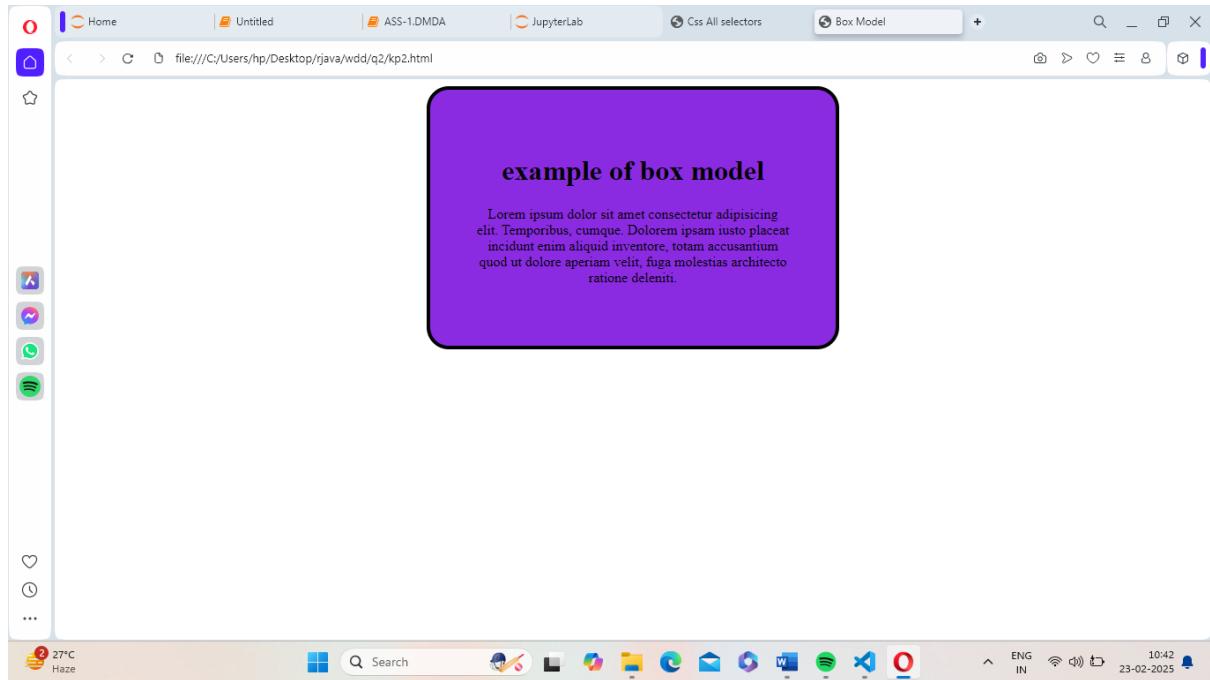

Name : Prajapati Khyati

Roll no : 1305

Div : c

Q-3

Code

```
File Edit Selection View Go ... wdd
kp3.html
q3 > kp3.html > html > body > form > table > tr > td
1 <html>
2 <head>
3 <title>student registration form</title>
4 </head>
5 <body>
6 <form>
7 <h2 align="center" ><font color="blue" ><u> Student Registration Form </u></h2>
8 <table bgcolor="skyblue" style="color:black;" align="center" width="60%" >
9 <tr>
10 <td><label for ="uname" > Name</label></td>
11 <td><input type="text" id="uname" name="uname" >
12 </td> </tr>
13 <tr>
14 <td><label for ="email">Email Id</label></td>
15 <td><input type="email" id="email" name="email" >
16 </td></tr>
17 <tr>
18 <td><label > Gender </label></td>
19 <td><input type="radio" id="male" name="gender" value="male" /> Male
20 <input type="radio" id="female" name="gender" value="female" />Female </td></br> </tr>
21 <tr>
22 <td><label > Hobbies</label></td>
23 <td><input type="checkbox" id="Drawing" name="Drawing" value="Drawing"/>Drawing
24 <input type="checkbox" id="Singing" name="Singing" value="Singing"/>Singing
25 <input type="checkbox" id="Dancing" name="Dancing" value="Dancing"/> Dancing
26 <input type="checkbox" id=" Sketing" name=" Sketing" value=" Sketing"/> Sketing</br>
27 </td></tr>
28 </table>
29 </form>
30 </body>
31 </html>
```


```
File Edit Selection View Go ... wdd
kp3.html x
q3 > kp3.html > html > body > form > table > tr > td
1 <html>
5 <body>
6 <form>
8 <table bgcolor="skyblue" style="color:black;" align="center" width="60%" >
21 <tr>
23 <td><input type="checkbox" id="Drawing" name="Drawing" value="Drawing"/>Drawing
24 <input type="checkbox" id="Singing" name="Singing" value="Singing"/>Singing
25 <input type="checkbox" id="Dancing" name="Dancing" value="Dancing"/> Dancing
26 <input type="checkbox" id=" Sketing" name=" Sketing" value=" Sketing"/> Sketing</br>
27 <input type="checkbox" id="Others" name="Others" value="Others"/>Others
28 <input type="text" id="in" name="in" value="" placeholder="Ex.teaching"/>
29 </td></br> </tr>
30 <tr>
31 <td><input type="submit" value="Submit" >
32 <input type="reset" value="Reset" ></td>
33 </tr>
34 </table>
35 </form>
36 </body>
37 </html>
38
```

Name : Prajapati Khyati

Roll no : 1305

Div : c

Output

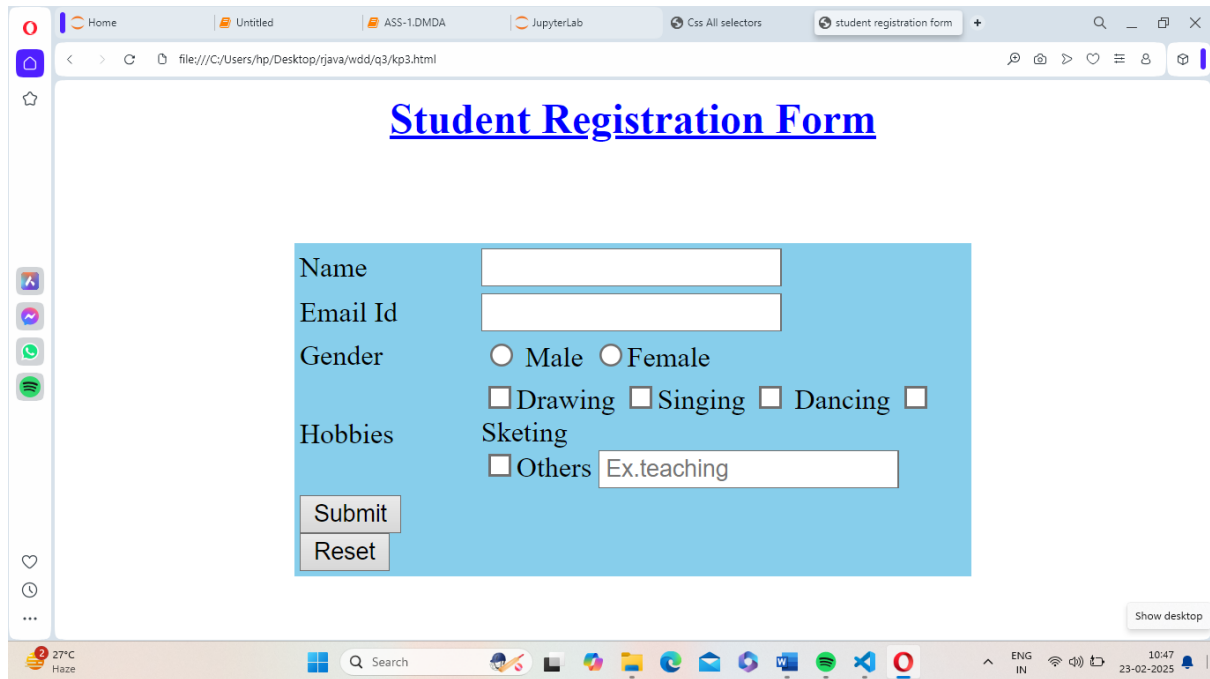

The screenshot shows a web browser window with the title 'student registration form'. The address bar shows the file path: file:///C:/Users/hp/Desktop/rjava/wdd/q3/kp3.html. The main content area displays a form titled 'Student Registration Form' in blue text. The form is contained within a light blue rectangular box. It includes the following fields and controls:

- Name:** A text input field.
- Email Id:** A text input field.
- Gender:** Two radio buttons labeled 'Male' and 'Female'.
- Hobbies:** Four checkboxes labeled 'Drawing', 'Singing', 'Dancing', and 'Others'. The 'Others' checkbox is selected, and a text input field next to it contains the text 'Ex.teaching'.
- Submit:** A button.
- Reset:** A button.

The browser's taskbar at the bottom shows the Windows logo, a search bar, and several application icons. The system tray on the right indicates the temperature is 27°C, the weather is 'Haze', and the time is 10:47 on 23-02-2025.


Name : Prajapati Khyati

Roll no : 1305

Div : c


Q-4

Code

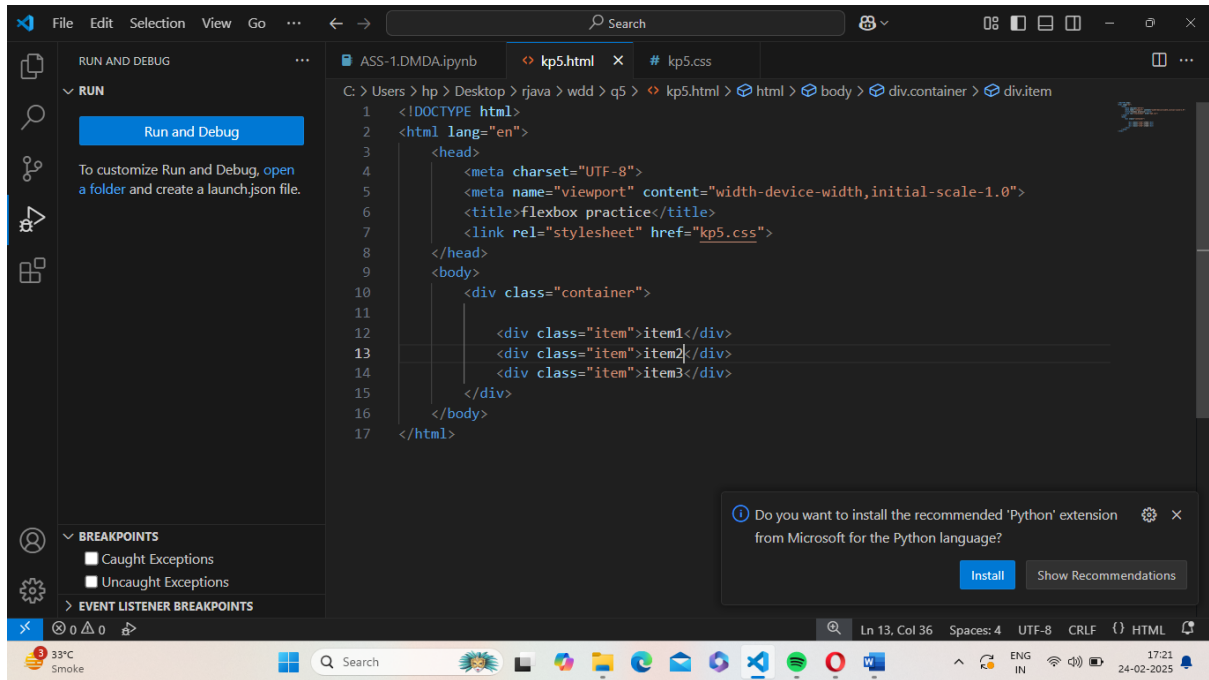

The screenshot shows the Visual Studio Code editor with a file named `kp5.html` open. The code is an HTML document using Flexbox. The `body` contains a `div` with the class `container`, which contains three `div` elements with the class `item`, labeled `item1`, `item2`, and `item3`. The left sidebar shows the 'RUN AND DEBUG' panel with a 'Run and Debug' button. A notification at the bottom right asks if the user wants to install the recommended 'Python' extension from Microsoft.

```
1 <!DOCTYPE html>
2 <html lang="en">
3   <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width,initial-scale=1.0">
6     <title>flexbox practice</title>
7     <link rel="stylesheet" href="kp5.css">
8   </head>
9   <body>
10    <div class="container">
11      <div class="item">item1</div>
12      <div class="item">item2</div>
13      <div class="item">item3</div>
14    </div>
15  </body>
16 </html>
```

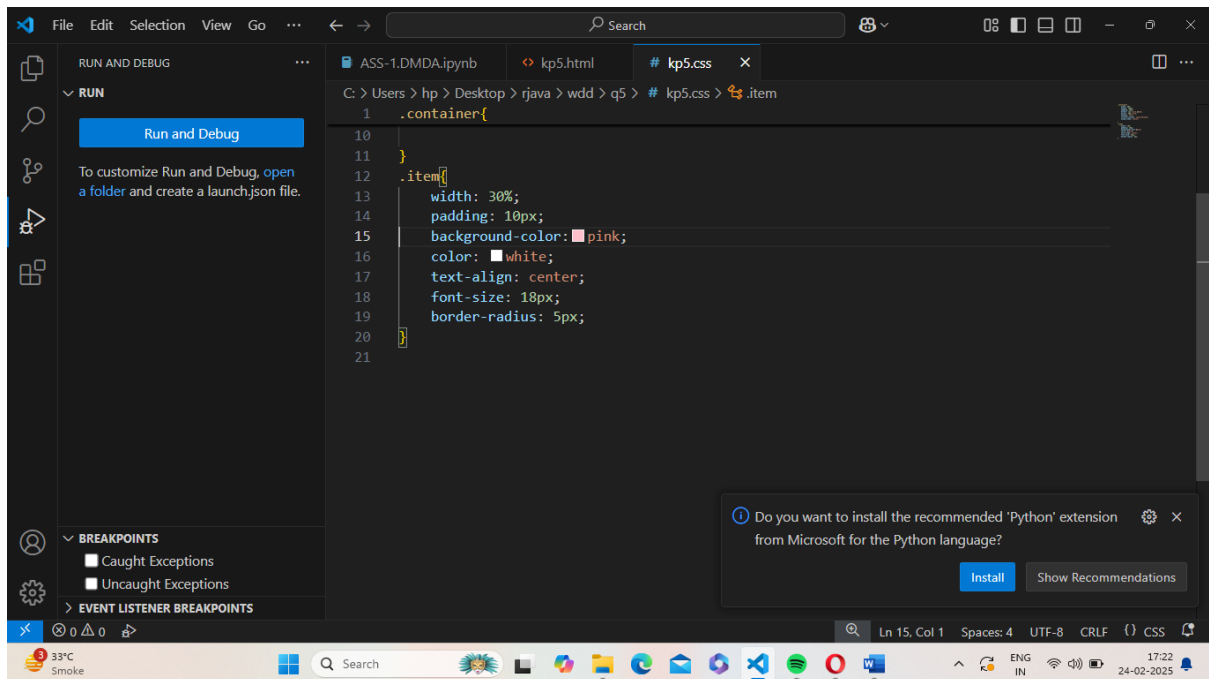

The screenshot shows the Visual Studio Code editor with a file named `kp5.css` open. The code defines styles for the `.container` and `.item` classes. The `.container` class is a flex container. The `.item` class has a width of 30%, padding of 10px, a pink background color, white text color, centered text alignment, a font size of 18px, and a border radius of 5px. The left sidebar shows the 'RUN AND DEBUG' panel with a 'Run and Debug' button. A notification at the bottom right asks if the user wants to install the recommended 'Python' extension from Microsoft.


```
1 .container{
10
11 }
12 .item{
13   width: 30%;
14   padding: 10px;
15   background-color: pink;
16   color: white;
17   text-align: center;
18   font-size: 18px;
19   border-radius: 5px;
20
21 }
```

Output

Name : Prajapati Khyati

Roll no : 1305

Div : c

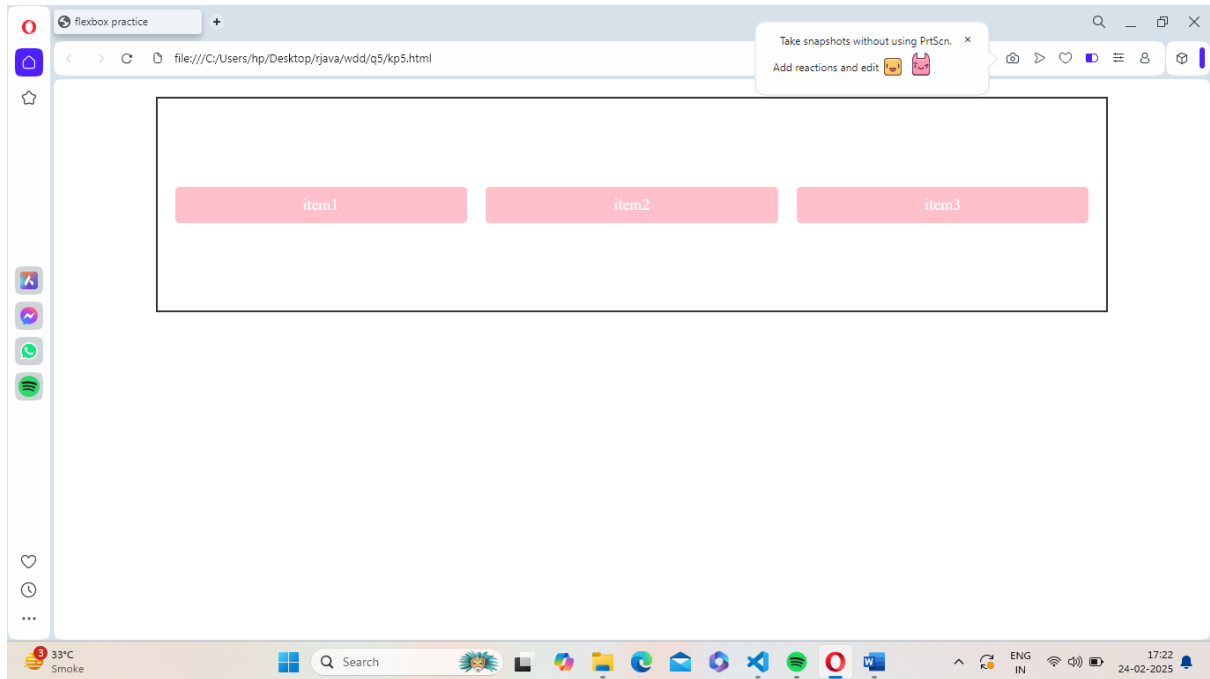


Name : Prajapati Khyati

Roll no : 1305

Div : c

Q-5


Code

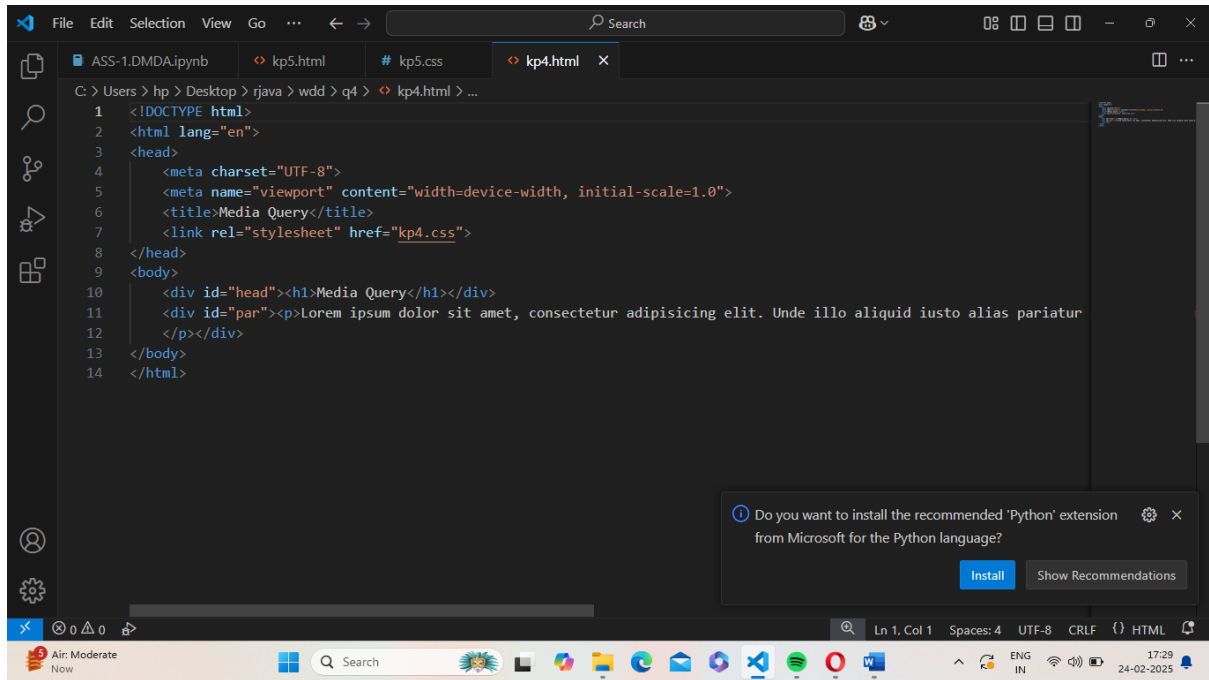

The screenshot shows the Visual Studio Code editor with the file 'kp4.html' open. The code is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Media Query</title>
7   <link rel="stylesheet" href="kp4.css">
8 </head>
9 <body>
10  <div id="head"><h1>Media Query</h1></div>
11  <div id="par"><p>Lorem ipsum dolor sit amet, consectetur adipisicing elit. Unde illo aliquid iusto alias pariatur
12  </p></div>
13 </body>
14 </html>
```

A notification box at the bottom right asks: "Do you want to install the recommended 'Python' extension from Microsoft for the Python language?" with buttons for "Install" and "Show Recommendations".

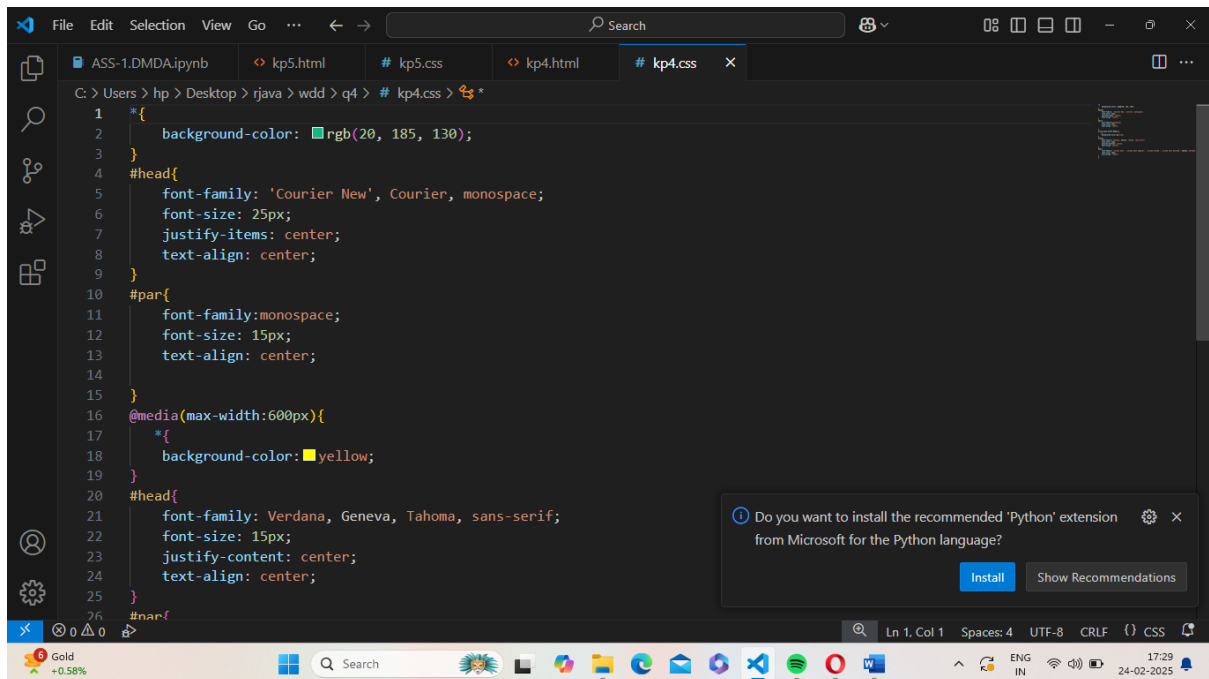

The screenshot shows the Visual Studio Code editor with the file 'kp4.css' open. The code is as follows:

```
1 *{
2   background-color: rgb(20, 185, 130);
3 }
4 #head{
5   font-family: 'Courier New', Courier, monospace;
6   font-size: 25px;
7   justify-items: center;
8   text-align: center;
9 }
10 #par{
11   font-family: monospace;
12   font-size: 15px;
13   text-align: center;
14 }
15 }
16 @media(max-width:600px){
17   *{
18     background-color: yellow;
19   }
20   #head{
21     font-family: Verdana, Geneva, Tahoma, sans-serif;
22     font-size: 15px;
23     justify-content: center;
24     text-align: center;
25   }
26   #par{
```


A notification box at the bottom right asks: "Do you want to install the recommended 'Python' extension from Microsoft for the Python language?" with buttons for "Install" and "Show Recommendations".

Name : Prajapati Khyati

Roll no : 1305

Div : c

Output

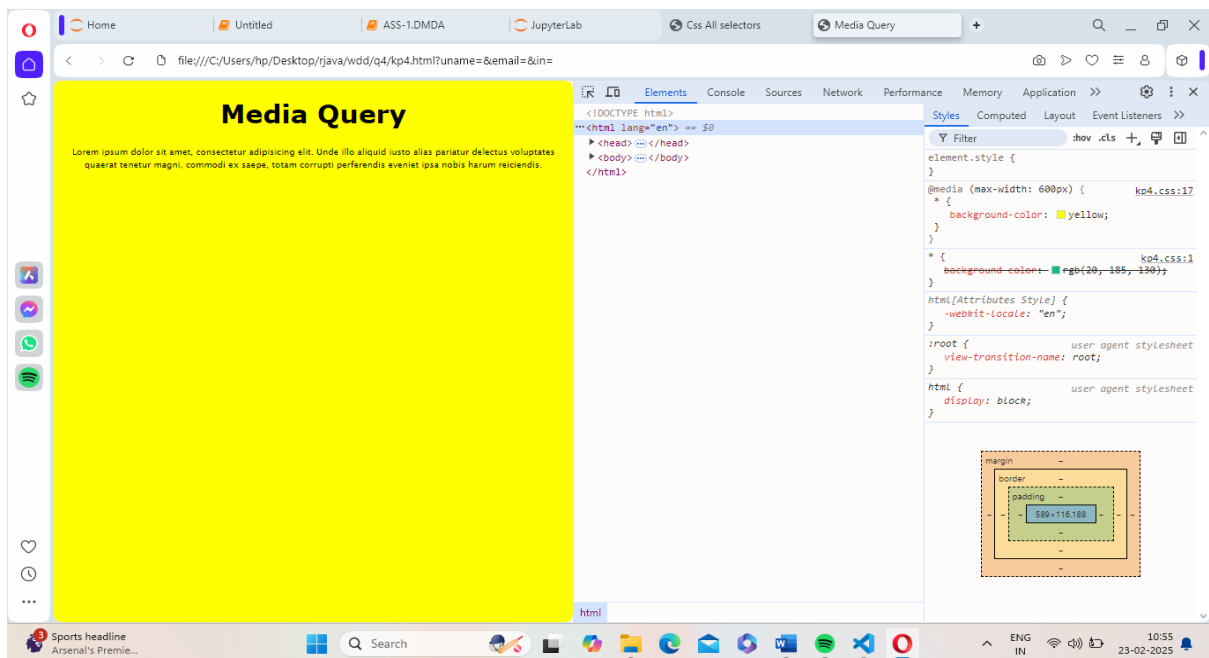

Name : Prajapati Khyati

Roll no : 1305

Div : c

