폼 css클래스
input.form-control[-크기] //width 속성이 100%다.

체크폼, 라디오폼 div.form-check >
label.form-check-label > input.form-check-input

선택폼
label.form-label   select.form-select > option

<form>

<==여기에 들어가 내용들

<button submit>
</form>

2025년 상반기 K-디지털 트레이닝

Form

[KB] IT's Your Life

KB 국민은행

☑ form 엘리먼트 구성요소

- **.form-control**
  - form 엘리먼트에 배정하는 클래스
  - width 속성이 100%   부모로 크기를 잡아야함

```
<div class="mb-3 mt-3">
  <label for="email">Email:</label>
  <input type="email" class="form-control" id="email" placeholder="Enter email" name="email">
</div>
```

Email:

Enter email

- **.form-control-lg, .form-control-sm**
  - 크기 설정 클래스

2

📝 form-input.html

```html
<div class="container mt-3">
  <form >
    <div class="mb-3 mt-3">
      <label for="email">Email:</label>
      <input type="email" class="form-control" id="email" placeholder="Enter email" name="email">
    </div>
    <div class="mb-3">
      <label for="pwd">Password:</label>
      <input type="password" class="form-control" id="pwd" placeholder="Enter password" name="pswd">
    </div>
    <div class="form-check mb-3">
      <label class="form-check-label">
        <input class="form-check-input" type="checkbox" name="remember"> Remember me
      </label>
    </div>
    <button type="submit" class="btn btn-primary">Submit</button>
  </form>
</div>
```
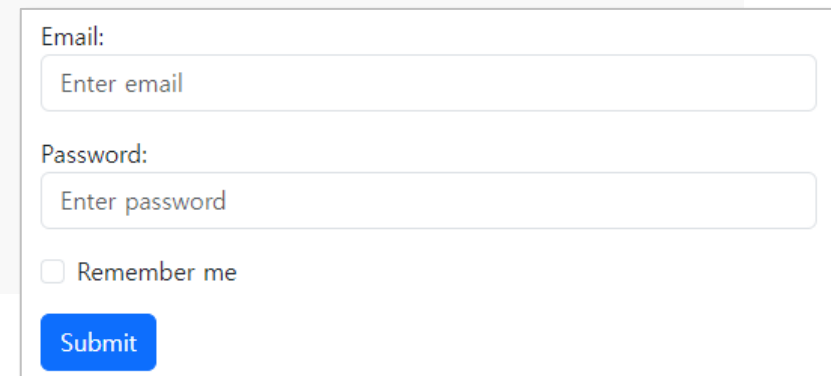
이게 더
직관적이죠?

Email:

Enter email

Password:

Enter password

☐ Remember me

Submit

✅ **select**

- ○ .form-select

Select list (select one):

| 1 | ⌄ |

Mutiple select list (hold shift to select more than one):

```
1
2
3
4
```

Submit

✏️ form-select.html

```html
<div class="container mt-3">
  <form>
    <label for="sel1" class="form-label">Select list (select one):</label>
    <select class="form-select" id="sel1" name="sellist1">
      <option>1</option>
      <option>2</option>
      <option>3</option>
      <option>4</option>
    </select>
    <br>

    <label for="sel2" class="form-label">Mutiple select list (hold shift to select more than one):</label>
    <select multiple class="form-select" id="sel2" name="sellist2">
      <option>1</option>
      <option>2</option>
      <option>3</option>
      <option>4</option>
      <option>5</option>
    </select>
    <button type="submit" class="btn btn-primary mt-3">Submit</button>
  </form>
</div>
```
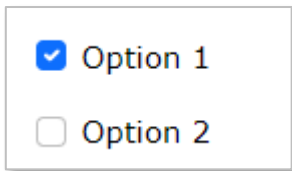
5

☑ checkbox, radio

- ○ .form-check
- ○ .form-check-input
- ○ .form-check-label

```html
<div class="form-check">
  <input class="form-check-input" type="checkbox" id="check1" name="option1" value="something" checked>
  <label class="form-check-label" for="check1">Option 1</label>
</div>
```

☑ Option 1
☐ Option 2

✎ form-check.html

```html
<div class="container mt-3">
  <form>
    <div class="form-check">
      <input type="checkbox" class="form-check-input" id="check1" name="option1" value="something" checked>
      <label class="form-check-label" for="check1">Option 1</label>
    </div>
    <div class="form-check">
      <input type="checkbox" class="form-check-input" id="check2" name="option2" value="something">
      <label class="form-check-label" for="check2">Option 2</label>
    </div>
    <div class="form-check">
      <input type="checkbox" class="form-check-input" disabled>
      <label class="form-check-label">Option 3</label>
    </div>
    <button type="submit" class="btn btn-primary mt-3">Submit</button>
  </form>
</div>
```

7

form-radio.html

```html
<div class="container mt-3">
  <form>
    <div class="form-check">
      <input type="radio" class="form-check-input" id="radio1" name="optradio" value="option1" checked>
      <label class="form-check-label" for="radio1">Option 1</label>
    </div>
    <div class="form-check">
      <input type="radio" class="form-check-input" id="radio2" name="optradio" value="option2">
      <label class="form-check-label" for="radio2">Option 2</label>
    </div>
    <div class="form-check">
      <input type="radio" class="form-check-input" disabled>
      <label class="form-check-label">Option 3</label>
    </div>
    <button type="submit" class="btn btn-primary mt-3">Submit</button>
  </form>
</div>
```