Extending Airflow DAGs with new specifications (Exercise)

In this train, we'll learn how to extend a given Airflow DAG according to new specifications.

Learning objectives

> - Extend a given Airflow DAG according to new specifications.

[Exercise] Extending the pipeline

Having gained a better understanding of Airflow and its operation, it's now time for you to assess your understanding by extending Linda's current workflow. Here, Linda is keen to have not only a silent message printed out to the console when her workflow is run, but she would also like you to create a log file that can permanently capture the current state of the image folder to which her kitten images are saved. To perform this update for Linda, you'll need to extend the current definition of the `Basic_AirFlow_Pipeline` DAG by including an additional task and its dependence within the current workflow. Here are some details to guide your implementation: - Name the new task `write_results_to_file`. - This task can be implemented using a simple `BashOperator`. - Use your knowledge of Linux command line utilities to alter the command run by the `pipeline_notification` task, making it write the notification string to a file instead of to [`stdout`](https://www.computerhope.com/jargon/s/stdout.htm). - Your results should be saved to `/usr/local/airflow/kitten_state.txt`. - This new task should run in parallel with the `pipeline_notification` task. The resulting DAG with the updated task and dependence is represented in Figure 15.

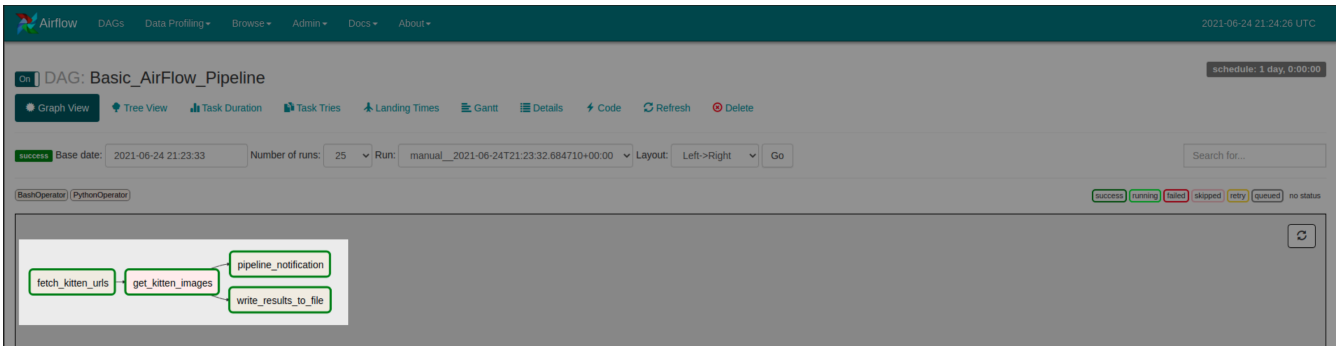


Figure 15: The graph view of your DAG after successful implementation of the additional exercise.