

The Ocean Health Index Assessment Manual

Contents

1	Introduction	5
1.1	The Ocean Health Index	5
2	What is OHI+?	5
2.1	The Process of OHI+: Phase Three	6
3	Overview of the OHI WebApp	6
3.1	Background	6
3.2	Using the WebApp	7
3.3	The App Page	7
3.4	The App's Data tab	9
3.4.1	Overview of display options	9
3.4.2	Overview of variable options	11
3.5	The App's Compare tab	11
4	Conducting an Assessment	11
4.1	What to expect when conducting an assessment	12
4.1.1	Timeline	12
4.2	Where to start	12
4.3	Points to remember	13
4.4	Checklist: How to prepare for using the Toolbox	14
4.5	Discovering and Gathering Appropriate Data and Indicators	15
4.5.1	Data sources	15
4.5.2	Gathering responsibilities	16
4.5.3	The process of discovery	16
4.5.4	Requirements for data and indicators	16
4.5.4.1	Relevance to ocean health	16
4.5.4.2	Accessibility	18
4.5.4.3	Quality	18
4.5.4.4	Reference point	18
4.5.4.5	Appropriate spatial scale	18
4.5.4.6	Appropriate temporal scale	18
4.5.5	Example: US West Coast data discovery	18

4.5.5.1	Reasons data were excluded	19
4.6	Best approaches for goals, pressures and resilience	19
4.6.0.2	Synergies and Goals to approach together	20
4.6.0.3	Do Habitat-Based Goals Together	20
4.6.0.4	Linkages: Note climate change connections	20
4.6.0.5	Linkages: Note the influence of trash	20
4.6.0.6	Strategies for Assessment	21
4.6.1	Using this Guide	21
4.6.2	Where to start?	21
4.6.2.1	To consider as you get started	21
4.6.3	Which data are available?	21
4.6.4	What scale is appropriate?	22
4.6.5	What's important spatially?	22
4.6.5.1	Reference Points	22
4.7	Pressures and resilience	22
4.7.1	<i>Ideal Approach:</i>	23
4.7.1.1	Pressure and resilience categories	23
4.7.2	Pressures and resilience matrices	23
4.7.3	Incorporating local pressures in your assessment	26
4.7.3.1	Including pressures from global assessments	26
4.8	Guide to searching for resilience metrics	27
4.8.1	Ideal Approach	27
4.8.1.1	Practical Considerations	27
4.8.1.2	Scoring: Turning Qualitative into Quantitative	28
4.8.1.3	Data sources	29
4.8.2	Incorporating local resilience measures in your assessment	29
4.8.2.1	Including resilience measures from global assessments	29
5	The Ocean Health Index Toolbox	30
5.1	File System for Assessment Repositories	31
5.1.1	Assessments and scenarios	31
5.1.2	<i>layers.csv</i>	31
5.1.3	<i>layers</i> folder	34
5.1.4	<i>conf</i> folder	35
5.1.4.1	<i>config.R</i>	35
5.1.4.2	<i>functions.R</i>	35
5.1.4.3	<i>goals.csv</i>	35

5.1.4.4	<i>pressures_matrix.csv</i>	36
5.1.4.5	<i>resilience_matrix.csv</i>	36
5.1.4.6	<i>resilience_weights.csv</i>	36
5.1.5	<i>install_ohicore.R</i>	36
5.1.6	<i>launch_app_code.R</i>	36
5.1.7	<i>calculate_scores.R</i>	36
5.1.8	<i>scores.csv</i>	36
5.1.9	<i>spatial</i> folder	38
5.1.10	<i>layers-empty_swapping-global-mean.csv</i>	38
5.1.11	Relaunching the Toolbox	38
5.2	Formatting Data for the Toolbox	38
5.2.1	Introduction	38
5.2.2	Gapfilling	39
5.2.2.1	Temporal gapfilling	39
5.2.2.2	Spatial gapfilling	41
5.2.3	Long formatting	42
6	Installing the Toolbox	43
6.1	Overview	44
6.2	GitHub	44
6.2.1	Learning GitHub	45
6.3	Accessing GitHub Repositories	45
6.3.1	Create a GitHub account	45
6.3.2	Install <i>git</i> software	45
6.3.3	Set up your Git Identity	47
6.3.4	Install the GitHub application	48
6.3.5	Create a folder called <i>github</i> on your computer	48
6.3.6	Clone your repository to your computer	49
6.3.7	Update permissions	49
6.3.8	Work locally	50
6.3.9	Syncing	50
6.3.10	Using the GitHub App to synchronize your repository	51
6.3.11	Working with R and RStudio	51
6.3.12	Using RStudio to synchronize your repository	53
6.3.13	Install the latest version of R and RStudio	54
6.4	GitHub repository architecture	55

7 Using the Toolbox	55
7.0.1 File Preparation Workflow	57
7.1 Modifying and creating data layers	57
7.1.1 Create data layers with proper formatting	59
7.1.2 Save data layers in the <i>layers</i> folder	59
7.1.3 Register data layers in <i>layers.csv</i>	59
7.1.4 Check pressures and resilience matrices	60
7.2 Modifying pressures matrices	60
7.2.1 Create the new pressure layers and save in the <i>layers</i> folder	61
7.2.2 Register the new pressure layers in <i>layers.csv</i>	61
7.2.3 Register the new layers in <i>pressure_matrix.csv</i>	61
7.2.3.1 Set the pressure category	62
7.2.3.2 Identify the goals affected and set the weighting	62
7.2.4 Modify the resilience matrix (if necessary)	62
7.3 Modifying resilience matrices	62
7.3.1 Updating resilience matrix with local habitat information	62
7.3.1.1 Global resilience layers	63
7.3.1.2 Determining how to modify these resilience layers	64
7.4 Modifying goal models	65
7.4.1 Update <i>functions.R</i>	66
7.4.2 Check and possibly update <i>goals.csv</i>	67
7.4.3 Example modification:	67
7.5 Removing goals	68
7.6 Modifying goals with categories	70
7.6.1 Example 1: Pressures	70
7.6.2 Example 2: Pressures	71
7.6.3 Example 3: Resilience	71
7.6.3.1 Resources	74
7.7 Notes about R	74
8 Frequently Asked Questions (FAQs)	74
8.1 Overall	75
8.2 Conceptual	75
8.3 Timing and Resources	75
8.4 Structure	76
8.5 Reference points	76
8.6 Appropriate data layers	77

8.7	Food Provision	78
8.8	Livelihoods & Economies	79
8.9	Tourism & Recreation	79
8.10	Natural Products	79
8.11	Species	79
8.12	Sense of Place	80
8.13	Pressures	80
9	Toolbox Troubleshooting	80
9.1	Error: RStudio won't push to GitHub	80
9.2	Loading RWorkspace on Restart	83
9.3	Calculating Pressures.	84
9.3.1	'The following components for [goal] are not in the aggregation layer [layer]...'	84
9.3.2	'Error in matrix...'	86
9.4	Calculating Resilience	86
9.4.1	'Error in match(x, table, nomatch = OL) : object id_num not found'	86

1 Introduction

1.1 The Ocean Health Index

The **Ocean Health Index (OHI)** project was created with a strong foundation in communication and collaboration. Following the initial publication by Halpern *et al.* 2012 in *Nature*, we have conducted global assessments annually (in 2013, 2014, and ongoing), and have conducted smaller-scale assessments for the U.S. West Coast (Halpern *et al.* 2014), Fiji (Selig *et al.* in press), and Brazil (Elfes *et al.* 2014).

We have also developed the **OHI Toolbox** and **WebApps** to enable any group to conduct independent assessments using the OHI framework and modifying it to their needs. The Toolbox enables the OHI framework to be customized to any area of interest, incorporating whatever goals, data, indicators, and priorities regarding ocean-derived benefits that are relevant and available to the chosen spatial scale. Information is presented through the WebApps, which are used for orientation, visualization, and reporting.

This manual provides information for:

1. Planning an assessment
2. Navigating the OHI WebApp to visualize data at global and regional scales
3. Modifying data and models within the Toolbox for an independent assessment
4. Guidance for frequently asked questions and troubleshooting

2 What is OHI+?

Your assessment is an example of independent assessment called Ocean Health Index+ (OHI+). At this stage of the process, you have **Learned** and **Planned** for the assessment, and are now ready to **Conduct** it.

The Ocean Health Index framework presents a highly tailorable approach ready to meet the needs and priorities of those who wish to use the ocean sustainably. Here you will learn how to conduct an Ocean Health Index+ (OHI+) assessment. The OHI+ approach adds new inputs and information to the overarching OHI framework that consist of data and indicators that are relevant to the local context. Because method of the framework is repeatable, transparent, quantitative, and goal-driven, repeated assessments are invaluable because they can be used to track and monitor the progress of ocean health through time. Even a first-effort OHI+ is valuable because it establishes a baseline against which to monitor change.

Such a flexible framework allows OHI+ assessments to adapt to local conditions while still being useful for management.

The Index is the first assessment tool that provides a common platform for scientifically combining and comparing key elements from all dimensions of the oceans health — biological, physical, economic, and social – to measure how sustainably people are using the ocean. By allowing for a comprehensive and integrated view of marine systems as a way to understand the trade-offs and synergies among these goals, the Index represents a significant advance over conventional single-sector approaches to assessing sustainability as communicated through other kinds of index efforts. Because of this, preparing the conducting phase will require careful thought, consideration, and documentation, throughout this scientific process.

2.1 The Process of OHI+: Phase Three

TIP: The amount of time required to do an OHI+ Assessment will vary.

The OHI+ process consists of four distinct phases. In the first phase, you **learned** about the OHI and understood the philosophy behind it and the motivation for conducting your study. In the second phase, you actively **planned** to conduct an OHI+ Assessment. Now, in the third phase, you will **conduct** the assessment by engaging with the science of finding the data, preparing the goal models, and taking the necessary steps to learn the software and produce the results. In the final phase, you will communicate the results of your OHI+ Assessment in order to inform stakeholders who will use its findings.

- **Phase 1:** Learn about the OHI
- **Phase 2:** Plan an OHI+ Assessment
- **Phase 3:** Conduct the OH+ Assessment
- **Phase 4:** Communicate and Inform

3 Overview of the OHI WebApp

Section Summary:

In this section, you will learn how to access and use the OHI WebApps. Once using the WebApp, you can conduct a preliminary assessment and use the built-in functions to compare input layers, output scores, and change data display options.

3.1 Background

OHI WebApps are websites created to facilitate independent assessments, and one is available for nearly every coastal nation or territory. The WebApps are meant to be a ‘Starter Kit’ and are available through <http://ohi-science.org> using a three-letter identifier in the URL. For example, Ecuador’s WebApp (“ECU”) is found at <http://ohi-science.org/ecu>. Each WebApp displays data layers*, which are raw data in this case, as

well as the calculated OHI scores based on information extracted from global assessments. As such, they do not provide fine-scale resolution of data for each coastal nation or territory: the scores and data on which they are based are a starting point for an assessment to be conducted by an independent group. These data can be used as a default if better data for the region do not exist, but we encourage you to replace them wherever possible. (*Note: each data component that is included in the OHI is called a **data layer** because it will be combined with others to calculate the goal scores. Many data layers are rescaled from 0-1 to be combined with other data layers on the same unitless scale.)

Boundaries for exclusive economic zones (EEZs) were identified by <http://www.marineregions.org> and the largest subcountry regions (i.e., provinces, states, districts) were identified by <http://gadm.org>. Subcountry region boundaries were extended offshore to divide the EEZ of each study area into offshore regions. These subcountry regions have been provided as a starting point, and are typically coastal states or provinces, which, in our experience, is consistent with the scale at which most policy decisions are made. However, it is possible to change the boundaries for the regions and the study area depending on your preferences.

OHI WebApps serve several purposes because they:

1. allow for exploration of how the Index works: what data look like and which data layers are used in each goal
2. are a communication platform for an assessment team, since information is presented in a manner that is accessible to group members of different disciplines and technical capacities
3. can be used to set data gathering or goal model development priorities for the assessment
4. display your assessment's data and calculated scores once you have finalized and formatted your data and modified goal models.

The information displayed on the website is stored online, in a **GitHub repository**. GitHub is an open-source development platform allows for multiple users to collaborate, track changes, and document work such as data files and code. Therefore, any changes made to the files contained within the GitHub repository will be displayed on the WebApp for all team members to view. See below for how to modify files using GitHub.

3.2 Using the WebApp

When first exploring a WebApp (for example, <http://ohi-science.org/ecu>), first note that it is possible to **translate** the site into any language that Google provides using the pull-down menu at the top.

The WebApp homepage provides several tabs for you to explore. The interactive **App** sub-page allows you to explore input data layers and output calculated scores for each region (See **Overview of Variable Options**). More detailed information is about the default **regions** and **data layers**, **goal models**, and **calculated scores** based on global data can be viewed in separate tabs, as well as through the App page. A quick reference about navigating the WebApp is available through the **Docs** link at the bottom of the page. When your team has finalized data layers and updated goal models, these data and scores will be visualized through the WebApp.

3.3 The App Page

The App page allows you to explore and visualize input data layers and calculated output scores for each region in the study area. By default, global data are presented for each subcountry region in the study area, and scores are calculated for each region using those data.

The App page displays this information through two tabs: Data and Compare. The **Data** tab provides several subtabs for viewing data (*Map, Histogram, Table*), and is the default tab when the Toolbox is launched. The **Compare** tab is most useful for comparing output scores when modifications are made to the underlying data or models (this provides a way to error check) once you have begun the process of calculating your own assessment.

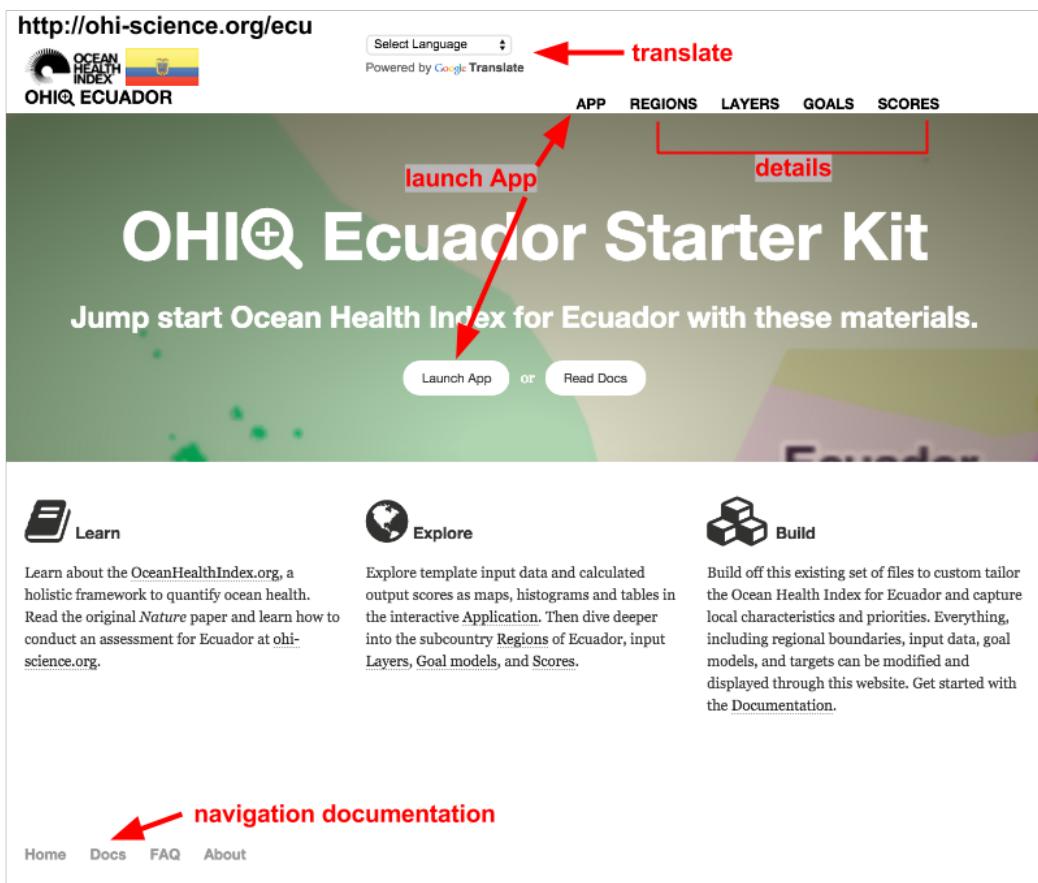


Figure 1: The WebApp start page. Note that it's possible to translate the page into your language of choice.

The App provides two Branch/Scenario options to view, identified in the upper-left corner of the Data tab. The **Branch** options refer to the versions of the GitHub repository where data are stored. Branches start off as copies of the same repository, but can be modified independently of each other, enabling progress to be made on one ('draft' branch) while not altering the vetted original ('published' branch). These branches can be merged back together at any time. The App page will display the 'published branch' by default; we recommend working on the 'draft' branch until your assessment is finalized, at which point you would merge the draft branch with the published branch.

Scenario folders contain all the files needed to calculate scores. Scenario folders can differ from each other based on the years included (i.e., 2014 would be a different scenario from 2015), or they can be used to explore outcomes of policy alternatives, such as implementation of a proposed Marine Protected Area network or fisheries regulations.

3.4 The App's Data tab

3.4.1 Overview of display options

The Data tab displays input data layer or calculated scores for each goal parameter, and presents the information as a map, histogram, or table. These options (*Map*, *Histogram*, *Table*) are presented as subtabs located the map. The Map subtab is the default display option for the Data tab, and all data presented are based on data from global assessments.

Data displayed in the Map subtab:

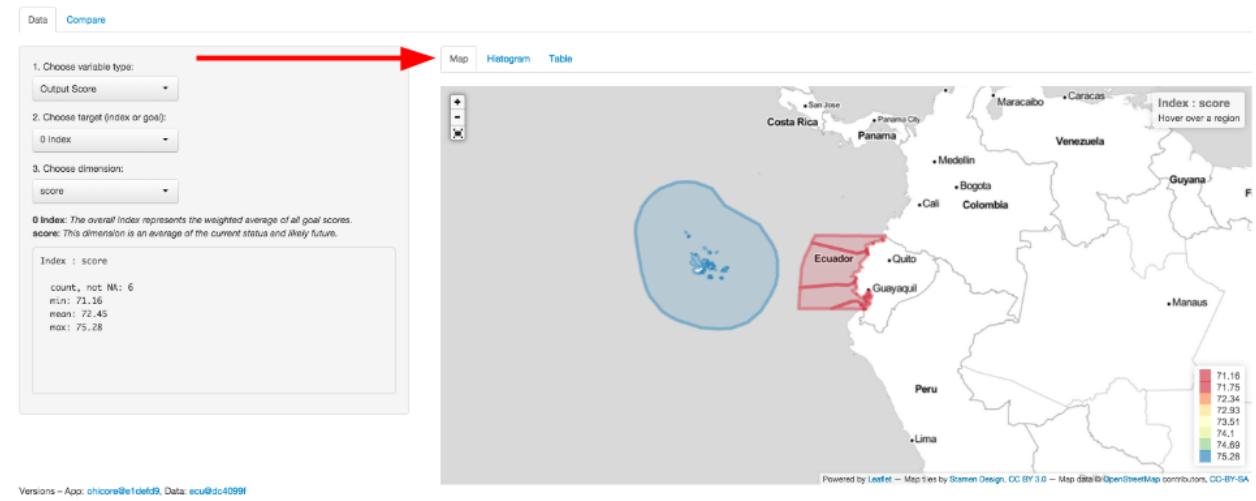


Figure 2: The Map subtab. Click on 'Map' to see a geographic view of your assessment region. Colors indicate scores or values for your input layers or output scores.

The map displays data for every region as reported in the scenario. A color legend is displayed in the lower right corner of the map. The range of values will change as different variables are selected, and the colors will automatically change to create a visual scale of reference.

Data displayed in the Histogram subtab:

The histogram shows the distribution of the selected variable as the number of observations per value bin (white bars) and a smoothed density function (pink shading).

Data displayed in the Table subtab:

The table displays the target value for each region and the overall study area. It provides an identifying code (*rgn_id*), name (*rgn_name*), and value (*value*) for each.

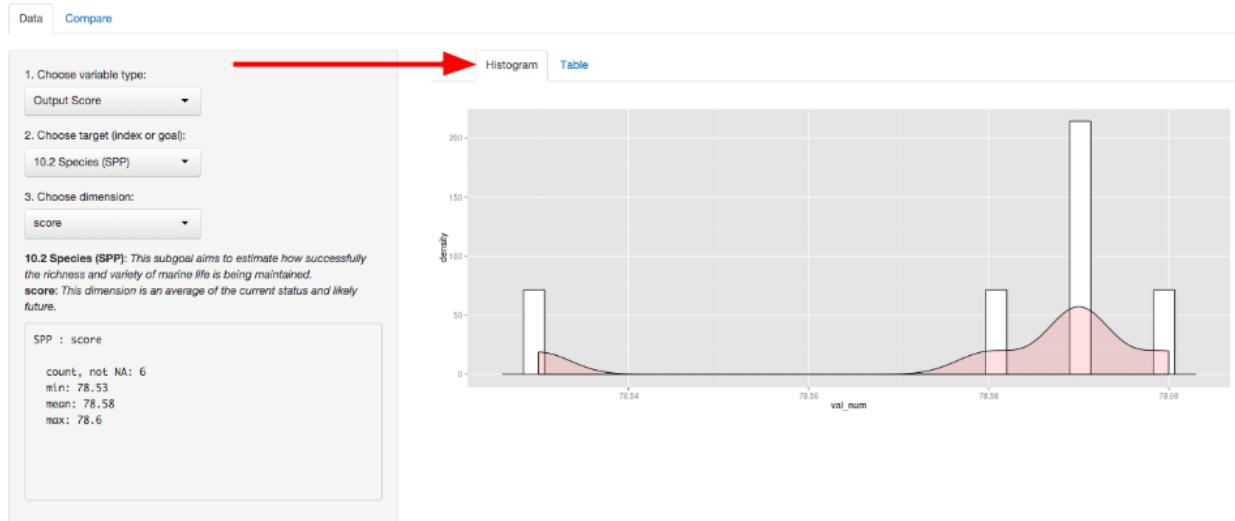


Figure 3: Click on ‘Histogram’ to see the distribution of your data or scores, after selecting a variable layer on the left. This example shows the Species sub-goal scores for the study regions of Ecuador.

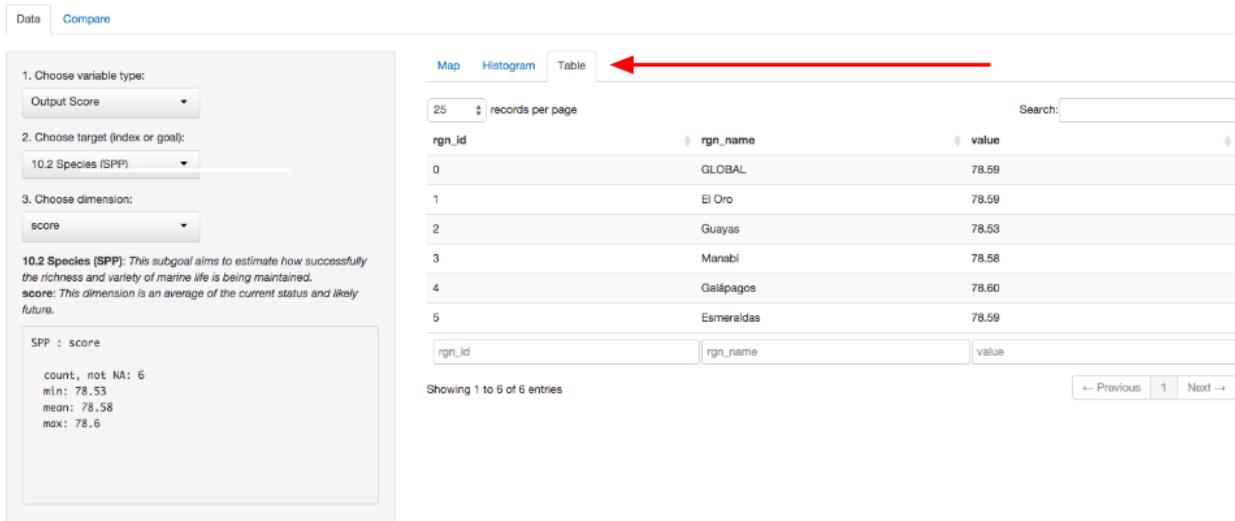


Figure 4: Click on ‘Table’ to see a table of your data or scores, after selecting a variable layer on the left. This example shows the Species sub-goal scores for the study regions of Ecuador.

3.4.2 Overview of variable options

The Data tab has drop-down menus from which you choose the data to be displayed. Data selected from the pull-down menus can be viewed in Map, Histogram, or Table form as described in the section above. Descriptions, statistics and metadata for the chosen fields are also displayed below the drop-down menus on the left side of the tab.

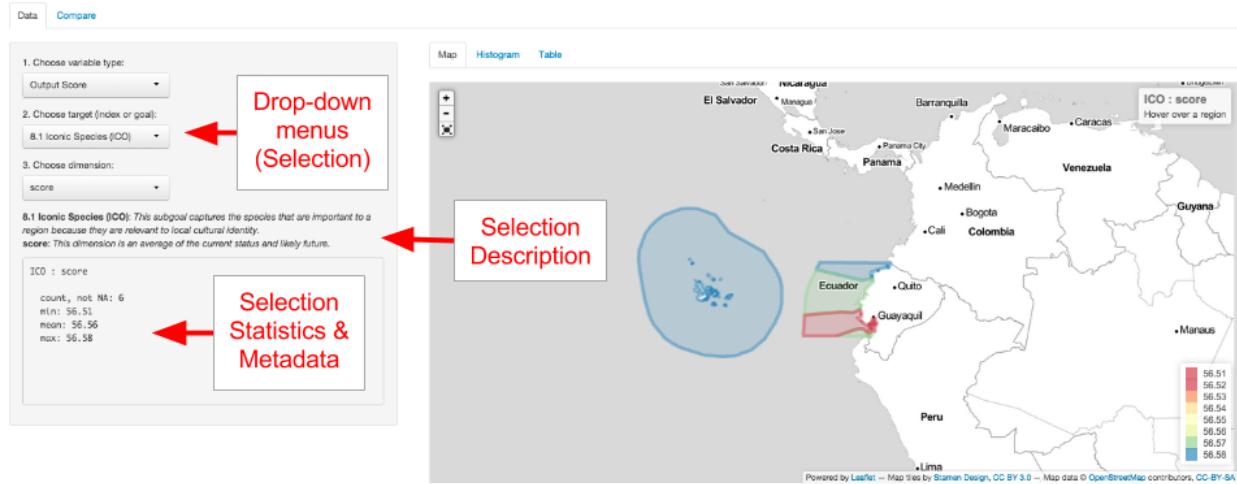


Figure 5: Overview of the Data tab. Choose the variable you would like to explore through the drop-down menus on the left-hand side of the page. Once you select either raw data or a score, you can view a description and statistical summary below.

TIP: Remember that your descriptions and values in `layers.csv` will appear here.

The first selection to be made from the drop-down menus is variable type, in which you can choose the **Output Score** that will show a calculated score (for a particular target chosen subsequently), or **Input Layer** that will show the data layer used to calculate the score of a particular target. To reiterate, Output Scores are the scores calculated using the Input Layers (data layers).

For example, if you select ‘Output Score’ as the variable type (which is the default), you will then be able to choose a target (goal or sub-goal), and the OHI dimension to be reported.

As another example, if you select ‘Input Layer’ as the variable type, you will be able to choose a target and a specific data layer associated with that target. If that layer has multiple categories or years available, you will be able to select a preference. Without selection, the default setting is the first category alphabetically and the most recent year.

3.5 The App’s Compare tab

The **Compare** tab allows you to compare differences in calculated scores based on changes you have made to the underlying data layers. Visualizing these differences is extremely helpful for confirming results and error checking. More context on the use of this function can be found in the section, “**The Ocean Health Index Toolbox**.”

4 Conducting an Assessment

Section Summary:

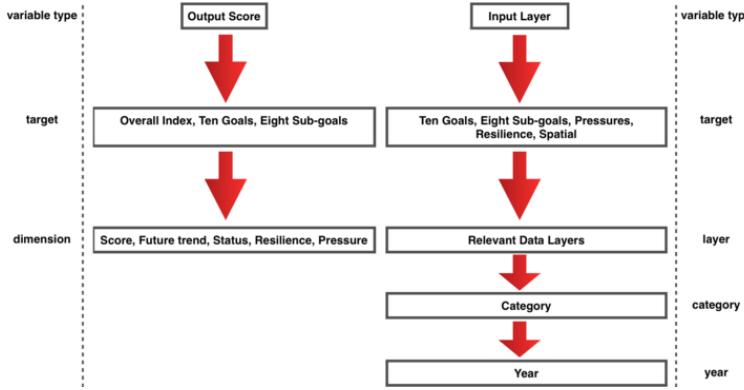


Figure 6:

In this section, you will learn what to think about before conducting an assessment. Your team should already be familiar with the OHI approach and can now prepare for tailoring it to the local context.

TIP: Careful planning before an assessment will pay off later.

4.1 What to expect when conducting an assessment

There are key considerations and processes that will be a part of every assessment, however, the process for conducting each assessment will be unique depending on the local context. For example: what data and indicators are available will determine how goal models can be tailored to the region, and what skillsets and resources are involved will affect the time it takes to complete the assessment.

4.1.1 Timeline

The time required to complete an assessment depends on the local context and available resources, but the proportion of time required for different phases of the assessment is more predictable.

Expect strategic planning, discovering and gathering data, and developing reference points and models to comprise > 80% of the time allotted for the assessment.

Tasks	PHASE 1 Create Framework for a Regional Assessment	PHASE 2 Calculate the Index Scores	PHASE 3 Influence Decision-Making
Develop strategic plan & timeline; assemble skilled team			
Data discovery & acquisition			
Assign reference points (targets) & modify goal models			
Use Toolbox Application			
Document decisions & results interpretation of scores; publish findings			

Figure 7:

4.2 Where to start

You should start by understanding the structure of the global assessment and the data involved will help you think about what should be done differently in your local context.

The best way to do this is to begin with the WebApps. As described in the section, “**Overview of the OHI WebApp**,” most coastal countries have a WebApp that was created to facilitate planning and communication during your assessment. The WebApp presents data, goal models and calculated scores for each region (global administrative area identified by <http://gadm.org>) visually through maps, histograms, and tables. All data presented were extracted from the global analysis, and scores were calculated using global goal models. For a finer-scale assessment of ocean health in your region, these data files provided will need to be updated with available data and indicators for each region in your assessment. However, if better data are not available, you can use the data provided. Then, to dive deeper into data layers and goal models, you can explore your assessment’s GitHub repository, which stores all the information presented through the WebApp.

You should also be familiar with the approaches taken by other assessments adapted from the global context, including Brazil, the US West Coast, and Fiji. You can find these studies at <http://ohi-science.org>.

While our team of scientists and managers is prepared to provide guidance for assessments, you should follow the steps in this training program to complete your assessment as autonomously as possible.

4.3 Points to remember

We recommend keeping in mind the following as you develop your approach:

- People are part of ocean health
 - economic and social data are included in OHI: consider how people are locally engaging with the ocean
- Goal models should be modified to capture local characteristics and priorities that can be measured with available data
 - after identifying what is important locally, identify direct or indirect measures to develop tailored goal models
- Assessments can use a mix of regional-, country- and global-scale data
 - include the finest-scale data available, but when this is not possible, rely on global-scale data
- Scores are calculated by region and then aggregated to the study area
 - comparing scores between regions is a primary reason for conducting a independent assessment
 - goal models and data layers are the same across all regions; data values will vary by region. For example, the carbon storage goal model is the same for each region, but the habitats present in each region, and the area and condition of those habitats (the data values) are specific to each region
- All data do not need to be at the same spatial or temporal scale
 - each assessment should represent the best understanding of ocean health at a point in time. For example, if fisheries data are available from 1980-2011 and tourism data are available from 2008-2012; these can both be used to represent current ocean health
- Document all decisions made, including:
 - all data sources (publications, website URL, date of access, etc).
 - processes for establishing reference points,
 - how and why models were modified, and additionally why other potential modifications were not done, as this reminds yourself of past decisions and helps explain them to others in the future)
 - that it is important for transparency, describing methods and explaining results in reports and publications, and for reproducibility (for any future comparable assessments in your study area)

4.4 Checklist: How to prepare for using the Toolbox

Most time spent conducting an assessment occurs before using the Toolbox to calculate scores. Prior to these calculations the Toolbox and WebApp can be used to understand the Index and as a tool to provide structure to its underlying framework. For example: how the data and models are used to calculate the ten goals (and, in some cases, corresponding subgoals) for each region and how these are combined to generate an overall score for each region can be explored with the Toolbox. At this point, the Toolbox provides a guideline for the data that must be collected and how it should be organized.

When going through the checklist remember too that a motivation for conducting an assessment is to be able to modify goal models and set reference points using finer-scale, local information and reference points.

The following list of tasks will not necessarily be accomplished in sequence: there is a lot of iteration of tasks as you discover data, develop reference points and models, and revisit other data possibilities. This checklist identifies decisions and steps that must be done before the Toolbox can be used to calculate your goal scores:

- Understand the philosophy of OHI
 - what the goals represent, how they are modeled, and what types of data are included
 - what pressures and resilience data are included
 - how reference points are set
- Identify local characteristics and priorities
 - what local cultural preferences or priorities should be captured in the assessment?
 - should any goals be removed?
 - should any goals be redefined?
 - should other goals be added?
 - should goals be weighted unequally?
 - what are social and ecological pressures to the local system?
 - what social and ecological resilience measures (laws, regulations, restoration projects) are in place locally?
- Be familiar with the global inputs (data and models) used in the WebApp
 - understand the data and models used in global assessments
 - prioritize which data and models should be updated to better represent local characteristics and priorities
- Decide the spatial scale for regions within the study area
 - do the WebApp regions (states or provinces) make sense? If not, what alternate scales are more appropriate?
 - we recommend multiple regions to allow for comparisons and determine geographic priorities within the study area
 - regions should be at the smallest scale the data allow
 - at what spatial scale are data most frequently reported?
 - at what spatial scale are policy decisions made (optional)?
- Discover and gather appropriate data and indicators
 - what local data and indicators are available for goal models?
 - what local data and indicators are available for pressures and resilience?
 - are available data and indicators relevant to OHI?
 - are local data and indicators at the appropriate temporal scales?
 - how should reference points be set for local data?
 - process and format data and indicators to create data layers for the Toolbox (See ‘Formatting Data for the Toolbox’ section below)

- use the Toolbox repository as a registry to organize data layers
- Update pressures and resilience information
 - determine whether all global pressures are relevant locally
 - identify local pressures not captured in the global pressures matrix
 - categorize any new local pressures layers
 - set pressure weighting/ranking based on literature, expert opinion
 - identify potential resilience measures for each of the pressures identified
 - determine what datasets may be available to measure resilience metrics
- Modify goal models mathematically:
 - how can goal models be represented mathematically using locally available data and indicators?
 - can reference points be refined using locally available data and indicators, government mandates, management targets, obligations from multilateral agreements?

4.5 Discovering and Gathering Appropriate Data and Indicators

The OHI spans disciplines and integrates diverse data to give a comprehensive assessment of ocean health. A hallmark of the OHI is that it uses freely-available, existing data and indicators to create models that capture the philosophy of individual goals, and finding appropriate data requires good problem-solving abilities. There are many decisions to make when gathering from disparate sources, identifying good proxies and indicators, deciding reference points, and developing goal models.

****** The accuracy of Index scores is a reflection of input data quality and the degree of understanding of the study area, and thus including the best quality and appropriate data and indicators available is of highest importance.******

Because the data and indicators you use will come from different sources and available from online databases, reports, spreadsheets and text files, they will also have different formatting. To include these data and indicators in your assessment, you will need to process these files into the format required by the Toolbox, which is explained in the section, **Formatting Data for the Toolbox**. When data have been prepared and formatted for the Toolbox, we call it a **data layer**. Because creating data layers can be quite time-intensive, data should only be prepared for the Toolbox after final decisions have been made to include the data or indicator in your assessment, and after the appropriate goal model and reference points have been finalized.

There are many data layers included in the OHI framework. There are about eighty individual data layers from the global assessment that should be replaced with higher-resolution data in your study area where possible. You will need to search for data used to calculate status models as well as pressures and resilience layers.

4.5.1 Data sources

Existing data and indicators can be gathered from many sources across environmental, social, and economic disciplines, including:

- government reports and project websites
- peer-reviewed literature
- masters and PhD theses
- university websites
- non-profit organizations

All data must be rescaled to specific reference points (targets) before being combined with the Toolbox; therefore setting these reference points at the appropriate scale is a fundamental component of any OHI

assessment. This requires your assessment team to interpret the philosophy of each Index goal and sub-goal using the best available data and indicators. Some indicators already are scaled (e.g., from 0-1 or 0-10), and can easily be incorporated into your assessment since the reference points have already been identified.

4.5.2 Gathering responsibilities

Gathering appropriate data requires searching for and accessing existing data. You do not have to go collect the data itself, but you do need to discover and acquire existing data. It is important that team members responsible for data discovery make thoughtful decisions about whether data are appropriate for the assessment, and that they get feedback from the full team to discuss the merits of different data sources. Data discovery and acquisition are typically an iterative process, as there are both practical and philosophical reasons for including or excluding data.

When you begin exploring data possibilities, you can seek local data sources that could directly replace data from the global assessment provided in your repository. Such data would be better quality, i.e., higher accuracy and spatio-temporal resolution, than the data from the global assessment, and models may not need to change. However, we recommend first exploring other data possibilities that could capture specific characteristics to your study area. Assessments conducted at smaller scales are an opportunity to include characteristics specific to your study area that were not captured in the global assessment.

4.5.3 The process of discovery

The most important thing to remember when gathering data and indicators is that they must contribute to measuring ocean health. Not all information that enhances our knowledge of marine processes directly convey information about ocean health and may not be appropriate within the OHI framework. Because of this, compiled indicators can sometimes be more suitable than raw data measuring single marine attributes.

Begin by understanding and comparing the best approaches used in assessments that have been completed, including global assessments, Brazil, Fiji, and the US West Coast. For the smaller-scale assessments (i.e., anything but the global assessments), if finer-resolution local data were available in the study area, these data were either incorporated into modified goal models that used locally appropriate and informed approaches or into the existing global goal model. When local data were not available, the global-scale data and global goal models were used, which is least desirable because it does not provide more information than the global study. When looking for data, the following decision tree may be useful. This should be a goal-by-goal process:

4.5.4 Requirements for data and indicators

There are six requirements to remember when investigating (or ‘scoping’) potential data and indicators. It is important that data satisfy as many of these requirements as possible, at times requiring gap-filling solutions. If requirements are not met and gap-filling solutions are not possible, you will likely need to exclude a dataset from the analyses. If data cannot be included, you may elect to use the global data layers or identify other data and a different modeling approach.

1. relevance to ocean health
2. accessibility
3. quality
4. how to set the reference point
5. spatial scale
6. temporal scale

4.5.4.1 Relevance to ocean health There must be a clear connection between the data and ocean health, and determining this will be closely linked to each goal model.

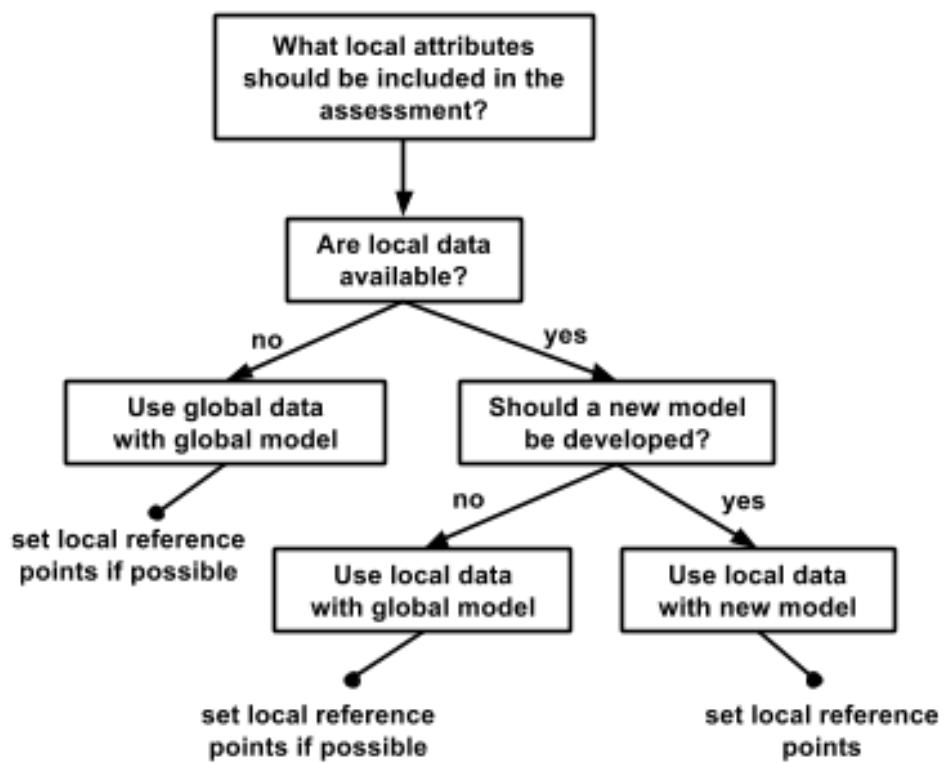


Figure 8:

4.5.4.2 Accessibility The two main points regarding accessibility are whether the source is open access and whether the data or indicators will be updated regularly.

The Index was created in the spirit of transparency and open-access, using open-source software and online platforms such as GitHub, is to ensure as much accessibility and open collaboration as possible. Data and indicators included should also follow these guidelines, so that anyone wishing to understand more about the Index may be able to see what data were used and how. For this reason we emphasize the importance of using data that may be made freely downloadable, as well as the importance of clearly documenting all data sources and reasons for the choices made in selecting data, indicators, and models.

Index scores can be recalculated annually as new data become available. This can establish a baseline of ocean health and serve as a monitoring mechanism to evaluate the effectiveness of actions and policies in improving the status of overall ocean health. This is good to keep in mind while looking for data: will it be available again in the future? It is also important to document the sources of all data so that it is both transparent where it came from and you will be able to find it in the future.

4.5.4.3 Quality Understanding how the data or indicators were collected or created is important. Are they collected by a respected organization with quality control? Are there any protocol changes to be aware of, e.g., were there changes in the collection protocol to be aware of when interpreting temporal trends?

4.5.4.4 Reference point Most data will need to be scaled to a reference point, as you consider different data sources it is important to think about or identify what a reasonable reference point may be. Ask the following types of questions as you explore data possibilities:

- Has past research identified potential targets for these data?
- example: maximum sustainable yield in fisheries
- Have policy targets been set regarding these data?
- example: maximum levels of pollutants before beach closures
- Would a historic reference point be an appropriate target?
- example: percent of habitat coverage before coastal development
- Could a region within the study area be set as a spatial reference point?
- example: a certain region a leader in creating protected areas

4.5.4.5 Appropriate spatial scale Data must be available for every region within the study area.*

4.5.4.6 Appropriate temporal scale Data must be available for at least three to five years to calculate the trend. For some goals, where temporal reference points are desirable, longer time series are preferable.*

* It is not always possible to fully meet the spatial and temporal requirements with each source. In these cases, provided that the gaps are not extensive, it can still be possible to use these data if appropriate gap-filling techniques are used (See: ‘Formatting Data for Toolbox’ section).

4.5.5 Example: US West Coast data discovery

Below are examples of some decisions made when exploring available data for the US West Coast assessment. Determining whether certain data could be included began with a solid understanding of the data layers and models included in the global assessment. Since the US West Coast is a data-rich region, finer-resolution local data could be used in place of many of the global data layers. The US West Coast assessment had five regions: Washington, Oregon, Northern California, Central California, and Southern California.

4.5.5.1 Reasons data were excluded There are a lot of existing data that contribute to our scientific understanding of ocean processes and interactions but are not ideal for the OHI. Reasons to exclude data are both due to practical requirements (e.g., resolution, coverage, or other requirements that have been listed) and philosophical requirements (i.e., they do not help capture the attributes of interest for assessing ocean health). Some common reasons for excluding data are:

- **The data do not cover the entire area of the reporting region.** The state of California had excellent, long-term data on public attendance at state parks that would have been quite useful in the calculation of the tourism and recreation goal. However, data were only available for three of the five regions (the three California regions but not Oregon and Washington), so they could not be used.
- **There is not a clear and scientifically observed relationship between the data and ocean health.** Along the US West Coast, kelp beds are a very important habitat because of their contribution to biodiversity and coastal protection. However, kelp coverage variation and is driven primarily by abiotic natural forcing (wave/storm disturbance and temperature) and thus it is not a good indicator of kelp forest health, particularly in the case of anthropogenic impacts. For these reasons kelp coverage was not included in the assessment.
- **The feature being measured may provide benefits to people, but this feature is not derived from marine or coastal ecosystems.** Sea walls and riprap provide coastal protection to many people along the US West Coast. However, these structures are not a benefit that is derived from the marine ecosystems, so only coastal habitats were included in the calculation of this goal. These data can be included as a pressure due to habitat loss. They were not used as a resilience measure because they can often have negative side effects (e.g., by altering sedimentation dynamics), and because they have limited long-term sustainability (i.e., they need maintenance).
- **Data collection is biased and might misrepresent ocean health.** The US Endangered Species Act identifies a species list focused on species of concern within the US. As such, these data are biased in the context of ocean health since they only assess species whose populations may be in danger. For the calculation of the biodiversity goal, using these data would be inappropriate because this goal represents the status of all species in the region, not just those that are currently of conservation concern. Using these data may have shown the status of biodiversity to be lower than it really is because the selection of species to assess was already biased towards species of concern.
- **Time series data are not long enough to calculate a trend or a reference point** (when a historical reference point is most appropriate). For the US West Coast, the current extent of seagrass habitats was available, however, these do not exist for previous points in time in most areas, so could not be used to calculate the trend or set a historical reference point. Therefore, we estimated the trend in health of seagrass habitats using as a proxy the trend in the main stressor (i.e., turbidity). In other words, we assumed that the rate of seagrass loss was directly proportional to the rate of increase in turbidity. Similar solutions may be used to estimate trends in your own assessment, if there is scientific support for assuming that the trend of what we want to assess (or the relationship between the current state and the state in the reference year) has a strong relationship with the trend of the proxy data available.

4.6 Best approaches for goals, pressures and resilience

The Ocean Health Index team has a wealth of knowledge from years of developing the Index. However, with each new independent assessment, the team is learning even more, and we hope to share that information with you and encourage outside dialogue on the best approaches to conducting an Independent Assessment. Your OHI+ assessment will also be invaluable in learning how to develop better and more appropriate techniques to changing goal models.

4.6.0.2 Synergies and Goals to approach together

TIP: See section, **Assembling a Team**

Whether you are working goal-by-goal, or data layer by data layer, it is important to consider where you can find synergies. This will save you time, and effort, and will help build a picture of how your goals are interlocking in a way that is reflective of the actual linkages that exist in the coupled human and natural systems you are studying. Some examples include:

4.6.0.3 Do Habitat-Based Goals Together You should do the habitat-based goals together. These include **Carbon Storage**, **Coastal Protection**, **Biodiversity: Habitats** in the Global Assessment. This will be more efficient because the spatial analyst can do the data manipulation to create the spatial layers that get used for these goals, based off the same source material. This will greatly expedite your data search, and layer preparation. If you wish to further coordinate these activities on a higher level, you could have the same team member coordinate activities for the development of these three goals.

If you look at **functions.R**, you will see that the reason this is the case is because the data layer, **Hab_extent**, is used in multiple places in the software:

- NP
- FIS
- CS
- CP

The screenshot shows a portion of the **functions.R** file. A red arrow points from the text "habitat layer" in a red-bordered box to the word "mangrove_inland1km" in the R code, which is highlighted in blue. The code is as follows:

```
750 CP = function(layers){  
751  
752   # sum mangrove_offshore1km + mangrove_inland1km = mangrove to match with extent and trend  
753   m = layers$data[["hab_extent"]] %>%  
754     filter(habitat %in% c('mangrove_inland1km', 'mangrove_offshore1km')) %>%  
755     select(rgn_id, habitat, km2)  
756  
757   if (nrow(m) > 0){  
758     m = m %>%  
759       group_by(rgn_id) %>%  
760       summarize(km2 = sum(km2, na.rm=T)) %>%  
761       mutate(habitat='mangrove') %>%  
762       ungroup()  
763 }
```

Figure 9: Note that Habitat Extent appears in several goal model functions.

4.6.0.4 Linkages: Note climate change connections Climate change appears in several places in the global index, and will certainly influence numerous goals in your assessment. You will see that climate pressures include UV radiation, Sea Surface Temperature (SST), sea-level rise (SLR), ocean acidification, and influence in the Global model the goals for Natural Products, Carbon Storage, Coastal Protection, Sense of Place, Livelihoods and Economies, and Biodiversity.

4.6.0.5 Linkages: Note the influence of trash In the case of Global 2012, the **Clean Waters** goal is very much linked to the pressures because the same data layers for pressures are used as the input layers for the status, albeit transformed as (1 - value). Note that because trash is also a pressure, it affects other goals as well (TR, LSP/ICO/SP, LIV/ECO/LE, SPP/BD).

Other tips:

- Do the **Wild-Caught Fisheries** model and the fisheries-related pressures together. This is because you will already be searching for data on commercial high bycatch, low-bycatch,
- Do the **Mariculture** model and the Fisheries

4.6.0.6 Strategies for Assessment Every Independent Assessment requires a plan of action. One approach would be to have **goalkeepers** for each goal

See **Assembling a Team**

4.6.1 Using this Guide

For each goal and sub-goal model and for each assessment, we provide recommendations for conducting independent assessments.

For descriptions of the models, evolution of the approach, reference point, how to interpret the score, see the **OHI Conceptual Guide**>

4.6.2 Where to start?

Any assessment will depend on the available data, which requires creative thinking, particularly when ideal data are unavailable. Determining the appropriate scale and defining the study area and any regions within the study area will also depend on available data. The scale and resolution of available data can help inform the scale of the study area to be analyzed and how to divide it into regions.

4.6.2.1 To consider as you get started Data included to calculate scores are partly based on the philosophical framework of the Ocean Health Index (see Part I), and partly based on data available. Several goals that combine across categories have many potential data sources that could be included (or excluded): in particular the natural products, livelihoods and economies, and habitat based goals. The existence of the data itself will drive a lot of these decisions, but here are some guidelines to help determine if data are appropriate philosophically:

- Do the data represent something truly ocean-based, and natural (i.e. not man-made)?
- How would the reference point be calculated?
- Do data cover the appropriate spatial scales?
- Do data cover the appropriate temporal scales?

4.6.3 Which data are available?

Humans interact with and depend upon the oceans in complex ways, some of which are familiar and easy to measure, such as providing seafood, transporting goods, or disposing of waste. Other benefits are more difficult to measure, such as the way marine-related jobs indirectly affect coastal communities, how different habitats mediate storm damage or the benefits people receive or perceive simply from living near the ocean. Thinking creatively and exploring the data available can make the Index more representative of reality.

It is important to think creatively and beyond the interests of a specific institution or primary field of study. Google or other internet search engines are great starting places: investigate what kinds of information are available from government and public records, scientific literature, academic studies, surveys and reports or other sources.

Data used in the Ocean Health Index spans a wide array of disciplines, both within and outside of oceanography and marine ecology. Therefore, it is necessary to look beyond the most known or obvious data sources to find data relevant for the goals in the region. Discussions with colleagues, literature searches, emails to experts, and search engines are good ways to understand what kinds of data are collected and to hunt for appropriate data.

4.6.4 What scale is appropriate?

Here it is important to think about why there is interest in completing an OHI assessment. If managers or policy makers are interested, at what scale do they work? Where are the political boundaries? These questions are important to keep the OHI assessment relevant, but ultimately data availability will be most important in how to define regional boundaries for the OHI.

4.6.5 What's important spatially?

There are several spatial considerations you should have prepared before moving forward with the Toolbox. One is your map definitions for use in the assessment and in the WebApps. You must define your map regions and boundary. This can be politically drawn or, if appropriate, biogeographically drawn. Biographic considerations may be important when there are disputed territories or boundary lines in your area. *Note that OHI+ does not take a position on disputed territories, so it is up to you to vet the quality of the maps.*

Once you have the maps, you may also need to define buffer zones. Buffers are distances from shore, both inland and offland, that can be used later in the Toolbox to assess many impacts more accurately.

Finally, you will need to prepare your layers folder with spatial data. Only goals certain goals will require data layers that are spatial (see Section, **Habitat-based goals, practical***). When considering spatial data, you should be conscientious of how it is presented: is it by square kilometers, or by a kind of region such as an EEZ or other identifier? Do you have better local data than global satellite or modeled data? Once you find the data, consider how far back in time it goes. Can you set a reference point with this data, or do you have to find another dataset or other source of information to find a historical reference point?

TIP: The only thing to do is remember that you are trying to capture ocean health—too far inland may no longer relate to ocean health.

4.6.5.1 Reference Points When you have a spatial ref point like in the global assessment, you essentially take the highest-scoring region and say that it is perfect.

4.7 Pressures and resilience

Pressures and Resilience are two of the four dimensions used to evaluate each goal or sub-goal, along with **Status** and **Trend**.

It is important to identify the pressures that affect the ocean and coastal systems in your study area, and to search for additional pressures not included in the global assessments. Once you have identified pressures within your study area, you should identify what resilience measures could counteract or nullify those pressures. Alternatively, you can start with a list of known resiliences, such as the relevant environmental laws in your country, and then map them onto pressure layers.

TIP: The same considerations and requirements about data presented in the “**Gathering Appropriate Data**” section also apply to pressures and resilience. Every measure you include for pressures and resilience requires data for each region in your assessment.

4.7.1 Ideal Approach:

Ideally, every stressor with an identified strong impact should have a corresponding resilience measure. The rationale is that as resiliences in the study area increase (for instance, by improving environmental regulations), they would balance out and eventually neutralize the pressures. This would lead to an increase in the overall goal or sub-goal score. By including regulatory responses in your assessment, you ensure that the actions taken in your country are relevant to ocean health.

In practice, however, the pressures and resilience measures you include in your assessment will be highly determined by data availability. It is best to first consider what pressures are acting in your study area and then determine if data are available to measure them. You should also decide if the pressures data included in the global assessment are relevant for your assessment and determine if local data better capture pressures for all the regions in your study area. When considering resilience measures, look for regulations or indicators that could be encompassed in one of the pressures categories.

4.7.1.1 Pressure and resilience categories The Toolbox calculates pressures in five ecological pressure categories (pollution, habitat destruction, fishing pressure, species pollution, and climate change) and one social pressure category. The reason behind the ecological categories is to avoid hidden weighting (e.g., overrepresentation of pressures for which there is more data). For example, in the global assessment there were many pollution datasets available, but few distinct habitat destruction datasets. If we simply averaged the scores of each individual stressor, pollution scores would have a greater influence on the results (stronger weight) due to the relative higher availability of measurements of various pollutants. Instead, aggregating by pressure categories ensures that different stressor types influence the score based on ranks. Nonetheless, the scores are combined in a cumulative way within each category to account for the fact that multiple stressors within a category have a cumulative impact that is greater than if only one of the stressors were present. The resulting scores for the five ecological categories are averaged to produce a single ecological pressures score. This score is then averaged with the social pressures score to produce the final overall pressure score.

4.7.2 Pressures and resilience matrices

After you identify the pressures and resilience measures for your study area are and gather available data for each region, you will use matrix tables to determine how each of the measures affects each goal and sub-goal (for some goals you will also need to do this for habitat type or natural product categories). The pressures matrix establishes the relationships between stressors and goals are determined, and uses a rank from 1-3 to weight how strongly a given pressure affects a goal or sub-goal relative to all the other pressures affecting it.

The rank weights used in the pressures matrix were determined by Halpern *et al.* 2012 (*Nature*) based on scientific literature and expert opinion (see Supplemental Table S28 of *Halpern et al. 2012*). In the pressures matrix ranks are categorized as follows:

- 3 = high pressure
- 2 = medium pressure
- 1 = low pressure

Stressors that have no impact are not included rather than being assigned a rank of zero, which would affect the average score. Pressures are ranked rather than being represented as a binary (yes/no) measure because the range of consequence of different pressures on each goal can be quite large, and to classify all those pressures as a simple ‘yes’ would give too much influence to the weakest stressors. For example, food provision is most heavily impacted by unsustainable, high-bycatch fishing, but pollution does have some impact on fish populations. Without a weighting system, these stressors would be treated equally in their impact on the food provision goal.

While pressures and resilience are usually displayed as two-dimensional matrices, they are actually three-dimensional matrices: each stressor should have data for each region in the study area, which is the third

	Pollution Pressures Data Layer 1	Pollution Pressures Data Layer 2	Pollution Pressures Data Layer 3	Fishing Pressures Data Layer 1	Fishing Pressures Data Layer 2	Climate Change Data Layer 1	Climate Change Data Layer 2	...
FISHERIES (Food Provision)	1			1			2	2
MARICULTURE (Food Provision)	2				3			
ARTISANAL FISHING OPPORTUNITY		1			1		1	3
CARBON STORAGE Habitat 1		1			1			
CARBON STORAGE Habitat 2		1			2			
CARBON STORAGE Habitat 3		2			3			
...

Figure 10: Scores from 1-3 are given to rank the importance of each pressure. Only values of 2 or 3 require that a resilience layer be activated when calculating the goal scores.

dimension of the matrix, as shown in the figure. The Toolbox will combine the data with the rank weights to calculate the pressures scores. Therefore, pressure weights should not be applied to the regions, but only to the goals. The Toolbox will multiply the stressor score for each region by the weight (1, 2, 3) assigned to that pressure for a specific goal and subgoal, and then it will combined that score within its appropriate pressure category as previously discussed.

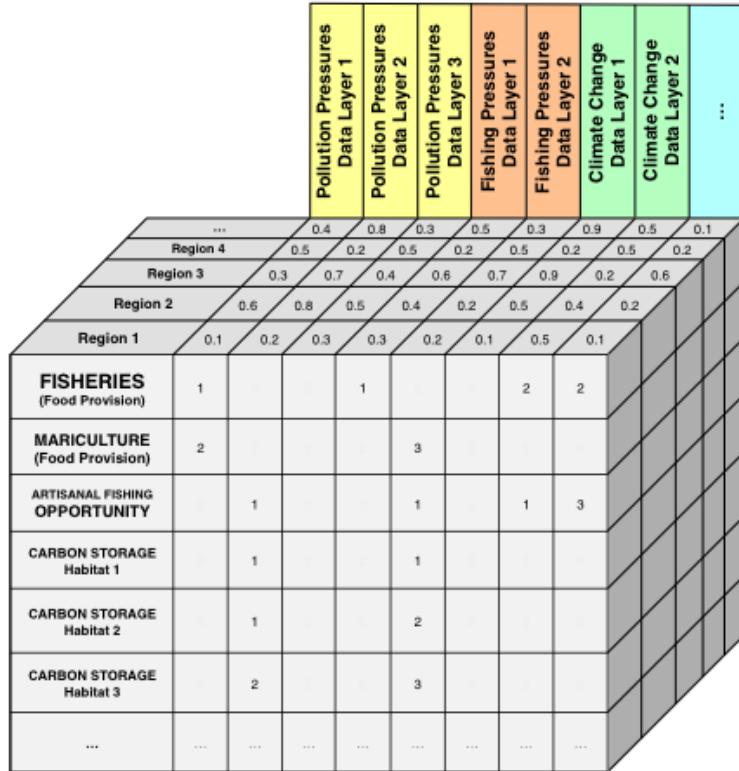


Figure 11: The pressures matrix is three-dimensional: each pressure layer has data per region, which is multiplied by the ranking weights of the pressures matrix.

Each pressure with a rank weight of 2 or 3 should have a corresponding resilience measure, which is meant to ‘balance’ the pressures since these have the greatest effect on ocean health. The Ocean Health Index considers resilience in two categories: **ecological resilience** to address ecological pressures, and **social resilience**, which may not be strictly marine-related, but they can help estimate how a region may be able to respond to or prevent new environmental challenges. Additionally, **goal-specific regulations** are intended to address ecological pressures, and are measured as laws, regulations, and other institutional measures related to a specific goal. Ideally, for any resilience measure, you would have three tiers of information:

- **Existence of regulations:** Are regulations in place to appropriately address the ecological pressure?
- **Implementation and enforcement:** Have these regulations been appropriately implemented and are there enforcement mechanisms in place?
- **Effectiveness and compliance:** How effective have the regulations been at mitigating these pressures and is there compliance with these regulations?

Ideally, information would exist for these three tiers, and you would be able to weight the resilience measure based on the quality of the information as 1 (existence of regulation), 2 (implementation and enforcement), or 3 (effectiveness and compliance). This approach is different from the way ranks are assigned in pressures,

which is based on impact. However, in most cases, information is not available for these three tiers: often, the existence of regulations is all that is available, and this does not always vary by region. In some cases, you may want to consider building your own set of indicators to determine **implementation and enforcement** and **effectiveness and compliance**.

4.7.3 Incorporating local pressures in your assessment

The pressures you will include in your assessment will depend on what is important in your study area and what data are available. If local pressures data are not available, you may default to using data from the global assessment, but this means in most cases that you will not have different information for each region (See **Including pressures from global assessments**). You will determine the weight ranks required in the pressures matrix only after you have identified the data you will include.

The following steps outline the process of how to include pressures in your assessment. The steps are iterative; return to previous steps to ensure you capture all important pressures in your study area:

1. Begin by exploring pressures important to your study area. What are big stressors acting along your coastlines?
2. Are data available to measure these stressors? If not, are other indirect measures or proxies available to represent these stressors?
3. Evaluate the pressures included in the global assessment. For example, if there is no mariculture in your study area, you could remove pressures data layers that only affect this goal (i.e. genetic escapes).
4. Are all of them relevant? Are there local data that can be substituted in the place of global data?
5. Determine the pressure category for any additional stressors in your study area, and add it to the pressures matrix.
6. When all stressors are included in the pressures matrix, determine which goals it affects. Then, determine the weight rankings of all stressors for each goal. Use literature and expert judgement to determine this.
7. Prepare each pressure data layer as described in this manual only after steps 1-6 are completed. In addition to the proper formatting for the Toolbox, pressures data must be rescaled (normalized) on a unitless scale from 0 - 1, where 0 is no stressor at all and 1 is the highest possible value for the stressor, or the value at which the goal achievement is completely impaired. You will have to determine how to rescale the data, whether it is based on the highest value in the data range or other methods.

4.7.3.1 Including pressures from global assessments If you are not able to find local data for stressors, you may use the data from the global assessments for your country. For most of the stressors, this means that there will not be differences between the regions within your study area. However, several stressors included in the global assessment are based on spatial data at high resolution from previous work by Halpern *et al.* (2008) in *Science: A global map of human impact on marine ecosystems*. These data are available at a resolution of 1 km² for the entire global ocean, and can be extracted for the regions in your study area. The stressors available at 1km² resolution are indicated below with ** *** ***.

Table of pressures layers and descriptions

layer	name
cc_acid**	Ocean acidification
cc_slr**	Sea level rise
cc_sst**	Sea surface temperature (SST) anomalies
cc_uv**	UV radiation
fp_art_hb	High bycatch caused by artisanal fishing
fp_art_lb	Low bycatch caused by artisanal fishing
fp_com_hb	High bycatch caused by commercial fishing
fp_com_lb	Low bycatch caused by commercial fishing

layer	name
fp_targetharvest	Targeted harvest of cetaceans and sea turtles
hd_intertidal	Coastal population density as a proxy for intertidal habitat destruction
hd_subtidal_hb	High bycatch artisanal fishing practices as a proxy for subtidal hard bottom habitat destruction
hd_subtidal_sb	High bycatch commercial fishing practices as a proxy for subtidal soft bottom habitat destruction
po_chemicals**	Ocean-based chemical pollution
po_chemicals_3nm**	Land-based chemical pollution
po_nutrients**	Ocean nutrient pollution
po_nutrients_3nm**	Coastal nutrient pollution
po_pathogens	Access to improved sanitation as a proxy for pathogen pollution
po_trash	Trash pollution
sp_alien	Alien species
sp_genetic	Introduced species as a proxy for genetic escapes
ss_wgi	Weakness of governance indicated with the WGI

Note that chemical and nutrient pollution have both land-based (within 3 nautical miles) and ocean-based (within the entire 200 nautical mile EEZ) elements. This is because how pollution affects different goals will depend on the spatial scale of the goal's activity. Some goals occur far from shore, and nutrient and chemical pollution should be included for all offshore waters: FIS, MAR, ECO, and SPP. However, some goals are really only relevant nearshore, so nutrient and chemical pollution should only be included close to the shoreline (3nm in the global study): AO, CS, CP, TR, ICO, LSP, HAB.

These distinctions won't always apply for smaller-scale assessments. For example, in the US West Coast study (Halpern *et al.* 2014), we did not distinguish between offshore and 3nm and therefore only used the `po_nutrients` data layer.

4.8 Guide to searching for resilience metrics

4.8.1 Ideal Approach

Ideally, assessments of social resilience would include national-level and as well as local rules and other relevant institutional mechanisms that are meant to safeguard ocean health. The global focus has been on international treaties and indices, so your region should have more localized information. There would also be information as to their effectiveness and enforcement. of more. Information on social norms and community (and other local-scale) institutions (such as tenure or use rights) that influence resource use and management would be useful too.

4.8.1.1 Practical Considerations In practical terms, resilience is hard to define and finding data can be difficult. It is often difficult to find regulations and indicators that would directly 'balance' individual stressors, but it is worth the effort to explore what information is available in the local context and how it could be included as resilience measures. You may be able to construct your own set of indicators for resilience (particularly social resilience) using proxy data. Your team may have to get creative to develop appropriate assessment measures here. It can be metrically be defined as presence-versus-absence (value of zero or one), or on a scale (value between zero and one) if the measure is an assessment or score. For instance in the global study, resilience measures that were counted in the socio-economic resilience class of data came from the World Governance Indicators (<http://govindicators.org>). In a regional context, however, a more appropriate data layer might be a local governance index of some kind, preferably developed by a reputable organization using credible methods.

When available, National-level data are preferable to global-level data for your assessment. These include national laws on the environment, or protection of the marine environment or rivers that lead to coastal waters. National laws include things like the Clean Water Act (CWA) and the Endangered Species Act

(ESA) in the U.S., or the national implementations of the E.U. Water Framework Directive. National actions can also be broadened beyond just legislation to include administrative procedures such as those involving permits, licenses, court cases, administrative action, and compliance mechanisms. [Cultural items at the national scale, such as holidays, are also applied at this scale]

State or province-level laws provide more regionally-specific information and thus work well for assessments. This would involve looking at the same types of laws and policies that exist on the national level, but specifically incorporating those that have been tailored to fit the needs of a particular sub-national area. This includes things such as California's state-level California Environmental Quality Act (CEQA), or the California Ocean Protection Act (COPA), which have laws designed specifically to protect California's environment. This would tell you more relevant information than using data from a national or international law. Local level regulations will usually provide you with the most accurate information for your assessment in order to tailor it best to the local context.

4.8.1.2 Scoring: Turning Qualitative into Quantitative There are several ways to turn the qualitative information of regulations and social actions into quantitative metrics for analysis. A robust way is to give credit for different aspects of the resilience measures. In addition to a score for having the law, policy, or action, in place, it is possible to gauge the effectiveness of that activity.

The simplest way is to give credit for having a resilience measure in place. This means assigning a binary score of zero or one for "presence" versus "absence" of the resilience measure. For international conventions, this can be done by assigning a value of 1 for having signed a convention. A more rigorous score can be given for countries that have further *ratified* a convention in addition to signing it; this is one way to further differentiate scores. This can be done by seeing if a country has signed and ratified CITES, for example.

For example, if you were trying to find out if there are regulations in place that guide fishing pressure, you could look see if regulations exist for trawl-fishing limitations, or see if there are regulations for fish size, length, or if there are any seasonal restrictions. Another option would be to see if formal stock assessments exist for commercially-fished species.

A further step is to assess how well those measures are being complied with. This will give you more robust way is to assess how well a resilience mechanism is working to maintain the integrity of the regulation and thereby the ecosystem.

For example, once you have found out whether regulations for fishing pressure exist, you would then try to find values for compliance with these regulations. These could be raw data or calculated statistics such as rate of compliance or proportion of compliance. It should answer the question, "Are there indicators of compliance with fishing pressure guidelines"?

A subsequent, and final, step to creating a robust resilience assessment is to determine whether there are enforcement mechanisms in place to deal with non-compliance of the regulations. This is because a regulation is only as good as its implementation, and having both enforcement and compliance actions in place would reinforce the regulation and make it more effective.

For example, in the case of fishing pressures, a further look into available data could lead you learn whether there are reported values of inspector visits and enforcement coverage of permitted facilities. Or you could look at reported numbers of enforcement actions in response to non-compliance. Further, you could also see if there are fines that have been paid or exist in association with non-compliance.

4.8.1.3 Data sources Environmental laws and policies offer tangible information on resilience. The most common type of environmental regulations come from administrative law, such as pollution regulation of various kinds. Land-use law is also important to the integration of social and ecosystem issues, so finding zoning laws relevant for coastal areas could be useful, and so could finding whether or not a region requires environmental impact statements before allowing construction for either coastal land or for marine planning. Other kinds of law some countries include court cases settling disputes or requiring reparation of pollution damages, for example.

Resilience also goes beyond just the law, however. Insurance policies present another option, for instance.. Coastal areas are increasingly requiring climate-related insurance in some countries, and so the existence of such markets in a vulnerable area would be an example of a climate change resilience measure. Social initiatives also present another way to tackle resilience. There might be a beach clean-up day, a percentage of the refuse material that is recycled by the population, or some other social factor that reduces trash inputs into the ocean. A local law banning plastic bags is another way that local jurisdictions control plastic trash.

In the Brazil study (2014), the marine trash resilience was calculated by counting up whether localities had one of four garbage management services, including access to beach clean-up services, household garbage collection, household recycling collection, and garbage collection in public streets.

4.8.2 Incorporating local resilience measures in your assessment

1. Begin by exploring how resilience could be measured in your study area. What laws and regulations are in place that could provide resilience to ocean health?
2. Are there locally-developed indices that capture social or ecological resilience? Is there information about how each region in your study area are implementing or enforcing the laws?
3. Evaluate the resilience measures are included in the global assessment. Are all of them relevant? Are there local data that can be substituted in the place of global data? Are there resilience measures that should be excluded entirely?
4. Assign the resilience measure to the appropriate goal. Since resilience measures are in response to pressures that have a weight rank of 2 or 3 effect on a certain goal, determining which goals ecological and social resilience measures effect follows the same pattern as the pressures matrix. For goal-specific resilience measures, assign the resilience measure to the appropriate goal.
5. Prepare each resilience data layer only after steps 1-6 are completed. In addition to the proper formatting for the Toolbox, resilience data must be rescaled (normalized) on a unitless scale from 0 - 1. You will have to determine how to rescale the data, whether it is based on the highest value in the data range or other methods.

4.8.2.1 Including resilience measures from global assessments Remember that local measures are far more appropriate than those included in global assessments, which likely do not reflect local management targets. However, international data were used in the global assessments that are available to you if you cannot find better local data:

Table of resilience layers and descriptions

layer	name
alien_species	Alien species
cites	Resilience from commitment to CITES
fishing_v1	CBD survey: coastal fishing v1
fishing_v1_eez	CBD survey: ocean fishing v1
fishing_v2_eez	CBD survey: ocean fishing v2
fishing_v3	CBD survey: coastal fishing v3
fishing_v3_eez	CBD survey: ocean fishing v3

layer	name
habitat	CBD survey: habitat
habitat_combo	CBD survey: coastal habitat
habitat_combo_eez	CBD survey: ocean habitat
li_gci	GCI: competitiveness in achieving sustained economic prosperity
li_sector_evenness	Sector evenness as a measure of economic diversity
mariculture	CBD survey: mariculture
msi_gov	MSI sustainability and regulations
species_diversity	Ocean ecological integrity
species_diversity_3nm	Coastal ecological integrity
tourism	CBD survey: tourism
water	CBD survey: water
wgi_all	Strength of governance indicated with the WGI

* CBD = Convention on Biological Diversity; GCI = Global Competitiveness Index; MSI = Mariculture Sustainability Index; WGI = World Governance Indicators.

5 The Ocean Health Index Toolbox

Section Summary:

In this section, you will learn the basics of how to use OHI tools for conducting an assessment. You will be introduced to the files you will be working with, how to prepare them, and you will learn how concepts such as status, trend, pressures, and resilience are used together to create the final score. You will also learn what to do in cases of missing data.

TIP: Knowing where your data gaps are will make gapfilling easier in this process.

The **OHI Toolbox** is an ecosystem of data, scripts, and structure required to calculate OHI scores at any scale. Toolbox scripts are open source, written in the software language R, and data inputted into the Toolbox are **comma-separated-value**, or *.csv* files, which can be created or edited using text editors or Microsoft Excel. Files are stored within two folders called **repositories**, or (*repos*), such that

OHI Toolbox = your assessment repo + `ohi core functions` repo.

We access and interact with the Toolbox ecosystem through an online collaborative platform called **GitHub**. GitHub stores the **R** scripts and *.csv* files in a folder called a repository, which is found online and can also be downloaded on your computer and synced with the online version. GitHub tracks changes by all collaborators working on the project through time, and saves all versions for comparison. The section, “**Installing the Toolbox**,” provides instruction on how to download GitHub repositories to your computer, but everything is also available online.

The Toolbox is used to calculate final scores. But, perhaps more importantly, it can also be used to organize an assessment, including data identification and management. The Toolbox can additionally be used to compare how different management scenarios could affect overall ocean health, which can inform effective strategies for ocean resource management at a local scale.

5.1 File System for Assessment Repositories

This section is an orientation to the files within your assessment repository. The file system structure is the same whether you view your assessment repository online or after downloading or cloning to your computer (see section, “[Installing the Toolbox](#)”).

Throughout this example, we will use Ecuador’s assessment repository as a guide. It’s available at <https://github.com/OHI-Science/ecu>.

TIP: Once you know the layout of the repository and the purpose of the files within it, you can plan an appropriate workflow with your team. See the [Using the Toolbox](#) introduction for more.

5.1.1 Assessments and scenarios

Your *assessment repository* contains a *scenario folder*, which by default is named `subcountry2014`. This scenario folder contains all the files needed to calculate scores, and they are described in detail below.

The scenario folder is named `subcountry2014` because it contains data for your country used in the 2014 global assessment. These data in most cases were attributed equally to all regions within your study area (for example, data used for Ecuador in the global assessment was attributed to all coastal states in the files within `subcountry2014`).

You will be able to rename your scenario folder to better reflect the spatial and temporal scale of your scenario after you have set up your GitHub account. We recommend that the name defines the scale of the regions and the year. Eventually, you will likely have multiple scenario folders that contain data for subsequent years or modifications to explore policy alternatives.

In the above figure, `ecu` is the **assessment repository** and `subcountry2014` is the **scenario folder**. Note that files with names preceded by a ‘?’ do not appear when not viewing from github.com; this is because these files are specific to GitHub.

Within the `subcountry2014` folder area all the inputs required by the Toolbox. See [Modifying and Creating Data Layers](#) for more information on the files you will commonly modify.

5.1.2 `layers.csv`

TIP: Keep `layers.csv` handy. It’s a very useful reference throughout the assessment process.

`layers.csv` is the registry that manages all data required for the assessment. All relevant data are prepared as a ‘data layer’ and registered in this file. The Toolbox will rely on information from this file to use the data layers and display information on the WebApp. You will update some of the layers in `layers.csv`, and some of them will be auto-generated by the Toolbox code when it’s running.

When you open `layers.csv`, you’ll see that each row of information represents a specific data layer that has been prepared for the Toolbox. The first columns (`targets`, `layer`, `name`, `description`, `fld_value`, `units`, `filename`) contain information that will be updated by your team as you incorporate your own data and edits; all other columns are generated later by the Toolbox as it confirms data formatting and content. The first columns have the following information:

- **targets** indicates which goal or dimension uses the data layer. Goals are indicated with two-letter codes and sub-goals are indicated with three-letter codes, with pressures, resilience, and spatial layers indicated separately.
- Food Provision (FP): Fisheries (FIS) and Mariculture (MAR)

<https://github.com/OHI-Science/ecu>

The screenshot shows the GitHub repository page for 'OHI-Science / ecu'. At the top, there's a navigation bar with 'GitHub', 'This repository', 'Search', 'Explore', 'Features', 'Enterprise', and 'Blog'. Below the navigation, the repository name 'OHI-Science / ecu' is displayed with a dropdown menu icon. A red arrow points from this area to the URL 'http://ohi-science.org/ecu'. The main content area shows basic repository statistics: 88 commits, 4 branches, 0 releases, and 1 contributor. Below this, a commit list is shown for the 'ecu' branch. A red arrow points from the commit list to the file 'subcountry2014'. The commit list includes the following entries:

File	Commit Message	Time Ago
.travis.yml	Update .travis.yml	2 months ago
subcountry2014	Update goals.Rmd	2 months ago
.Rbuildignore	auto-calculate from commit c449dfc	2 months ago
.gitignore	adding debug files to .gitignore	2 months ago
.travis.yml	Update .travis.yml	2 months ago
README.md	Update README.md	2 months ago
ecu.Rproj	install_github git2r	2 months ago

Figure 12:

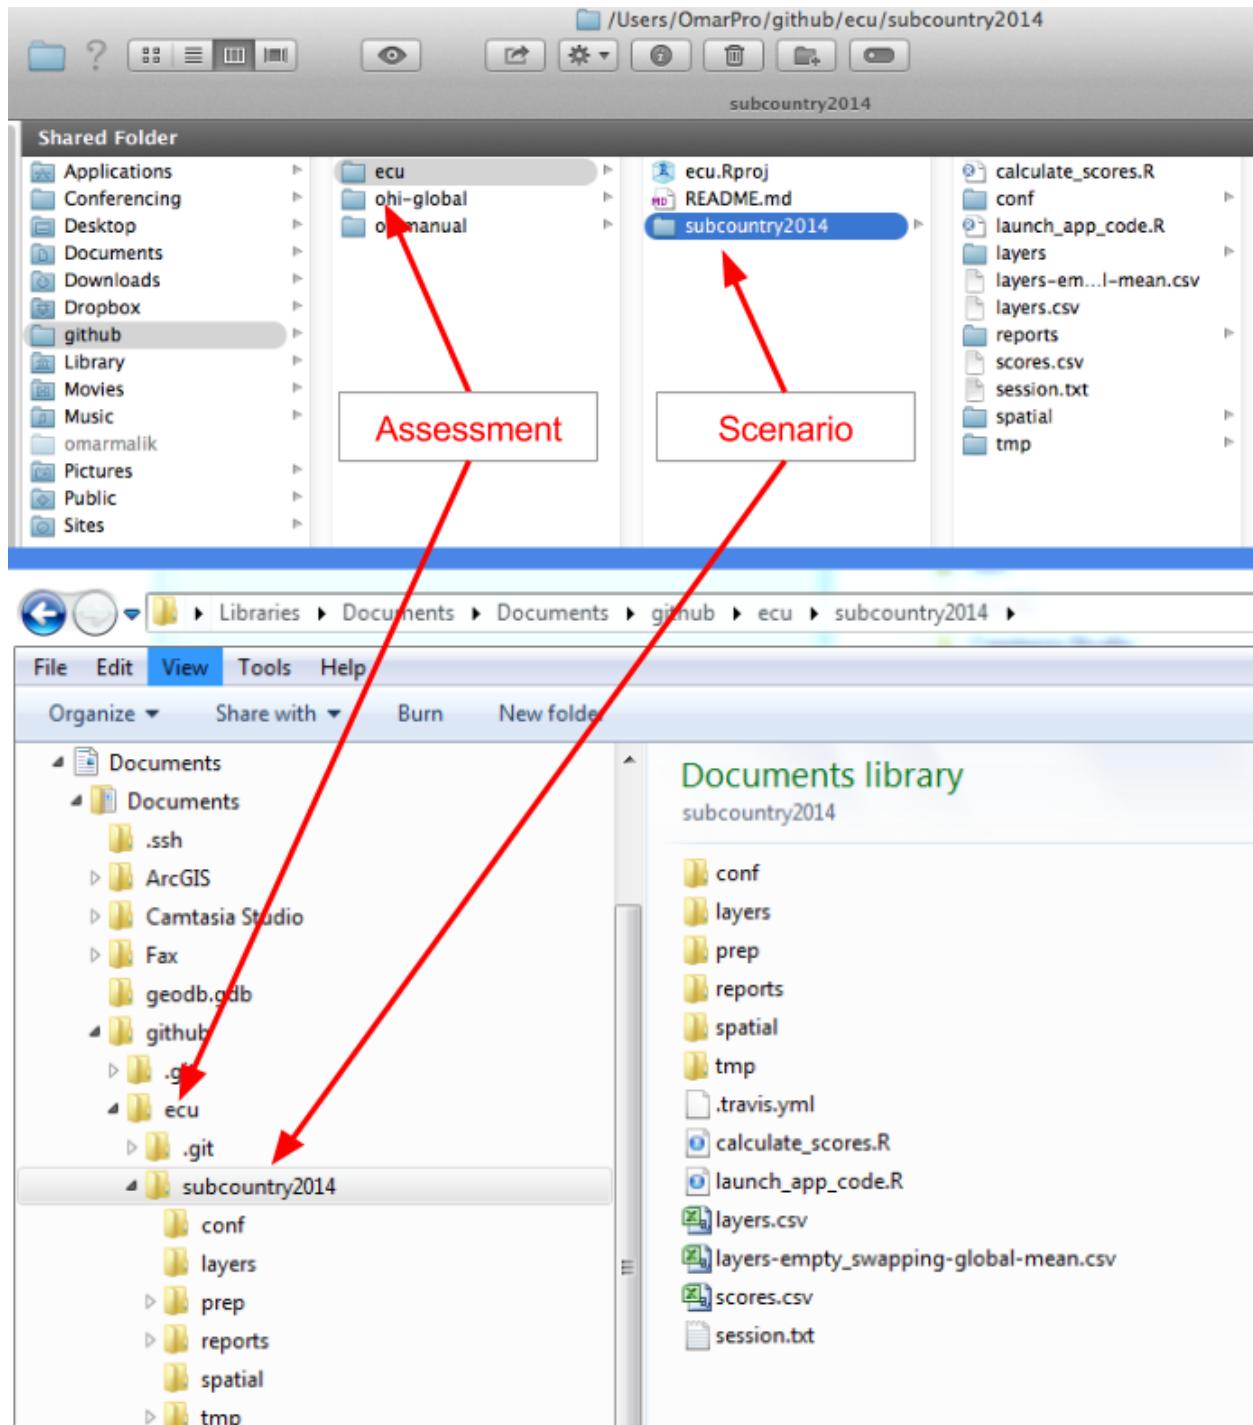


Figure 13: Navigating the assessment repository. The figure shows Mac folder navigation above and Windows navigation below.

1	targets	layer	name	description	fld_value	units	filename
2	AO	ao_access	Fisheries management	The opportunity for value	value		ao_access.csv
3	AO	ao_need	Purchasing power	The per capita pu value	value		ao_need.csv
4	CW	cw_coastalpopn_trend	Coastal human population	Coastal population trend	trend score		cw_coastalpopn_trend
5	CW	cw_fertilizer_trend	Fertilizer consumption	Statistics on fertilizer trend	trend score		cw_fertilizer_trend
6	CW	cw_pathogen_trend	Trends in access	Trends in percent trend	trend score		cw_pathogen_trend
7	CW	cw_pesticide_trend	Pesticide consumption	Statistics on pesticide trend	trend score		cw_pesticide_trend
8	FIS	fis_b_bmsy	B/Bmsy estimates obtained using the R script	B / B _{MSY}	B / B _{MSY}		fis_b_bmsy.csv
9	FIS	fis_meancatch	Catch data for each species	Reported data in mean catch	metric tons		fis_meancatch.csv

Figure 14:

- Artisanal Fishing Opportunity (AO)
- Natural Products (NP)
- Coastal Protection (CP)
- Carbon Storage (CS)
- Livelihoods and Economies (LE): Livelihoods (LIV) and Economies (ECO)
- Tourism and Recreation (TR)
- Sense of Place: Lasting Special Places (LSP) and Iconic Species (ICO)
- Clean Waters (CW)
- Biodiversity (BD): Habitats (HAB) and Species (SPP)
- **layer** is the identifying name of the data layer, which will be used in R scripts like `functions.R` and `.csv` files like `pressures_matrix.csv` and `resilience_matrix.csv`. This is also displayed on the WebApp under the drop-down menu when the variable type is ‘input layer’.
- **name** is a longer title of the data layer; this is displayed on the WebApp under the drop-down menu when the variable type is ‘input layer’.
- **description** is further description of the data layer; this is also displayed on the WebApp under the drop-down menu when the variable type is ‘input layer’.
- **fld_value** indicates the units along with the units column.
- **units** unit of measure in which the data are reported.
- **filename** is the `.csv` filename that holds the data layer information, and is located in the folder `subcountry2014/layers`.

5.1.3 *layers* folder

The `layers` folder contains every data layer as an individual `.csv` file. The names of the `.csv` files within the `layers` folder correspond to those listed in the `filename` column of the `layers.csv` file described above. All `.csv` files can be read with text editors or with Microsoft Excel or similar software.

Note that each `.csv` file within the `layers` folder has a specific format that the Toolbox expects and requires. Comma separated value files (`.csv` files) can be opened with text editor software, or will open by default by Microsoft Excel or similar software.

Now, open the `layers/alien_species.csv` file: note the unique region identifier (`rgn_id`) with a single associated `score` or `value`, and that the data are presented in ‘long format’ with minimal columns. See the section on *Formatting Data for the Toolbox* for further details and instructions. Scores can be viewed through the WebApp using the ‘Input Layer’ pulldown menu on the App page.

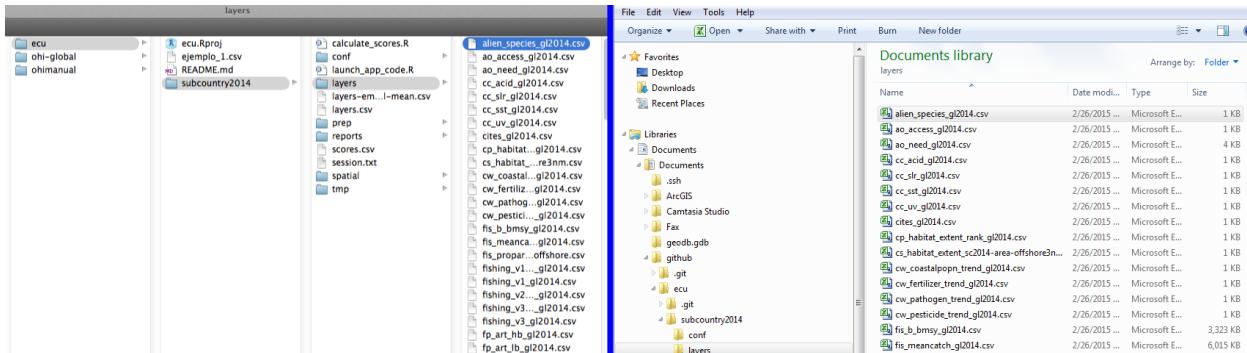


Figure 15: The `layers` folder contains every data layer as an individual `.csv` file. Mac navigation is shown on the left and Windows navigation is shown on the right.

TIP: You can check your region identifiers (`rgn_id`) in the `rgn_labels.csv` file in the `layers` folder.

5.1.4 `conf` folder

The `conf` (configuration) folder includes R functions (`config.R` and `functions.R`) and `.csv` files containing information that will be accessed by the R functions (`goals.csv`, `pressures_matrix.csv`, `resilience_matrix.csv`, and `resilience_weights.csv`).

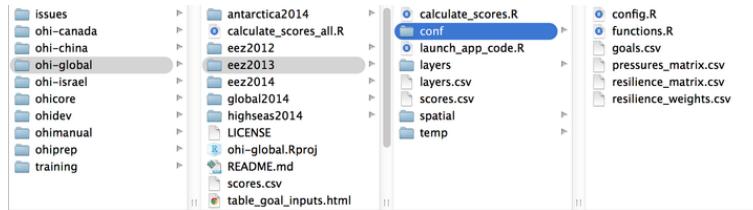


Figure 16: The `conf` folder contains important R functions and `.csv` files. Mac navigation is shown on the left and Windows is shown on the right.

5.1.4.1 `config.R`

`config.R` is an R script that configures labeling and constants appropriately.

5.1.4.2 `functions.R` `functions.R` contains functions for each goal and sub-goal model, which calculate the status and trend using data layers identified as ‘layers’ in `layers.csv`. When you modify or develop new goal models, you will modify `functions.R`.

TIP: It’s useful to skip to different sections of `functions.R` to see how key calculations are being done. See section, **Update `Functions.R`**.

5.1.4.3 `goals.csv` `goals.csv` is a list of goals and sub-goals and their weights used to calculate the final score for each goal. Other information includes the goal description that is also presented in the WebApp. `goals.csv` also indicates the arguments passed to `functions.R`. These are indicated by two columns: `preindex_function` (functions for all goals that do not have sub-goals, and functions for all sub-goals) and `postindex_function` (functions for goals with sub-goals).

TIP: It’s important to check the weightings and preindex functions if you’re planning to change the goal or sub-goal models.

5.1.4.4 *pressures_matrix.csv* *pressures_matrix.csv* defines the different types of ocean pressures and the goals they affect.

Each column in the pressures matrix identifies a data layer that is also registered in *layers.csv*: and has a prefix (for example: *po_* for the pollution category). The pressure data layers are also required to have a value for every region in the study area, with the region scores ranging from 0-1.

5.1.4.5 *resilience_matrix.csv* *resilience_matrix.csv* defines the different types of resilience with the goals that they affect.

Like the pressures matrix, the resilience matrix also has weights depending on the level of protection. However, these weights are in a separate file: *resilience_weights.csv*.

Each column in the resilience matrix is a data layer that is also registered in *layers.csv*. Resilience layers, like the pressure layers, are also required to have a value for every region in the study area. Resilience layers each have a score between 0-1.

5.1.4.6 *resilience_weights.csv* *resilience_weights.csv* describes the weight of various resilience layers, which in Halpern *et al.* 2012 (*Nature*) were determined based on scientific literature and expert opinion.

5.1.5 *install_ohicore.R*

This script will install *ohicore*, the engine behind all Toolbox calculations. You will only need to run this script only one time.

5.1.6 *launch_app_code.R*

The Toolbox can be launched on your computer so that you can visualize any edits you make while you are offline. To do this, you will run the code in *launch_app_code.R*. Make sure you are in the *subcountry2014* directory at that time: `setwd("~/github/ecu/subcountry2014")`

5.1.7 *calculate_scores.R*

calculate_scores.R is a script that tells the Toolbox to calculate scores using the *.csv* files in the *layers* folder that are registered in *layers.csv* and the configurations identified in *config.R*. Scores will be saved in *scores.csv*.

TIP: You can use the *layers* function in *calculate_scores.R* to error-check whether you have registered your files in *layers.csv* correctly or not. If you haven't, you will get an error message regarding 'missing files'.

5.1.8 *scores.csv*

scores.csv contains the calculated scores for the assessment. Currently, these scores were calculated using data for your country from the global 2014 assessment. Scores are reported for each dimension (future, pressures, resilience, score, status, trend) for each region in the study area (with region identifier), and are presented in 'long' format. Scores can be viewed through the WebApp using the 'Output Score' pulldown menu on the 'App' page.

~/github/chn - draft - RStudio

Excel File Edit View Insert Format Tools Data Window Help

~/github/chn - draft - RStudio

config.R calculate_scores.R data_prep.r cp_extent_chn2015_zb.csv

Environment History Build Git

Source on Save Run Source

```

1 # load required libraries
2 suppressWarnings(require(ohicore))
3
4 # set working directory to the scenario directory, ie containing conf and layers
5 setwd '~/github/chn/province2015'
6
7 # load scenario configuration
8 conf = Conf('conf')
9
10 # run checks on scenario layers
11 Checklayers('layers.csv', 'layers', flds_id=conf$config$layers_id_file)
12
13 # load scenario layers
14 layers = Layers('layers.csv', 'layers')
15
16 # calculate scenario scores
17 scores = CalculateAll(conf, layers, debug=F)
18 write.csv(scores, 'scores.csv', na='', row.names=F)
19

```

These errors mean your data layers have not been registered in 'layers.csv' correctly.

index_descr total area in hectare Vietname
 25 International category lco_spp_extinction_status
 26 International population trend trend score lco_spp_popn_trend_g2015
 27 Number of a value value lco_species_chn2015_YM
 28 Gross Domestic usd 2010 USD le_gdp_sc2014.popn-infl
 29 gapfilled value jobs le_jobs_sector_year_g2015
 30 gapfilled percent percent unemployed_unemployment_g2015
 31 gapfilled value 2010 USD le_wage_sector_year_g2015
 32 adjusted work jobs jobs le_workforce_size_adj_sc2015
 33 Jobs weight/weight value le_sector_weight_g2015
 34 Population count count le_popn_g2014.csv
 35 number of 10k people 10,000 peop le_livjob_chn2015_zb
 36 cc_uv_g2014.csv 240 B 2013, 0:1 AM
 37 cites_g2014.csv 74 B May 27, 2015, 8:01 AM
 38 cp_condition_chn2015_zb.csv 440 B May 27, 2015, 8:01 AM
 39 cp_extent_chn2015_zb.csv 1.5 KB May 27, 2015, 8:01 AM
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576
 577
 578
 579
 580
 581
 582
 583
 584
 585
 586
 587
 588
 589
 590
 591
 592
 593
 594
 595
 596
 597
 598
 599
 600
 601
 602
 603
 604
 605
 606
 607
 608
 609
 610
 611
 612
 613
 614
 615
 616
 617
 618
 619
 620
 621
 622
 623
 624
 625
 626
 627
 628
 629
 630
 631
 632
 633
 634
 635
 636
 637
 638
 639
 640
 641
 642
 643
 644
 645
 646
 647
 648
 649
 650
 651
 652
 653
 654
 655
 656
 657
 658
 659
 660
 661
 662
 663
 664
 665
 666
 667
 668
 669
 670
 671
 672
 673
 674
 675
 676
 677
 678
 679
 680
 681
 682
 683
 684
 685
 686
 687
 688
 689
 690
 691
 692
 693
 694
 695
 696
 697
 698
 699
 700
 701
 702
 703
 704
 705
 706
 707
 708
 709
 710
 711
 712
 713
 714
 715
 716
 717
 718
 719
 720
 721
 722
 723
 724
 725
 726
 727
 728
 729
 730
 731
 732
 733
 734
 735
 736
 737
 738
 739
 740
 741
 742
 743
 744
 745
 746
 747
 748
 749
 750
 751
 752
 753
 754
 755
 756
 757
 758
 759
 760
 761
 762
 763
 764
 765
 766
 767
 768
 769
 770
 771
 772
 773
 774
 775
 776
 777
 778
 779
 780
 781
 782
 783
 784
 785
 786
 787
 788
 789
 790
 791
 792
 793
 794
 795
 796
 797
 798
 799
 800
 801
 802
 803
 804
 805
 806
 807
 808
 809
 810
 811
 812
 813
 814
 815
 816
 817
 818
 819
 820
 821
 822
 823
 824
 825
 826
 827
 828
 829
 830
 831
 832
 833
 834
 835
 836
 837
 838
 839
 840
 841
 842
 843
 844
 845
 846
 847
 848
 849
 850
 851
 852
 853
 854
 855
 856
 857
 858
 859
 860
 861
 862
 863
 864
 865
 866
 867
 868
 869
 870
 871
 872
 873
 874
 875
 876
 877
 878
 879
 880
 881
 882
 883
 884
 885
 886
 887
 888
 889
 890
 891
 892
 893
 894
 895
 896
 897
 898
 899
 900
 901
 902
 903
 904
 905
 906
 907
 908
 909
 910
 911
 912
 913
 914
 915
 916
 917
 918
 919
 920
 921
 922
 923
 924
 925
 926
 927
 928
 929
 930
 931
 932
 933
 934
 935
 936
 937
 938
 939
 940
 941
 942
 943
 944
 945
 946
 947
 948
 949
 950
 951
 952
 953
 954
 955
 956
 957
 958
 959
 960
 961
 962
 963
 964
 965
 966
 967
 968
 969
 970
 971
 972
 973
 974
 975
 976
 977
 978
 979
 980
 981
 982
 983
 984
 985
 986
 987
 988
 989
 990
 991
 992
 993
 994
 995
 996
 997
 998
 999
 1000
 1001
 1002
 1003
 1004
 1005
 1006
 1007
 1008
 1009
 1010
 1011
 1012
 1013
 1014
 1015
 1016
 1017
 1018
 1019
 1020
 1021
 1022
 1023
 1024
 1025
 1026
 1027
 1028
 1029
 1030
 1031
 1032
 1033
 1034
 1035
 1036
 1037
 1038
 1039
 1040
 1041
 1042
 1043
 1044
 1045
 1046
 1047
 1048
 1049
 1050
 1051
 1052
 1053
 1054
 1055
 1056
 1057
 1058
 1059
 1060
 1061
 1062
 1063
 1064
 1065
 1066
 1067
 1068
 1069
 1070
 1071
 1072
 1073
 1074
 1075
 1076
 1077
 1078
 1079
 1080
 1081
 1082
 1083
 1084
 1085
 1086
 1087
 1088
 1089
 1090
 1091
 1092
 1093
 1094
 1095
 1096
 1097
 1098
 1099
 1100
 1101
 1102
 1103
 1104
 1105
 1106
 1107
 1108
 1109
 1110
 1111
 1112
 1113
 1114
 1115
 1116
 1117
 1118
 1119
 1120
 1121
 1122
 1123
 1124
 1125
 1126
 1127
 1128
 1129
 1130
 1131
 1132
 1133
 1134
 1135
 1136
 1137
 1138
 1139
 1140
 1141
 1142
 1143
 1144
 1145
 1146
 1147
 1148
 1149
 1150
 1151
 1152
 1153
 1154
 1155
 1156
 1157
 1158
 1159
 1160
 1161
 1162
 1163
 1164
 1165
 1166
 1167
 1168
 1169
 1170
 1171
 1172
 1173
 1174
 1175
 1176
 1177
 1178
 1179
 1180
 1181
 1182
 1183
 1184
 1185
 1186
 1187
 1188
 1189
 1190
 1191
 1192
 1193
 1194
 1195
 1196
 1197
 1198
 1199
 1200
 1201
 1202
 1203
 1204
 1205
 1206
 1207
 1208
 1209
 1210
 1211
 1212
 1213
 1214
 1215
 1216
 1217
 1218
 1219
 1220
 1221
 1222
 1223
 1224
 1225
 1226
 1227
 1228
 1229
 1230
 1231
 1232
 1233
 1234
 1235
 1236
 1237
 1238
 1239
 1240
 1241
 1242
 1243
 1244
 1245
 1246
 1247
 1248
 1249
 1250
 1251
 1252
 1253
 1254
 1255
 1256
 1257
 1258
 1259
 1260
 1261
 1262
 1263
 1264
 1265
 1266
 1267
 1268
 1269
 1270
 1271
 1272
 1273
 1274
 1275
 1276
 1277
 1278
 1279
 1280
 1281
 1282
 1283
 1284
 1285
 1286
 1287
 1288
 1289
 1290
 1291
 1292
 1293
 1294
 1295
 1296
 1297
 1298
 1299
 1300
 1301
 1302
 1303
 1304
 1305
 1306
 1307
 1308
 1309
 1310
 1311
 1312
 1313
 1314
 1315
 1316
 1317
 1318
 1319
 1320
 1321
 1322
 1323
 1324
 1325
 1326
 1327
 1328
 1329
 1330
 1331
 1332
 1333
 1334
 1335
 1336
 1337
 1338
 1339
 1340
 1341
 1342
 1343
 1344
 1345
 1346
 1347
 1348
 1349
 1350
 1351
 1352
 1353
 1354
 1355
 1356
 1357
 1358
 1359
 1360
 1361
 1362
 1363
 1364
 1365
 1366
 1367
 1368
 1369
 1370
 1371
 1372
 1373
 1374
 1375
 1376
 1377
 1378
 1379
 1380
 1381
 1382
 1383
 1384
 1385
 1386
 1387
 1388
 1389
 1390
 1391
 1392
 1393
 1394
 1395
 1396
 1397
 1398
 1399
 1400
 1401
 1402
 1403
 1404
 1405
 1406
 1407
 1408
 1409
 1410
 1411
 1412
 1413
 1414
 1415
 1416
 1417
 1418
 1419
 1420
 1421
 1422
 1423
 1424
 1425
 1426
 1427
 1428
 1429
 1430
 1431
 1432
 1433
 1434
 1435
 1436
 1437
 1438
 1439
 1440
 1441
 1442
 1443
 1444
 1445
 1446
 1447
 1448
 1449
 1450
 1451
 1452
 1453
 1454
 1455
 1456
 1457
 1458
 1459
 1460
 1461
 1462
 1463
 1464
 1465
 1466
 1467
 1468
 1469
 1470
 1471
 1472
 1473
 1474
 1475
 1476
 1477
 1478
 1479
 1480
 1481
 1482
 1483
 1484
 1485
 1486
 1487
 1488
 1489
 1490
 1491
 1492
 1493
 1494
 1495
 1496
 1497
 1498
 1499
 1500
 1501
 1502
 1503
 1504
 1505
 1506
 1507
 1508
 1509
 1510
 1511
 1512
 1513
 1514
 1515
 1516
 1517
 1518
 1519
 1520
 1521
 1522
 1523
 1524
 1525
 1526
 1527
 1528
 1529
 1530
 1531
 1532
 1533
 1534
 1535
 1536
 1537
 1538
 1539
 1540
 1541
 1542
 1543
 1544
 1545
 1546
 1547
 1548
 1549
 1550
 1551
 1552
 1553
 1554
 1555
 1556
 1557
 1558
 1559
 1560
 1561
 1562
 1563
 1564
 1565
 1566
 1567
 1568
 1569
 1570
 1571
 1572
 1573
 1574
 1575
 1576
 1577
 1578
 1579
 1580
 1581
 1582
 1583
 1584
 1585
 1586
 1587
 1588
 1589
 1590
 1591
 1592
 1593
 1594
 1595
 1596
 1597
 1598
 1599
 1600
 1601
 1602
 1603
 1604
 1605
 1606
 1607
 1608
 1609
 1610
 1611
 1612
 1613
 1614
 1615
 1616
 1617
 1618
 1619
 1620
 1621
 1622
 1623
 1624
 1625
 1626
 1627
 1628
 1629
 1630
 1631
 1632
 1633
 1634
 1635
 1636
 1637
 1638
 1639
 1640
 1641
 1642
 1643
 1644
 1645
 1646
 1647
 1648
 1649
 1650
 1651
 1652
 1653
 1654
 1655
 1656
 1657
 1658
 1659
 1660
 1661
 1662
 1663
 1664
 1665
 1666
 1667
 1668
 1669
 1670
 1671
 1672
 1673
 1674
 1675
 1676
 1677
 1678
 1679
 1680
 1681
 1682
 1683
 1684
 1685
 1686
 1687
 1688
 1689
 1690
 1691
 1692
 1693
 1694
 1695
 1696
 1697
 1698
 1699
 1700
 1701
 1702
 1703
 1704
 1705
 1706
 1707
 1708
 1709
 1710
 1711
 1712
 1713
 1714
 1715

5.1.9 spatial folder

The spatial folder contains a single file, `regions_gcs.js`. This is a spatial file in the JSON format; it spatially identifies the study area and regions for the assessment. If you plan to modify your study area or regions, you will need to upload a `.js` file with appropriate offshore boundaries. You will need a GIS analyst to do this: see http://ohi-science.org/pages/create_regions.html for some instruction.

5.1.10 layers-empty_swapping-global-mean.csv

This file contains a list of data layers that were used in the global assessment while not for your country. Without these data for your country, global averages are included in your `subcountry2014` scenario folder so the Toolbox can calculate scores until you replace these data with appropriate data for your study area. This file is not used anywhere by the Toolbox but is a registry of data layers that should prioritize to be replaced with your own local data layers.

5.1.11 Relaunching the Toolbox

After the initial Toolbox setup, further launches of the Toolbox can be done without the software program R. Instead, PC users can double-click the `launchApp.bat` file and Mac users can double-click the `launchApp.command` file.

5.2 Formatting Data for the Toolbox

5.2.1 Introduction

The OHI Toolbox is designed to work in the programming language **R** using input data stored in text-based `.csv` files (`csv` stands for ‘comma-separated value’; these files can be opened as a spreadsheet using Microsoft Excel or similar programs). Each data layer (data input) has its own `.csv` file, which is combined with others within the Toolbox for the model calculations. These data layers are used for calculating goal scores, meaning that they are inputs for status, trend, pressures, and resilience. The global analysis included over 100 data layer files, and there will probably be as many in your own assessments. This section describes and provides examples of how to format the data layers for the Toolbox.

OHI goal scores are calculated at the scale of the reporting unit, which is called a ‘**region**’ and then combined using an area-weighted average to produce the score for the overall area assessed, called a ‘**study area**’. The OHI Toolbox expects each data file to be in a specific format, with data available for every region within the study area, with data layers organized in ‘long’ format (as few columns as possible), and with a unique region identifier (`rgn_id`) associated with a single *score* or *value*. In order to calculate trend, input data must be available as a time series for at least 5 recent years (and the longer the time series the better, as this can be used in setting temporal reference points).

The example below shows information for a study area with 4 regions. There are two different (and separate) data layer files: tourism count (`tr_total.csv`) and natural products harvested, in metric tonnes (`np_harvest_tonnes.csv`). Each file has data for four regions (1-4) in different years, and the second has an additional ‘categories’ column for the different types of natural products that were harvested. In this example, the two data layers are appropriate for status calculations with the Toolbox because:

1. At least five years of data are available,
2. There are no data gaps
3. Data are presented in ‘long’ or ‘narrow’ format (not ‘wide’ format – see “**Long Formatting**” section).

Example of data in the appropriate format:

rgn_id	year	count	rgn_id	product	year	tonnes
1	2005	177.14	1	ornamentals	2005	10327
1	2006	201.39	1	ornamentals	2006	10389
1	2007	199.81	1	ornamentals	2007	10897
1	2008	212.99	1	ornamentals	2008	9985
1	2009	228.81	1	ornamentals	2009	9001
2	2005	580.98	2	shells	2005	6179
2	2006	730.18	2	shells	2006	6823
2	2007	717.00	2	shells	2007	8239
2	2008	851.44	2	shells	2008	8819
2	2009	836.68	2	shells	2009	9205
3	2005	129.69	3	coral	2005	22079
3	2006	173.45	3	coral	2006	25297
3	2007	229.86	3	coral	2007	25361
3	2008	231.44	3	coral	2008	23817
3	2009	221.95	3	coral	2009	23623
4	2005	397.00	4	shells	2005	7500
4	2006	566.00	4	shells	2006	9700
4	2007	591.00	4	shells	2007	8600
4	2008	1154.00	4	shells	2008	9400
4	2009	1570.00	4	shells	2009	9300

Figure 18:


5.2.2 Gapfilling

It is important that data prepared for the Toolbox have no missing values or ‘gaps’. Data gaps can occur in two main ways: 1) **temporal gaps**: when several years in a time series in a single region have missing data, and 2) **spatial gaps**: when all years for a region have missing data (and therefore the whole region is ‘missing’ for that data layer).

How these gaps are filled will depend on the data and regions themselves, and requires thoughtful, logical decisions to most reasonably fill gaps. Each data layer can be gapfilled using different approaches. Some data layers will require both temporal and spatial gapfilling. The examples below highlight some example of temporal and spatial gapfilling.

All decisions of gapfilling should be documented to ensure transparency and reproducibility. The examples below are in Excel, but programming these changes in software like R is preferred because it promotes easy transparency and reproducibility.

5.2.2.1 Temporal gapfilling Temporal gaps occur when a region is missing data for some years. The Toolbox requires data for each year for every region. It is important to make an informed decision about how to temporally gapfill data.

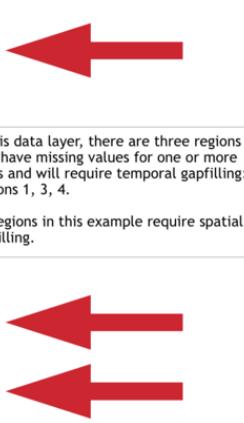

rgn_id	year	count	Annotations			
1	2005	177.14				
1	2006					
1	2007					
1	2008	212.99				
1	2009	228.81				
2	2005	580.98				
2	2006	730.18				
2	2007	717.00				
2	2008	851.44				
2	2009	836.68				
3	2005	129.69				
3	2006	173.45				
3	2007	229.86				
3	2008	231.44				
3	2009					
4	2005	397.00				
4	2006	566.00				
4	2007					
4	2008	1154.00				
4	2009	1570.00				

In this data layer, there are three regions that have missing values for one or more years and will require temporal gapfilling: Regions 1, 3, 4.

No regions in this example require spatial gapfilling.

Figure 19:

Often, regression models are the best way to estimate data and fill temporal gaps. Here we give an example that assumes a linear relationship between the year and value variables within a region. If data do not fit a linear framework, other models may be fit to help with gapfilling. Here we give an example assuming linearity.

Using a linear model can be done in most programming languages using specific functions, but here we show this step-by-step using functions in Excel for Region 1.

Temporal gapfilling example (assumes linearity: able to be represented by a straight line on a graph)):

There are four steps to temporally gapfill with a linear model, illustrated in the figures with four columns.

1. Calculate the slope for each region

The first step is to calculate the slope of the line that is fitted through the available data points. This can be done in Excel using the **SLOPE(known_y's,known_x's)** function as highlighted in the figure below. In this case, the x-axis is *years* (2005, 2006, etc...), the y-axis is *count*, and the Excel function automatically plots and fits a line through the known values (177.14 in 2005, 212.99 in 2008, and 228.81 in 2009), and subsequently calculates the slope (12.69).

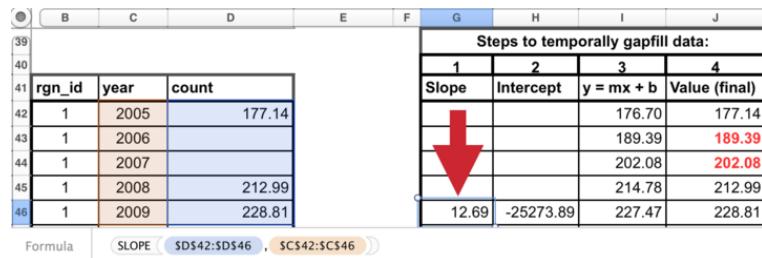


Figure 20:

2. Calculate the y-intercept for each region

The next step is to calculate the intercept of the line that is fitted through the available data points. This can be done in Excel similarly as for the slope calculation, using the the **INTERCEPT(known_y's,known_x's)** function that calculates the y-intercept (-25273.89) of the fitted line.

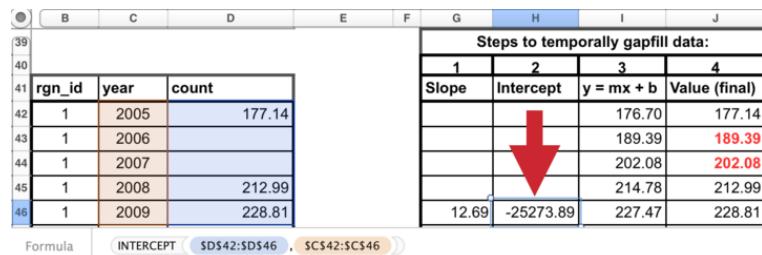


Figure 21:

3. Calculate y for all years

The slope and y-intercept that were calculated in steps 1 and 2 can then be used along with the year (independent variable) to calculate the unknown 'y-values'. To do so, simply replace the known three values into the $y = mx + b$ equation (m =slope, x =year, b =intercept), to calculate the unknown 'count' for a given year (189.39 in 2006, and 202.08 in 2007).

4. Replace modeled values into original data where gaps had occurred

Substitute these modeled values that were previously gaps in the timeseriew. *The data layer is now ready for the Toolbox, gapfilled and in the appropriate format.*

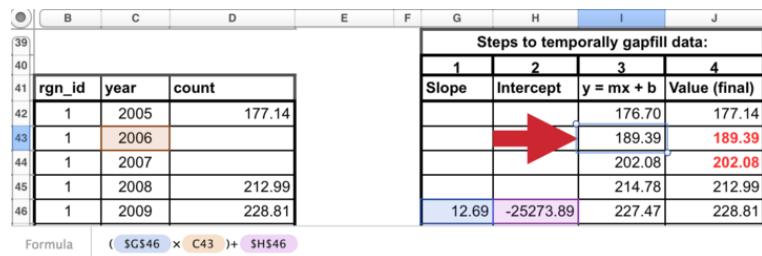


Figure 22:

5.2.2.2 Spatial gapfilling Spatial gaps are when no data are available for a particular region. The Toolbox requires data for each region. It is important to make an informed decision about how to spatially gapfilling data.

The figure shows a Microsoft Excel spreadsheet with a large dataset. The columns are 'rgn_id', 'year', and 'count'. The data spans multiple years and regions. A red arrow points from the bottom right of this table towards a callout box. The callout box contains two pieces of text: 'In this data layer, Region 2 is missing from this dataset and requires spatial gapfilling.' and 'No temporal gapfilling is required in this example.'

rgn_id	year	count
1	2005	177.14
1	2006	201.39
1	2007	199.81
1	2008	212.99
1	2009	228.81
2	2005	
2	2006	
2	2007	
2	2008	
2	2009	
3	2005	129.69
3	2006	173.45
3	2007	229.86
3	2008	231.44
3	2009	221.95
4	2005	397.00
4	2006	566.00
4	2007	591.00
4	2008	1154.00
4	2009	1570.00

Figure 23:

To fill gaps spatially, you must assume that one region is like another, and data from another region is adequate to be substituted in place of the missing data. This will depend on the type of data and the properties of the regions requiring gapfilling. For example, if a region is missing data but has similar properties to a different region that does have data, the missing data could be ‘borrowed’ from the region with information. Each data layer can be gapfilled using a different approach when necessary.

Characteristics of regions requiring gapfilling that can help determine which type of spatial gapfilling to use:

1. proximity: can it be assumed that nearby regions have similar properties?
2. study area: are data reported for the study area, and can those data be used for subcountry regions?
3. demographic information: can it be assumed a region with a similar population size has similar data?

Spatial gapfilling example:

For a certain data layer, suppose the second region (*rgn_id 2*) has no data reported, as illustrated in the figure above. How to spatially gapfill *rgn_id 2* requires thinking about the properties and characteristics of the region and the data, in this case, tourist count.

Here are properties that can be important for decision making:

rgn_id 2:

- is located between *rgn_id* 1 and 3
- is larger than *rgn_id* 1
- has similar population size/demographics to *rgn_id* 3
- has not been growing as quickly as *rgn_id* 4

There is no absolute answer of how to best gapfill *rgn_id* 2. Here are a few reasonable possibilities:

Assign *rgn_id* 2 values from:

- *rgn_id* 1 because it is in close proximity to *rgn_id* 2
- *rgn_id* 3 because it is in close proximity to *rgn_id* 2 and has similar population size/demographics
- *rgn_id* 1 and 3 averaged since they are in close proximity to *rgn_id* 2

Suppose the decision was made to gapfill *rgn_id* 2 using the mean of *rgn_id* 1 and 3 since this would use a combination of both of those regions. Again, other possibilities could be equally correct. But some form of spatial gapfilling is required so a decision must be made. The image below illustrates this in Excel.

	A	B	C	D	E	F	G	H
42	rgn_id	year	count			rgn_id	year	count
43	1	2005	177.14			1	2005	177.14
44	1	2006	201.39			1	2006	201.39
45	1	2007	199.81			1	2007	199.81
46	1	2008	212.99			1	2008	212.99
47	1	2009	228.81			1	2009	228.81
48	2	2005				2	2005	153.42
49	2	2006				2	2006	187.42
50	2	2007				2	2007	214.84
51	2	2008				2	2008	222.22
52	2	2009				2	2009	225.38
53	3	2005	129.69			3	2005	129.69
54	3	2006	173.45			3	2006	173.45
55	3	2007	229.86			3	2007	229.86
56	3	2008	231.44			3	2008	231.44
57	3	2009	221.95			3	2009	221.95
58	4	2005	397.00			4	2005	397.00
59	4	2006	566.00			4	2006	566.00
60	4	2007	591.00			4	2007	591.00
61	4	2008	1154.00			4	2008	1154.00
62	4	2009	1570.00			4	2009	1570.00

Figure 24:

The data layer is now ready for the Toolbox, gapfilled and in the appropriate format.

5.2.3 Long formatting

The Toolbox expects data to be in ‘long’ or ‘narrow’ format. Below are examples of correct and incorrect formatting, and tips on how to transform data into the appropriate format.

Example of data in an incorrect format:

Region	DataLayer	Year									
		2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
A	GDP_USDx1000	8	7	30	26	69	39	108	92	261	151
B	GDP_USDx1000	13	9	13	14	10	12	14	10	6	5
C	GDP_USDx1000	2132	2325	2963	3214	2942	2910	1759	2029	2077	2453
D	GDP_USDx1000	21	5	14	2	11	3	26	14	15	100
A	governance_indicator					0.8545	0.5400	0.7062	1	1	
B	governance_indicator					0.8564	0.7794	0.8615	1	1	
C	governance_indicator					0.8779	1	1	0.8986	1	
D	governance_indicator					0.8537	0.5373	0.7044	1	1	

Figure 25:

With ‘wide’ format, data layers are more difficult to combine with others and more difficult to read and to analyze.

Transforming data into ‘narrow’ format:

Data are easily transformed in a programming language such as R.

In R, the `reshape` package has the `melt` command, which will melt the data from a wide format into a narrow format. It also can `cast` the data back into a wide format if desired. R documentation:

- <http://cran.r-project.org/web/packages/reshape2/reshape2.pdf>
- <http://www.slideshare.net/jeffreybreen/reshaping-data-in-r>
- <http://tgmstat.wordpress.com/2013/10/31/reshape-and-aggregate-data-with-the-r-package-reshape2/>

Example code using the `melt` command in the `reshape2` library. Assume the data above is in a variable called `data_wide`:

```
install.packages('reshape2')
library(reshape2)
data_melt = melt(data=data_wide, id.vars=c('Region', 'DataLayer'), variable.name='Year')
data_melt = data_melt[order(data_melt$DataLayer, data_melt$Region),]
```

Figure 26:

This will melt everything except any identified columns (*Region* and *DataLayer*), and put all other column headers into a new column named *Year*. Data values will then be found in a new column called *value*.

The final step is optional: ordering the data will make it easier for humans to read (R and the Toolbox can read these data without this final step):

Example of data in the appropriate (long) format:

GDP_USDx1000.csv		
Region	Year	value
A	2000	8
A	2001	7
A	2002	30
A	2003	26
A	2004	69
A	2005	39
A	2006	108
A	2007	92
A	2008	261
A	2009	151
B	2000	13
B	2001	9
B	2002	13
B	2003	14
B	2004	10
B	2005	12
B	2006	14
B	2007	10
B	2008	6
B	2009	5

governance_indicator.csv		
Region	Year	value
A	2000	
A	2001	
A	2002	
A	2003	
A	2004	
A	2005	0.854599407
A	2006	0.540059347
A	2007	0.706231454
A	2008	1
A	2009	1
B	2000	
B	2001	
B	2002	
B	2003	
B	2004	
B	2005	0.856410256
B	2006	0.779487179
B	2007	0.861538462
B	2008	1
B	2009	1

Figure 27:

6 Installing the Toolbox

Section Summary:

In this section, you will learn how to successfully download, install, and use the software required to conduct an assessment. You will create a GitHub account and install R, RStudio, git, and the

Github desktop app. OHI assessments are conducted through open-source platforms that allow you to make real-time changes with collaborators, and to track progress so that errors can be corrected and new insights can be shared in the future.

6.1 Overview

The **OHI Toolbox** is essentially several folders containing all the files required for an OHI assessment. These folders are stored online on www.github.com, and are called **GitHub repositories**. At this point, you should already be familiar with your assessment's repository, and all of the files it contains (if not, read the section, “**File System for Assessment Repositories**”).

Conducting an OHI assessment using GitHub enables collaboration and transparency, and will provide access to the latest developments in the Toolbox software, allowing the OHI team to provide support remotely if necessary.

This section explains the GitHub workflow and how to access and setup required software. Then, it explains how to after modifying files on your own computer, you can use GitHub to upload any modifications you make so that you can work collaboratively with your team.

Required software:

1. **GitHub App**
2. **** git ****
3. **R**
4. **RStudio**



Figure 28:

6.2 GitHub

GitHub is an open-source development platform that enables easy collaboration and versioning, which means that all saved versions are archived and attributed to each user. It is possible to revert back to any previous version, which is incredibly useful to not only to document what work has been done, but how it differs from work done in the past, and who is responsible for the changes.

GitHub Vocabulary:

- **clone** ~ download to your computer from online version with syncing capabilities enabled
- **commit** ~ message associated with your changes at a point in time
- **pull** ~ sync a repo on your computer with online version
- **push** ~ sync the online repo with your version, only possible after committing

sync = pull + commit + push

6.2.1 Learning GitHub

The following section describes how to use GitHub to access and sync your assessment repository. There are also many great resources available online with more in-depth information:

- **Git and GitHub** by Hadley Wickham: <http://r-pkgs.had.co.nz/git.html>
- **Collaboration and Time Travel: Version Control with Git, GitHub and RStudio** video tutorial by Hadley Wickham: www.rstudio.com/resources/webinars
- **Good Resources for Learning Git and GitHub** by GitHub: <https://help.github.com/articles/good-resources-for-learning-git-and-github/>

6.3 Accessing GitHub Repositories

GitHub has an online interface and a desktop application for the version-control software called *git*. In addition to cloning your GitHub repository to your computer, you will need to download and install *git* software and the GitHub App (application), both of which are freely available.

6.3.1 Create a GitHub account

Create a GitHub account at <http://github.com>. Choose a username and password. You will use this username and password when you install and set up *git* on your computer.

6.3.2 Install *git* software

How you install *git* will depend on whether you are working on a Windows or Mac computer. It will also depend on your operating system version. If you have problems following these instructions, it is likely because your operating system requires a previous version of *git*. Previous versions are available from <http://www.wandisco.com/git/download> (you will need to provide your email address).

For Windows:

- Download *git* at <http://git-scm.com/downloads> and follow the install instructions.
- When running the Windows installer, use all default options except “Adjusting your PATH environment”: instead, select “**Run Git from the Windows Command Prompt**”. This will allow later compatibility with RStudio.

For Mac:

- Download *git* at <http://git-scm.com/downloads> and follow the install instructions.
- Apple’s **Xcode** has a command line tools option during install which can override the preferred *git* command line tools. To ensure you are using the latest preferred version of *git*, you will need to launch Terminal and type the following few lines of code:

```
sudo xcode-select --install
```
- Access Terminal from the Applications folder: **Applications > Utilities > Terminal**. When you launch Terminal a window will appear with your computer’s name followed by a \$. When you type, your commands will appear after the \$.

Add access your ‘bash profile’ by typing:

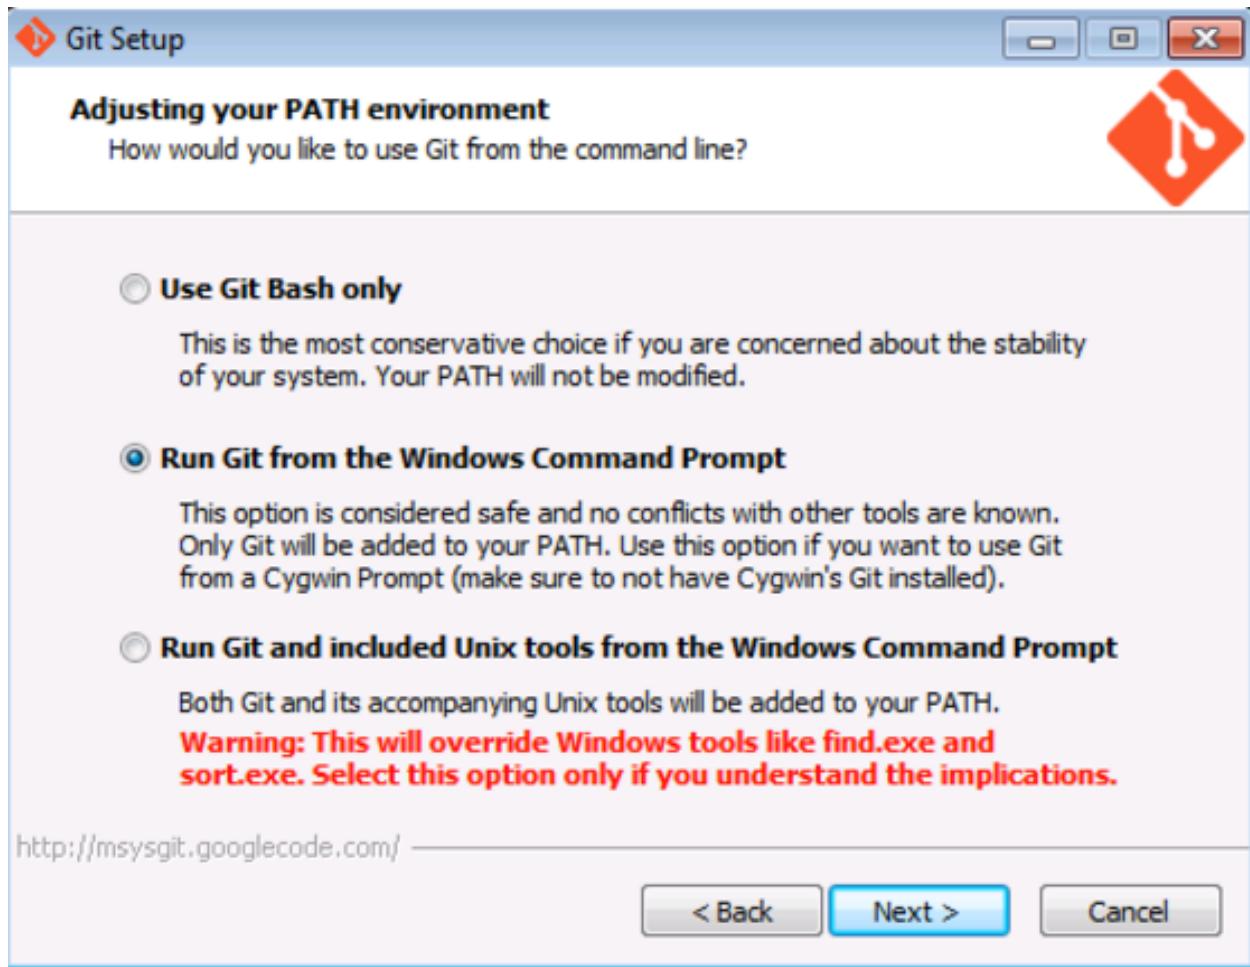


Figure 29:

```
pico ~/.bash_profile
```

You are now able to edit your ‘bash profile’. Type:

```
export PATH=/usr/local/git/bin:$PATH
```

Exit pico by typing:

control-X


y

return/enter

Exit Terminal by typing:

```
exit
```

Finally, quit Terminal.

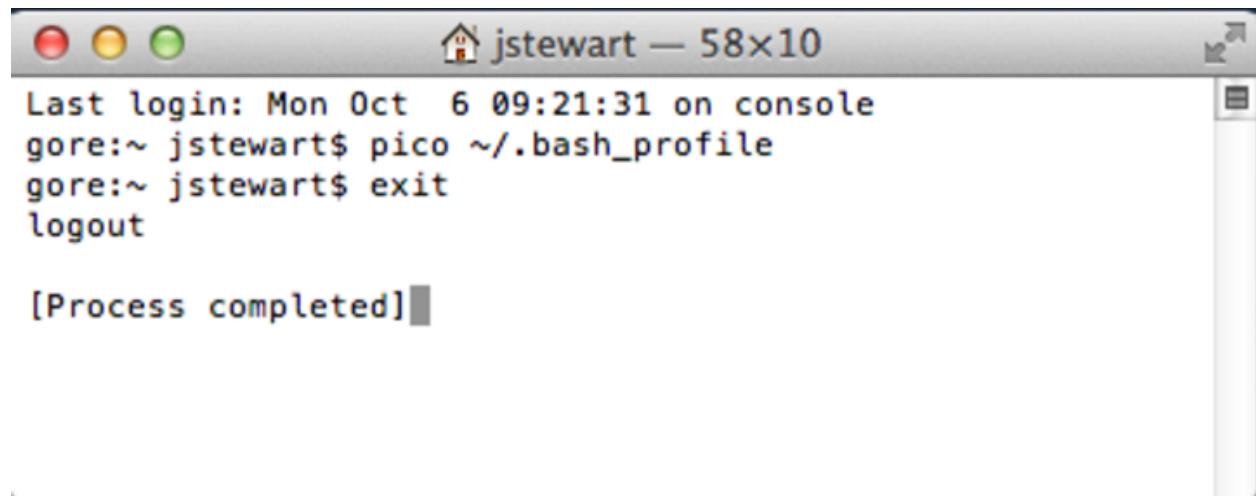

```
Last login: Mon Oct  6 09:21:31 on console
gore:~ jstewart$ pico ~/.bash_profile
gore:~ jstewart$ exit
logout

[Process completed]
```

Figure 30:

6.3.3 Set up your Git Identity

After downloading and installing *git*, you will need to set up your **Git Identity**, which identifies you with your work. *Note:* if you have any problems with the following instructions, it is likely because of incompatibility between the version of your operating system and the version of git you downloaded in the previous section. In this case, find and download a compatible version at www.wandisco.com/git/download and then follow the instructions below.

You will set up your GitHub identity using the command line specific to Windows or Mac:

- **Windows:** Start > Run > cmd
- **Mac:** Applications > Utilities > Terminal

In the window, you will see a cursor where you are able to type. Type the following and press return (or enter) at each step. Make sure all spaces and symbols are identical to the example below, including all spaces () and dashes (-).

Substitute your GitHub username instead of jdoe:

```
git config --global user.name jdoe
```

and then: substitute the email address you used to create your GitHub account:

```
git config --global user.email john.doe@example.com
```

You can check settings with the following:

```
git config --list
```

Quit the Terminal after typing:

```
exit
```

6.3.4 Install the GitHub application

There are several options to clone your repository to your local machine. When getting started, we recommend using the GitHub application. This is freely available for download. Follow the default instructions for downloading and installing from the following:

- **Windows:** <https://windows.github.com/>.
- **Mac:** <https://mac.github.com/>.

6.3.5 Create a folder called *github* on your computer

Because you will use GitHub to collaborate with your team or request support from the OHI team, it is important you save files in places where the file path is universal and not specific to your computer. When team members save files in different places, this will create a lot of problems when collaborating, particularly between Macs and Windows machines.

Please create a folder called *github* in your root directory. The file path for this folder will be:

- **Windows:** `Users\[User]\Documents\github\`
- **Mac:** `Users/[User]/github/`

This folder can be identified by any computer as `~/github/`.

TIP: You can check the location of your *github* folder by right-clicking the folder icon and selecting ‘Get Info’ on a Mac or ‘Properties’ on Windows.

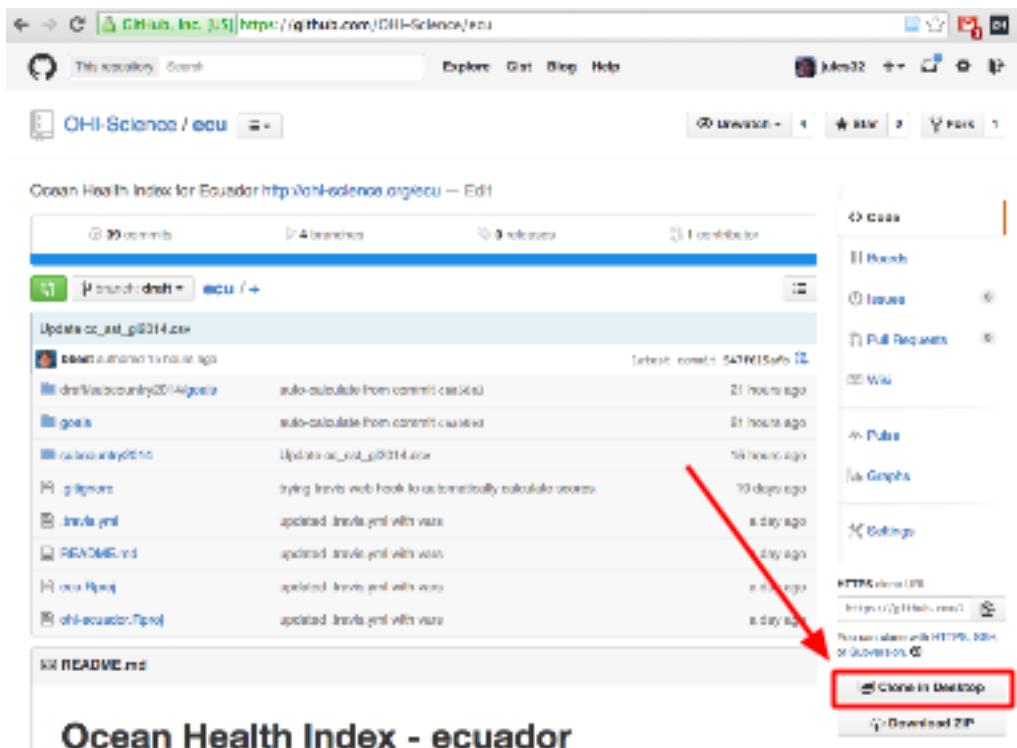


Figure 31:

6.3.6 Clone your repository to your computer

Clone a repository by clicking the ‘Clone in Desktop’ button on your online repository’s homepage ([https://github.com/OHI-Science/{\[\]assessment{}}\)](https://github.com/OHI-Science/{[]assessment{}}):

You will be asked where to save this repository: save it into the `github` folder you created. The file path for your assessment will therefore be:

- Windows: `C:\Users\[User]\Documents\github\[assessment]` (example: `C:\Users\johndoe\Documents\github\ohi-ecu`)
- on a Mac: `/Users/[User]/github/[assessment]` (example: `/Users/johndoe/github/ecu`)

The assessment can be identified by any computer as `~/github/[assessment]`.

The entire folder will now be saved on your computer.

6.3.7 Update permissions

You need to **email your username to ohi-science@nceas.ucsb.edu** for permission to upload modifications to your GitHub repository (you only need to do this once). Only team members who will be modifying files will need to do this; all other members can view online and download the repository without these permissions.

6.3.8 Work locally

You will then work locally on your own computer, modifying the files in the repository to reflect the desired modifications your team has identified for your assessment. Multiple users can work on the same repository at the same time, so there are steps involved to ‘check in’ your modifications so they can merge with the work of others without problems. GitHub has specific words for each of these steps. You have already successfully **cloned** an online repository to your local machine. After making modifications, you will **commit** these changes with a description before being able to sync back to the online repository. **Syncing** involves both **pulling** any updates from the online repository before **pushing** committed changes back to the server.

TIP: While you can edit files in the online GitHub repository, we do not recommend this. It is good practice to track changes through commits and syncing.

The example below illustrates GitHub’s collaborative workflow with the `ohi-israel` repo owned by OHI-Science:

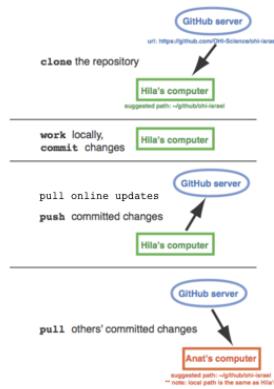


Figure 32:

All changes within your local repository will be tracked by GitHub regardless of the software you use to make the changes. This means that you can delete or paste files in the Mac Finder or Windows Explorer and edit `.csv` files in Excel or a text editor, and still sync these changes with the online repository. We recommend doing as much data manipulation as possible in a programming language like R, to maximize transparency and reproducibility. When modifying R scripts such as `functions.R`, you will need to work in R.

We recommend syncing with either the GitHub App or with RStudio. Both methods require you to commit your changes, before pulling any updates and pushing your modifications. The GitHub App combines the pulling and pushing into one step, called syncing. The following sections show you how to synchronize the repository on your computer with the repository online.

6.3.9 Syncing

When you work on your computer, any edits you make to any files in your repo, using any program, will be tracked by *git*. You can use any of the above to commit and sync your changes back to GitHub. There are many options you can use to sync your edits on a repo with the online version.

- GitHub App for Mac and for Windows
- RStudio
- Command line

If you are just modifying data `.csv` files, you probably only need to use the GitHub App. RStudio is convenient if you are working with `.R` files. Also, the command line can be used by those interested, and there are resources available online.

TIP: Once you sync your repository, the updated information will be automatically available to the WebApps.

6.3.10 Using the GitHub App to synchronize your repository

The GitHub App will track your modifications and can be used to commit and sync any changes made locally to your repository. Once you are done working on the pertinent files and wish to commit and sync the changes to the online server on the Github server, open the GitHub App. The following example is with the `ecu` repository:

1. Make sure you select the correct repository, located on the left column of the GitHub App window (Step 1 in the figure).
2. Select the different files to which changes have been made (2a), and preview those changes on the right column of the GitHub App window (2b).
3. Once all the changes have been reviewed, write a summary/description in the respective message bars in the GitHub App window (3), then click on ‘Commit’ (3a) and then ‘Sync’ (3b) located on the top-right corner of the GitHub App window (Note: If a `Commit` button appears instead of `Commit & Sync`, you can either click `Commit` and then click the `Sync` in this way, or you can alternatively select `Edit > Automatically Sync After Committing` which will then allow you to click on ‘Commit and Sync’)

Go online and check that your changes are now visible on GitHub online.

6.3.11 Working with R and RStudio

RStudio is a program that can be used to synchronize any modifications you make to files in your assessment’s repository, and if you are working in R, it is convenient since you do not need to open the GitHub App. If you do not already have this installed, install the latest version of R and RStudio (and if you do have these installed, check for updates: there are frequent updates to the R software, and the current version is identified on the website). Both R and RStudio are freely available to download.

R: Download the current version of R appropriate for your operating system at <http://cran.r-project.org> and follow the instructions to install it on your computer. If updating, compare the available version on their website with what you already have on your computer by typing `sessionInfo()` into your R console.

RStudio: Download the current version of RStudio software at www.rstudio.com. RStudio is not updated as often as R, but it is good to check for updates regularly. Note that in this case, you should follow the default install instructions.

If you are working on a Mac, you will need to tell RStudio to use the proper version of Git by doing the updating the preferences for ‘Git executable’:

RStudio > Preferences... > Git/SVN > Git executable: /usr/local/git/bin/git

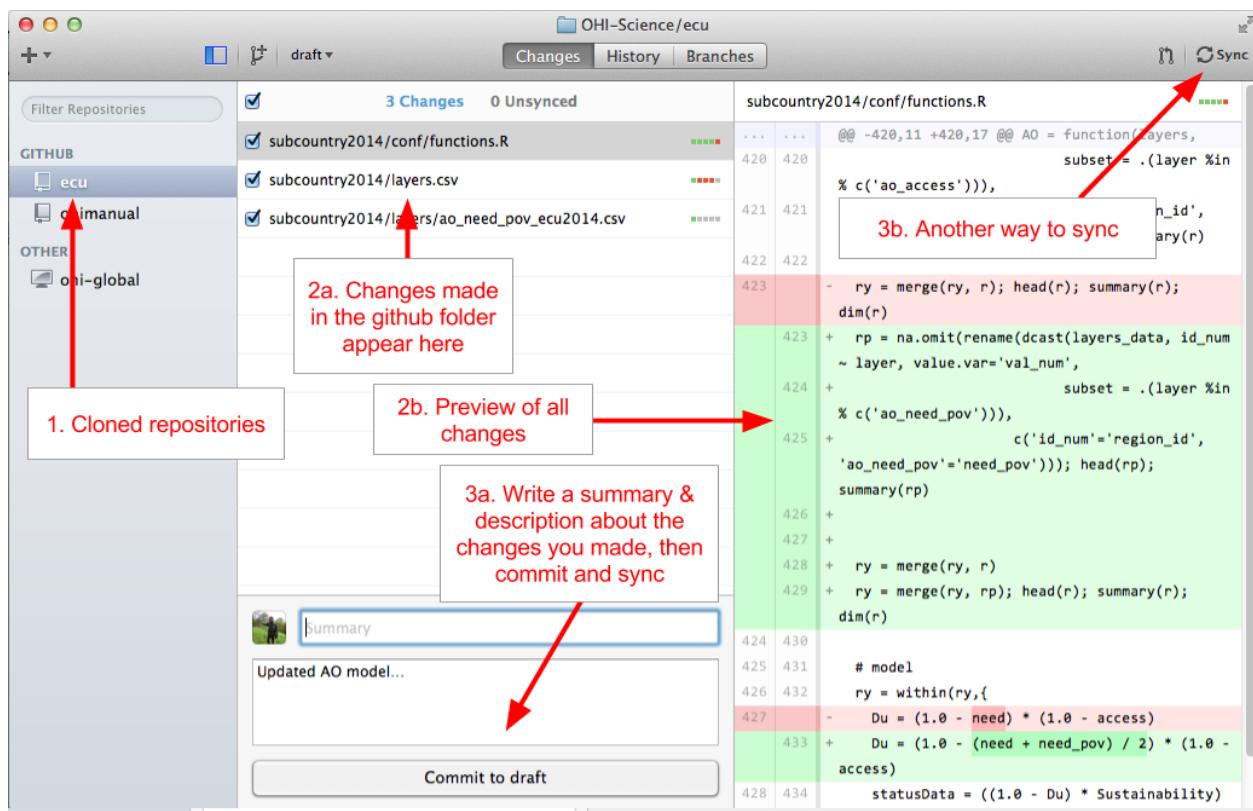


Figure 33: Figure showing the layout of the GitHub App when syncing. Click on ‘Commit’ and then ‘Sync’ to push changes to your repository.

6.3.12 Using RStudio to synchronize your repository

RStudio can sync files with GitHub directly, and can be used instead of the GitHub App. Like the GitHub App, it will capture the changes made to any files within the repository, no matter which software was used to modify them. The advantage for using RStudio to sync instead of the GitHub App is if you are working with R scripts already. In RStudio, you sync by first pulling and then pushing (separately); in the GitHub App these two functions are done together.

Launch your project in RStudio by double-clicking the .Rproj file in the assessment folder on your local hard drive.

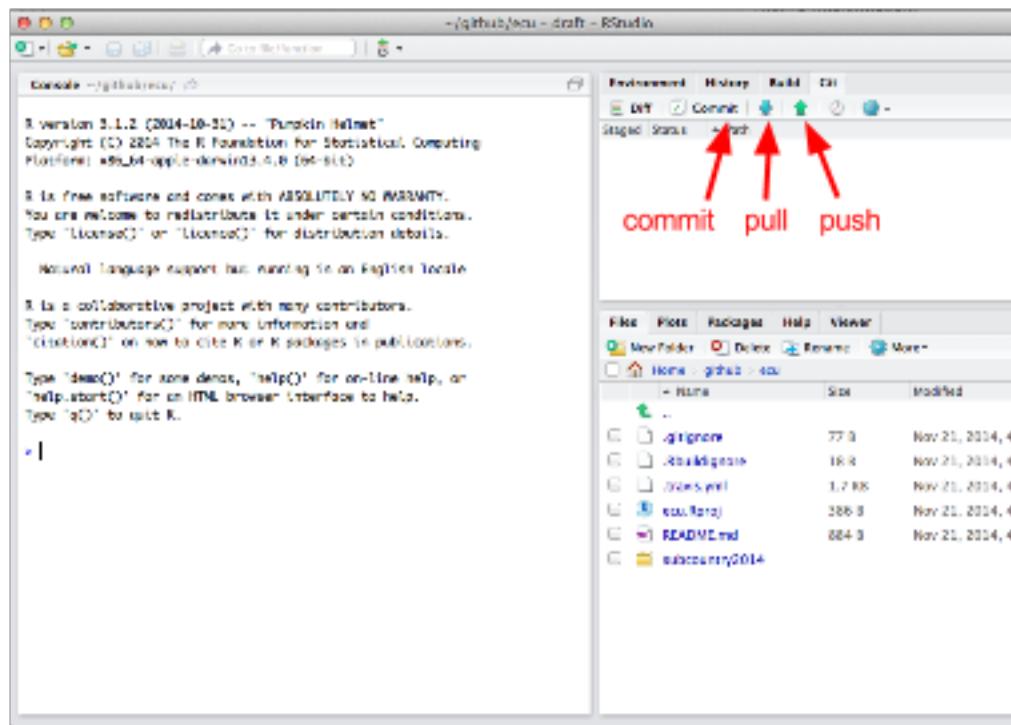


Figure 34:

When you modify or add a file, the file will appear in the ‘Git’ window once it has been saved. In the example below, the file `test.R` was created.

1. Clicking the ‘Staged’ box and the ‘Commit’ button opens a new window where you can review changes.
2. Type a commit message that is informative to the changes you’ve made.
 - Note 1: there will often be multiple files ‘staged’ at the same time, and so the same commit message will be associated with all of the updated files. It is best to commit changes often with informative commit messages.
 - Note 2: clicking on a staged file will identify additions and deletions within that file for your review
3. Click ‘Commit’ to commit the changes and the commit message

- Pull any changes that have been made to the online repository. This is important to ensure there are no conflicts with updating the online repository.
- Push your committed changes to the online repository. Your changes are now visible online.

TIP: If you aren't seeing your changes in the 'Git' window, try saving the file again.

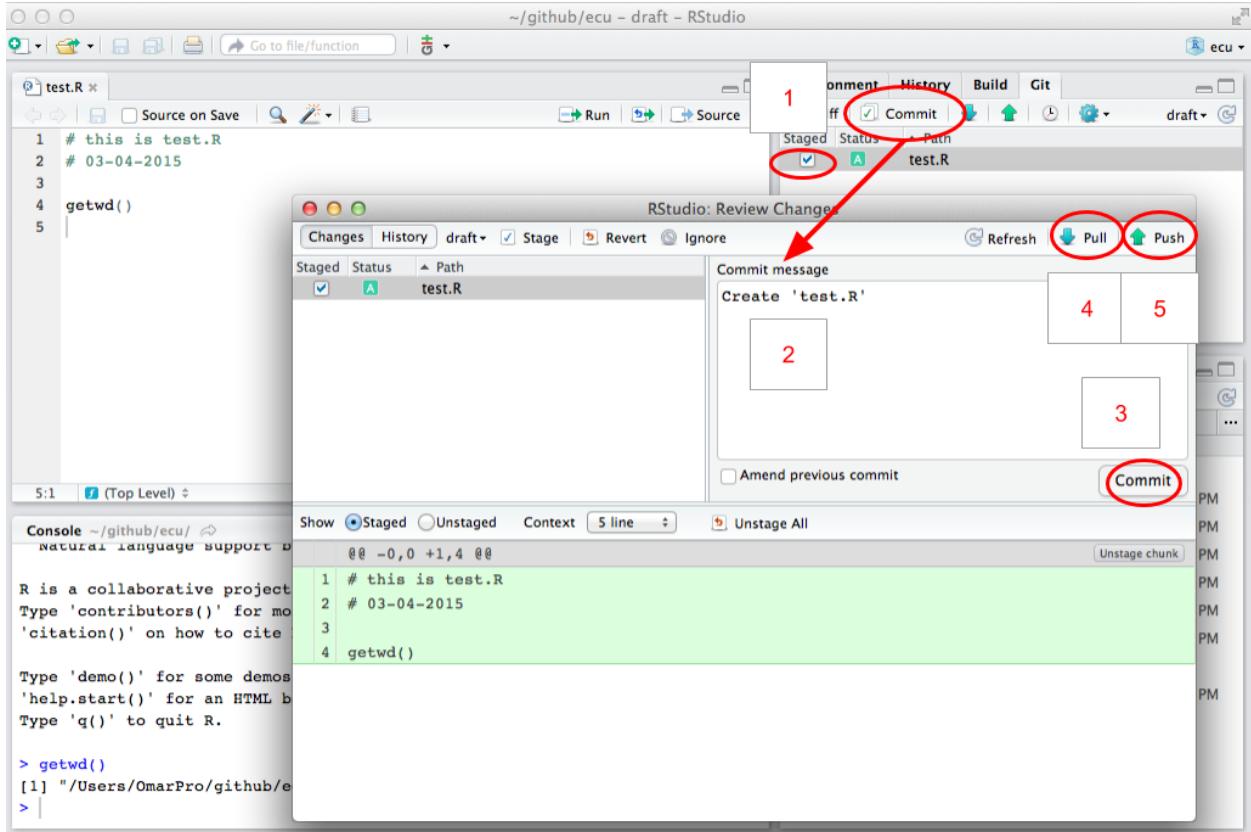


Figure 35: Figure showing RStudio when syncing. After first staging your changes, click the 'commit' button to open a new window where you can enter a 'commit message' and then pull and push new changes.

TIP: Another way to sync and open the project is to click on 'New Project' in the upper-right-hand corner of Rstudio, then choose 'Version Control', and then you can paste the URL of the desired repository. This URL can be found on your online repository's homepage.

6.3.13 Install the latest version of R and RStudio

Make sure you have the most current version of R and RStudio. Download **R** at <http://cran.r-project.org/> and install on your computer. If you already have R installed, check the website for updates. There are frequent updates to the R software, and the current version is identified on the website. Compare what is available from their website with what you already have on your computer by typing `sessionInfo()` into your R console. (This will also identify packages you have installed).

While not required, we highly recommend working with **RStudio**, which is an interface that makes working with R much easier, and it also interfaces with GitHub so you are able to synchronize without using the GitHub App. RStudio does not get updated as often as R does, but it is good to check for updates regularly.

6.4 GitHub repository architecture

GitHub stores all data files and scripts for your assessment in a repository (a folder). Different copies or complements to these folders, called *branches* can also exist, which aid with versioning and drafting. Your repository has four branches, two of which are displayed on your website (e.g., ohi-science.org/ecu):

1. **draft** branch is for editing. This is the default branch and the main working area where existing scenario data files can be edited and new scenarios added.
2. **published** branch is a vetted copy of the draft branch, not for direct editing. This branch is only updated by automatic calculation of scores if:
 1. no errors occur during the calculation of scores in the draft branch, and
 2. publishing is turned on. During the draft editing and testing phases of development, it is typically desirable to turn this off.
3. **gh-pages** branch is this website. The results sections of the site (regions, layers, goals, scores per branch/scenario) are overwritten into this repository after automatic calculation of scores. The rest of the site can be manually altered.
4. **app** branch is the interactive layer and map viewer application. The user interface and server-side processing use the [Shiny](#) R package and are deployed online via [ShinyApps.io](#) to your website. Once deployed, the WebApp pulls updates from the data branches (draft and published) every time a new connection is initiated (i.e., browser refreshes).

TIP: When looking at files on GitHub, note that the timestamps are associated with the ‘commit’ time rather than the ‘push’ time.

7 Using the Toolbox

Section Summary:

In this section, you will learn about the most common modifications made to repositories. You will be given examples to follow to help with your own assessment. The most common modifications are changing the pressures and resilience matrices, changing or creating data layers, and changing or removing goals models.

TIP: You should now have your assessment repository opened and be familiar with the files in the folder.

As your team finalizes which data should be included in the assessment and begins developing goal models, you can incorporate this information into your repository. Data layer files can be created and updated with any software that handles *.csv* files, but goal models must be updated in R. With any modifications you sync to the online repository, the Toolbox will automatically recalculate goal scores. Calculations can also be done locally and offline by running `subcountry2014/calculate_scores.R`.

This section gives instruction and examples for the most common modifications you will make to your repository:

- **modifying pressures and resilience matrices**
- **modifying and creating data layers for status, trend, pressures and resilience**
- **modifying goal models**
- **removing goals**

The files you will modify are:

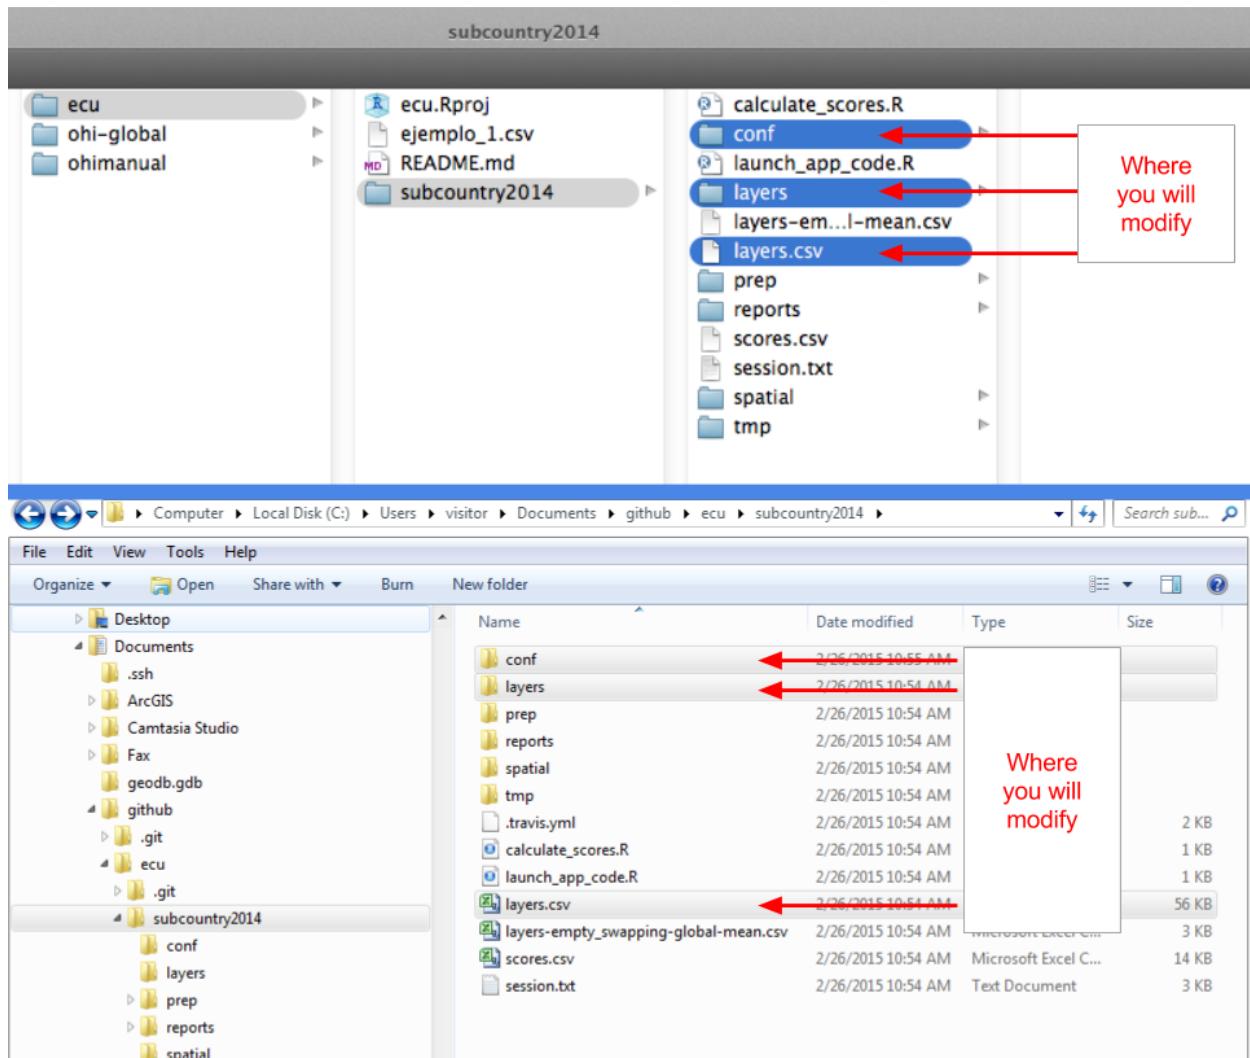


Figure 36: Files you will commonly modify are shown in the figure (Mac navigation is shown above and Windows is shown below). These include the `conf` folder, `layers` folder, and `layers.csv`.

7.0.1 File Preparation Workflow

It is generally recommended that you construct a useful workflow with your team when updating data layers for the Toolbox. This process is one that can be done by one person, or by several who are working through GitHub to sync the work. There are overall two main steps to preparing to input your layers into the Toolbox, starting with data layer preparation, and then going into data layer registration. The first step involves placing files into `layers` folder, and the second is registering those files in `layers.csv`. This file preparation process can occur in tandem with the model modification process. However, it must occur in order for you to run modified goal code using your new input data.

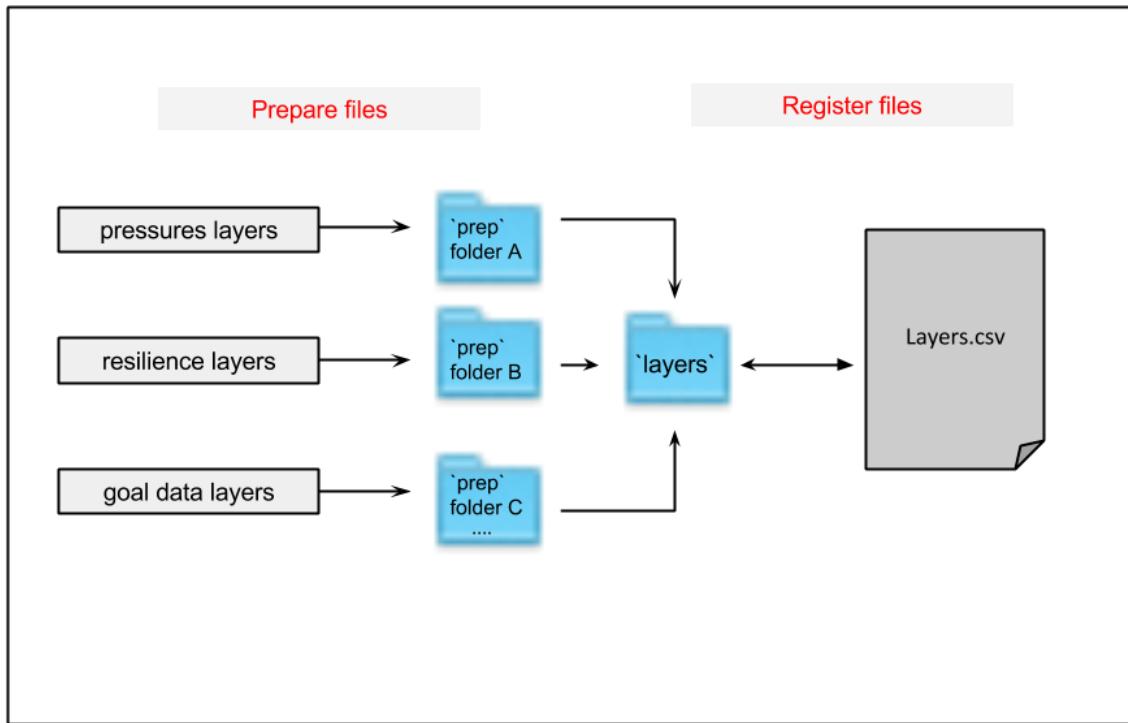


Figure 37: Diagram of OHI Toolbox data preparation workflow. You should start by prepping the files, loading them into the `layers` folder when they're ready for the Toolbox, and then registering them in `layers.csv`

7.1 Modifying and creating data layers

Data layers are `.csv` files and are located in the `[assessment]/subcountry2014/layers` folder. Remember that all data layers provided in your repository are extracted from the global 2014 assessment.

- Layers with the suffix `_gl2014.csv` (*gl* for *global*) have been exactly copied from the global assessment and applied equally to each region, and therefore the values will be the same across all subcountry regions.

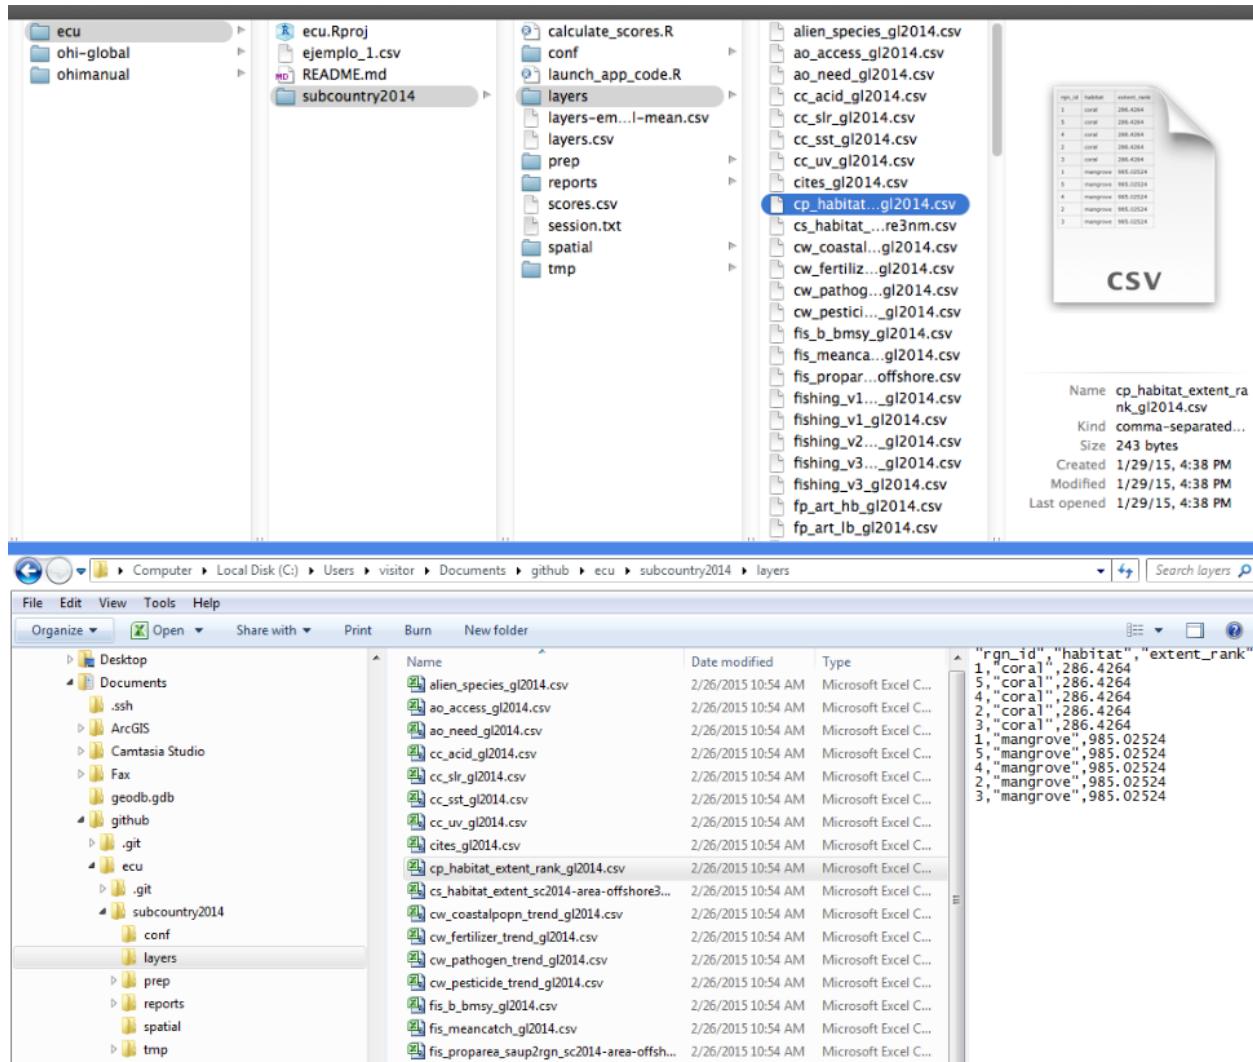


Figure 38: This figure shows the location of your data layers. Mac navigation is shown above and Windows is shown below.

- Layers with the suffix `_sc2014.csv` (*sc* for *subcountry*) have been spatially-extracted from global data or adjusted with spatially-extracted data so that each region in your assessment has a unique value. For example, gross domestic product (GDP) used in the global assessment was reported at the national (most often country) level. Instead of being applied equally across all subcountry regions (which would incorrectly increase the nation's GDP several times), national GDP was down-weighted by the proportion of coastal population in each region compared with the total coastal population.

Both types of default data layers are of coarse-resolution and should be replaced with local, high-resolution data when possible. The priority should be to replace as much of the `_gl2014.csv` data as possible.

There are several steps to follow when working with data layers:

1. Modify or create data layer with proper formatting
2. Save the layer in the `layers` folder
3. Register the layer in `layers.csv`
4. Check (and update when appropriate) `pressures_matrix.csv` and `resilience_matrix.csv` (located in: `[assessment]/subcountry2014/conf`)

7.1.1 Create data layers with proper formatting

The OHI Toolbox expects each data layer to be in its own `.csv` file and to be in a specific format, with data available for every region within the study area, with data organized in ‘long’ format (as few columns as possible), and with a unique region identifier (*rgn_id*) associated with a single score or value. See the ‘Formatting data for the Toolbox’ section for more information.

7.1.2 Save data layers in the `layers` folder

When you modify existing or create new data layers, we recommend saving this as a new `.csv` file with a suffix identifying your assessment (example: `_sc2014.csv`). Modifying the layer name provides an easy way to track which data layers have been updated regionally, and which rely on global data. Then, the original layers (`_gl2014.csv` and `_sc2014.csv`) can be deleted.

* Note: filenames should not have any spaces: use an underscore (‘`_`’) instead. This will reduce problems when R reads the files.

7.1.3 Register data layers in `layers.csv`

When there are new filenames associated with each layer, they will need to be registered in `[assessment]/subcountry2014/layers.csv`. If a layer simply has a new filename, only the *filename* column needs to be updated:

TIP: This part is done manually. If you prefer not to manipulate your file by hand, you can generate a script that automates this.

However, if a new layer has been added (for example when a new goal model is developed), you will need to add a new row in the registry for the new data layer and fill in the first eight columns (columns A-H); other columns are generated later by the Toolbox as it confirms data formatting and content:

- **targets:** Add the goal/dimension that the new data layer relates to. Goals are indicated with two-letter codes and sub-goals are indicated with three-letter codes, with pressures, resilience, and spatial layers indicated separately.

targets	layer	name	description	fld_value	units	filename	clip_h_shpclip_n_ship_dislayer_gl	path_in	rgns_in	fld_id_rfld_id	fld_categ	fld_id_ye	fld_val_n	fld_val_c	fld_file_exis	year_min	year_max	val_min	val_max		
1	AO	ao_access	Fisheries	The	value	value	ao_access_g	2014.csv		global	manager	ao_access	/github/global	rgn_id	value	TRUE	1990	2013	0.555772	0.63467	
2	AO	ao_need	Purchasing	The per	value	value	ao_need_g	2014.csv		global	purchasi	ao_need	/github/global	rgn_id	year	TRUE	1990	2013	0.063467	0.077218	
3	CW	cw_coasta	Coastal	Coastal	trend	trend	scor_cw_coastalpopn_trend_g	2014.csv		global	trends	w_cw_coaste	/github/global	rgn_id	trend	TRUE			-1	0.002294	
4	CW	cw_fertil	Fertilizer	Statistics	trend	trend	scor_cw_fertilizer_trend_g	2014.csv		global	trends	w_cw_fertil	/github/global	rgn_id	trend.score	TRUE			0.878753		
5	CW	cw_patho	Trends	In Trends	trend	trend	scor_cw_pathogen_trend_g	2014.csv		global	trends	w_cw_patho	/github/global	rgn_id	trend	TRUE			0.002294		
6	CW	cw_pestic	Pesticide	Statistics	trend	trend	scor_cw_pesticide_trend_g	2014.csv		global	trends	w_cw_pestic	/github/global	rgn_id	trend.score	TRUE			0.002294		
7	FIS	fis_b_bmsy	B/Bmsy	et	The Ratio	b_bmsy	B/B_msy	fis_b_bmsy_g	2014.csv		global	b_bmsy	fis_b_bmsy	/github/global	fao_id	taxon_nar_year	TRUE	1954	2011	0.054352	
8	FIS	fis_meanCat	Catch Data	Mean	mean_cat	metric	fis_meancatch_g	2014.csv		global	mean cat	fis_mean	/github/global	fao_id	saup_id	TRUE	2006	2011	8.18E-18		
9	FIS	fis_proparea	area	Lookup	prop_area	proprio	fis_proprea	saup_id	2014-area-offshore.csv	global	mean	cat/fis_mean	/github/global	fao_id	saup_id	prop_area	TRUE		0.001827		
10	FP	fp_wildca	Fisheries	Proportion	w_fis	value	fp_wildcaught_weight_g	2014.csv		global	weights	fp_wildca	/github/global	rgn_id	w_fis	TRUE			0.469561		
11	HAB CS	hab_exter	Habitat	Ex Modelled	km2	hab_exten	hab_exter_g	2014.csv	raster area_offshore	hab_exter	/github/global	rgn_id	habitat	km2	TRUE			71.6066			
12	HAB CS	hab_health	Health	Modelled	health	value	hab_health_g	2014.csv		global	habitat	hab_health	/github/global	rgn_id	habitat	health	TRUE		0.741379		
13	HAB CS	hab_trend	Habitat	Modelled	trend	trend	scor_hab_trend_g	2014.csv		global	habitat	trend	/github/global	rgn_id	habitat	trend	TRUE		-1		
14	ICO	ico_spp_iUCN	IUCN extir	Internati	category	category	ico_spp_extinction_status_g	2014.csv		global	category	ico_spp_extincti	/github/global	rgn_id	sciname	category	TRUE				
15	ICO	ico_spp_iUCN	popn Internati	popn	tre	trend	scor_ic	2014.popn_trend_g	2014.csv	global	popn	ico_spp	/github/global	rgn_id	sciname	popn_trer	TRUE				
16	LE	le_gdp	GDP	Gross	usd	value	le_gdp_2014-popn-inland25km.csv			population	gdp	2010 USD	le_gdp_2014-popn-inland25km.csv	rgn_id	year	usd	TRUE	1998	2011	1327122	
17	LE	le_jobs	sJobs	gapfilled	value	jobs	le_jobs_sector_year_g	2014.csv		population	gdp	2010 USD	le_gdp_2014-popn-inland25km.csv	rgn_id	sector	year	value	1997	2010	15.32	
18	LE	le_unemp	Unemploy	gapfilled	percent	percent	ule_unemployment_g	2014.csv		population	gdp	2010 USD	le_gdp_2014-popn-inland25km.csv	rgn_id	sector	year	percent	1997	2010	6.065547	
19	LE	le_wage	Wages	gapfilled	value	value	le_wage_sector_year_g	2014.csv		population	gdp	2010 USD	le_gdp_2014-popn-inland25km.csv	rgn_id	sector	year	value	1993	2008	307.6993	
20	LE	le_workf	Workforce	Modelled	adjusted	jobs	le_workforce_size_adj_g	2014.popn-inland25km.csv		population	gdp	2010 USD	le_gdp_2014-popn-inland25km.csv	rgn_id	sector	year	jobs	1990	2012	112.473	
21	LE	le_pressur	le_secto	Jobs weig	Jobs weig	weight	le_sector_weight_g	2014.csv		population	gdp	2010 USD	le_gdp_2014-popn-inland25km.csv	rgn_id	sector	weight	TRUE			1	
22	LIVECO	le_popn	Total popn	Populatio	count	count	le_popn_g	2014.csv		population	gdp	2010 USD	le_gdp_2014-popn-inland25km.csv	rgn_id	year	count	TRUE	1960	2012	4514593	
23	LSP	lsp_prot_Coastal	prCoastal	area_km2	km2	lsp_prot_area_inland1km_g	2014.csv		raster area_inland1km	lsp_prot_	/github/global	rgn_id	area_km2	TRUE	1959	2007	1				
24	LSP	lsp_prot_Coastal	mCoastal	area_km2	km2	lsp_prot_area_offshore3nm_g	2014.csv		raster area_offshore3nm	lsp_prot_	/github/global	rgn_id	area_km2	TRUE	1959	2007	3				

Figure 39: Register new layers in `layers.csv`. Be sure to note if there is a change in the filename.

- layer:** Add an identifying name for the new data layer, which will be used in R scripts like `functions.R` and `.csv` files like `pressures_matrix.csv` and `resilience_matrix.csv`.
- name:** Add a longer title for the data layer—this will be displayed on your WebApp.
- description:** Add a longer description of the new data layer—this will be displayed on your WebApp.
- fld_value:** Add the appropriate units for the new data layer (which will be referenced in subsequent calculations).
- units:** Add a description about the *units* chosen in the *fld_value* column above.
- filename:** Add a filename for the new data layer that matches the name of the `.csv` file that was created previously in the `layers` folder.
- fld_id_num:** Area designation that applies to the newly created data layer, such as: `rgn_id` and `fao_id`.

TIP: Think about what units you would like to be displayed on the WebApp when filling out “units.”

7.1.4 Check pressures and resilience matrices

If the new or modified layer is a pressures layer, check that `pressures_matrix.csv` and `resilience_matrix.csv` have been properly modified to register the new data layers.

7.2 Modifying pressures matrices

Your team will identify if any pressures layers should be added to the pressures matrices, and if so, which goals the pressure affects and what weight they should have. You can transfer this information in `pressures_matrix.csv` (located in the `[assessment]/subcountry2014/conf` folder). It is important to note that the matrix identifies the pressures relevant to each goal, and which weight will be applied in the calculation. Each pressure is a data layer, located in the `subcountry2014/layers` folder. This means that pressure layers need information for each region in the study area, and some layers will need to be updated with local data. In modifying pressures, you will need to consider whether data layers can be updated or added, and whether data layers map onto goals appropriately in the local context.

Adding a new pressure to the pressures matrix requires the following steps:

1. Create new pressure layer(s) and save in the `layers` folder
2. Register pressure layer(s) in `layers.csv`
3. Register pressure layer(s) in `pressures_matrix.csv`
 - a. Set the pressure category
 - b. Identify the goals affected and set the weighting
 - c. Modify the resilience matrix (if necessary)

The following is an example of adding two new pressures layers.

7.2.1 Create the new pressure layers and save in the `layers` folder

If you create a new data layer, give it a short but descriptive name that also includes a prefix that signifies the pressure category (for example: `po_` for the pollution category). There are five physical categories and one social category:

- `po_` = pollution
- `hd_` = habitat destruction
- `fp_` = fishing pressure
- `sp_` = species pollution
- `cc_` = climate change
- `ss_` = social pressure

So for example, `po_trash` is a pollution layer with trash on beaches, and `sp_alien` is species pollution due to alien (invasive) species.

In the current example, the two new layers created to account for the input and output effects of desalination operations will be called `po_desal_in`, and `po_desal_out`.

These new layers will have scores from 0 to 1, with values for each region in your study area, and will be saved in the `layers` folder.

7.2.2 Register the new pressure layers in `layers.csv`

Add two new rows in `layers.csv`, and register the new pressure layers by filling out the first eight columns for `po_desal_in`, and `po_desal_out`.

	A	B	C	D	E	F	G	H
1	targets	layer	name	description	fid_value	units	filename	fid_id_num
60	TR	tr_sustainabil	Sustainability in Tourism	Comp score	score		tr_sustainability_global2013.csv	rgn_id
61	TR	tr_unemploym	Percent unemployment	percent	percent unempl		tr_unemployment_global2013.csv	rgn_id
62	pressures	po_desal_in	Example data	Made-up data value	pressure score		po_desal_in_china2014.csv	rgn_id
63	pressures	po_desal_out	Example data	Made-up data value	pressure score		po_desal_out_china2014.csv	rgn_id
64	pressures	cc_acid	Ocean acidificati	Modeled distri	pressure_scor		cc_acid_global2013.csv	rgn_id
65	pressures	rr_dlr	Sea level rica	Modeled sea le	pressure scor		rr_dlr_global2013.csv	rgn_id

Figure 40:

7.2.3 Register the new layers in `pressures_matrix.csv`

`pressures_matrix.csv` identifies the different types of ocean pressures (columns) with the goals that they affect (rows). Adding a new pressures layer to `pressures_matrix.csv` requires adding a new column with the pressure layer name.

7.2.3.1 Set the pressure category This step requires transferring previous decisions made by your team into `pressures_matrix.csv`. Each pressure category is calculated separately before being combined with the others, so it is important to register the new pressure with the appropriate category prefix decided by your regional assessment team.

7.2.3.2 Identify the goals affected and set the weighting This step also requires transferring prior decisions into `pressures_matrix.csv`. Mark which goals are affected by this new pressure, and then set the weighting. Pressures weighting by goal should be based on scientific literature and expert opinion (3 = highly influential pressure, 2 = moderately influential pressure, 1 = not very influential pressure). Remember that the rankings in the pressures matrix are separate from the actual data within the pressures data layers. The rankings ensure that within a particular goal (e.g. within a row of the pressures matrix), the stressors that more strongly influence the goal's delivery have a larger contribution to that goal's overall pressure score. Therefore, the rankings are assigned independently of the actual pressure scores, and only determine their importance within the calculations.

o	goal	A	B	component	component_name	pressures_matrix.csv										
						D	E	F	G	H	I	J	K	L	M	N
						po_desal_in	po_desal_out	po_chemicals	po_pathogens	po_nutrients	po_nutrients(po)	po_trash	hd_subtidal	shd_subtidal	hd_intertidal	shd_intertidal
1	goal					3	2	2	1	1	3	1	1	3	1	
2	CP															
3	MAR															
4	AD															
5	NP															
6	NP	corals				1	2	1	2	1	2	1	1	3	1	
7	NP	fish_oil														
8	NP	microplastics				1	2	2	2	1	2	1	1	3	1	
9	NP	seaweeds				1	2	2	2	1	2	1	1	3	1	
10	NP	seahells				1	2	2	2	1	2	1	1	3	1	
11	CS	mangroves				1	2	2	2	1	2	1	1	3	1	
12	CS	saltmarsh				2	2	2	2	1	2	1	1	3	1	
13	CS	seagrass				2	2	2	2	1	2	1	1	3	1	
14	CP	corals				2	2	2	2	1	2	1	1	3	1	
15	CP	mangroves				2	2	2	2	1	2	1	1	3	1	
16	CP	saltmarsh				2	2	2	2	1	2	1	1	3	1	
17	CP	seagrass				2	2	2	2	1	2	1	1	3	1	
18	CP	seabed_sediment				2	2	2	2	1	2	1	1	3	1	
19	LSP															
20	LSP															
37	CP															
38	CP															
39	HAB	coral				2			3	3	3	3	2	3	3	
40	HAB	macroalgae							1							
41	HAB	saltmarsh				2			1							
42	HAB	seagrass_edge				2			1							
43	HAB	seagrass				2			2							
44	HAB	soft_bottom				2			2							
45	SPP					2			2							

Figure 41:

7.2.4 Modify the resilience matrix (if necessary)

Resilience is included in OHI as the sum of the ecological factors and social initiatives (policies, laws, etc.) that can positively affect goal scores by reducing or eliminating pressures. The addition of new pressure layers may therefore warrant the addition of new resilience layers that were not previously relevant. Similarly, the removal of pressure layers may warrant the removal of now irrelevant resilience layers.

7.3 Modifying resilience matrices

Previous decisions made with your team will identify if any resilience layers should be added to the resilience matrices, and if so, which goals and/or pressures the resilience affects and what weight they should have. You can then transfer this information into `resilience_matrix.csv` (located in the `[assessment]/subcountry2014/conf` folder).

`resilience_matrix.csv` maps the different types of resilience (columns) with the goals that they affect (rows). New resilience layers may be added to `resilience_matrix.csv` based on finer-scale local information either in response to a new pressures layer, or as a new independent measure. Any added layer must be associated with a pressures layer that has a weight of 2 or 3 in the OHI framework so that resilience measures can mitigate pressures in each region.

Each goal must have a resilience measure associated with it. In the figure below, the Toolbox would give an error because there are no resilience layers indicated for the natural products (NP) goal.

7.3.1 Updating resilience matrix with local habitat information

In this example we will borrow from the experience of `ohi-israel`, where they assessed habitats in the Habitats (HAB) sub-goal that were not included in global assessments `ohi-global`. Therefore, the resilience

goal	component	alien_species	cites	fishing_v1	fishing_v1_eez	fishing_v2_eez	fishing_v3	fishing_v3_eez	habitat	habitat_combo	habitat_combo_li_gci	li_sector_even	mariculture	msi_gov	species_diver	species_diver_tourism	water	wg_all
HAB	coral only	alien_species							habitat_combo_eez	habitat_combo_eez	habitat_combo_eez	mariculture	species_diver	species_diver_3nm	tourism	water	wg_all	
HAB		alien_species							habitat_combo_eez	habitat_combo_eez	habitat_combo_eez	mariculture	species_diver	species_diver_tourism	tourism	water	wg_all	
HAB	soft_bottom	alien_species							habitat_combo_eez	habitat_combo_eez	habitat_combo_eez	mariculture	species_diver	species_diver_tourism	tourism	water	wg_all	
HAB	soft_bottom	alien_species							habitat_combo_eez	habitat_combo_eez	habitat_combo_eez	mariculture	species_diver	species_diver_tourism	tourism	water	wg_all	
SPP		alien_species	cites						habitat_combo_eez	habitat_combo_eez	habitat_combo_eez	mariculture	species_diver	species_diver_tourism	tourism	water	wg_all	
CS									habitat_combo							water	wg_all	
CW										habitat_combo_eez						water	wg_all	
FIS											mariculture	msi_gov	species_diver			water	wg_all	
MAR											li_gci	li_sector_evenness				water	wg_all	
ECO																water	wg_all	
LIV																water	wg_all	
NP																water	wg_all	
CP										habitat_combo						water	wg_all	
ICO										habitat_combo_eez						water	wg_all	
LSP											habitat					water	wg_all	
TR																water	wg_all	

Figure 42:

matrix needed some revision.

The habitats assessed for ohi-israel are:

`rocky_reef, sand_dunes, soft_bottom`

Updates are required for the following files:

- `layers.csv`
- `resilience_matrix.csv`
- `resilience_weights.csv` (only if adding new resilience layers)

7.3.1.1 Global resilience layers The first step is to determine which resilience layers from the global assessment are relevant to your assessment, and whether others need to be added. The full list of layers included in the global resilience matrix are:

```
alien_species, cites, fishing_v1, fishing_v1_eez, fishing_v2_eez, fishing_v3,
fishing_v3_eez, habitat, habitat_combo, habitat_combo_eez, li_gci, li_sector_evenness,
mariculture, msi_gov, species_diver, species_diver_3nm, tourism, water,
wgi_all
```

Some of these layers capture general aspects of governance that apply to the protection of any habitat. These are:

`alien_species, cites, msi_gov, water, wgi_all`

Two layers only apply to the livelihoods and economies goal (LE), so they should be excluded from HAB resilience:

`li_gci, li_sector_evenness`

The remaining layers apply to certain habitats, but not others. We focus on these to determine how to adapt the HAB resilience calculation for ohi-israel. They are:

```
fishing_v1, fishing_v1_eez, fishing_v2_eez, fishing_v3, fishing_v3_eez, habitat,
habitat_combo, habitat_combo_eez, mariculture, species_diver, species_diver_3nm,
tourism
```

7.3.1.2 Determining how to modify these resilience layers

- To determine whether `species_diversity_3nm` or `species_diversity` should be used:
 - `sand_dunes` should use `species_diversity_3nm`,
 - `soft_bottom` should use `species_diversity`,
 - is `rocky_reef` mainly coastal? if so it should use `tourism` and `species_diversity_3nm`.
- If the habitats can be affected by mariculture plants (e.g. eutrophication and decreased water quality can occur if mariculture plants are close by and have poor wastewater treatment), then the `mariculture` resilience score should be added.
 - are there any mariculture plants in Israel? If yes, on which habitats do they occur?
- The remaining layers are the `fishing_v...` and `habitat...` layers, which are composite indicators obtained from different combinations of the following indicators:

`Mora`, `Mora_s4`, `CBD_hab`, `MPA_coast`, `MPA_eez`,

where:

- `Mora` is a fisheries governance effectiveness indicator by Mora *et al* (2009)
- `Mora_s4` is another indicator from Figure S4 of the supplementary material of the same publication that focuses on regulations of artisanal and recreational fisheries
- `CBD_hab` is a score assigned based on answers to a questionnaire compiled by countries that committed to Rio's Convention on Biological Diversity (CBD) to establish their progress towards habitat biodiversity protection
- `MPA_coast` is an indicator obtained as the proportion of coastal (3nm) waters that are in a marine protected area (MPA), with the maximum being 30% of coastal waters
- `MPA_eez` is an indicator obtained as the proportion of the whole EEZ that is in a marine protected area, with the maximum being 30% of the whole EEZ.

This table shows which indicators are used by each combo layer:

Layer	Mora	Mora_s4	CBD_hab	MPA_coast	MPA_eez
<code>fishing_v1</code>	Mora		CBD_hab	MPA_coast	
<code>fishing_v1_eez</code>	Mora		CBD_hab		MPA_eez
<code>fishing_v2_eez</code>	Mora	<code>Mora_s4</code>	CBD_hab		MPA_eez
<code>fishing_v3</code>		<code>Mora_s4</code>	CBD_hab	MPA_coast	
<code>fishing_v3_eez</code>		<code>Mora_s4</code>	CBD_hab		MPA_eez
<code>habitat</code>			CBD_hab		
<code>habitat_combo</code>			CBD_hab	MPA_coast	
<code>habitat_combo_eez</code>			CBD_hab		MPA_eez

Questions to consider:

The first objective is to determine whether the general `fishing_v...` or `habitat...` categories are relevant to each of the habitats. For example, fisheries regulations do not affect the conservation of sand dunes, so this habitat should not use any of the fisheries combos. If the general resilience categories are relevant to the habitat, the next step is to select one resilience layer within the `fishing_v...` and `habitat...` categories that most adequately captures the suite of combined resilience variables that affect the habitat. For example, the sand dune habitat is a strictly coastal habitat, so the most appropriate resilience layer would be the one that uses the `MPA_coast` (i.e., `habitat_combo`). The rocky reef and soft bottom, on the other hand, should

definitely include fisheries and habitat regulations. So, you'll need to choose a fisheries and a habitat combo for these two habitats. To do so, consider:

- 1) For which habitats should you use both a fishery and a habitat combo, or just use a habitat combo?
 - fisheries regulations do not affect the conservation of sand-dunes, so this habitat should not use any of the fisheries combos. Also, this is a strictly coastal habitat, so choose the habitat layer that uses the `MPA_coast` instead of the `MPA_eez`, i.e. `habitat_combo` (and, as mentioned above, choose the coastal version of biodiversity, i.e. `species_diversity_3nm`).
 - The rocky reef and soft bottom, on the other hand, should definitely include fisheries regulations. So you'll need to choose a fisheries and a habitat combo for these two habitats.
- 2) Which fisheries and habitat combos for `rocky_reef` and `soft_bottom`? The choice depends on two things:
 - whether they are coastal habitats (within 3nm of the coast) or EEZ-wide habitats
 - if coastal, use the fisheries and habitat combos with `MPA_coast` (`fishing_v1`, `fishing_v3`, `habitat_combo`), and the `species_diversity_3nm` layer
 - if EEZ-wide, use the fisheries and habitat combos with `MPA_eez` (`fishing_v1_eez`, `fishing_v2_eez`, `fishing_v3_eez`, `habitat_combo_eez`), and the `species_diversity` layer
 - whether the fisheries occurring on that habitat are mainly artisanal, mainly commercial, or both
 - if only commercial fisheries, use a layer that only uses the `Mora` data `fishing_v1..`)
 - if only artisanal/small-scale fisheries, use a layer that only uses the `Mora_s4` data (`fishing_v3..`)
 - if both, use a layer that uses both `Mora` and `Mora_s4` data (`fishing_v2..`)
- 3) It may also be that the existing global combo layers are not appropriate for your habitats. For example, if rocky reef is mainly coastal, and it is fished by both commercial and artisanal methods, then we need a new combo that uses `Mora`, `Mora_s4`, `CBD_hab`, and `MPA_coast` (this is the same as `fishing_v2_eez`, but we use the `MPA_coast` layer instead of the `MPA_eez`). All other combinations are already present.
- 4) Another issue to consider is whether local data are available to improve the pressure layers (that are based on global data). For example, if there are local data on Marine Protected Areas (MPAs) and any areas with special regulations, this should be used to generate the `MPA_coast` and `MPA_eez` layers. You may know that only certain types of protected areas are closed to fisheries, and may want to only include those. Also, local datasets may be more accurate and regularly updated. **NOTE: in the global study, these are the same datasets used to calculate the status of Lasting Special Places (LSP).
- 5) How to update `resilience_matrix.csv`?
 - write the complete list of layers you want to use for each habitat. Based on the above, for example, `soft_bottom` in Israel matches the combination of layers called `soft bottom, with corals` in the default `resilience_matrix.csv`. But the `rocky_reef` and `sand_dunes` don't seem to match any existing combination, so you'll probably need to delete some of the rows, e.g. the `coral only`, and replace with new ad-hoc rows.

7.4 Modifying goal models

When an existing layer is updated with new data, the Toolbox will automatically incorporate it into the goal calculations after the updated filenames are registered in `layers.csv`. However, if a new layer has been added to the layers folder and registered in `layers.csv`, the Toolbox will not use it unless it is called

in a goal model. To integrate any new data layers registered in `layers.csv` you will need to modify the goal model to incorporate the data. Furthermore, in many cases, it will make sense to modify goal models based on data availability and/or local context. For example, the models for regional analyses can often be simplified because of improved data.

There are two steps to follow when working with goal models:

1. Update `functions.R`
2. Check and possibly update `goals.csv`

7.4.1 Update `functions.R`

To incorporate a new data layer into a goal model, open `functions.R` in RStudio: this script contains all the models for each goal and sub-goal. A member of your team with the ability to write R code will need to translate the updated goal model into the Toolbox format. Follow the structure of existing goal models in order to incorporate the new data layers, noting the use of certain R packages for data manipulation.

The image below shows the navigation pane in RStudio that can be used to easily navigate between goal models.

```

61
62 # separate out the region ids:
63 c$fao_id      <- as.numeric(sapply(strsplit(as.character(c$fao_saup_id), "_"), function(x)x[1]))
64 c$saup_id     <- as.numeric(sapply(strsplit(as.character(c$fao_saup_id), "_"), function(x)x[2]))
65 c$TaxonName   <- sapply(strsplit(as.character(c$taxon_name_key), "_"), function(x)x[1])
66 c$TaxonKey    <- as.numeric(sapply(strsplit(as.character(c$taxon_name_key), "_"), function(x)x[2]))
67 c$catch       <- as.numeric(c$catch)
68 c$year        <- as.numeric(as.character(c$year))
69 #Create Identifier for linking assessed stocks with country-level catches
70 c$stock_id <- paste(as.character(c$TaxonName),
71                      as.character(c$fao_id), sep="_")
72
73 # b_bmsy data
74 b = SelectLayersData(layers, layer='fis_b_bmsy', narrow=T) %>%
75   select(
76     fao_id      = id_num,
77     TaxonName   = category,
78     year,
79     bmsy        = val_num)
80 # Identifier taxa/fao region:
81 b$stock_id <- paste(b$TaxonName, b$fao_id, sep="_")
82 b$bmsy     <- as.numeric(b$bmsy)
83 NP          <- as.numeric(as.character(b$fao_id))
84 CS          <- as.numeric(as.character(b$year))
85 CP          <- as.numeric(as.character(b$prop_area))
86 TR          <- as.numeric(as.character(b$saup_id))
87 LIV_ECO    <- as.numeric(as.character(b$rgn_id))
88 LE          <- as.numeric(as.character(b$prop_area))
89 ICO         <- as.numeric(as.character(b$saup_id))
90 LSP         <- as.numeric(as.character(b$rgn_id))
91 SP          <- as.numeric(as.character(b$saup_id))
92 SP          <- as.numeric(as.character(b$rgn_id))
93 CW          <- as.numeric(as.character(b$saup_id))
94 HAB         <- as.numeric(as.character(b$rgn_id))
95 SPP         <- as.numeric(as.character(b$saup_id))
96
97 e the species status data with catch data
CAtches: only taxa with catch status data

```

Figure 43: The navigation pane in RStudio can be used to easily navigate between goal models.

7.4.2 Check and possibly update `goals.csv`

`goals.csv` provides input information for `functions.R`, particularly about goal weighting and function calls. It also includes descriptions about goals and sub-goals, which is presented on the WebApp.

Changing goal weights will be done here by editing the value in the *weight* column. Weights do not need to be 0-1 or add up to 10; weights will be scaled as a proportion of the number of goals assessed. `goals.csv` also indicates the arguments passed to `functions.R`. These are indicated by two columns: *preindex_function* (functions for all goals that do not have sub-goals, and functions for all sub-goals) and *postindex_function* (functions for goals with sub-goals).

Check the information in `goals.csv`

order_color	order_hierarchy	order_calculate	goal	parent	name	name_flower	description
1	1.2	1.0	15	FP	Food Provision	Food Provision	This goal measures the amount of seafood sustainably harvested in a given region th
2	1.1	1.1	1	FIS	Fisheries	Fisheries	This subgoal model aims to assess the amount of wild-caught seafood that can be sus
3	1.3	1.2	2	MAR	Mariculture	Mariculture	This subgoal measures the ability to obtain maximal seafood yield from farm-raised
4	2.0	2.0	3	AO	Artisanal Fishing Opportunity	Artisanal Fishing Opportunities	This goal captures the access people have to coastal resources, whether or not they
5	3.0	3.0	4	NP	Natural Products	Natural Products	This goal model calculates overall status by weighting the status of sustainable ha
6	4.0	4.0	5	CS	Carbon Storage	Carbon Storage	This goal captures the carbon stored in natural coastal ecosystems that absorb and
7	5.0	5.0	6	CP	Coastal Protection	C	tain coastal habitats provide by mea
8	6.0	6.0	7	TR	Tourism & Recreation	T	periciencing and taking pleasure in co
9	7.2	7.0	16	LE	Coastal Livelihoods & Economics	C	dependent livelihoods and productive c
10	7.1	7.1	8	LIV	Livelihoods	L	on from the oceans in the form of jo
11	7.3	7.2	9	ECO	Economics	E	ated with marine industries.
12	8.2	8.0	17	SP	Sense of Place	S	for aspects of the coastal and na
13	8.1	8.1	10	ICO	Iconic Species	Iconic\nSpecies	tionary species.
14	8.3	8.2	11	LSP	Lasting Special Places	Lasting Special\nPlaces	This subgoal captures the species that are important to a region because they are r
15	9.0	9.0	12	CH	Clean Waters	Clean Waters	This subgoal captures the conservation status of geographic locations that hold sig
16	10.2	10.0	18	BD	Biodiversity	Biodiversity	This goal captures the degree to which waters are polluted.
17	10.1	10.1	13	HAB	Habitats	Habitats	This goal captures the conservation status of marine species.
18	10.3	10.2	14	SPP	Species	Species	This subgoal measures the condition of habitats that are important for supporting a

weight	preindex_function	postindex_function
1.0		FP(layers)
0.5	FIS(layers, status_year=2011)	
0.5	MAR(layers, status_years=2007:2012)	
1.0	AO(layers, year_max=2013)	
1.0	NP(scores, layers, year_max=2011)	
1.0	CS(layers)	
1.0	CP(layers)	
1.0	TR(layers, year_max=2012)	
1.0		LE(scores, layers)
0.5	LIV_ECO(layers, subgoal='LIV')	
0.5	LIV_ECO(layers, subgoal='ECO')	
1.0		SP(scores)
0.5	ICO(layers)	
0.5	LSP(layers, status_year=2013, trend_years=2008:2013)	
1.0	CW(layers)	
1.0		BD(scores)
0.5	HAB(layers)	
0.5	SPP(layers)	

Figure 44: Check the information in `goals.csv`. It provides input information for `functions.R`.

When updating layers or goal models, it is important to ensure that information called from `goals.csv` is correct:

- check the years
- etc...

7.4.3 Example modification:

Suppose your team has decided to add an ‘artisanal access’ component to the Artisanal Fishing Opportunity goal because of locally available data. Once the data are obtained and properly formatted, the data layer is saved as `ao_access_art`. To include this new information in the goal model, you will need to do the following:

1. register the layer in `layers.csv`
2. update the goal model in `functions.R`
3. update the goal call in `goals.csv`

1. register in `layers.csv`

	A	B	C	D	E	F	Sheets	Charts	SmartArt Graphics	WordArt	H
1	targets	layer	name	description	fid_value	units	filename				
2	AO	ao_access	Fisheries management	The opportunity for value	value		ao_access_china2014.csv				fid_id_num
3	AO	ao_access_art	Example data	Made-up data	value	value	ao_access_art_china2014.csv				rgn_id
4	AO	ao_need	Purchasing power	The per capita pu value	value		ao_need_global2013.csv				rgn_id
5	CW	cw_coastalpopn_trend	Coastal human pop.	Coastal population trend	trend score		cw_coastalpopn_trend_global2013.csv				rgn_id
6	CW	cw_fertilizer_trend	Fertilizer economic	Statistics on fertilizer trend across	trend scores		cw_fertilizer_trend_global2013.csv				rgn_id

Figure 45:

2. update goal model

```

326 l0 = function(layers,
327   year_max=max(layers$data$year, na.rm=T),
328   year_min=min(layers$data$year, na.rm=T), max(layers$data$year, na.rm=T)-10,
329   Sustainability=1.0{
330 
331   # cost data
332   layers_data = SelectLayersData(layers, targets='AO')
333 
334   ry = rename(dcast(layers_data, id_num ~ year - layer, value.var='val_num',
335     subset = .(layer %in% c('ao_need'))),
336     c('id_num'='region_id', 'ao_need'='need')); head(ry); summary(ry)
337 
338   r = na.omit(rename(dcast(layers_data, id_num ~ year, value.var='val_num',
339     subset = .(layer %in% c('ao_access'))),
340       c('id_num'='region_id', 'ao_access'='access'))); head(r); summary(r)
341 
342   ro = na.omit(rename(dcast(layers_data, id_num ~ layer, value.var='val_num',
343     subset = .(layer %in% c('ao.access.art'))),
344       c('id_num'='region_id', 'ao.access.art'='access_art'))); head(r); summary(r)
345 
346   ry = merge(ry, r)
347   ry = merge(ry, ro); head(ry); summary(ry); dim(ry)
348 
349   # model
350   ry = within(ry,{
351     Du = (1.0 - need) * (1.0 - (access + access_art)/2)
352     status = ((1.0 - Du) * Sustainability) * 100
353   })
354 
355   # status
356   r.status = subset(ry, year==year_max, c(region_id, status)); summary(r.status); dim(r.status)
357 
358   # trend

```

Figure 46:

3. update goal call in `goals.csv`

[develop]

7.5 Removing goals

If a goal is not relevant in your region, it is possible to remove the goal completely from the calculation. There are four places where you will need to remove the reference to this goal. Failing to delete all referenced layers after the goal is deleted will result in errors. To remove goals from your assessment, you will have to do the following:

1. Remove the goal model from `functions.R`
2. Remove the goal's row from `goals.csv`
3. Remove the goal's row from `pressures_matrix.csv`
4. Remove the goal's row from `resilience_matrix.csv`

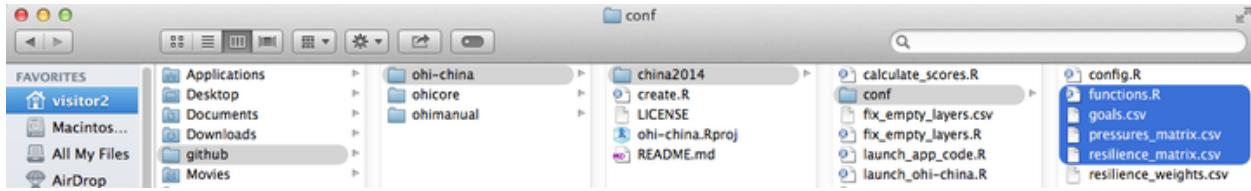


Figure 47:

Example: Removing carbon storage (CS) goal

To completely remove the carbon storage goal from Index calculations, you will do the following.

- 1) Remove the carbon storage (CS) goal model from **functions.R**. Delete the highlighted text in the figure below that references the CS layers and calculates CS goal status, trend, and scores.

```

529 CS <- function(layers){
530   # layers
531   lyrss <- list("RK" = c("hab_health", "hab_extent", "hab_trend"))
532   lyrss$names = sub("\\\\w+\\_\\w+", "", names(unlist(lyrs)))
533 
534   # cost data
535   # get habitat layers, layer=lyr$names
536   rk = rename(dossD, (dnum = category ~ Layer, value.von~valnum, subset = -(layer %in% lyrss["RK"])))
537   rk = rk[!(dnum == "region_id", category == "habitat", lyrss["RK"])]
538 
539   # limit to CS habitats
540   rk = subset(rk, habitat %in% c("mangrove", "saltmarsh", "seagrass"))
541 
542   # assign extent of 0 as NA
543   rk$extent[rk$extent == 0] = NA
544 
545   # status
546   r$status = dplyr::na.omit(rk[,c("region_id", "habitat", "extent", "health")], .(region_id), summarize,
547   # group_by(region_id, habitat, extent),
548   #     sum(extent),
549   #     dimension = "status",
550   #     score = min(1, sum(extent * health) / sum(extent)) * 100)
551 
552   # trend
553   r$trend = dplyr::na.omit(rk[,c("region_id", "habitat", "extent", "trend")], .(region_id), summarize,
554   # group_by(region_id, habitat, extent),
555   #     sum(extent),
556   #     dimension = "trend",
557   #     score = sum(extent * trend) / sum(extent))
558 
559   # return scores
560   scores = dplyr::bind(r$status, r$trend)
561 
562   # CP = function(layers){
563   #   scores
564   # }
565 
566   # CP = function(layers){
567   #   scores
568   # }
569 }

```

Figure 48:

- 2) Remove the CS row from **goals.csv**. Delete the highlighted row in the figure below that contains the CS goal.

	A	B	C	D	E	F	G	H	I	J
1	order_color	order_hierarch	order_calculate_goal	parent	name	name_layer	description	This goal mean	weight	preindex_func
2	1.2	1	15 FP		Food Provision	Food Provision	This goal mean		1	
3	1.1	1.1	1 FIS	FP	Fisheries	Fisheries	This subgoal n	0.5 FIS(layers, sta		
4	1.3	1.2	2 MAR	FP	Marculture	Marculture	This subgoal n	0.5 MAR(layers, st		
5	2	2	3 AO		Artisanal Fishl	Artisan	This goal capti	1 AO(layers, yea		
6	3	3	4 NP		Natural Produt	Natural Produt	This goal mod	1 NP(scores, lay		
7	4	4	5 CS		Carbon Storag	Carbon Storag	This goal capti	1 CS(layers)		
8	5	5	6 CP		Coastal Protec	Coastal\nProt	This goal mean	1 CP(layers)		
9	6	6	7 TR		Tourism & Rec	Tourism & VR	This goal capti	1 TR(layers, year		
10	7.2	7	16 LE		Coastal Liveli	Coastal Liveli	This goal aims	1		

Figure 49:

- 3) Remove all CS rows from **pressures_matrix.csv**. Delete the highlighted rows in the figure below that contain CS pressures.

- 4) Remove all CS rows from **resilience_matrix.csv**. Delete the highlighted rows in the figure below that contain CS resilience.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1	goal	component	component_np	goal_in	po_deal_in	po_deal_out	po_chemicals	po_pathogens	po_nutrients	po_trash	hd_eutrdal	sl_hd_eutrdal	h
9	NP	shells		1	2				1			2	
10	NP	sponges		1	2				1			3	
11	CS	mangrove		2	2			1			1		
12	CS	salmarsh		2	2			2			2		
13	CS	seagrass		2	2			2			3		
14	CP	coral		2	2		1			2			3

Figure 50:

	A	B	C	D	E	F	G	H	I	J	K	L	M
1	goal	component	alien_species	cites	fishing_v1	fishing_v1_eco	fishing_v2	fishing_v2_eco	fishing_v3	fish_habitat	habitat_combr	habitat_combo	gci
7	NP		alien_species	cites							habitat_combo	habitat_combo	
8	CS										habitat_combo	habitat_combo	
9	CS		mangrove	only									
10	CW												
11	FIS												habitat_combo_eco

Figure 51:

7.6 Modifying goals with categories

Several goals have categories that are assessed within them. In global assessments, these goals are:

Goal	Category
NP	product types
CS	habitat types
CP	habitat types
HAB	habitat types
LIV	industry sectors
ECO	industry sectors

These goal categories are identified in the file `config.r` located in the `conf` folder. The Toolbox uses `config.r` to identify the appropriate categories when pressures and resilience dimensions are calculated.

When you open `config.r`, you'll see that the `pressures_components` variable identifies which data layer indicates the category types. For global assessments, the following data layers are used:

Goal	Category	Pressures Layer in <code>config.r</code>
NP	product types	np_harvest_product_weight
CS	habitat types	cs_habitat_extent
CP	habitat types	cp_habitat_extent_rank
HAB	habitat types	le_sector_weight
LIV	industry sectors	le_sector_weight
ECO	industry sectors	hab_presence

If you have modified any of the categories for any goal, you will likely need to update the layer indicated in `config.r` in addition to updating the categories as unique rows in `pressures_matrix.csv`.

7.6.1 Example 1: Pressures

For example, there are three product types for Natural Products in the China assessment (seasalt, sea chemicals, and sea medicine), differ from those assessed in the global assessments (corals, fish_oil, ornamentals, seaweeds, sponges). To modify this goal in the Toolbox, input layers were updated, saved in the `layers` folder, and registered in `layers.csv`; the `NP` function in `functions.r` was updated, and new categories replaced the old in `pressures_matrix.csv`. The only remaining step to finalize the new NP goal is to update `config.r` to ensure it looks for the correct data layer and therefore categories. If you do not update `config.r` before running `calculate_scores.r`, you will get the following warning:

```
Calculating Pressures...
The following components for NP are not in the
aggregation layer np_harvest_product_weight categories
(corals, fish_oil, ornamentals, seaweeds, sponges):
seasalt, sea_chemicals, sea_medicine
```

This message indicates that the `np_harvest_product_weight` layer identifies five categories (corals, fish_oil,

7.6.2 Example 2: Pressures

More subtle examples of these mismatch between the categories identified in `pressures_matrix.csv` and `config.r` can also occur. For example, after updating the CS layers and goal in the China assessment, the following warning message appeared when running `calculate_scores.r`:

```
Calculating Pressures...
The following components for CS are not in the aggregation layer
cs_extent categories (saltmarshes, seagrasses, mangroves):
mangrove, saltmarsh, seagrass
```

The problem here is that the categories identified in `config.r` (saltmarshes, seagrasses, mangroves) are plural, whereas the categories identified in the pressures matrix (mangrove, saltmarsh, seagrass) are singular, and the Toolbox needs exact matches. To fix this warning, you need to update the pressures matrix with the plural names.

7.6.3 Example 3: Resilience

For resilience, the proper categories also need to be identified both in `resilience_matrix.csv` and `config.r`. If neither are updated, you will see the following message:

```
Calculating Resilience...
Note: each goal in resilience_matrix.csv
must have at least one resilience field
Based on the following components for NP:
corals
fish_oil
ornamentals
seaweeds
shells
sponges
```

With resilience, if we update only the `resilience_matrix.csv` but not `config.r`, we get the following error message instead of the warning message we saw for pressures above.

```
Based on the following components for NP:
  seasalt
  sea_chemicals
  sea_medicine
Error in subset.default(SelectLayersData(layers, layers = lyrs),
id_num == : object 'id_num' not found
In addition: Warning messages:
1: Grouping rowwise data frame strips rowwise nature
2: In left_join_impl(x, y, by$x, by$y) :
  joining factors with different levels, coercing to character vector
  ````
```

This error can be fixed by updating `config.r` with a layer identifying the appropriate categories. NOT

```
Other example modifications

Preparing the fisheries sub-goal
```

Here is some background information about how to prepare fisheries data layers for the Toolbox.

\*\*Data layers used by the Toolbox:\*\*

```
* `fis_b_bmsy`
* `fis_meanCatch`
* `fis_proarea_saup2rgn`
* `fp_wildcaught_weight`
```

#### Description of data layers

`fis\_b\_bmsy`

```
* *for species*: B/Bmsy estimate (either from formal stock assessment, or from a data-poor method such as
* *for genus/family/broader taxa*: the toolbox will use median B/Bmsy from species in that region + a pool of
* *data source (for CMSY)*: catch time-series (at least 10 years of catch >0), species resilience (if available)
```

\*\*Example data:\*\*

| fao_id | taxon_name     | year | b_bmsy   |
|--------|----------------|------|----------|
| 51     | Ablennes hians | 1985 | 1.112412 |
| 51     | Ablennes hians | 1986 | 1.222996 |
| 51     | Ablennes hians | 1987 | 1.371058 |

NOTE: if a species that is caught in different sub-regions belongs to the same population, you don't want to use multiple fao\_ids. Use \*fao\_id\* as an identifier that separates different fisheries 'stocks' belonging to the same species. If you don't have multiple stocks in your study area, set all \*fao\_id\* = 1.

`fis\_meanCatch`:

\* average catch across all years, per species, per region

\* \*data source\*: catch time-series (at least 10 years of catch >0), with a unique identifier for each population

\*\*Example data:\*\*

| fao_saup_id | taxon_name_key             | year | mean_catch  |
|-------------|----------------------------|------|-------------|
| 37_8        | Aristeus antennatus_690051 | 2014 | 14.24398116 |
| 37_8        | Atherinidae_400218         | 2014 | 27.30120156 |
| 37_8        | Balistes capriscus_607327  | 2014 | 3.247883895 |

The \*taxon\_name\_key\* column indicates the name of the species (e.g. Aristeus antennatus) and its 'taxonomic key'.

`fis\_proarea\_saup2rgn`:

\* a conversion file that, for each region for which catch is reported, tells us what proportion of that

\*\*Example data:\*\*

| saup_id | rgn_id | prop_area |
|---------|--------|-----------|
| -----   | -----  | -----     |

```

166	1	1.0
162	2	1.0
574	3	0.7
37	4	0.8

```

**\*\*Specific instances:\*\***

\*only if catch is reported for different regions than the ones used for the OHI assessment:\* this should be avoided  
 \*If catch is reported for the same areas for which OHI is calculated:\* then all the **\*prop\_area\*** are = 1  
 \*If catch is reported for the whole area of the assessment, but you want to calculate a separate OHI score:

`fp\_wildcaught\_weight`:

\*only needed if there is mariculture\*: for each region, this represents the relative proportion of catch (NOTE that, before all mariculture harvest from all species gets summed, the mariculture harvest for each

##### Running CMSY model

**\*\*Sample data to run CMSY:\*\***

| id   stock_id                    | res    | ct          | yr   |  |
|----------------------------------|--------|-------------|------|--|
| 6   Acanthistius brasiliensis_41 | Medium | 100         | 1950 |  |
| 23   Acanthurus dussumieri_61    |        | 0.059250269 | 1950 |  |
| 24   Acanthurus dussumieri_71    |        | 0.190749971 | 1950 |  |
| 25   Acanthurus lineatus_61      | Low    | 12.74821966 | 1950 |  |

The current CMSY script produces an output that looks something like this (split into 2 tables):

| stock_id               | convergence | effective_sample_size | yr   | b_bmsy   | b_bmsyUpper |  |
|------------------------|-------------|-----------------------|------|----------|-------------|--|
| Ablennes hians_51   SC | 30974       |                       | 1985 | 1.112412 | 1.8         |  |
| Ablennes hians_51   SC | 30974       |                       | 1986 | 1.222996 | 1.768895    |  |

| stock_id                 | yr       | b_bmsyLower | b_bmsyiQ25 | b_bmsyiQ75 | b_bmsyGM | b_bmsyMed |  |
|--------------------------|----------|-------------|------------|------------|----------|-----------|--|
| Ablennes hians_51   1985 | 1        | 1           | 1          | 1.093932   | 1        |           |  |
| Ablennes hians_51   1986 | 1.014688 | 1.075699    | 1.298437   | 1.209005   | 1.160329 |           |  |

where **\*stock\_id\*** is the unique identifier for each stock that was used in the input file, **\*convergence\*** is the

**\*\*How to:\*\***

**\*\*1. Include resilience in the CMSY code:\*\***

In the CMSY R script, in the PARAMETERS section, replace the following:

```
>
```

**\*\*2. Make assumptions about fisheries regulations:\*\***

If you assume that fisheries are depleted and there isn't very much fisheries regulation, and you are using the original constrained prior on final biomass is set by this line within the code:

```
finalbio <- if(ct[nyr]/max(ct) > 0.5) {c(0.3,0.7)} else {c(0.01,0.4)}
```

The model uses a uniform prior if that line is replaced with:

```
finalbio <- c(0.01,0.7) ``
```

### **3. Use data at a different spatial resolution than the final assessment:**

See notes above for `fis_proparea_saup2rgn`

### **4. Calculate B, or Bmsy:**

The CMSY model calculates B/Bmsy as a ratio, it does not estimate the two variables separately.

### **5. Use catch per unit of effort (CPUE):**

The CMSY model requires total biomass removed by fisheries, and uses catch as a proxy for that. It cannot use CPUE. Other more sophisticated stock assessment models use CPUE and may be employed. We do not provide documentation for the use of these other models.

### **6. Use other life-history characteristics, in addition to resilience:**

The CMSY model does not use more detailed information. Other more sophisticated stock assessment models use other life-history traits such as fecundity, larval dispersal, r, K, Lmax, etc., and may be employed. We do not provide documentation for the use of these other models.

### **7. Create a ‘taxonkey’ to assign to each species:**

When replacing the SAUP\_FAO data with your own data, assign a key of 600000 to all species. For all catch that is reported at genus or coarser taxonomic level, you will have to choose an appropriate taxonkey. You can create your own key, from 100000 to 500000, based on your own judgment of how many species may be reported under that same denomination, and how different they may be (all that matters for the toolbox code is whether the number starts with a 1,2,3,4,5 or 6 with 1 being the coarsest, such as ‘miscellaneous marine animals’, or ‘crustaceans nei’).

**7.6.3.1 Resources** Martell, S & Froese, R (2013) “A simple method for estimating MSY from catch and resilience”. *Fish and Fisheries*, DOI: 10.1111/j.1467-2979.2012.00485.x. [Downloadable here](#)

Rosenberg, A.A., Fogarty, M.J., Cooper, A.B., Dickey-Collas, M., Fulton, E.A., Gutiérrez, N.L., Hyde, K.J.W., Kleisner, K.M., Kristiansen, T., Longo, C., Minte-Vera, C., Minto, C., Mosqueira, I., Chato Osio, G., Ovando, D., Selig, E.R., Thorson, J.T. & Ye, Y. (2014) Developing new approaches to global stock status assessment and fishery production potential of the seas. *FAO Fisheries and Aquaculture Circular No. 1086*. Rome, FAO. 175 pp. [Downloadable here](#)

## **7.7 Notes about R**

The Toolbox is written in R, and relies heavily on a few R packages created to facilitate data handling and manipulation. The primary R package used is called `dplyr` by Hadley Wickham. The `dplyr` package allows for ‘chaining’ between functions, which is represented with a `%>%`. See: <https://github.com/hadley/dplyr#dplyr> for documentation.

## **8 Frequently Asked Questions (FAQs)**

This document provides answers to some frequently asked questions about conducting regional assessments using the Ocean Health Index. A few questions are related to general concepts in the Ocean Health Index,

but mostly those topics are covered at <http://www.oceanhealthindex.org/About/FAQ/>. Here, the FAQ are primarily technical questions regarding regional assessments and using the OHI Toolbox. This document will be updated continually as we have more questions. Questions are arranged by theme, and have the format Q: (question) and A: (answer).

## 8.1 Overall

### 8.2 Conceptual

#### **Q: Are regional assessment scores comparable with global assessment scores?**

A: Regional Index scores cannot be directly compared to global Index scores, or to other regional Index scores calculated through separate efforts. This is because data and indicators (both what they measure and their quality), reference points (set using local knowledge and priorities), and specific goal models are often different for the areas being compared.

However, because scores for each goal are scaled to a reference point, qualitative comparisons can be made. For example, a score of 71 in the US West Coast compared to 66 in Brazil says that the US West coast is closer to fully meeting its sustainable goals (i.e., meeting regional reference points). Furthermore, use of the same Ocean Health Index framework across regional assessments permits fruitful discussion and general comparisons even if data inputs differ. Ocean Health Index assessments at any scale always work within a standardized definition of ocean health, using information to capture the philosophy of the ten goals that have been identified (and undergone scientific peer-review) prior to compiling relevant data. Use of the ten-goal framework is important both to ensure that all aspects of ocean health are captured and to allow better comparison across regional assessments than would be possible if the different regions used different methods.

#### **Q: How does the Index account for ecosystem benefits?**

A: The OHI is not an index of ecosystem services. The Index prefers to describe benefits from a healthy ocean and emphasize their relevance, but the ideas are closely related. The ten goals roughly fall into areas of ecosystem services such as food provisioning (**Food Provision**), regulatory services (**Carbon Storage**), cultural services (**Tourism and Recreation, Special Places**), supporting services (**Clean Waters, Biodiversity**), and other values (**Livelihoods and Economies**).

(Source: OHI Baltic workshop)

#### **Q: Where is climate change measured in the Index?**

A: Four different aspects of climate change – increases in sea surface temperature (SST), sea level rise (SLR), ultraviolet radiation (UV), and ocean acidification (OA) – are included as pressures to many goals in the Index, including Natural Products, Carbon Storage, Coastal Protection, Sense of Place, Livelihoods & Economies and Biodiversity. Mitigation of climate change through carbon storage is one of the ten goals.

#### **Q: Why are food provision and artisanal fishing opportunities goals separated?**

A: These goals measure different aspects of how people relate to fishing. The catch of fish made by artisanal (=small-scale, subsistence type) fisheries is captured in the food provision goal. Jobs, wages and income from both the food provision and artisanal fishing goals are captured in the livelihoods & economies goal. The purpose of the artisanal fishing opportunity goal is to evaluate the opportunity for people to pursue this fishing in relation to their need to do so.

## 8.3 Timing and Resources

#### **Q: How much does it cost to produce a regional assessment?**

A: Regional assessments can be completed at(varying costs depending on the local context.(Funds are needed for a management and scientific team, workshops and meetings (including travel), communications, policy

engagement, and operating costs. Therefore, securing funding is an important component to satisfactorily complete the assessment. We encourage the development of a local proposal or strategic action plan that details a timeline of activities and the resources needed to accomplish them.

**Q: How many people are required in a team?**

A: rather than a specific number of individuals, what is required are specific skillsets. For example, if the scientific analysts were capable of effectively conducting the R analysis, then a dedicated R analyst would not be required. In current assessments, teams range between 2 and 8 people.

**Q: How long does it take to calculate OHI at a regional scale?**

A: The duration of an OHI assessment depends on a number of factors, such as the budget and number of people involved, the scale of the study area and whether new regions will need to be created, how easily data can be acquired, how much local data can be incorporated, how many goal models need to be changed. Additionally, decisions about setting reference points require input from experts. For independent assessments (OHI+), we have found that the average time has ranged from 1.5 to 3 years (See **Task Timeline** in the **Conceptual Guide**).

**Q: How much time will modifications by an R analyst take?**

A: This will depend on if you are changing any models, and potentially data layers—but a lot of changing data layers just requires registering them properly in `layers.csv` (and maybe `pressures_matrix.csv` and `resilience_matrix.csv` if they are pressures or resilience files) and having the `functions.R` file call those layers. That is more ‘bookkeeping’ than actual R programming.

**Q: How much time will modifications by a GIS analyst take?**

A: this will depend on how many layers you are processing: you are clipping spatial data? That will take some time because there are quite a few files, but maybe not too long since it is pretty small scale and once there is a clipping mask created I think you apply it to other files.

**Q: Which goals require a GIS analyst?**

A: All goals using spatial data could potentially require a GIS analyst. These goals are commonly: habitat-based goals and sub-goals: (Coastal Protection, Carbon Storage, Habitats—a sub-goal of Biodiversity), Food Provision, Sense of Place, Species—a sub-goal of Biodiversity, Clean Waters

## 8.4 Structure

**Q: Can we remove or add goals to the OHI?**

A: A lot of deliberation went into defining the ten goals, and they seem to do a pretty good job of covering many if not most ocean uses, so additional goals may not be necessary. But it could be that they eclipse or replace an existing goal.

## 8.5 Reference points

**Q: Can planning targets can be used as the reference points?**

A: Yes, planning targets can be used as reference points. This won’t be appropriate for every goal, but there are cases where this seemed best (example: iconic species sub-goal in the global assessment, mariculture sub-goal in the US West Coast assessment).

**Q: What is sector evenness?**

A: Sector evenness (also called a diversity index) is an economic concept that is included in OHI to enable comparison across many different sectors included in the Livelihoods & Economies goal. This goal evaluates jobs, wages and revenues for nine marine employment sectors. The distribution of employment across these

nine sectors is an effective indicator of resilience. If total employment within a community is primarily based in one or two sectors, the overall economic system will be excessively vulnerable to downturns in those sectors. Conversely, if employment is spread relatively evenly throughout all nine sectors, the overall system will be more robust and resistant to such disturbances. Overall revenue within the community will remain more stable during such downturns, and workers displaced by a downturn in their sector may be able to find employment in another sector without leaving the community.

## 8.6 Appropriate data layers

**Q: Shipping and port activity are hardly affected by the health of the ecosystem. Why are these included in the Index?**

A: Shipping and port activity are included as pressures only

**Q: Can oil spills be included in OHI?**

A: Yes, oil spills could be included as a pressure and in the Clean Waters goal.

**Q: Is seasonal (non-permanent) sea ice included in OHI habitats?**

A: No, sea ice only includes permanent sea ice.

**Q: Can seaweeds be included in the Carbon Storage goal?**

A: Because they store carbon for less than 100 years, seaweeds and corals are not included in the carbon storage goal. While the pelagic oceanic carbon sink (phytoplankton) plays a large role in the sequestration of anthropogenic carbon, the pelagic ocean mechanisms are not amenable to local or regional management intervention. Phytoplankton contribute to carbon fixation when they die and sink to the sea bottom at sufficient depth, because it is effectively out of circulation. However, if those phytoplankton are eaten, the carbon is cycled back into the system and not sequestered. Something that could potentially be included in the carbon storage goal is mollusc shells, if they are added to a landfill and not recycled in the sea. So if information on mariculture production and waste disposal are available, this could be an interesting addition to carbon storage at a regional scale.

**Q: Is coastal engineering included in Coastal Protection? What if it reduces erosion?**

A: We did not include an assessment of the protection afforded by man-made structures, such as jetties and seawalls, because these structures cannot be preserved without maintenance, may have other negative side effects (e.g. alter sedimentation rates causing erosion in new locations), thus they do not constitute long-term sustainable services. Coastal engineering (jetties, harbours, marina and breakwater) is not natural, and is mostly seen as a pressure. It will also be evident in the status of due to decreased natural habitat. It gets tricky when structures are built to help reduce coastal erosion—they are still manmade and therefore not a natural benefit that the ocean provides. But if available data allow, it might be possible to include tradeoff effects: maybe in areas where natural habitats are degraded and man-made structures have been built to reduce erosion, we could reduce the pressure that would otherwise be applied.

**Q: How is seawater used for cooling on-shore power plants incorporated into OHI?**

A: The use of cooling water for on-shore power plants would be a pressure on the ocean, since it causes entrapment of fishes, larvae, etc, and usually is circulated back into the ocean at higher temperatures (and maybe other chemicals, minerals, etc). Since the energy is coming from land-based activities, there isn't a service that the ocean is providing that 'benefits' people, it is only a pressure from the OHI perspective.

**Q: How is freshwater production through desalination incorporated into OHI?**

A: Desal would be incorporated into OHI in several places. The benefit is that there is freshwater produced, which could be incorporated into the Natural Products goal (or potentially into its own goal). Data required would be the volume of freshwater created based on the volume of seawater involved and spatial extent. Setting the reference point would not be based on how much can be produced, but some other targets perhaps set by government (percentage of the population served). Similar to the mariculture sub-goal and tourism

goals, any negative effects caused by desal that affect other goals (example: species) do not influence the ability to obtain desalination targets now and in the future. Therefore, the sustainability coefficient only measures the ability to sustain that goal, but not the impacts on other goals: instead, they are taken into account as pressures when calculating the other goals. Desal should be included as a pressure similar to cooling on-shore power plants since the discharge brine is dense, doesn't plume very well and there are chemicals involved.

**Q: Where do energy activities fit in to OHI?**

It depends. Energy could be part of a **Natural Products** goal, for instance, such as wave energy – but then the question is, what is the reference point? It is partially accounted for in **Livelihoods & Economies** through sectoral jobs data. The infrastructure is also something to consider. It could also be a pressure or resilience factor if there is a measurable footprint of the activity. You may want to consider for resilience, do you have governance measures that promote more sustainable practices in the energy industry?

## 8.7 Food Provision

**Q: Could the culture of marine fish in closed pools on-shore be included in the Mariculture sub-goal?**

A: This should not be included because onshore aquaculture does not require a marine environment.

**Q: Can aquaculture farms that receive seawater supply and return seawater back to the sea be included in the food provision goal?**

A: This would be more appropriately included in the Mariculture sub-goal, and with finer-scale data additional pressures due to the intake pipes and the processed brine back into the marine system could be incorporated as well. Natural Products

**Q: If natural products are all produced through on-land aquaculture, should this goal be removed?**

A: In this case you would probably have good reason to exclude the natural product goal due if this was defendable through discussions with experts and any reports/papers on the topic. This would also depend on the origin of these natural products—are they from the region's waters? Habitat-based goals

\*\*Q: I have fish that are used as feed for other fish (e.g., sprat) in my country. Can I include them in this goal?

A: It would be more appropriate to include them in Natural Products rather than Food Provision. This is because they are not being consumed directly. Fish such as sprat, for example, may be used to feed pigs in addition to other fish, and therefore you would need to know how much (tonnage) is being produced, and where it is going to be able to accurately distinguish these categories to avoid double-counting.

(Source: OHI Baltic Workshop, February 2015)

**Q: How is coral health calculated?**

A: Coral health was estimated by compiling point data from multiple studies of percent live coral cover. In other words, estimates of coral cover within transects of certain sites were repeated in time and we used that rate of change in time as an indication of health of the reefs in the whole region. The difficulty lies in 1) having enough different locations sampled that you can say something about the whole region and 2) finding studies that did repeated measures in time, in the same location, over at least 20 years. In the Global 2013 assessment, there were so few datasets that satisfied this condition that we had to pool observations from different locations.

**Q: Is it possible to calculate habitat goals when there is only one year of habitat data?**

A: With only one year of habitat data, it is not possible to calculate the trend (which requires 5 years of data). Instead, it might be best to use the available habitat data to calculate the current status and then to overlay pressures for the last 5 years to calculate trend.

## **8.8 Livelihoods & Economies**

**Q: Benefits gained from Wild-caught fisheries, Mariculture, Tourism & Recreation are included in specific goals. Why are these counted again in Livelihoods & Economies?**

A: The quantity of fish, mariculture, and participation in T&R are considered separately in goals whereas the monetary component is captured in L&E.

**Q: Why are revenue data from shipping, boat building, ports and harbors included as revenue? Do these activities rely on a healthy ocean?**

A: These sectors are included in the Ocean Health Index because the demand for some of those boats (fishing boats, sailboats, yachts) is dependent on a healthy ocean.

**Q: Why isn't oil and gas industries included in revenue?**

A: The Natural Products goal does not include non-living items such as oil, gas, and mining products, because these practices are not considered to be sustainable. They are also done at such large scales that including them would essentially make OHI an index for oil and mining—and they are not truly an ocean product. Because these products are not included in terms of quantity extracted, it did not seem appropriate to include information regarding jobs, wages or revenue.

## **8.9 Tourism & Recreation**

**Q: How do I calculate the sustainability term for TR?**

A: The best way is to use a local indicator or measure of tourism sustainability or competitiveness, otherwise use the TTCI value from the Global 2013 assessment for the study area (applied evenly across all regions).

## **8.10 Natural Products**

**Q: Where do Natural Products come from?**

A: In the global assessments, Natural Products data come from the UN's Food and Agriculture Administration ([www.fao.org/fishery/statistics/software/fishstatj/en](http://www.fao.org/fishery/statistics/software/fishstatj/en)). These data are compiled and reported by product for each country, and available by downloading the FishStatJ software.

## **8.11 Species**

**Q: Can species and iconic species model scores be penalized if there are local flagship species that have not been evaluated?**

Global data are based on IUCN assessments. For these evaluations, IUCN chooses a taxon (e.g. sharks) and a group of world experts assess it comprehensively. Locally identified species identified in a regional assessment may not be in the IUCN database because they do not belong to one of the taxa that have been selected for assessment, or because the experts that did the assessment did not know that information existed. In either case, there is no connection between what IUCN reports and what assessments are done locally. Therefore, it might not be fair to penalize a study area for missing species. For biodiversity, it is unrealistic to expect that all species are assessed, so it seems unfair to penalize for unassessed species. In the fisheries goal, there are penalties for species that are exploited but not assessed, because if there are landings data, it means they are somewhat measurable, and so it is reasonable to expect they should be at least monitored.

It might be reasonable to penalize unassessed iconic species. It is a smaller list of species that are specifically identified as being of interest, for one reason or other. This would work for species that have some form of assessment - unless that information already exists, it might be unrealistic to try to produce the data layer required to develop a new model.

## 8.12 Sense of Place

**Q:** Data are only available for marine protected areas, not terrestrial protected areas. Can we still calculate the Lasting Special Places sub-goal?

A: Yes, it is possible to calculate only the marine component of this sub-goal: this is not ideal but OHI is flexible to work with the data available.

**Q:** Should we calculate each category used in our assessment (e.g., antiquities, MPAs, beaches of special interest) independently, and then give the same weight (e.g., a third of the goal score) to the three categories, or should we instead pool the actual areas of the 3 categories?

A: Whether you group them together or calculate each category separately depends on reference points. Maybe you want 10% of offshore water to be in MPAs, but only 5% of coastlines to be beaches and 3% Antiquities, for example; in this case, you would calculate them separately and then add them together. But if you want 10% of your country's coast to have any combination of these things, you would keep them together.

(Source: OHI Israel assessment discussions, 2014-2015)

## 8.13 Pressures

**Q:** How are single ecological pressures (si in Equation S8) calculated?

A: Data included in pressures calculations are accessed in the same manner as any other data layer, and rescaled from 0-1 with an appropriate reference point. For further information, see HowTo\_GatherAppropriateData and HowTo\_CalculatePressures from ohi-science.org.

**Q:** Does the pressures matrix need to be changed?

A: It is likely that the pressures matrix will not need to be changed. The weights assigned in the matrix were set using information from the literature and by experts; the matrix was created by Halpern et al. 2012.

**Q:** How is commercial high and low bycatch calculated?

A: Commercial high and low bycatch are categorical values that were set based on fishing gear type. This began as a list of gear types used, producing a range of potential bycatch frequencies (from local reports when possible), which can be rescaled.

# 9 Toolbox Troubleshooting

The Toolbox prints messages during its processing to help guide error checking and debugging. Here are a few troubleshooting tips. This section will be updated frequently; please share any problems that you encounter.

## 9.1 Error: RStudio won't push to GitHub

When pushing committed changes within RStudio, would return the error \* error: unable to read askpass response from 'rpostback-askpass' \* fatal: could not read Username for

RStudio: Review Changes

Git Push  
error: unable to read askpass response from 'rpostback-askpass'  
fatal: could not read Username for 'https://github.com': Device not configured

Here's how we fixed it: we updated git.exe to the latest version, 2.2.1, edited the search path to point to the new version, made sure the git credential.helper was configured to be able to access the OS X keychain,

and pushed a test commit from terminal to store the username and password in the keychain, where it can be accessed from other apps like RStudio. Easy peasy!

1. To check your current version of `git.exe`, type this at the terminal command line:
  - `$ git --version` should return something like:
  - `git version 2.2.1` (check online to see if this is the latest version)
2. To update, go to <http://git-scm.com/download/mac>, download the latest *git* for OS X, install it.
3. In terminal, type `git --version` and verify that it reports the new version. If it shows the new version, great! Skip to Step 5.
  - Don't be sad if it doesn't! If you still see the old version, the installer put the new version into a different directory, which has a lower priority in the search path, so now to update the search path. The default Apple *git* seems to install the `git.exe` into `/usr/bin/` directory, this particular updater seems to install into `/usr/local/git/bin/` directory. The search path needs to be updated to look for `git.exe` in the new directory first.
4. To change the search path, open up the paths file in `nano` editor using `sudo`:
  - `$ sudo nano /etc/paths`
  - At the top line of the paths file, add the directory for the updated *git*: `'/usr/local/git/bin'` (without

```
GNU nano 2.0.6 File: /etc/paths
/usr/local/git/bin
/usr/local/bin
/usr/bin
/bin
/usr/sbin
/sbin


^G Get Help ^O WriteOut ^R Read File ^Y Prev Page ^K Cut Text
^X Exit ^J Justify ^W Where Is ^V Next Page ^U Uncut
```

- the quotes) so it looks like the top line here:
- Then hit `control-X` to exit, then `Y` in response to the save prompt.
5. Make sure your `git config` is up to date, including `credential.helper`:
    - `$ git config --global -l` should return something like:
      - `user.name="Casey O'Hara"`
      - `user.email=ohara@nceas.ucsb.edu`
        - see [https://github.com/OHI-Science/ohiprep/wiki/Setup#git\\_identity](https://github.com/OHI-Science/ohiprep/wiki/Setup#git_identity) for help on updating user.name and user.email
      - `credential.helper=osxkeychain`
        - (if you need to configure the credential helper: <https://help.github.com/articles/caching-your-github-password-in-git/>)

6. Now while you are in Terminal, it is important to sync with a repository to establish your security credentials. You must clone a repository and push a ‘test’ commit, and then once you are prompted for your username and password your information will get stored in the keychain. Here are the steps:

- Change your working directory to your local github directory: `$ cd github`
- (Tip: you can check if you’re in the right folder by entering `pwd`, short for “print working directory”; or you could look at the line of code preceding the “\$”.)
- Clone into a repository with a URL *for which you have permissions*. As an example, the following steps use a repository called ‘ZAF’ but you should use your own URL with a three-letter country code in place of ‘ZAF’:
  - `$ git clone https://github.com/omalik/zaf.git`
  - Change your working directory to the folder you just created (here, ‘ZAF’): `$ cd zaf`
  - Push a test commit to repository ‘ZAF’:
    - `$ touch test.md`
    - `$ git add test.md`
    - `$ git commit -m "testing"`
    - `$ git status`
    - `$ git push`
    - Check your status again: `$ git status`
      - (TIP: You can check your status with `$ git status` and you can use ‘ls’ to see if your new changes have registered in this repository.)

7. Now that `git` is updated and your username and password are set, make sure RStudio knows the location of the new `git.exe`. In RStudio, select **Tools > Global Options...**, select the **Git/SVN**, and browse to the new **Git executable** (it should appear as `/usr/local/git/bin/git` if you updated your `git` version

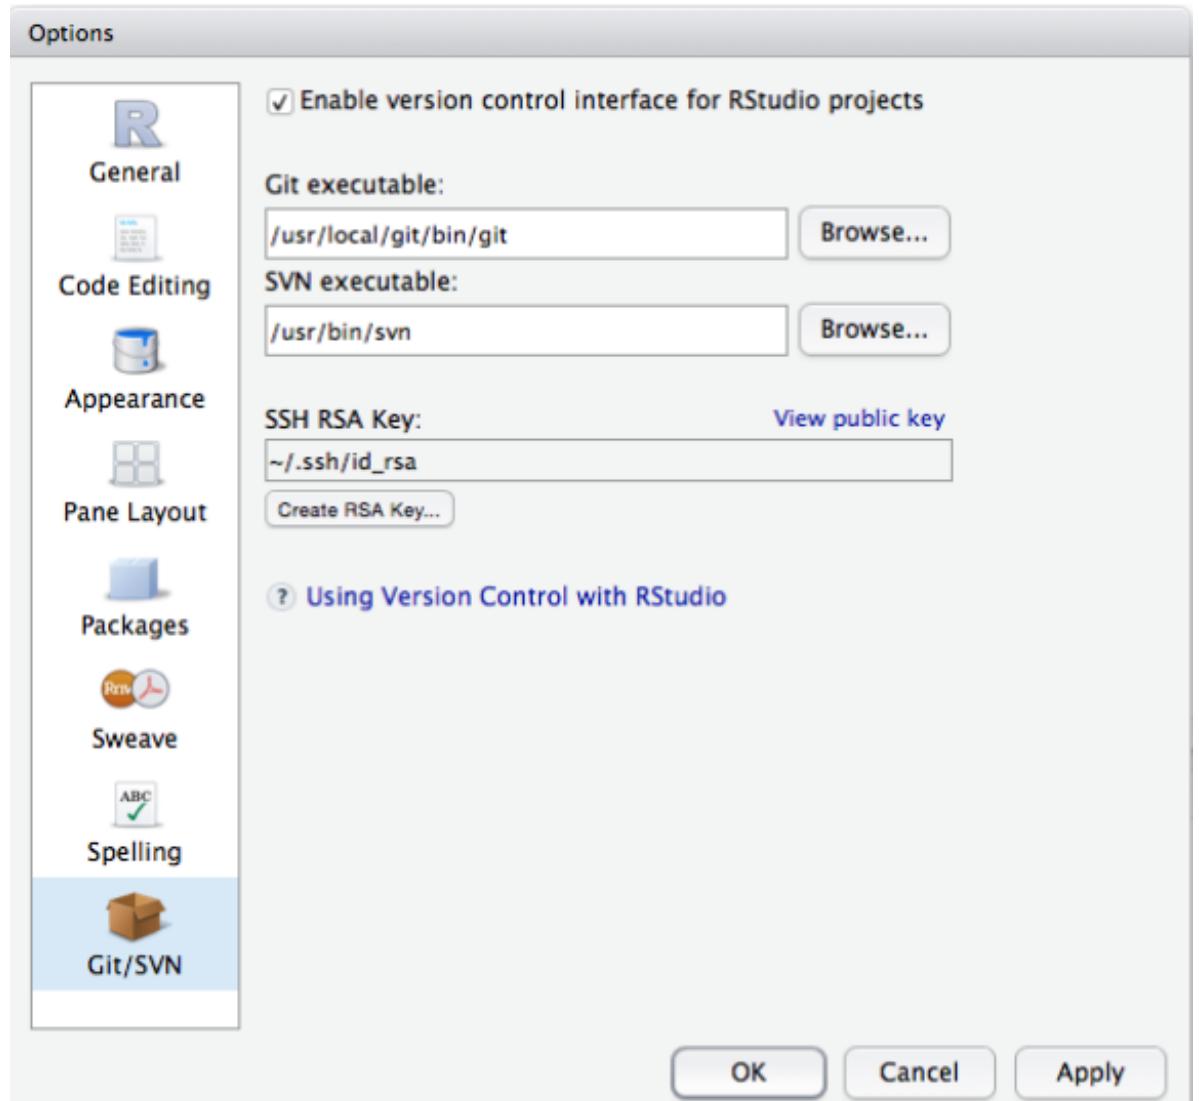

as above).

Next time you push a commit from RStudio, it should remember the username and password from your test commit in Step 6, and you should be good to go.

## 9.2 Loading RWorkspace on Restart

When you restart your R Session (**Session > Restart R** on a Mac), if you see that it is trying to load `ohicore`, it may give you an error:

You do not want it to load `ohicore` or to save anything in your workspace. You will need to change the default setting from your `.Rproj` file. Steps to do this:

1. Go to Project Options, either in the pull-down menu or by double-clicking the `.Rproj` file:

```
Console ~/github/ohi-china/china2014/ ↵
Restarting R session...

Loading required package: ohicore
Error in .requirePackage(package) :
 unable to find required package 'ohicore'
In addition: Warning message:
In library(package, lib.loc = lib.loc, character.only = TRUE, logical.return = TRUE, :
 there is no package called 'ohicore'
Loading required package: ohicore
Error in .requirePackage(package) :
 unable to find required package 'ohicore'
In addition: Warning message:
In library(package, lib.loc = lib.loc, character.only = TRUE, logical.return = TRUE, :
 there is no package called 'ohicore'
>
```

Figure 52:

2. Change all options to **No**:

### 9.3 Calculating Pressures...

#### 9.3.1 ‘The following components for [goal] are not in the aggregation layer [layer]...’

Example:

This error means you should update your pressures matrix because it expects there to be components that your region does not have.

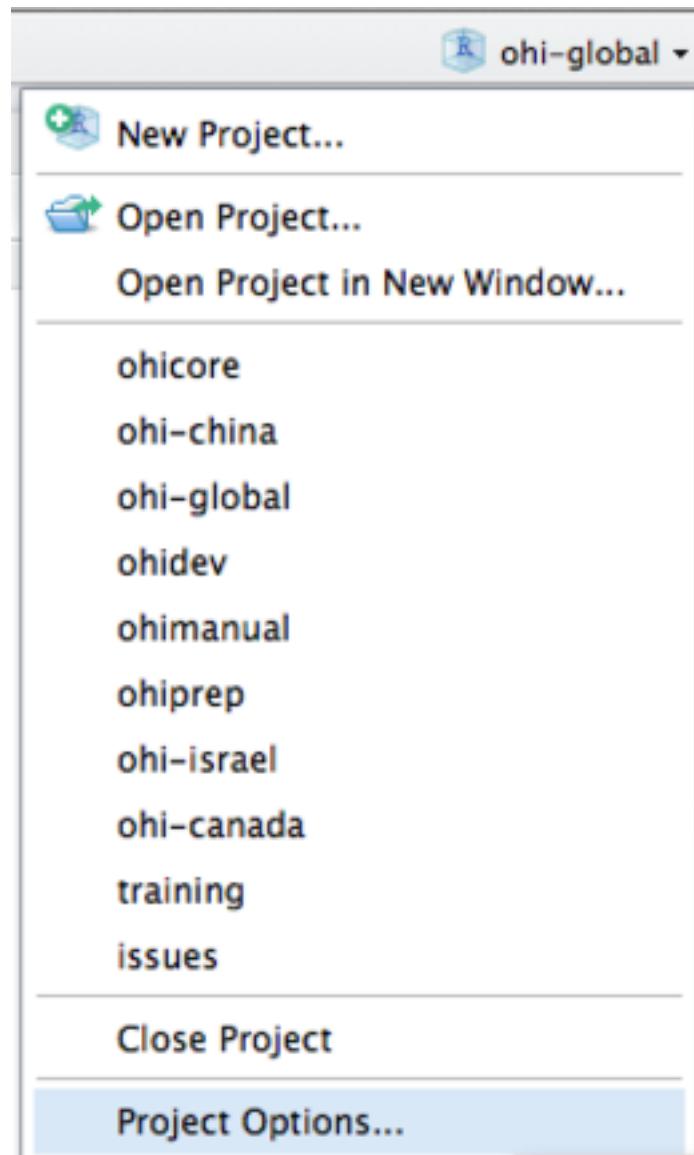


Figure 53:

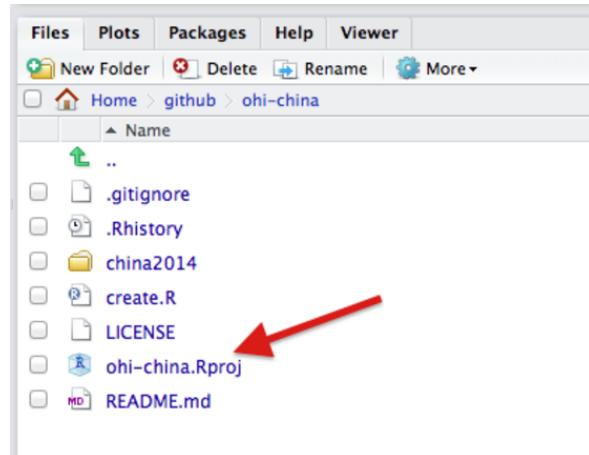


Figure 54:

### 9.3.2 ‘Error in matrix...’

|    | A    | B           | C           | D            | E            | F            | G            |
|----|------|-------------|-------------|--------------|--------------|--------------|--------------|
| 1  | goal | component   | component_n | po_chemicals | po_chemicals | po_pathogens | po_nutrients |
| 2  | FIS  |             |             |              | 1            |              | 1            |
| 3  | MAR  |             |             |              | 2            |              |              |
| 4  | AO   |             |             |              |              | 1            |              |
| 5  | NP   | corals      |             |              | 1            |              | 2            |
| 6  | NP   | fish_oil    |             |              | 2            |              | 1            |
| 7  | NP   | ornamentals |             |              | 2            |              | 1            |
| 8  | NP   | seaweeds    |             |              | 2            |              | 2            |
| 9  | NP   | shells      |             |              |              |              | 1            |
| 10 | NP   | sponges     |             |              |              |              | 1            |

Example: >

This error means there is an empty column in `pressures_matrix.csv`, and the Toolbox cannot handle empty columns.

## 9.4 Calculating Resilience ...

### 9.4.1 ‘Error in match(x, table, nomatch = OL) : object id\_num not found’

This error means you should check that there is at least one entry for each goal (for each row) in `resilience_matrix.csv`.

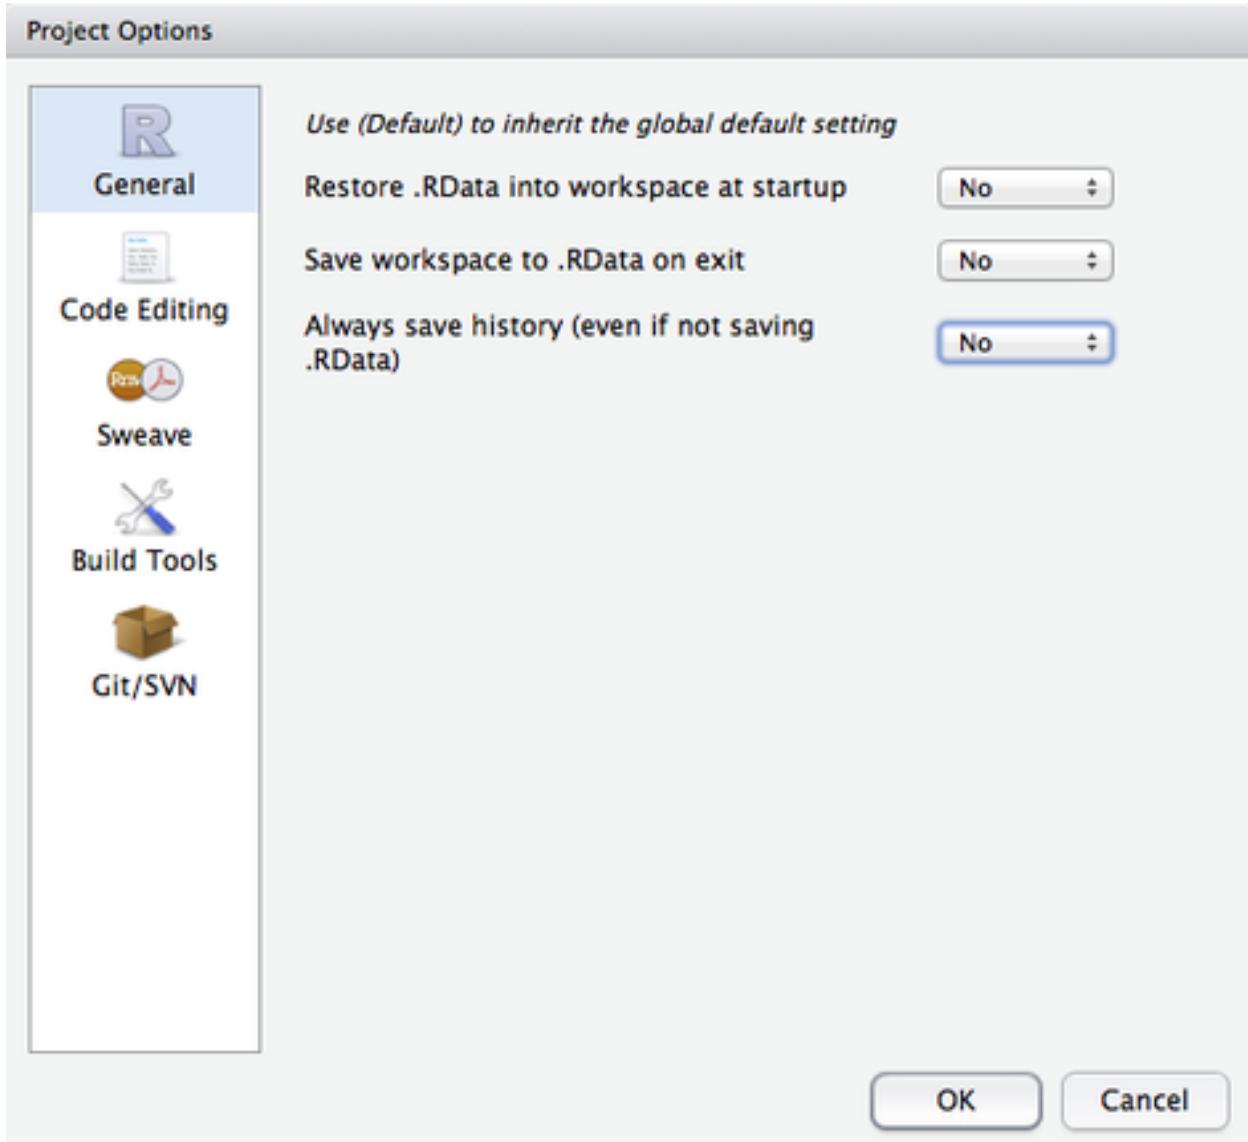


Figure 55:

```
Running Setup()...
Calculating Pressures...
The following components for NP are not in the aggregation layer np_harvest_product_weight categories (fish_oil,
Error in data.frame(names(P), P) :
 arguments imply differing number of rows: 0, 1
```

Figure 56:

|    | A    | B           | C           | D            | E            | F            | G            |
|----|------|-------------|-------------|--------------|--------------|--------------|--------------|
| 1  | goal | component   | component_n | po_chemicals | po_chemicals | po_pathogens | po_nutrients |
| 2  | FIS  |             |             | 1            |              |              | 1            |
| 3  | MAR  |             |             | 2            |              |              |              |
| 4  | AO   |             |             |              | 1            |              |              |
| 5  | NP   | corals      |             | 1            |              |              | 2            |
| 6  | NP   | fish油       |             | 2            |              |              | 1            |
| 7  | NP   | ornamentals |             | 2            |              |              | 1            |
| 8  | NP   | seaweeds    |             | 2            |              |              | 2            |
| 9  | NP   | shells      |             |              |              |              | 1            |
| 10 | NP   | sponges     |             |              |              |              | 1            |

Figure 57:

```

tr_sustainability
tr_unemployment
Running Setup...
Calculating Pressures...
Calculating Resilience...
Error in match(x, table, nomatch = 0L) : object 'id_num' not found
In addition: There were 18 warnings (use warnings() to see them)
>

```

Figure 58: