
Path-based Routing for Microservices



web1 instance web1 container **TCP/80** TCP/80 Apache TCP/443 TCP/443 172.17.0.2 Docker imagegen1 container /image.php imagegen **TCP/80** TCP/81 172.31.1.21 / 54.175.77.71



Configuring Path-based Routing

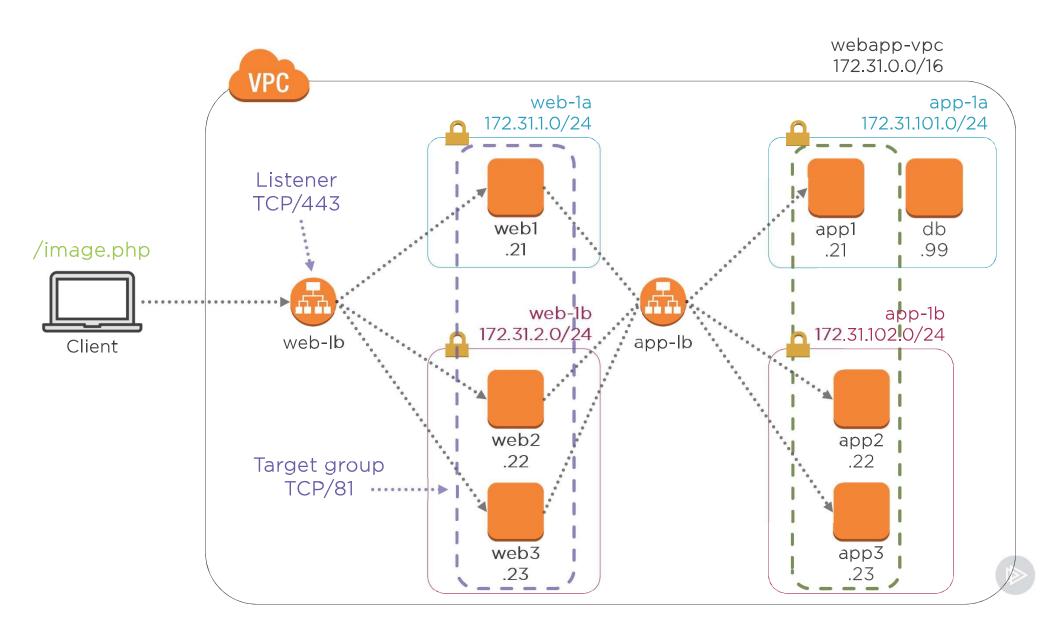

Summary



Useful for microservices

Direct traffic to a different target group based on a path in the URL

Redirection based on listener rules



Coming Up Next



Configuring the Network Load Balancer

