


Securing Web Applications with HTTPS





Generating a Certificate with ACM

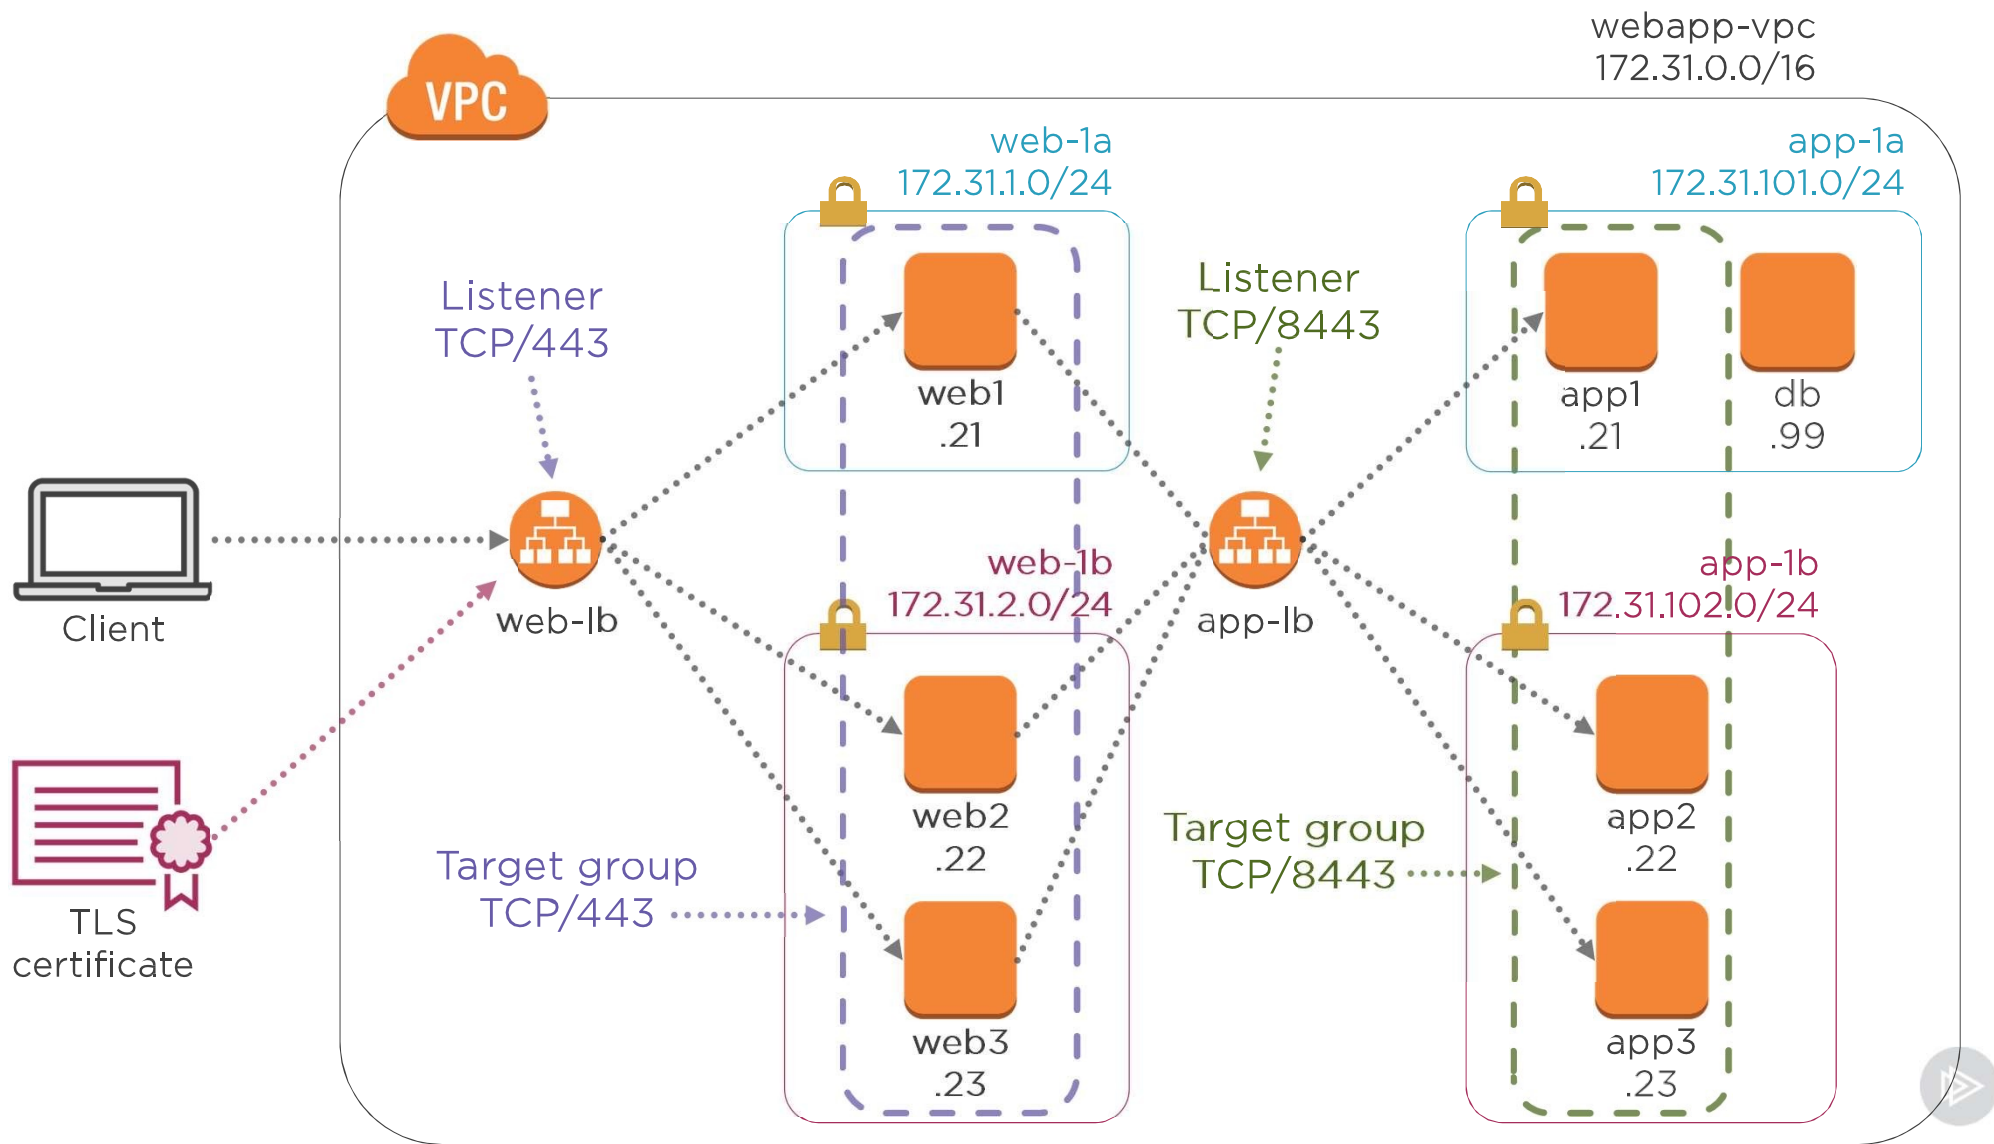

Adding an Internet-facing Secure Listener



Creating an Alias Record



Securing Target Communications



Adding an Internal Secure Listener



Summary



Create or import certificate

Use certificate to create a secure listener

Create a secure target group



Coming Up Next



Path-based Routing for Microservices

