

# **ONLINE SERVICE MANAGEMENT SYSTEM**

**A Project Submitted  
In Partial Fulfillment of the Requirements  
for the Degree of**

## **MASTER OF COMPUTER APPICATIONS**

**By**

**PRANJUL PANDAY  
(University Roll No.1900290140024)**

**Under the Supervision of  
Mrs. VIDUSHI MISHRA  
(Assistant Professor)  
KIET Group of Institution**



**To the**

**DEPARTMENT OF COMPUTER APPLICATIONS**

**DR. APJ ABDUL KALAM TECHNICAL UNIVERSITY  
LUCKNOW  
(Formerly Uttar Pradesh Technical University, Lucknow)**

**June, 2022**

## **DECLARATION**

Certified that **Pranjul Panday, 1900290140024**, has carried out the research work presented in this project report entitled **Online Service Management System** at Internet Research Bureau from January, 2022 to PRESENT, under the supervision of Mr. **Ravi Rose (Tech Lead), Internet Research Bureau Pvt Ltd.** and Miss **Vidushi Mishra Assistant Professor, KIET Group Of Institutions**, is a record of original work for the partial fulfillment of the requirements for the award of the degree, **MCA** (Master of Computer Application).

Name : Pranjul Panday  
Enroll. No. : 1900290140024  
Field : Computer Application

**(Candidate Signature)**



IRB

## CERTIFICATE

To Whomsoever It May Concern

Date: 30-May-2022

Dear Sir/Madam,

This is to confirm that **Mr. Pranjal Panday** is undergoing a Training program with Internet Research Bureau Pvt Ltd. from 20-Jan-2022 and he is working as Trainee – Java Developer with us.

Please feel free to contact us if require any further information.

For and on behalf of  
Internet Research Bureau Pvt Ltd.

AASHIMA  
SAXENA  
Digitally signed by  
AASHIMA SAXENA  
Date: 2022.05.30  
14:08:13 +05'30'

## **ABSTRACT**

Online Service Management System is a project which aims in developing a Online Application to maintain all the daily work of Service Centre .This project has many features which are generally not available in normal Online Service Management Systems like Product/Parts Records, Issue Customer Bill etc. It also has a facility of admin login through which the admin can monitor the whole system. This System can be used to search for Assign Work, Add/Remove Technician, Add/Remove Products etc. The Admin after logging into his account can generate various reports such as Product Sell Report and Service/Work Report.

Overall this project of ours is being developed to help the Service Centre to maintain the Service Centre in the best way possible and also reduce the human efforts.

## **AKNOLEDGEMENT**

First and foremost, I would like to thank our Project Mentor/Teacher Mrs. Vidhusi Mishra Mam who guided us in doing these projects. He provided us with invaluable advice and helped us in difficult periods. His motivation and help contributed tremendously to the successful completion of the project.

Besides, we would like to thank all the teachers who helped us by giving us advice and providing the information which we needed.

Also I would like to thank my friends/Project Members for their support. Without that support we couldn't have succeeded in completing this project.

At last but not in least, we would like to thank everyone who helped and motivated us to work on this project.

Name:

Place:

# Table of Contents

<b>Chapter 1 .....</b>	<b>1</b>
<b>Introduction .....</b>	<b>1</b>
1.1    Overview .....	1
1.2    Objectives .....	2
<b>Chapter 2 .....</b>	<b>3</b>
<b>System Analysis .....</b>	<b>3</b>
2.1    Software Requirements Specification (SRS) .....	4
2.1.1    Data Gathering .....	4
2.1.2    Feasibility Study .....	4
2.1.3    Software Process Model .....	7
2.2    Data Flow Diagrams (DFD) .....	10
2.2.1    DFD 0 Level .....	10
2.2.2    DFD 1 Level .....	11
2.2.3    DFD 2 Level .....	12
2.3    Entity Relationship Diagram (ER-Diagram) .....	13
2.4    Flow Chart .....	14
2.5    Gantt Chart .....	17
<b>Chapter 3 .....</b>	<b>18</b>
<b>System Design .....</b>	<b>18</b>
3.1    Input to Project .....	18
3.2    Output to Project .....	21
3.3    Modularization Detail .....	21
3.4    Class Diagram .....	26

3.5	Process Logic .....	27
3.6	Data Integrity .....	28
3.7	Data Dictionary .....	29
<b>Chapter 4</b>	.....	36
<b>Tool/Environment</b>	.....	36
4.1	Hardware Requirements .....	36
4.2	Software Requirements .....	36
<b>Chapter 5</b>	.....	37
<b>Software Description</b>	.....	37
5.1	Visual Studio Code .....	37
5.2	Languages .....	37
5.2.1	HTML .....	37
5.2.2	CSS .....	38
5.2.3	JavaScript .....	38
5.2.4	Why Using PHP .....	38
5.3	Why Using MySQL .....	39
5.4	yEd Graph Editor .....	39
5.5	StarUML .....	40
<b>Chapter 6</b>	.....	41
<b>Program Code</b>	.....	41
<b>Chapter 7</b>	.....	107
<b>Testing</b>	.....	107
7.1	Type of testing .....	108

7.2	Use Case .....	110
7.3	Test Cases .....	113
<b>Chapter 8</b>	.....	114
<b>Implementation</b>	.....	114
<b>Chapter 9</b>	.....	115
<b>Limitations</b>	.....	115
<b>Chapter 10</b>	.....	116
<b>Future Scope</b>	.....	116
<b>Chapter 11</b>	.....	117
<b>Conclusion</b>	.....	117
<b>Bibliography</b>	.....	A

## **List of Figures**

Figure 1 :DFD 0 Level

Figure 2 :DFD 1 Level

Figure 3 :DFD 2 Level

Figure 4 :ER – Diagram

Figure 5 :Flow Chart

Figure 6 : Gantt Chart

Figure 7: Class Diagram

Figure 8: Process Logic

Figure 9: Use Case

# Online Service Management System

# Chapter 1: Introduction

---

OSMS is India's leading chain of multi-brand Electronics and Electrical service workshops offering wide array of services. We focus on enhancing your user experience by offering world-class Electronic Appliances maintenance services. Our sole mission is "To provide Electronic Appliances care services to keep the devices fit and healthy and customers happy and smiling". With well-equipped Electronic Appliances service centres and fully trained mechanics, we provide quality services with excellent packages that are designed to offer you great savings. Our state-of-art workshops are conveniently located in many cities across the country.

## 1.1 Overview

Through computers organization, IT Firms, Universities and Businesses etc.. can transact to their clients in a convenient way using advance technologies and specially the Web Application, The Web Application is created for Service Centre functions through this "Online Service Management System" Admin (Manager) can lessen their errors and efforts in every Customer Support processing and transactions and in making reports.

It is Web Application which is developed in HTML, CSS, PHP & MySQL. The purpose of this Web Application is to manage the activities of service centre. Even a person can handle very easily; it means Web Interface is user friendly.

## 1.2 Objective

- **Practicality:** The software must be stable and can be operated by people with average intelligence.

- **Efficiency:** This involves accuracy, timeliness and comprehensiveness of the output.
- **Cost:** It is desirable to aim for a system with a minimum cost subject to the condition that it must satisfy all the requirements.
- **Portability:** The Web Application should be portable to all environments.
- **Security:** This important aspect of design covers areas of physical security of data. This could be provided by a login facility enabling username and password for the user and administrator. Thus it makes the Admin work simple with 100% efficiently.

## Chapter 2: System Analysis

---

System Analysis is a problem solving technique that improves the system and ensures that all the components of the system work efficiently to accomplish their purpose.

A systems analyst researches problem, plans solutions, recommends software and systems, and coordinates development to meet business or other requirements. The main goal of this system analyst is to collect different data from different site, process these data and generate progress as well as daily report.

System analyst operates in a dynamic environment where change is a way of life. The environment may be a business firm, a business application, or a computer system. to construct a system the following key elements must be considered: -

**Input:** Input is what data the system receives to produce a certain output.

**Output:** What goes out from the system after being processed is known as Output.

**Processing:** The process involved to transform input into output is known as Processing.

**Control:** In order to get the desired results it is essential to monitor and control the input, Processing and the output of the system. This job is done by the control.

**Feedback:** The Output is checked with the desired standards of the output set and the necessary steps are taken for achieving the output as per the standards, this process is called as Feedback. It helps to achieve a much better control in the system.

**Boundaries:** The boundaries are nothing but the limit of the system. Setting up boundaries helps for better concentration of the actives carried in the system.

**Environment:** The things outside the boundary of the system are known as environment. Change in the environment affects the working of the system.

**Interfaces:** The interconnections and the interactions between the sub-systems are known as the Interfaces. They may be inputs and outputs of the systems.

## 2.1 Software Requirements Specification (SRS)

A software requirements specification is a document that captures complete description about how the system is expected to perform. It is usually signed off at the end of requirements engineering phase.

### Product perspective

The software product is a Web application. The application will be made up of two parts, one administrator who has all the rights and the other user who has limited rights to handle the application. The two users of the system, namely the Service Manager (Admin) and Customers (User) interact with the system in different ways.

### Product Functions

First of all it will authenticate the user whether he is Admin or User the unauthorized person can't get access to the application.

The Admin will be able to Add, delete, and modify Product details. He can also Add, delete and modify Service Request made by Customers. He can use this application to check all reports related to Product Sell, and assign work order as well as he can manipulate the data of Repair Request.

The User has some less function compare to Admin. He will be able to Submit Service Requests, Update Own Profile etc. He can check request status.

### Safety Requirements

All the data will be saved to database for safety purpose so there will be no data loss. These data can be accessed only by an authorized person so data theft is also not possible in this application.

## **Security Requirements**

For preventing unauthorized access to the application, this application have login feature so only granted user can access with defined rights.

### **2.1.1 Data Gathering**

Data collection is the systematic approach to gathering and measuring information from a variety of sources to get a complete and accurate picture of an area of interest. Data collection enables a person or organization to answer relevant questions, evaluate outcomes and make predictions about future probabilities and trends. Accurate data collection is essential to maintaining the integrity of research, making informed business decisions and ensuring quality assurance.

### **2.1.2 Feasibility study**

Feasibility study means to check whether the project is feasible or not, that means possible or not. Some feasibility study regarding this project is as follows: -

#### **Economic Feasibility**

The project has shown the economic feasibility by the study of the fact that by using this software the increased number of the customers can be given service effectively and efficiently and can save a lot time and saving time means saving money. The cost and benefit analysis has shown that cost that have incurred in developing the project is less than the benefits that the project is going to provide once it is developed, so this project has passed the feasibility test.

## **Technical Feasibility**

Technical feasibility centers on the existing computer system (Hardware, Software etc.) and to what extent it supports the existing system. As the existing system computer system is viable so there is no matter of technical feasibility that is the system is technically feasible. In this type of feasibility study it is checked whether there is a need of new hardware/software or not. What are the basic requirements of the project? If there is need then how it can be fulfilled. In this context, this project doesn't need any special hardware or software.

## **Behavioral Feasibility**

The User also interested in this project, as it will help them to do work with ease and efficiently without complexity, so they supported the development of this project with full enthusiasm. This shows the behavioral feasibility of the project.

## **Time Feasibility**

It is the determination of whether a proposed project can be implemented fully within stipulated time frame. The project was decided to be done in three months and was thought to be feasible

## **Operational Feasibility**

In this feasibility study it is determined whether there is need of well qualified operator or simple user. Is there need to train the operator or not? This project is supporting the Graphical User Interface; hence operating this project is so simple. Even a person who has a little knowledge of computer can easily handle this well. There is no need of trained operator.

### 2.1.3 Software Process model

The Software Process Models are the various processes or methodologies that are being selected for the development of the project depending on the project's aims and goals. There are many development life cycle models that have been developed in order to achieve different required objectives. The models specify the various stages of the process and the order in which they are carried out.

The selection of model has very high impact on the testing that is carried out. It will define the what, where and when of our planned testing, influence regression testing and largely determines which test techniques to use.


Choosing right model for developing of the software product or application is very important. Based on the model the development and testing processes are carried out.

A Process Model describes the sequence of phases for the entire lifetime of a product. Therefore it is sometimes also called Software Life Cycle. This covers everything from the initial commercial idea until the final de-installation or disassembling of the product after its use.



In order to develop the project “Online Service Management System” we have adopted the **Iterative Enhancement Model** also known as Incremental Model. This model removes the shortcoming of waterfall model. Since many facts of this system are already known. It is not a new concept and hence no research is required. A working version can be easily created and hence the system can start working. Rest of the functionalities can be implemented in the next iteration and can be delivered later. As the requirement analysis is also not required. It not being a new technology risk involved is also less. So one need not perform detailed risk analysis. If redevelopment Admin is less than development can be started with less number of people and in next increments others can be involved. As this model combines the advantage of waterfall model and prototyping, clients are always aware of the product being delivered and can always suggest changes and enhancements and can get them implemented. As less amount of customer communication is required one need not apply spiral model in

which all types of analysis is done in detail. As the deadline is affordable one need not to for Rapid Application Development model. Iterative enhancement model is useful when less manpower is available for software development and the release deadlines are specified. It is best suited for in house product development, where it is ensured that the user has something to start with. The complete product is divided into releases and the developer delivers the product release by release.

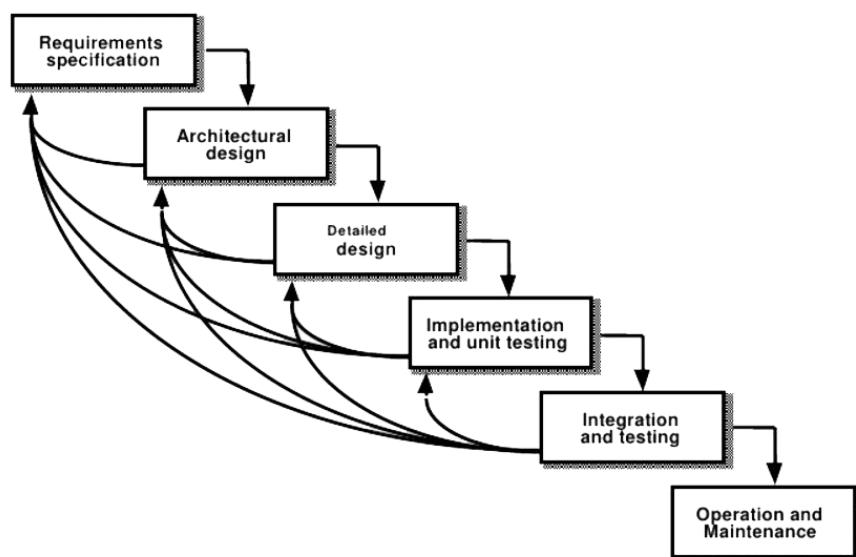


Iterative Enhancement Model

## 2.2 Data Flow Diagram (DFD)

Data flow diagram is graphical representation of flow of data in an information system. It uses defined symbols like rectangles, circles and arrows, plus short text labels, to show data inputs, outputs, storage points and the routes between each destination. Data flowcharts can range from simple, even hand-drawn process overviews, to in-depth, multi-level DFDs that dig progressively deeper into how the data is handled.


### 2.2.1 DFD 0 Level

The 0 Level DFD shows flow of data of application. DFD Level 0 is also called a Context Diagram. It's a basic overview of the whole system or process being analyzed or modeled.

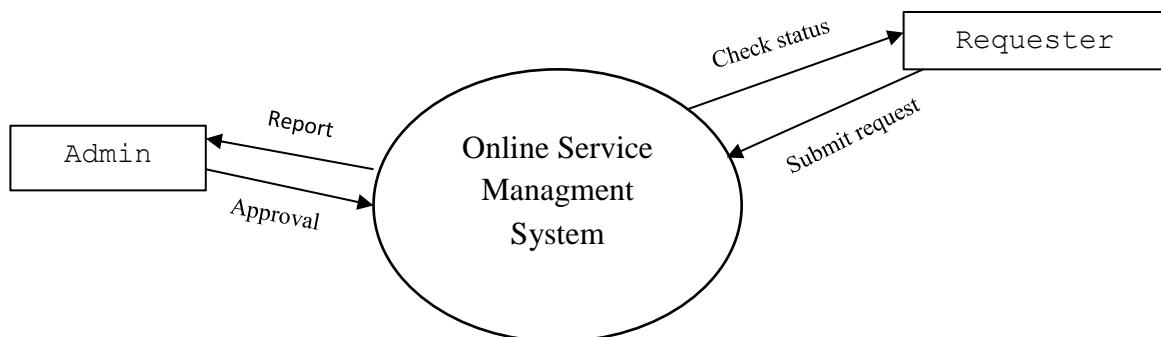


## 2.2.2 DFD 1 Level

DFD Level 1 provides a more detailed breakout of pieces of the Context Level Diagram. This DFD describes main functions carried out by the system, as we break down the high-level process of the Context Diagram into its sub-processes.

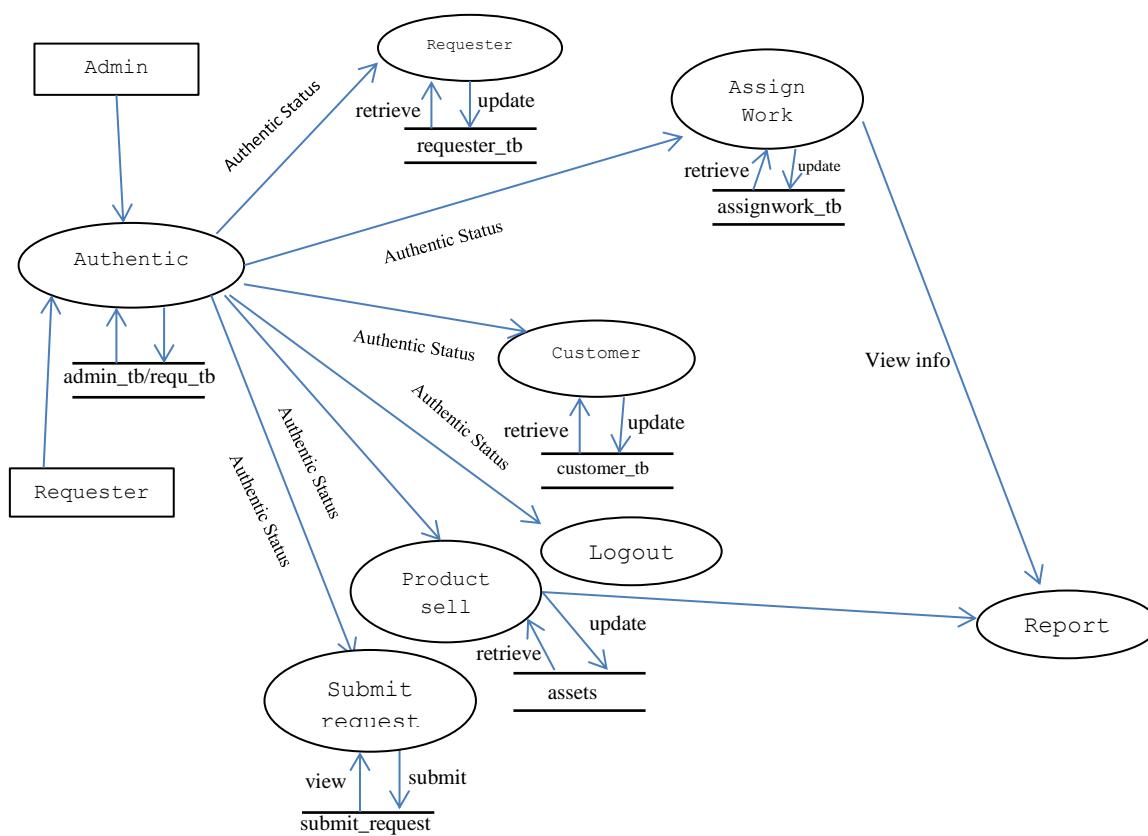


### 2.2.3 DFD 2 Level

The DFD 2 Level describes flow of data in more detail. DFD Level 2 goes one step deeper into parts of Level 1. It may require more text to reach the necessary level of detail about the system's functioning.

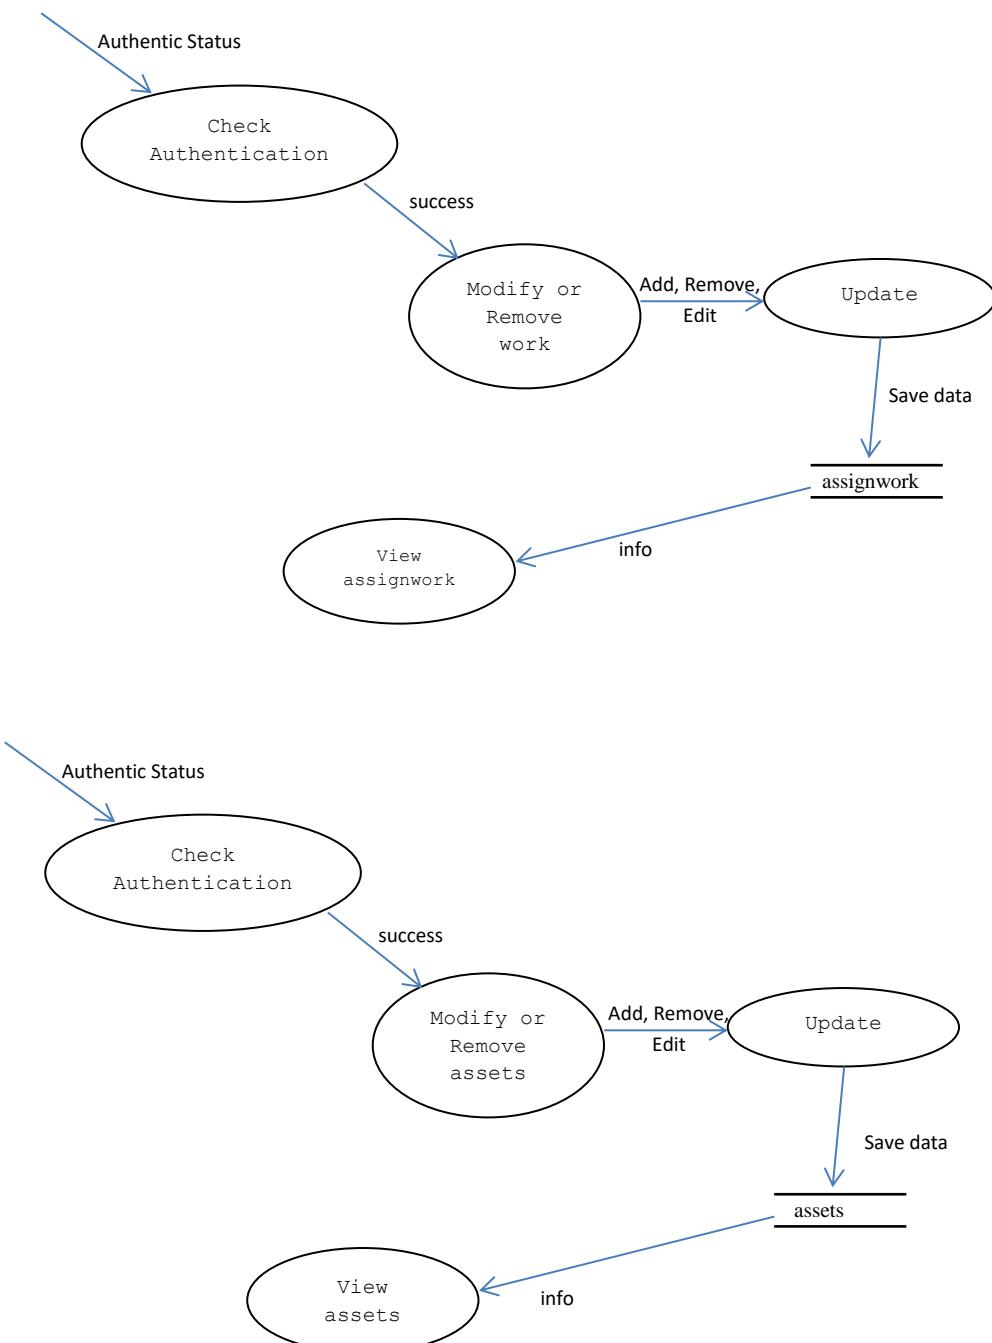

## 2.3 Entity Relationship Diagram (ER-Diagram)


An Entity Relationship Diagram (ERD) is a visual representation of different entities within a system and how they relate to each other. Entity relationship diagrams are used in software engineering during the planning stages of the software project. They help to identify different system elements and their relationships with each other.

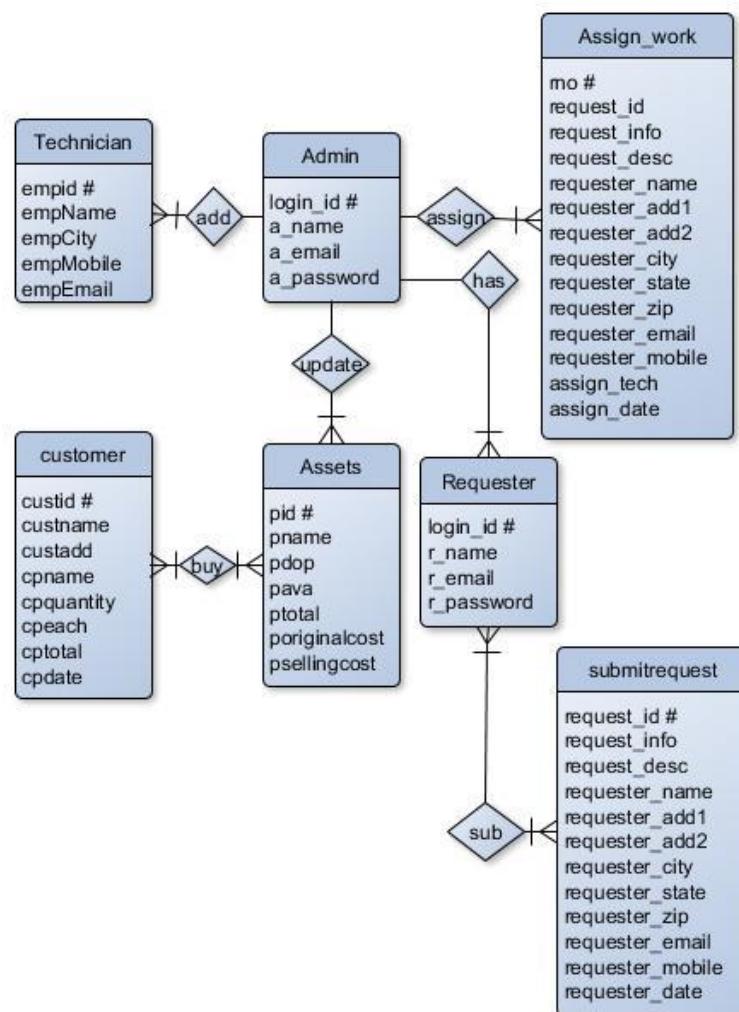


## 2.4 Flow Chart

A flowchart is a diagram that depicts a process, system or computer algorithm. They are widely used in multiple fields to document, study, plan, improve and communicate often complex processes in clear, easy-to-understand diagrams. Flowcharts, sometimes spelled as flow charts, use rectangles, ovals, diamonds and potentially numerous other shapes to define the type of step, along with connecting arrows to define flow and sequence.


### Login

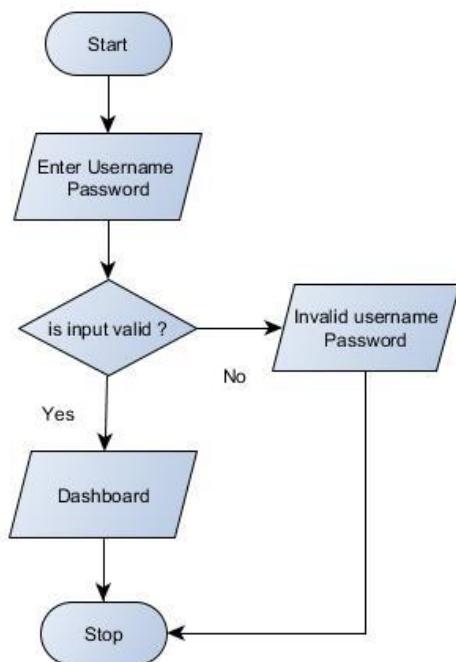

## Assign Work

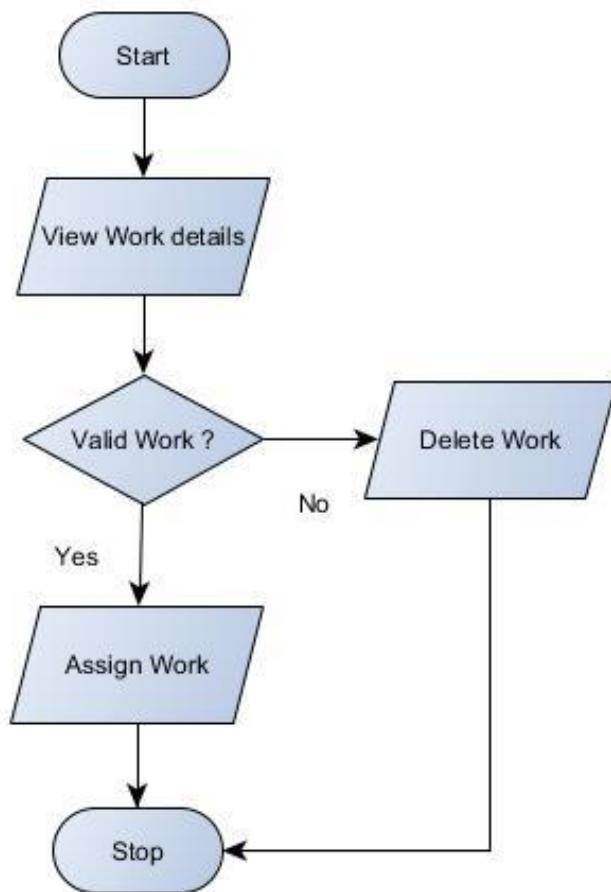

## Sell Product

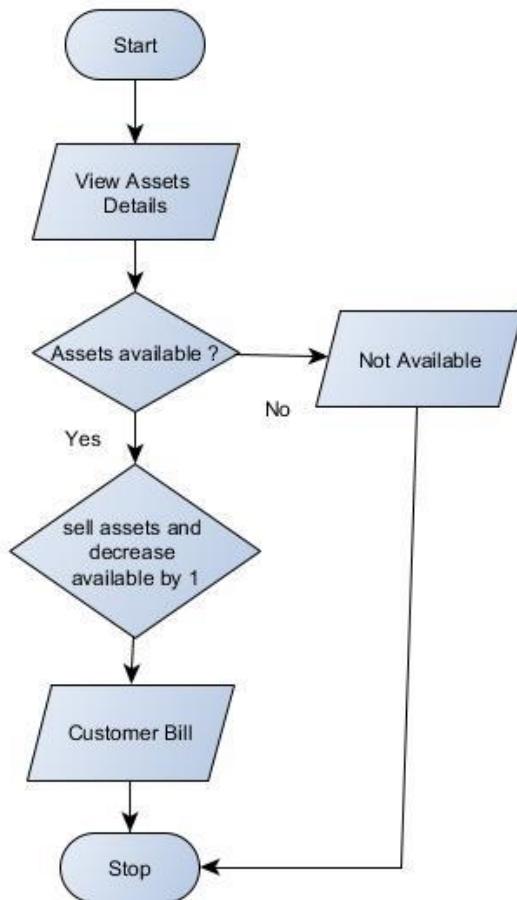

## 2.5 Gantt Chart

Gantt chart was invented by a mechanical engineer named Henry Gantt in 1910. A gantt chart is simply a type of bar chart that visually represents a project plan over time. It shows start and end dates for tasks, displays milestones, and allows for dependencies between tasks. With all the features of Henry gantt's project management system, it's no wonder that even now, more than 100 years later, the gantt chart is still the preferred tool for managing projects of all sizes and types.

Week	1	2	3	4	5	6	7	8	9	10	11	12
Activities												
Research												
Define Specification												
Project Planning												
Design												
Development												
Test Plan												
Testing and Q A												
Delivery												

## Chapter 3: System Design

The systems design approach first appeared right before World War II, when engineers were trying to solve complex control and communications problems. They needed to be able to standardize their work into a formal discipline with proper methods, especially for new fields like information theory, operations research and computer science in general. System design is the process of defining the elements of a system such as the architecture, modules and components, the different interfaces of those components and the data that goes through that system. It is meant to satisfy specific needs and requirements of a business or organization through the engineering of a coherent and well-running system.

### 3.1 Input to the project

In order to complete the tasks of the Application and to get output by using this application work, there is need of some input based on the work that is to be carried out by using it. Different kinds of input are required for different purposes.

#### i. Input for new Registration

- ⊕ Login ID # (Automatically generated)
- ⊕ Requester Name
- ⊕ Requester Email
- ⊕ Requester Password

#### ii. Input for new Technician

- ⊕ Emp ID# (Automatically generated)
- ⊕ Emp Name

⊕ Emp City

⊕ Emp Mobile

⊕ Emp Mobile

iii. Input for Submit Request

⊕ Request ID # (Automatically generated)

⊕ Request Info

⊕ Request Desc

⊕ Requester Name

⊕ Requester Add1

⊕ Requester Add2

⊕ Requester City

⊕ Requester State

⊕ Requester Zip

⊕ Requester Email

⊕ Requester Mobile

⊕ Requester Date

iv. Input for Assign Work

⊕ Rno # (Automatically generated)

⊕ Request ID

⊕ Request Info

⊕ Request Desc

⊕ Requester Name

- ⊕ Requester Add1
- ⊕ Requester Add2
- ⊕ Requester City
- ⊕ Requester State
- ⊕ Requester Zip
- ⊕ Requester Email
- ⊕ Requester Mobile
- ⊕ Assign\_tech
- ⊕ Assign\_date

v. Input for assets

- ⊕ pid #
- ⊕ Product Name
- ⊕ Product date of Purchase
- ⊕ Product available
- ⊕ Product Total
- ⊕ Product Original Cost
- ⊕ Product Selling Cost

vi. Input for getting reports

- ⊕ Date rang

vii. Input for login in the application

- ⊕ Email #
- ⊕ Password

### 3.2 Output to the project

The project named “**Online Service Management System**” is being made keeping in mind to solve the activities that are carried out in the Service Centre. By using this Admin can easily do many things like as:

- i. Maintain assets details easily
- ii. Maintain the Requester details easily
- iii. Maintain the Technician details easily
- iv. Can check work order details
- v. Can assign work
- vi. Can check Service Request Status
- vii. Can generate Bill
- viii. Can generate hard copy output of all product sell
- ix. Can generate report of particular

### 3.3 Modularization Detail

#### **Home:**

When the user click on this button,it will display the other modules and pages of the website such as Services, Registration, Login, Contact, and Admin Login. This module will be used to display the brief introduction of the project and will show the title of the project as well as the name of the developer.

**Services:**

This module describes which services company provides to its customers.

**Registration:**

This is the most important module of the Online Service Management System which provides a Registration form where user/requesters can register themselves and submit Service Requests.

**Contact:**

This module contains a contact us form which can be used to send feedback or to communicate with the service provider.

**Login:**

This is user login form. When an user clicks on this link a user login form will appear where user can enter their email id and password for logging in to the user panel.

**User Panel:-****Profile:**

User can see their register email id and Name as well as if they wish to change the name, they can update new Name. The Registered Email ID is read only so it can't be altered.

**Submit Request:-**

Using this module user can submit service request. It is necessary to fill up all the details asked in the form. After submitting form user will get a receipt which he can print out.

**Service Status:-**

User can check their service request status by filling up service request id

**Change Password:-**

User can change his/her login password.

**Logout:-**

This Logout and Exit the Application.

**Admin Login:**

This is Admin login form. When Admin clicks on this link an Admin login form will appear where admin can enter their email id and password for logging in to the Admin panel.

**Admin Panel:-****Dashboard:-**

This screen displays overview of work and other stuff like Number of technician and list of requesters.

**Work Order:-**

This page contains all the assigned request made by users. Admin can view or delete the assigned work as per their need.

**Requestes:-**

This is the most important module of admin panel where admin can assign the work/requests made by users/requesters. If there is any invalid request admin can delete that request without assigning them.

**Assets:-**

The main work is to accomplish in this module is to add, modify or remove any assets of the Service centre. This contains few sub modules through which works are performed. These are as follows:

- New: This is used to add new Product Part in the service centre.  
There is a Plus (+) sign button which is actually New Button.
- Edit: This sub module is used to modify the existing details of the Product if anything goes changes in their record. There is a Pencil button which is actually Remove Button.
- Remove: This is used to remove any product from the service centre. There is a Trash button which is Remove Button.

- Sell: This is used when going to sell a product Admin can also print out a bill for customer.

### **Technician:-**

The main work is to accomplish in this module is to add, modify or remove Technician of the Service centre. This contains few sub modules through which works are performed. These are as follows:

- New: This is used to add new Technician details in the service centre. There is a Plus (+) sign button which is actually New Button.
- Edit: This sub module is used to modify the existing details of the Technician if anything goes changes in their record. There is a Pencil button which is actually Remove Button.
- Remove: This is used to remove Technician from the service centre. There is a Trash button which is Remove Button.

### **Requester:-**

The main work is to accomplish in this module is to add, modify or remove Requesters/Users. This contains few sub modules through which works are performed. These are as follows:

- New: This is used to add new Requesters details in the service centre database. There is a Plus (+) sign button which is actually New Button.
- Edit: This sub module is used to modify the existing details of the Requester if anything goes changes in their record. There is a Pencil button which is actually Remove Button.
- Remove: This is used to remove Requester from the service centre. There is a Trash button which is Remove Button.

**Sell Report:-** This module is used to view and print sell report.

**Work Report:-** This module is used to view and print Work report.

**Change Password:-**

User can change his/her login password.

**Logout:**

This Logout and Exit the Application.


### 3.4 Class Diagram

Class diagrams are the main building block in object-oriented modeling.



They are used to show the different objects in a system, their attributes, their operations and the relationships among them.

Classes in class diagrams are represented by boxes that are partitioned into three:-

- The top partition contains the name of the class.
- The middle part contains the class's attributes.
- The bottom partition shows the possible operations that are associated with the class.

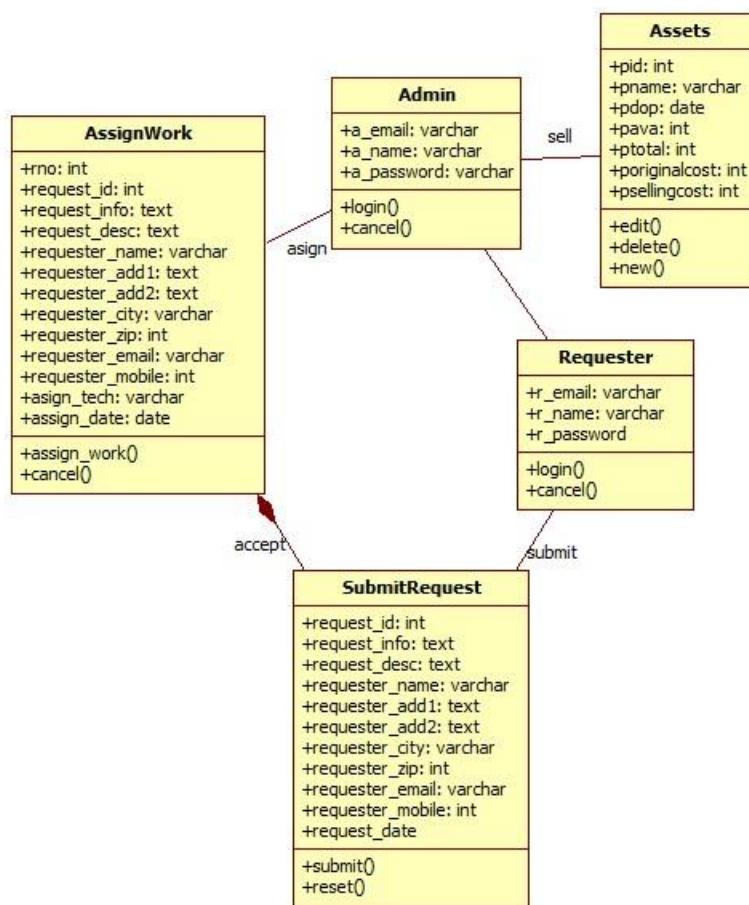

### 3.5 Process Logic

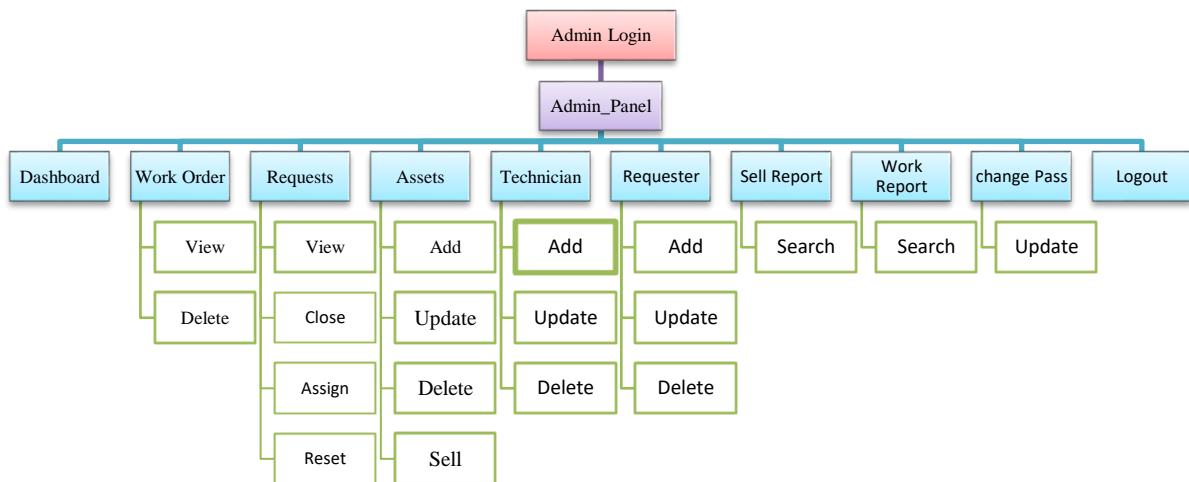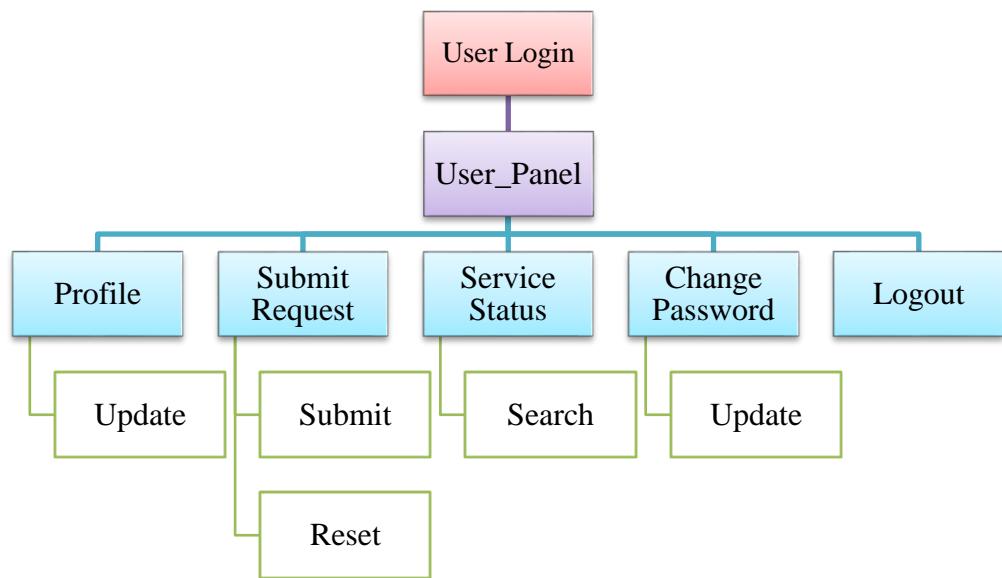

### 3.6 Data Integrity

Data integrity is the overall completeness, accuracy and consistency of data. This can be indicated by the absence of alteration between two instances or between two updates of a data record, meaning data is intact and unchanged. Data integrity is usually imposed during the database design phase through the use of standard procedures and rules. The concept of data integrity ensures that all data in a database can be traced and connected to other data. This ensures that everything is recoverable and searchable. Having a single, well-defined and well-controlled data integrity system increases stability, performance, reusability and maintainability. Data values are standardized according to a data model and data type. All characteristics of the data must be correct including business rules, relations, dates and definitions for data to be complete. Data integrity is imposed within a database when it is designed and is authenticated through the ongoing use of error checking and validation routines. As a simple example, to maintain data integrity numeric columns/cells should not accept alphabetic data.

### 3.7 Data Dictionary

A data dictionary contains a list of all files in the database, the number of records in each file, and the names and types of each field. Most database management systems keep the data dictionary hidden from users to prevent them from accidentally destroying its contents. For most relational database management systems (RDBMS), the database management system software needs the data dictionary to access the data within a database. For example, the Oracle Database software has to read and write to an Oracle Database. However, it can only do this via the data dictionary created for that particular database.

**Table Name: adminlogin\_tb**

Attribute	Data Type	Description
a_login_id #	int	Stores login id (Automatically Generated)
a_name	varchar(60)	Stores Name
a_email	varchar(60)	Store Email
a_password	varchar(60)	Store Password

The screenshot shows the phpMyAdmin interface with the following details:

- Server:** 127.0.0.1
- Database:** osms\_db
- Table:** adminlogin\_tb
- Table Structure View:** The table has four columns:
 

#	Name	Type	Collation	Attribute
1	a_login_id	int(11)		
2	a_name	varchar(60)	utf8_bin	
3	a_email	varchar(60)	utf8_bin	
4	a_password	varchar(60)	utf8_bin	

**Table Name: requesterlogin\_tb**

<b>Attribute</b>	<b>Data Type</b>	<b>Description</b>
r_login_id #	int	Stores login id (Automatically Generated)
r_name	varchar(60)	Stores Name
r_email	varchar(60)	Store Email
r_password	varchar(60)	Store Password

The screenshot shows the phpMyAdmin interface for the 'osms\_db' database. The left sidebar lists databases: information\_schema, mysql, and osms\_db. Under osms\_db, there are several tables: adminlogin\_tb, assets\_tb, assignwork\_tb, customer\_tb, and requesterlogin\_tb. The 'requesterlogin\_tb' table is selected, and its structure is displayed in the main pane. The 'Table structure' tab is active, showing the following columns:

#	Name	Type	Collation	Attrib
1	r_login_id	int(11)	utf8_bin	
2	r_name	varchar(60)	utf8_bin	
3	r_email	varchar(60)	utf8_bin	
4	r_password	varchar(60)	utf8_bin	

Below the table structure, there are buttons for Print, Propose table structure, and Track.

**Table Name: customer\_tb**

Attributes	Data Type	Description
custid #	int	Customer ID (Automatically Generated)
custname	varchar(60)	Customer Name
custadd	varchar(60)	Customer Address
cpname	varchar(60)	Product Name
cpquantity	int	Product Quantity
cpeach	int	Each Quantity Price
cptotal	int	Total Price
cpdate	date	Selling Date

The screenshot shows the phpMyAdmin interface for the osms\_db database. The left sidebar lists databases and tables. The 'customer\_tb' table under the 'osms\_db' database is selected. The right panel displays the 'Table structure' tab, which shows the following columns:

#	Name	Type	Collation	Attributes
1	<b>custid</b>	int(11)		
2	<b>custname</b>	varchar(60)	utf8_bin	
3	<b>custadd</b>	varchar(60)	utf8_bin	
4	<b>cpname</b>	varchar(60)	utf8_bin	
5	<b>cpquantity</b>	int(11)		
6	<b>cpeach</b>	int(11)		
7	<b>cptotal</b>	int(11)		
8	<b>cpdate</b>	date		

**Table Name: assets\_tb**

Attributes	Data Type	Description
pid #	int	Product ID (Automatically Generated)
pname	varchar(60)	Product Name
pdop	date	Product Date
pava	int	Number of Available Product
ptotal	int	Number of Total Product
poriginalcost	int	Product Original Cost
psellingcost	int	Product Selling Price

The screenshot shows the phpMyAdmin interface with the following details:

- Server:** 127.0.0.1
- Database:** osms\_db
- Table:** assets\_tb
- Structure View:** The "Structure" tab is selected.
- Table Structure:**

#	Name	Type	Collation	Attrib
1	pid	int(11)		
2	pname	varchar(60)	utf8_bin	
3	pdop	date		
4	pava	int(11)		
5	ptotal	int(11)		
6	poriginalcost	int(11)		
7	psellingcost	int(11)		
- Navigation:** The left sidebar shows the database structure, including the osms\_db database which contains several tables like adminlogin\_tb, assets\_tb, assignwork\_tb, customer\_tb, requesterlogin\_tb, submitrequest\_tb, and technician\_tb.

## Table Name: submitrequest\_tb

Attributes	Data Type	Description
request_id #	int	Request ID (Automatically Generated)
request_info	text	Request Info
request_desc	text	Request Description
requester_name	varchar(60)	Requester Name
requester_add1	text	Requester Address Line 1
requester_add2	text	Requester Address Line 2
requester_city	varchar(60)	Requester City
requester_state	varchar(60)	Requester State
requester_zip	int	Requester Zip
requester_email	varchar(60)	Requester Email
requester_mobile	bigint	Requester Mobile
request_date	date	Request Date

The screenshot shows the phpMyAdmin interface for the 'osms\_db' database. The left sidebar lists databases and tables. The right panel shows the 'Structure' tab for the 'submitrequest\_tb' table. A message at the top says 'Table submitrequest\_tb has been altered successfully.' Below it is the SQL command: 'ALTER TABLE `submitrequest\_tb` CHANGE `requester\_mobile` `requester\_mobile` bigint(11)'. The table structure is displayed in a grid:

#	Name	Type	Collation	Attrib
1	request_id	int(11)		
2	request_info	text	utf8_bin	
3	request_desc	text	utf8_bin	
4	requester_name	varchar(60)	utf8_bin	
5	requester_add1	text	utf8_bin	
6	requester_add2	text	utf8_bin	
7	requester_city	varchar(60)	utf8_bin	
8	requester_state	varchar(60)	utf8_bin	
9	requester_zip	int(11)		
10	requester_email	varchar(60)	utf8_bin	
11	requester_mobile	bigint(11)		
12	request_date	date		

## Table Name: assignwork\_tb

Attributes	Data Type	Description
rno #	int	Request Number (Automatically Generated)
request_id	int	Request ID
request_info	text	Request Info
request_desc	text	Request Description
requester_name	varchar(60)	Requester Name
requester_add1	text	Requester Address Line 1
requester_add2	text	Requester Address Line 2
requester_city	varchar(60)	Requester City
requester_state	varchar(60)	Requester State
requester_zip	int	Requester Zip
requester_email	varchar(60)	Requester Email
requester_mobile	bigint	Requester Mobile
assign_tech	varchar(60)	Assign Technician Name
assign_date	date	Assigned Date

The screenshot shows the phpMyAdmin interface for the osms\_db database. The left sidebar lists databases and tables. The main area shows the 'Structure' tab for the 'assignwork\_tb' table. A message at the top says 'Table assignwork\_tb has been altered successfully.' Below it, the SQL command for the alteration is shown: `ALTER TABLE `assignwork_tb` CHANGE `requester_mobile` `requester_mobile` int(11);`. The structure table lists 14 columns:

#	Name	Type	Collation	Attribute
1	rno	int(11)		
2	request_id	int(11)		
3	request_info	text	utf8_bin	
4	request_desc	text	utf8_bin	
5	requester_name	varchar(60)	utf8_bin	
6	requester_add1	text	utf8_bin	
7	requester_add2	text	utf8_bin	
8	requester_city	varchar(60)	utf8_bin	
9	requester_state	varchar(60)	utf8_bin	
10	requester_zip	int(11)		
11	requester_email	varchar(60)	utf8_bin	
12	requester_mobile	bigint(11)		
13	assign_tech	varchar(60)	utf8_bin	
14	assign_date	date		

**Table Name: technician\_tb**

Attributes	Data Type	Description
empid #	int	Employee ID (Automatically Generated)
empname	varchar(60)	Employee Name
empcity	varchar(60)	Employee City
empmobile	bigint	Employee Mobile Number
empemail	varchar(60)	Employee Email ID

The screenshot shows the phpMyAdmin interface for the osms\_db database. The left sidebar lists databases and tables, with 'technician\_tb' selected. The main area displays the table structure:

#	Name	Type	Collation	Att.
1	empid	int(11)		
2	empName	varchar(60)	utf8_bin	
3	empCity	varchar(60)	utf8_bin	
4	empMobile	bigint(11)		
5	empEmail	varchar(60)	utf8_bin	

## Chapter 4: Tools and Environment

---

### 4.1 Hardware Requirements

Processor	1.6 GHz or Faster Processor
RAM	1.5 GB
Disk Space	4GB of Available Hard Disk
Graphic	DirectX 9-Capable Video Card
Display	1024 X 768 or Higher Resolution

### 4.2 Software Requirements

Operating System	Windows 10
Front End	HTML, CSS, JS
Frameworks/Library	Bootstrap, FontAwesome, Google Font
Back End	PHP
Text Editor	Visual Studio Code
Database	MySQL
Web Browser	Google Chrome
Web Server	Apache
Drawing Tools	yEd Graph Editor
	StarUML

## Chapter 5: Software Description

---

### 5.1 Visual Studio Code

Visual Studio Code was announced on April 29, 2015 by Microsoft at the 2015 Build conference. A Preview build was released shortly thereafter.

On November 18, 2015, Visual Studio Code was released under the MIT License and its source code posted to GitHub. Extension support was also announced.

On April 14, 2016, Visual Studio Code graduated the public preview stage and was released to web. Visual Studio Code is a source code editor developed by Microsoft for Windows, Linux and macOS. It includes support for debugging, embedded Git control, syntax highlighting, intelligent code completion, snippets, and code refactoring. It is also customizable, so users can change the editor's theme, keyboard shortcuts, and preferences. It is free and open-source, although the official download is under a proprietary license..

### 5.2 Languages

#### 5.2.1 HTML

Hypertext Markup Language (HTML) is the standard markup language for creating web pages and web applications. With Cascading Style Sheets (CSS) and JavaScript, it forms a triad of cornerstone technologies for the World Wide Web.

Web browsers receive HTML documents from a web server or from local storage and render the documents into multimedia web pages. HTML describes the structure of a web page semantically and originally included cues for the appearance of the document.

### 5.2.2 CSS

Cascading Style Sheets (CSS) is a style sheet language used for describing the presentation of a document written in a markup language like HTML. CSS is a cornerstone technology of the World Wide Web, alongside HTML and JavaScript.

CSS is designed to enable the separation of presentation and content, including layout, colors, and fonts. This separation can improve content accessibility, provide more flexibility and control in the specification of presentation characteristics, enable multiple web pages to share formatting by specifying the relevant CSS in a separate .css file, and reduce complexity and repetition in the structural content.

### 5.2.3 JavaScript

JavaScript often abbreviated as JS, is a high-level, interpreted programming language. It is a language which is also characterized as dynamic, weakly typed, prototype-based and multi-paradigm.

### 5.2.4 Why using PHP

Every PHP is an open source language and all its components are free to use and distribute. PHP is server-side scripting language. It is embedded in HTML source code. It is used to generate dynamic pages content. People find it useful to develop websites and dynamic web pages. It is platform independent. PHP supports all major web servers such as Apache, Microsoft IIS and Netscape etc. All the major database such as Mysql, PostgreSQL, Oracle, Sybase, Microsoft SQL Server is supported by PHP. The main reasons for using PHP language are:

- i) It collects form data and save data send by mail.
- ii) It sends and receives cookies by accessing cookies variables.

- iii) It provides add, delete and modify element function within our database.
- iv) Through PHP, we can restrict users to access some pages of our website.
- v) It can encrypt data, so that our data will become more secure.

### **5.3 Why using MySQL**

Mysql is the most popular open source relational database management system .It is one of the best RDBMS being used to develop web-based software applications. It is easy to use and fast RDBMS. There are many good reasons which help us to develop website using this RDBMS:

- It is open-source, so available for free.
- It works on many operating system and with many languages including PHP, PERL, C, C++ etc.
- Mysql is customizable.
- Mysql works very friendly to PHP.
- Mysql works very quickly and works well even with large data sets.

### **5.4 yEd Graph Editor**

yEd is a powerful Free Desktop Application that can be used to quickly and effectively generate high-quality diagrams. yEd can be used to draw many different types of diagrams, including flowcharts, network diagrams, UMLs, BPMN, mind maps, organization charts, and entity-relationship diagrams. yEd can automatically arrange diagram elements using a variety of graph layout algorithms. The program works much like many similar applications.


yEd can export diagrams to various raster and vector formats, including GIF, JPEG, PNG, EMF, BMP, PDF, EPS, and SVG.

## 5.5 StarUML

StarUML is an open source project to develop fast, flexible, extensible and featureful diagrams . With StarUML it is very easy to make Class Diagram. StarUML is implemented to provide many user-friend features such as Quick dialog, Keyboard manipulation, Diagram overview, etc.

# Chapter 6: Program Code

## Index.php

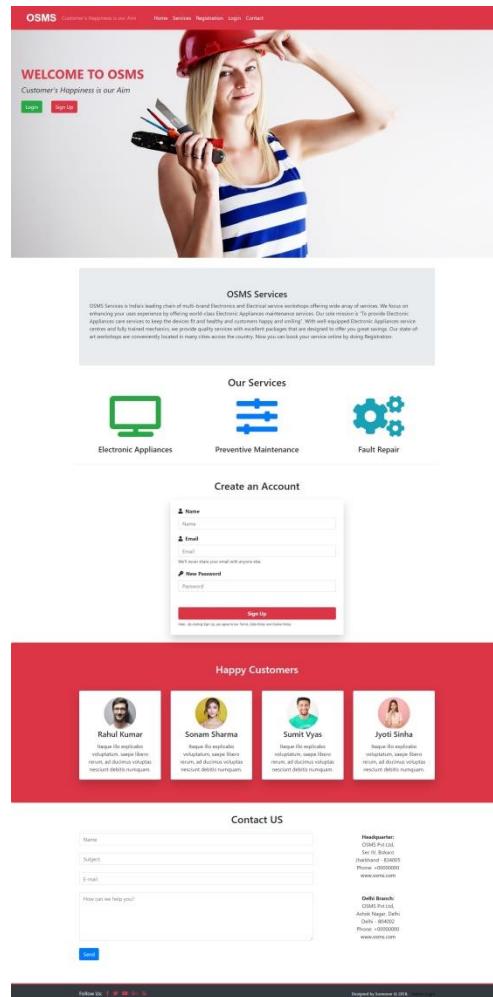

```

<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<meta http-equiv="X-UA-Compatible" content="ie=edge">
<!-- Bootstrap CSS -->
<link rel="stylesheet"
      href="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/css/bootstrap.min.css">
<!-- Font Awesome CSS -->
<link rel="stylesheet" href="https://use.fontawesome.com/releases/v5.4.1/css/all.css">
<!-- Google Font -->
<link href="https://fonts.googleapis.com/css?family=Ubuntu" rel="stylesheet">
<!-- Custom CSS -->
<link rel="stylesheet" href="css/custom.css">
<title>OSMS</title>

```

```

</head>
<body>
  <!-- Start Navigation -->
  <nav class="navbar navbar-expand-sm navbar-dark bg-danger pl-5 fixed-top">
    <a href="index.php" class="navbar-brand">OSMS</a>
    <span class="navbar-text">Customer's Happiness is our Aim</span>
    <button type="button" class="navbar-toggler" data-toggle="collapse" data-target="#myMenu">
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="myMenu">
      <ul class="navbar-nav pl-5 custom-nav">
        <li class="nav-item"><a href="index.php" class="nav-link">Home</a></li>
        <li class="nav-item"><a href="#Services" class="nav-link">Services</a></li>
        <li class="nav-item"><a href="#registration" class="nav-link">Registration</a></li>
        <li class="nav-item"><a href="Requester/RequesterLogin.php" class="nav-link">Login</a></li>
        <li class="nav-item"><a href="#Contact" class="nav-link">Contact</a></li>
      </ul>
    </div>
  </nav> <!-- End Navigation -->
  <!-- Start Header Jumbotron-->
  <header class="jumbotron back-image" style="background-image: url(images/Banner1.jpeg);">
    <div class="myclass mainHeading">
      <h1 class="text-uppercase text-danger font-weight-bold">Welcome to OSMS</h1>
      <p class="font-italic">Customer's Happiness is our Aim</p>
      <a href="Requester/RequesterLogin.php" class="btn btn-success mr-4">Login</a>
      <a href="#registration" class="btn btn-danger mr-4">Sign Up</a>
    </div>
  </header> <!-- End Header Jumbotron -->
  <div class="container">
    <!--Introduction Section-->
    <div class="jumbotron">
      <h3 class="text-center">OSMS Services</h3>
      <p>
        OSMS Services is India's leading chain of multi-brand Electronics and Electrical service
        workshops offering wide array of services. We focus on enhancing your uses experience by
        offering world-class Electronic Appliances maintenance services. Our sole mission is "To provide
        Electronic Appliances care services to keep the devices fit and healthy and customers happy and
        smiling". With well-equipped Electronic Appliances service centres and fully trained mechanics, we
        provide quality services with excellent packages that are designed to offer you great savings. Our
        state-of-art workshops are conveniently located in many cities across the country. Now you can
        book your service online by doing Registration.
      </p>
    </div>
  </div>
  <!--Introduction Section End-->
  <!-- Start Services -->
  <div class="container text-center border-bottom" id="Services">
    <h2>Our Services</h2>
    <div class="row mt-4">
      <div class="col-sm-4 mb-4">
        <a href="#"><i class="fas fa-tv fa-8x text-success"></i></a>
        <h4 class="mt-4">Electronic Appliances</h4>
      </div>
    </div>
  </div>

```

```

</div>
<div class="col-sm-4 mb-4">
<a href="#"><i class="fas fa-sliders-h fa-8x text-primary"></i></a>
<h4 class="mt-4">Preventive Maintenance</h4>
</div>
<div class="col-sm-4 mb-4">
<a href="#"><i class="fas fa-cogs fa-8x text-info"></i></a>
<h4 class="mt-4">Fault Repair</h4>
</div>
</div>
</div> <!-- End Services -->
<!-- Start Registration -->
<?php include('userRegistration.php') ?>
<!-- End Registration -->
<!-- Start Happy Customer -->
<div class="jumbotron bg-danger" id="Customer">
<!-- Start Happy Customer Jumbotron -->
<div class="container">
<!-- Start Customer Container -->
<h2 class="text-center text-white">Happy Customers</h2>
<div class="row mt-5">
<div class="col-lg-3 col-sm-6">
<!-- Start Customer 1st Column-->
<div class="card shadow-lg mb-2">
<div class="card-body text-center">

<h4 class="card-title">Rahul Kumar</h4>
<p class="card-text">Itaque illo explicabo voluptatum, saepe libero rerum, adducimus  
voluptas nesciunt debitis numquam.</p>
</div>
</div>
</div> <!-- End Customer 1st Column-->
<div class="col-lg-3 col-sm-6">
<!-- Start Customer 2nd Column-->
<div class="card shadow-lg mb-2">
<div class="card-body text-center">

<h4 class="card-title">Sonam Sharma</h4>
<p class="card-text">Itaque illo explicabo voluptatum, saepe libero rerum, adducimus  
voluptas nesciunt debitis numquam.</p>
</div>
</div>
</div> <!-- End Customer 2nd Column-->
<div class="col-lg-3 col-sm-6">
<!-- Start Customer 3rd Column-->
<div class="card shadow-lg mb-2">
<div class="card-body text-center">

<h4 class="card-title">Sumit Vyas</h4>
<p class="card-text">Itaque illo explicabo voluptatum, saepe libero rerum, adducimus  
voluptas nesciunt debitis numquam.</p>
</div>

```

```

        </div>
    </div> <!-- End Customer 3rd Column-->
<div class="col-lg-3 col-sm-6">
    <!-- Start Customer 4th Column-->
    <div class="card shadow-lg mb-2">
        <div class="card-body text-center">
            
            <h4 class="card-title">Jyoti Sinha</h4>
            <p class="card-text">Itaque illo explicabo voluptatum, saepe libero rerum, adducimus  
voluptas nesciunt debitis numquam.</p>
        </div>
    </div>
    </div> <!-- End Customer 4th Column-->
</div> <!-- End Customer Row-->
</div> <!-- End Customer Container -->
</div> <!-- End Customer Jumbotron -->
<!--Start Contact Us-->
<div class="container" id="Contact">
    <!--Start Contact Us Container-->
    <h2 class="text-center mb-4">Contact US</h2> <!-- Contact Us Heading -->
    <div class="row">
        <!--Start Contact Us Row-->
        <?php include('contactform.php'); ?>
        <!-- End Contact Us 1st Column -->
        <div class="col-md-4 text-center">
            <!-- Start Contact Us 2nd Column-->
            <strong>Headquarter:</strong> <br>
            OSMS Pvt Ltd, <br>
            Sec IV, Bokaro <br>
            Jharkhand - 834005 <br>
            Phone: +00000000 <br>
            <a href="#" target="_blank">www.osms.com</a> <br>
            <br><br>
            <strong>Delhi Branch:</strong> <br>
            OSMS Pvt Ltd, <br>
            Ashok Nagar, Delhi <br>
            Delhi - 804002 <br>
            Phone: +00000000 <br>
            <a href="#" target="_blank">www.osms.com</a> <br>
        </div> <!-- End Contact Us 2nd Column-->
    </div> <!-- End Contact Us Row-->
</div> <!-- End Contact Us Container-->
<!-- End Contact Us -->
<!-- Start Footer-->
<footer class="container-fluid bg-dark text-white mt-5" style="border-top: 3px solid #DC3545;">
    <div class="container">
        <!-- Start Footer Container -->
        <div class="row py-3">
            <!-- Start Footer Row -->
            <div class="col-md-6">
                <!-- Start Footer 1st Column -->
                <span class="pr-2">Follow Us: </span>

```

```

<a href="#" target="_blank" class="pr-2 fi-color"><i class="fab fa-facebook-f"></i></a>
<a href="#" target="_blank" class="pr-2 fi-color"><i class="fab fa-twitter"></i></a>
<a href="#" target="_blank" class="pr-2 fi-color"><i class="fab fa-youtube"></i></a>
<a href="#" target="_blank" class="pr-2 fi-color"><i class="fab fa-google-plus-g"></i></a>
<a href="#" target="_blank" class="pr-2 fi-color"><i class="fas fa-rss"></i></a>
</div> <!-- End Footer 1st Column -->
<div class="col-md-6 text-right">
  <!-- Start Footer 2nd Column -->
  <small> Designed by Someone &copy; 2018.
  </small>
  <small class="ml-2"><a href="Admin/login.php">Admin Login</a></small>
</div> <!-- End Footer 2nd Column -->
</div> <!-- End Footer Row -->
</div> <!-- End Footer Container -->
</footer> <!-- End Footer -->
<!-- Bootstrap JavaScript -->
<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.3/umd/popper.min.js"></script>
<script src="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/js/bootstrap.min.js"></script>
<script defer src="https://use.fontawesome.com/releases/v5.4.1/js/all.js"></script>
</body>
</html>

```

## dbConnection.php

```

<?php
$db_host = "localhost";
$db_user = "root";
$db_password = "";
$db_name = "osms_db";
// Create Connection
$conn = new mysqli($db_host, $db_user, $db_password, $db_name);
// Check Connection
if($conn->connect_error) {
  die("connection failed");
}
?>

```

## UserRegistration.php

```

<?php
include('dbConnection.php');
if(isset($_REQUEST['rSignup'])){
  // Checking for Empty Fields
  if($_REQUEST['rName'] == "") || ($_REQUEST['rEmail'] == "") || ($_REQUEST['rPassword'] == ""){
    $regmsg = '<div class="alert alert-warning mt-2" role="alert"> All Fields are Required </div>';
  } else {
    $sql = "SELECT r_email FROM requesterlogin_tb WHERE
r_email=".$_REQUEST['rEmail']."";
    $result = $conn->query($sql);
    if($result->num_rows == 1){
      $regmsg = '<div class="alert alert-warning mt-2" role="alert"> Email ID Already Registered
</div>';
    } else {
      // Assigning User Values to Variable

```

```

$rName = $_REQUEST['rName'];
$rEmail = $_REQUEST['rEmail'];
$rPassword = $_REQUEST['rPassword'];
$sql = "INSERT INTO requesterlogin_tb(r_name, r_email, r_password) VALUES
('{$rName}', '{$rEmail}', '{$rPassword}')";
if($conn->query($sql) == TRUE){
    $regmsg = '<div class="alert alert-success mt-2" role="alert"> Account Succefully Created
</div>';
} else {
    $regmsg = '<div class="alert alert-danger mt-2" role="alert"> Unable to Create Account
</div>';
}
}
}
}

?>
<div class="container pt-5" id="registration">
<h2 class="text-center">Create an Account</h2>
<div class="row mt-4 mb-4">
<div class="col-md-6 offset-md-3">
<form action="" class="shadow-lg p-4" method="POST">
<div class="form-group">
<i class="fas fa-user"></i><label for="name" class="pl-2 font-weight-bold">Name</label><input type="text"
class="form-control" placeholder="Name" name="rName">
</div>
<div class="form-group">
<i class="fas fa-user"></i><label for="email" class="pl-2 font-weight-bold">Email</label><input type="email"
class="form-control" placeholder="Email" name="rEmail">
<!--Add text-white below if want text color white-->
<small class="form-text">We'll never share your email with anyone else.</small>
</div>
<div class="form-group">
<i class="fas fa-key"></i><label for="pass" class="pl-2 font-weight-bold">New
Password</label><input type="password" class="form-control" placeholder="Password"
name="rPassword">
</div>
<button type="submit" class="btn btn-danger mt-5 btn-block shadow-sm font-weight-bold"
name="rSignup">Sign Up</button>
<em style="font-size:10px;">Note - By clicking Sign Up, you agree to our Terms, Data
Policy and Cookie Policy.</em>
<?php if(isset($regmsg)) {echo $regmsg; } ?>
</form>
</div>
</div>
</div>

```

## Contactform.php

```

<?php
// The contact Us Form wont work with Local Host but it will work on Live Server
if(isset($_REQUEST['submit'])) {
// Checking for Empty Fields
if(($_REQUEST['name'] == "") || ($_REQUEST['subject'] == "") || ($_REQUEST['email'] == "") ||
($_REQUEST['message'] == "")){

```

```
// msg displayed if required field missing

$msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';

} else {
$name = $_REQUEST['name'];
$subject = $_REQUEST['subject'];
$email = $_REQUEST['email'];
$message = $_REQUEST['message'];

$mailTo = "contact@osms.com";
$headers = "From: ". $email;
$txt = "You have received an email from ". $name. ".\n\n". $message;
mail($mailTo, $subject, $txt, $headers);
$msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Sent Successfully </div>';

}

?>


<!--Start Contact Us Row-->
<div class="col-md-8">
<!--Start Contact Us 1st Column-->
<form action="" method="post">
<input type="text" class="form-control" name="name" placeholder="Name"><br>
<input type="text" class="form-control" name="subject" placeholder="Subject"><br>
<input type="email" class="form-control" name="email" placeholder="E-mail"><br>
<textarea class="form-control" name="message" placeholder="How can we help you?" style="height:150px;"></textarea><br>
<input class="btn btn-primary" type="submit" value="Send" name="submit"><br><br>
<?php if(isset($msg)) {echo $msg; } ?>
</form>
</div> <!-- End Contact Us 1st Column-->
```

## RequesterLogin.php

① localhost/osms\_php/Requester/RequesterLogin.php

### Online Maintenance Management System

 Requester Area(Demo)

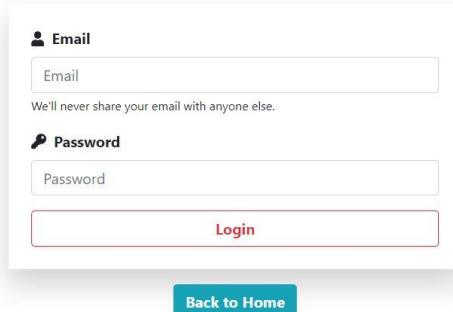

**Email**

We'll never share your email with anyone else.

**Password**

**Login**

**Back to Home**

```

<?php
include('../dbConnection.php');
session_start();
if(!isset($_SESSION['is_login'])){
    if(isset($_REQUEST['rEmail'])){
        $rEmail = mysqli_real_escape_string($conn,trim($_REQUEST['rEmail']));
        $rPassword = mysqli_real_escape_string($conn,trim($_REQUEST['rPassword']));
        $sql = "SELECT r_email, r_password FROM requesterlogin_tb WHERE r_email='".$rEmail."' AND r_password='".$rPassword."' limit 1";
        $result = $conn->query($sql);
        if($result->num_rows == 1){

            $_SESSION['is_login'] = true;
            $_SESSION['rEmail'] = $rEmail;
            // Redirecting to RequesterProfile page on Correct Email and Pass
            echo "<script> location.href='RequesterProfile.php'; </script>";
            exit;
        } else {
            $msg = '<div class="alert alert-warning mt-2" role="alert"> Enter Valid Email and Password
</div>';
        }
    }
} else {
    echo "<script> location.href='RequesterProfile.php'; </script>";
}
?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta http-equiv="X-UA-Compatible" content="ie=edge">
        <!-- Bootstrap CSS -->
        <link rel="stylesheet"
        href="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/css/bootstrap.min.css">
        <!-- Font Awesome CSS -->
        <link rel="stylesheet" href="https://use.fontawesome.com/releases/v5.4.1/css/all.css">

    <style>
        .custom-margin {
            margin-top: 8vh;
        }
    </style>
    <title>Login</title>
</head>

<body>
    <div class="mb-3 text-center mt-5" style="font-size: 30px;">
        <i class="fas fa-stethoscope"></i>
        <span>Online Service Management System</span>

```

```

</div>
<cp class="text-center" style="font-size: 20px;"> <i class="fas fa-user-secret text-danger"></i>
<span>Requester
    Area(Demo)</span>
</p>
<div class="container-fluid mb-5">
    <div class="row justify-content-center custom-margin">
        <div class="col-sm-6 col-md-4">
            <form action="" class="shadow-lg p-4" method="POST">
                <div class="form-group">
                    <i class="fas fa-user"></i><label for="email" class="pl-2 font-weight-bold">Email</label><input type="email"
                        class="form-control" placeholder="Email" name="rEmail">
                    <!--Add text-white below if want text color white-->
                    <small class="form-text">We'll never share your email with anyone else.</small>
                </div>
                <div class="form-group">
                    <i class="fas fa-key"></i><label for="pass" class="pl-2 font-weight-bold">Password</label><input type="password"
                        class="form-control" placeholder="Password" name="rPassword">
                </div>
                <button type="submit" class="btn btn-outline-danger mt-3 btn-block shadow-sm font-weight-bold">Login</button>
                <?php if(isset($msg)) {echo $msg; } ?>
            </form>
            <div class="text-center"><a class="btn btn-info mt-3 shadow-sm font-weight-bold"
                href="../index.php">Back
                to Home</a></div>
        </div>
    </div>
</div>


<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js"></script>
<script
src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.3/umd/popper.min.js"></script>
<script
src="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/js/bootstrap.min.js"></script>
    <script defer src="https://use.fontawesome.com/releases/v5.4.1/js/all.js"></script>
</body>

</html>

```

## Header.php

```

<!DOCTYPE html>
<html lang="en">

    <head>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0">

```

```

<meta http-equiv="X-UA-Compatible" content="ie=edge">
<title>
<?php echo TITLE ?>
</title>
    <!-- Bootstrap CSS -->
    <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/css/bootstrap.min.css">
    <!-- Font Awesome CSS -->
    <link rel="stylesheet" href="https://use.fontawesome.com/releases/v5.4.1/css/all.css">
    <!-- Google Font -->
    <link href="https://fonts.googleapis.com/css?family=Ubuntu" rel="stylesheet">
    <!-- Custom CSS -->
    <link rel="stylesheet" href="css/custom.css">
</head>

<body>
    <!-- Top Navbar -->
    <nav class="navbar navbar-dark fixed-top bg-danger flex-mdnowrap p-0 shadow">
        <a class="navbar-brand col-sm-3 col-md-2 mr-0" href="RequesterProfile.php">OSMS</a>
    </nav>

    <!-- Side Bar -->
    <div class="container-fluid mb-5" style="margin-top:40px;">
        <div class="row">
            <nav class="col-sm-2 bg-light sidebar py-5 d-print-none">
                <div class="sidebar-sticky">
                    <ul class="nav flex-column">
                        <li class="nav-item">
                            <a class="nav-link <?php if(PAGE == 'RequesterProfile') { echo 'active'; } ?>" href="RequesterProfile.php">
                                <i class="fas fa-user"></i>
                                Profile <span class="sr-only">(current)</span>
                            </a>
                        </li>
                        <li class="nav-item">
                            <a class="nav-link <?php if(PAGE == 'SubmitRequest') { echo 'active'; } ?>" href="SubmitRequest.php">
                                <i class="fab fa-accessible-icon"></i>
                                Submit Request
                            </a>
                        </li>
                        <li class="nav-item">
                            <a class="nav-link <?php if(PAGE == 'CheckStatus') { echo 'active'; } ?>" href="CheckStatus.php">
                                <i class="fas fa-align-center"></i>
                                Service Status
                            </a>
                        </li>
                        <li class="nav-item">
                            <a class="nav-link <?php if(PAGE == 'Requesterchangepass') { echo 'active'; } ?>" href="Requesterchangepass.php">
                                <i class="fas fa-key"></i>
                                Change Password
                            </a>
                        </li>
                    </ul>
                </div>
            </nav>
        </div>
    </div>

```

```

        </a>
    </li>
<li class="nav-item">
    <a class="nav-link" href="../logout.php">
        <i class="fas fa-sign-out-alt"></i>
        Logout
    </a>
</li>
</ul>
</div>
</nav>

```

## Footer.php


```

<!-- Bootstrap JavaScript -->
<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js"></script>
    <script
src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.3/umd/popper.min.js"></script>
        <script
src="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/js/bootstrap.min.js"></script>
            <script defer src="https://use.fontawesome.com/releases/v5.4.1/js/all.js"></script>
</body>

</html>

```

## RequesterProfile.php

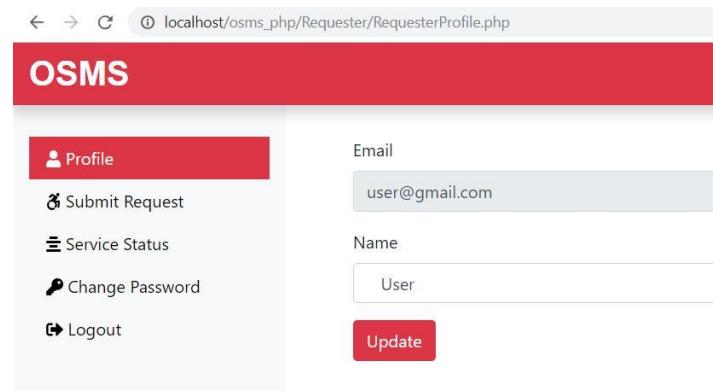

```

<?php
define('TITLE', 'Requester Profile');
define('PAGE', 'RequesterProfile');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if($_SESSION['is_login']){
    $rEmail = $_SESSION['rEmail'];
} else {

```

```

echo "<script> location.href='RequesterLogin.php'; </script>";
}

$sql = "SELECT * FROM requesterlogin_tb WHERE r_email='$rEmail'";
$result = $conn->query($sql);
if($result->num_rows == 1){
$row = $result->fetch_assoc();
$rName = $row["r_name"]; }

if(isset($_REQUEST['nameupdate'])){
if($_REQUEST['rName'] == ""){
// msg displayed if required field missing
$passmsg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
} else {
$rName = $_REQUEST["rName"];
$sql = "UPDATE requesterlogin_tb SET r_name = '$rName' WHERE r_email = '$rEmail'";
if($conn->query($sql) == TRUE){
// below msg display on form submit success
$passmsg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Updated Successfully
</div>';
} else {
// below msg display on form submit failed
$passmsg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Update
</div>';
}
}
}
?>


<form class="mx-5" method="POST">
<div class="form-group">
<label for="inputEmail">Email</label>
<input type="email" class="form-control" id="inputEmail" value=" <?php echo $rEmail ?>" readonly>
</div>
<div class="form-group">
<label for="inputName">Name</label>
<input type="text" class="form-control" id="inputName" name="rName" value=" <?php echo
$rName ?>">
</div>
<button type="submit" class="btn btn-danger" name="nameupdate">Update</button>
<?php if(isset($passmsg)) {echo $passmsg; } ?>
</form>
</div>
</div>
</div>
<?php
include('includes/footer.php');
?>


```

## Submitrequest.php

```
<?php
define('TITLE', 'Submit Request');
define('PAGE', 'SubmitRequest');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if($_SESSION['is_login']){
    $rEmail = $_SESSION['rEmail'];
} else {
    echo "<script> location.href='RequesterLogin.php'; </script>";
}
if(isset($_REQUEST['submitrequest'])){
    // Checking for Empty Fields
    if($_REQUEST['requestinfo'] == "") || ($_REQUEST['requestdesc'] == "") || 
    ($_REQUEST['requestername'] == "") || ($_REQUEST['requesteradd1'] == "") || 
    ($_REQUEST['requesteradd2'] == "") || ($_REQUEST['requestercity'] == "") || 
    ($_REQUEST['requesterstate'] == "") || ($_REQUEST['requesterzip'] == "") || 
    ($_REQUEST['requesteremail'] == "") || ($_REQUEST['requestermobile'] == "") || 
    ($_REQUEST['requestdate'] == ""){
        // msg displayed if required field missing
        $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        // Assigning User Values to Variable
        $rinfo = $_REQUEST['requestinfo'];
        $rdesc = $_REQUEST['requestdesc'];
        $rname = $_REQUEST['requestername'];
        $radd1 = $_REQUEST['requesteradd1'];
        $radd2 = $_REQUEST['requesteradd2'];
        $rcity = $_REQUEST['requestercity'];
        $rstate = $_REQUEST['requesterstate'];
        $rzip = $_REQUEST['requesterzip'];
        $remail = $_REQUEST['requesteremail'];
        $rmobile = $_REQUEST['requestermobile'];
        $rdate = $_REQUEST['requestdate'];
        $sql = "INSERT INTO submitrequest_tb(request_info, request_desc, requester_name,
requester_add1, requester_add2, requester_city, requester_state, requester_zip, requester_email,
```

```

requester_mobile, request_date) VALUES ('$rinfo','$rdesc', '$rname', '$radd1', '$radd2', '$rcity',
'$rstate', '$rzip', '$remail', '$rmobile', '$rdate')";
if($conn->query($sql) == TRUE){
    // below msg display on form submit success
    $genid = mysqli_insert_id($conn);
    $msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Request Submitted
Successfully Your' . $genid . '</div>';
    session_start();
    $_SESSION['myid'] = $genid;
    echo "<script> location.href='submitrequestsuccess.php'; </script>";
    // include('submitrequestsuccess.php');
} else {
    // below msg display on form submit failed
    $msg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Submit Your
Request </div>';
}
}
}
?>
<div class="col-sm-9 col-md-10 mt-5">
<form class="mx-5" action="" method="POST">
<div class="form-group">
<label for="inputRequestInfo">Request Info</label>
<input type="text" class="form-control" id="inputRequestInfo" placeholder="Request Info"
name="requestinfo">
</div>
<div class="form-group">
<label for="inputRequestDescription">Description</label>
<input type="text" class="form-control" id="inputRequestDescription" placeholder="Write
Description" name="requestdesc">
</div>
<div class="form-group">
<label for="inputName">Name</label>
<input type="text" class="form-control" id="inputName" placeholder="Rahul"
name="requestername">
</div>
<div class="form-row">
<div class="form-group col-md-6">
<label for="inputAddress">Address Line 1</label>
<input type="text" class="form-control" id="inputAddress" placeholder="House No. 123"
name="requesteradd1">
</div>
<div class="form-group col-md-6">
<label for="inputAddress2">Address Line 2</label>
<input type="text" class="form-control" id="inputAddress2" placeholder="Railway Colony"
name="requesteradd2">
</div>
</div>
<div class="form-row">
<div class="form-group col-md-6">
<label for="inputCity">City</label>
<input type="text" class="form-control" id="inputCity" name="requestercity">

```

```

</div>
<div class="form-group col-md-4">
  <label for="inputState">State</label>
  <input type="text" class="form-control" id="inputState" name="requesterstate">
</div>
<div class="form-group col-md-2">
  <label for="inputZip">Zip</label>
  <input type="text" class="form-control" id="inputZip" name="requesterzip"
onkeypress="isInputNumber(event)">
</div>
</div>

<div class="form-row">
<div class="form-group col-md-6">
  <label for="inputEmail">Email</label>
  <input type="email" class="form-control" id="inputEmail" name="requesteremail">
</div>
<div class="form-group col-md-2">
  <label for="inputMobile">Mobile</label>
  <input type="text" class="form-control" id="inputMobile" name="requestermobile"
onkeypress="isInputNumber(event)">
</div>
<div class="form-group col-md-2">
  <label for="inputDate">Date</label>
  <input type="date" class="form-control" id="inputDate" name="requestdate">
</div>
</div>

<button type="submit" class="btn btn-danger" name="submitrequest">Submit</button>
<button type="reset" class="btn btn-secondary">Reset</button>
</form>
<!-- below msg display if required fill missing or form submitted success or failed -->
<?php if(isset($msg)) {echo $msg; } ?>
</div>
</div>
</div>
<!-- Only Number for input fields -->
<script>
function isInputNumber(evt) {
  var ch = String.fromCharCode(evt.which);
  if (!(/[0-9]/.test(ch))) {
    evt.preventDefault();
  }
}
</script>
<?php
include('includes/footer.php');
$conn->close();
?>

```

## Submitrequestsuccess

← → ⌂ localhost/osms\_php/Requester/submitrequestsuccess.php

### OSMS

- [\*User\* Profile](#)
- [\*Document\* Submit Request](#)
- [\*Service\* Status](#)
- [\*Key\* Change Password](#)
- [\*Logout\*](#)

<b>Request ID</b>	52
<b>Name</b>	Sam
<b>Email ID</b>	user@gmail.com
<b>Request Info</b>	Rode Mic Note Working
<b>Request Description</b>	my rode mic is not working properly

[Print](#)

```
<?php
define('TITLE', 'Success');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if($_SESSION['is_login']){
    $rEmail = $_SESSION['rEmail'];
} else {
    echo "<script> location.href='RequesterLogin.php'; </script>";
}
$sql = "SELECT * FROM submitrequest_tb WHERE request_id = {$_SESSION['myid']}";
$result = $conn->query($sql);
if($result->num_rows == 1){
    $row = $result->fetch_assoc();
    echo "<div class='ml-5 mt-5'>
<table class='table'>
<tbody>
<tr>
<th>Request ID</th>
<td>".$row['request_id']."'</td>
</tr>
<tr>
<th>Name</th>
<td>".$row['requester_name']."'</td>
</tr>
<tr>
<th>Email ID</th>
<td>".$row['requester_email']."'</td>
</tr>

```

```

<tr>
<th>Request Info</th>
<td>".$row['request_info']."'</td>
</tr>
<tr>
<th>Request Description</th>
<td>".$row['request_desc']."'</td>
</tr>

<tr>
<td><form class='d-print-none'><input class='btn btn-danger' type='submit' value='Print'
onClick='window.print()'></form></td>
</tr>
</tbody>
</table></div>
';

} else {
echo "Failed";
}
?>

<?php
include('includes/footer.php');
$conn->close();
?>

```

## Checkstatus.php

The screenshot shows a web browser window with the URL `localhost/osms_php/Requester/CheckStatus.php`. The page has a red header bar with the text 'OSMS'. Below the header, there is a sidebar on the left containing several menu items: 'Profile', 'Submit Request', 'Service Status' (which is highlighted in red), 'Change Password', and 'Logout'. To the right of the sidebar, there is a search bar with the placeholder 'Enter Request ID:' and a red 'Search' button.

```

<?php
define('TITLE', 'Status');
define('PAGE', 'CheckStatus');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if($_SESSION['is_login']){
    $rEmail = $_SESSION['rEmail'];

```

```

} else {
echo "<script> location.href='RequesterLogin.php'; </script>";
}
?>
<div class="col-sm-6 mt-5 mx-3">
<form action="" class="mt-3 form-inline d-print-none">
<div class="form-group mr-3">
<label for="checkid">Enter Request ID: </label>
<input type="text" class="form-control ml-3" id="checkid" name="checkid"
onkeypress="isInputNumber(event)">
</div>
<button type="submit" class="btn btn-danger">Search</button>
</form>
<?php
if(isset($_REQUEST['checkid'])){
$SQL = "SELECT * FROM assignwork_tb WHERE request_id = {$_REQUEST['checkid']}";
$result = $conn->query($SQL);
$row = $result->fetch_assoc();
if($row['request_id'] == $_REQUEST['checkid']){ ?>
<h3 class="text-center mt-5">Assigned Work Details</h3>
<table class="table table-bordered">
<tbody>
<tr>
<td>Request ID</td>
<td>
<?php if(isset($row['request_id'])) {echo $row['request_id']; } ?>
</td>
</tr>
<tr>
<td>Request Info</td>
<td>
<?php if(isset($row['request_info'])) {echo $row['request_info']; } ?>
</td>
</tr>
<tr>
<td>Request Description</td>
<td>
<?php if(isset($row['request_desc'])) {echo $row['request_desc']; } ?>
</td>
</tr>
<tr>
<td>Name</td>
<td>
<?php if(isset($row['requester_name'])) {echo $row['requester_name']; } ?>
</td>
</tr>
<tr>
<td>Address Line 1</td>
<td>
<?php if(isset($row['requester_add1'])) {echo $row['requester_add1']; } ?>
</td>
</tr>

```

```

<tr>
  <td>Address Line 2</td>
  <td>
    <?php if(isset($row['requester_add2'])) {echo $row['requester_add2']; } ?>
  </td>
</tr>
<tr>
  <td>City</td>
  <td>
    <?php if(isset($row['requester_city'])) {echo $row['requester_city']; } ?>
  </td>
</tr>
<tr>
  <td>State</td>
  <td>
    <?php if(isset($row['requester_state'])) {echo $row['requester_state']; } ?>
  </td>
</tr>
<tr>
  <td>Pin Code</td>
  <td>
    <?php if(isset($row['requester_zip'])) {echo $row['requester_zip']; } ?>
  </td>
</tr>
<tr>
  <td>Email</td>
  <td>
    <?php if(isset($row['requester_email'])) {echo $row['requester_email']; } ?>
  </td>
</tr>
<tr>
  <td>Mobile</td>
  <td>
    <?php if(isset($row['requester_mobile'])) {echo $row['requester_mobile']; } ?>
  </td>
</tr>
<tr>
  <td>Assigned Date</td>
  <td>
    <?php if(isset($row['assign_date'])) {echo $row['assign_date']; } ?>
  </td>
</tr>
<tr>
  <td>Technician Name</td>
  <td>Zahir Khan</td>
</tr>
<tr>
  <td>Customer Sign</td>
  <td></td>
</tr>
<tr>
  <td>Technician Sign</td>

```

```

<td></td>
</tr>
</tbody>
</table>
<div class="text-center">
  <form class="d-print-none d-inline mr-3"><input class="btn btn-danger" type="submit" value="Print" onClick="window.print()"></form>
  <form class="d-print-none d-inline" action="work.php"><input class="btn btn-secondary" type="submit" value="Close"></form>
</div>
<?php } else {
  echo '<div class="alert alert-dark mt-4" role="alert">
  Your Request is Still Pending </div>';
}
?>

</div>
<!-- Only Number for input fields --&gt;
&lt;script&gt;
  function isInputNumber(evt) {
    var ch = String.fromCharCode(evt.which);
    if (!(/[0-9]/.test(ch))) {
      evt.preventDefault();
    }
  }
&lt;/script&gt;
&lt;?php
include('includes/footer.php');
?&gt;
</pre>

```

## Requesterchangeppass.php

localhost/osms\_php/Requester/Requesterchangeppass.php

**OSMS**

- Profile
- Submit Request
- Service Status
- Change Password
- Logout

Email  
user@gmail.com

New Password

New Password

Update Reset

```
<?php
define('TITLE', 'Change Password');
define('PAGE', 'Requesterchangeppass');
```

```

include('includes/header.php');
include('../dbConnection.php');
session_start();
if($_SESSION['is_login']){
    $rEmail = $_SESSION['rEmail'];
} else {
    echo "<script> location.href='RequesterLogin.php'; </script>";
}

$rEmail = $_SESSION['rEmail'];
if(isset($_REQUEST['passupdate'])){
    if($_REQUEST['rPassword'] == ""){
        // msg displayed if required field missing
        $passmsg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        $sql = "SELECT * FROM requesterlogin_tb WHERE r_email='$rEmail'";
        $result = $conn->query($sql);
        if($result->num_rows == 1){
            $rPass = $_REQUEST['rPassword'];
            $sql = "UPDATE requesterlogin_tb SET r_password = '$rPass' WHERE r_email = '$rEmail'";
            if($conn->query($sql) == TRUE){
                // below msg display on form submit success
                $passmsg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Updated
Successfully </div>';
            } else {
                // below msg display on form submit failed
                $passmsg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Update
</div>';
            }
        }
    }
}

?>
<div class="col-sm-9 col-md-10">
    <div class="row">
        <div class="col-sm-6">
            <form class="mt-5 mx-5" method="POST">
                <div class="form-group">
                    <label for="inputEmail">Email</label>
                    <input type="email" class="form-control" id="inputEmail" value=" <?php echo $rEmail ?>" readonly>
                </div>
                <div class="form-group">
                    <label for="inputnewpassword">New Password</label>
                    <input type="password" class="form-control" id="inputnewpassword" placeholder="New
Password" name="rPassword">
                </div>
                <button type="submit" class="btn btn-danger mr-4 mt-4"
name="passupdate">Update</button>
                <button type="reset" class="btn btn-secondary mt-4">Reset</button>
            <?php if(isset($passmsg)) {echo $passmsg; } ?>
        </div>
    </div>
</div>

```

```

</form>

</div>

</div>
</div>
</div>
</div>

<?php
include('includes/footer.php');
?>


```

## Login.php

① localhost/osms\_php/Admin/login.php

### Online Maintenance Management System

 Admin Area(Demo)

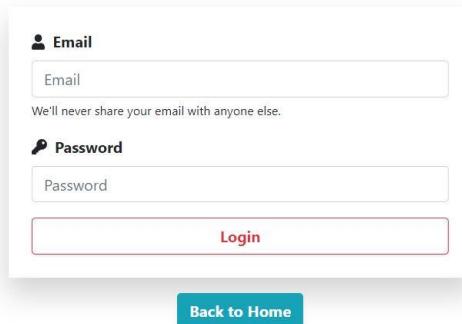

The screenshot shows a login form with the following fields:

- Email:** A text input field labeled "Email". Below it is a small note: "We'll never share your email with anyone else."
- Password:** A text input field labeled "Password".
- Login:** A red rectangular button labeled "Login".

Below the form is a blue button labeled "Back to Home".

```

<?php
include('../dbConnection.php');
session_start();
if(!isset($_SESSION['is_adminlogin'])){
if(isset($_REQUEST['aEmail'])){
    $aEmail = mysqli_real_escape_string($conn, trim($_REQUEST['aEmail']));
    $aPassword = mysqli_real_escape_string($conn, trim($_REQUEST['aPassword']));
    $sql = "SELECT a_email, a_password FROM adminlogin_tb WHERE a_email='".$aEmail."' AND a_password='".$aPassword."' limit 1";
    $result = $conn->query($sql);
    if($result->num_rows == 1){
        $_SESSION['is_adminlogin'] = true;
        $_SESSION['aEmail'] = $aEmail;
        // Redirecting to RequesterProfile page on Correct Email and Pass
        echo "<script> location.href='dashboard.php'; </script>";
        exit;
    } else {
        $msg = '<div class="alert alert-warning mt-2" role="alert"> Enter Valid Email and Password
</div>';
    }
}
}

```

```

        }
    }
} else {
    echo "<script> location.href='dashboard.php'; </script>";
}
?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta http-equiv="X-UA-Compatible" content="ie=edge">

    <!-- Bootstrap CSS -->
    <link rel="stylesheet"
    href="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/css/bootstrap.min.css">
    <!-- Font Awesome CSS -->
    <link rel="stylesheet" href="https://use.fontawesome.com/releases/v5.4.1/css/all.css">

    <style>
        .custom-margin {
            margin-top: 8vh;
        }
    </style>
    <title>Login</title>
</head>

<body>
    <div class="mb-3 text-center mt-5" style="font-size: 30px;">
        <i class="fas fa-stethoscope"></i>
        <span>Online Service Management System</span>
    </div>
    <p class="text-center" style="font-size: 20px;"> <i class="fas fa-user-secret text-danger"></i>
<span>Admin
    Area(Demo)</span>
</p>
<div class="container-fluid mb-5">
    <div class="row justify-content-center custom-margin">
        <div class="col-sm-6 col-md-4">
            <form action="" class="shadow-lg p-4" method="POST">
                <div class="form-group">
                    <i class="fas fa-user"></i><label for="email" class="pl-2 font-weight-bold">Email</label><input type="email"
                        class="form-control" placeholder="Email" name="aEmail">
                    <!--Add text-white below if want text color white-->
                    <small class="form-text">We'll never share your email with anyone else.</small>
                </div>
                <div class="form-group">
                    <i class="fas fa-key"></i><label for="pass" class="pl-2 font-weight-bold">Password</label><input type="password"
                        class="form-control" placeholder="Password" name="aPassword">
                </div>
            </form>
        </div>
    </div>
</div>

```

```

    </div>
    <button type="submit" class="btn btn-outline-danger mt-3 btn-block shadow-sm font-weight-bold">Login</button>
    <?php if(isset($msg)) {echo $msg; } ?>
</form>
<div class="text-center"><a class="btn btn-info mt-3 shadow-sm font-weight-bold" href=..../index.php>Back to Home</a></div>
</div>
</div>
<!-- Bootstrap JavaScript -->
<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.3/umd/popper.min.js"></script>
<script src="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/js/bootstrap.min.js"></script>
<script defer src="https://use.fontawesome.com/releases/v5.4.1/js/all.js"></script>
</body>

</html>

```

## Header.php

```

<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<meta http-equiv="X-UA-Compatible" content="ie=edge">
<title>
<?php echo TITLE ?>
</title>
<!-- Bootstrap CSS -->
<link rel="stylesheet" href="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/css/bootstrap.min.css">
<!-- Font Awesome CSS -->
<link rel="stylesheet" href="https://use.fontawesome.com/releases/v5.4.1/css/all.css">

<!-- Custom CSS -->
<link rel="stylesheet" href=..../css/custom.css">

</head>

<body>
<!-- Top Navbar -->
<nav class="navbar navbar-dark fixed-top bg-danger p-0 shadow">
<a class="navbar-brand col-sm-3 col-md-2 mr-0" href="dashboard.php">OSMS</a>
</nav>

```

```

<!-- Side Bar -->
<div class="container-fluid mb-5" style="margin-top:40px;">
<div class="row">
<nav class="col-sm-3 col-md-2 bg-light sidebar py-5 d-print-none">
<div class="sidebar-sticky">
<ul class="nav flex-column">
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'dashboard') { echo 'active'; } ?>" href="dashboard.php">
<i class="fas fa-tachometer-alt"></i>
Dashboard
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'work') { echo 'active'; } ?>" href="work.php">
<i class="fab fa-accessible-icon"></i>
Work Order
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'request') { echo 'active'; } ?>" href="request.php">
<i class="fas fa-align-center"></i>
Requests
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'assets') { echo 'active'; } ?>" href="assets.php">
<i class="fas fa-database"></i>
Assets
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'technician') { echo 'active'; } ?>" href="technician.php">
<i class="fab fa-teamspeak"></i>
Technician
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'requesters') { echo 'active'; } ?>" href="requester.php">
<i class="fas fa-users"></i>
Requester
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'sellreport') { echo 'active'; } ?>" href="soldproductreport.php">
<i class="fas fa-table"></i>
Sell Report
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'workreport') { echo 'active'; } ?>" href="workreport.php">
<i class="fas fa-table"></i>

```

```

Work Report
</a>
</li>
<li class="nav-item">
<a class="nav-link <?php if(PAGE == 'changepass') { echo 'active'; } ?>" href="changepass.php">
<i class="fas fa-key"></i>
Change Password
</a>
</li>
<li class="nav-item">
<a class="nav-link" href="../logout.php">
<i class="fas fa-sign-out-alt"></i>
Logout
</a>
</li>
</ul>
</div>
</nav>

```

### Footer.php

```

<!-- Bootstrap JavaScript -->
<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.3/umd/popper.min.js"></script>
<script src="https://stackpath.bootstrapcdn.com/bootstrap/4.1.3/js/bootstrap.min.js"></script>
<script defer src="https://use.fontawesome.com/releases/v5.4.1/js/all.js"></script>
</body>
</html>

```

## Dashboard.php

List of Requesters			
	Requester ID	Name	Email
	9	Rajesh	raj@gmail.com
	10	User	user@gmail.com

```

<?php
define('TITLE', 'Dashboard');
define('PAGE', 'dashboard');
include('includes/header.php');
include('../dbConnection.php');

```

```

session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
$sql = "SELECT max(request_id) FROM submitrequest_tb";
$result = $conn->query($sql);
$row = mysqli_fetch_row($result);
$submitrequest = $row[0];

$sql = "SELECT max(request_id) FROM assignwork_tb";
$result = $conn->query($sql);
$row = mysqli_fetch_row($result);
$assignwork = $row[0];

$sql = "SELECT * FROM technician_tb";
$result = $conn->query($sql);
$totaltech = $result->num_rows;

?>
<div class="col-sm-9 col-md-10">
    <div class="row mx-5 text-center">
        <div class="col-sm-4 mt-5">
            <div class="card text-white bg-danger mb-3" style="max-width: 18rem;">
                <div class="card-header">Requests Received</div>
                <div class="card-body">
                    <h4 class="card-title">
                        <?php echo $submitrequest; ?>
                    </h4>
                    <a class="btn text-white" href="request.php">View</a>
                </div>
            </div>
        </div>
        <div class="col-sm-4 mt-5">
            <div class="card text-white bg-success mb-3" style="max-width: 18rem;">
                <div class="card-header">Assigned Work</div>
                <div class="card-body">
                    <h4 class="card-title">
                        <?php echo $assignwork; ?>
                    </h4>
                    <a class="btn text-white" href="work.php">View</a>
                </div>
            </div>
        </div>
        <div class="col-sm-4 mt-5">
            <div class="card text-white bg-info mb-3" style="max-width: 18rem;">
                <div class="card-header">No. of Technician</div>
                <div class="card-body">
                    <h4 class="card-title">
                        <?php echo $totaltech; ?>
                    </h4>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

<a class="btn text-white" href="technician.php">View</a>
</div>
</div>
</div>
</div>
</div class="mx-5 mt-5 text-center">
<!--Table-->
<p class=" bg-dark text-white p-2">List of Requesters</p>
<?php
$sql = "SELECT * FROM requesterlogin_tb";
$result = $conn->query($sql);
if($result->num_rows > 0){
echo '<table class="table">
<thead>
<tr>
<th scope="col">Requester ID</th>
<th scope="col">Name</th>
<th scope="col">Email</th>
</tr>
</thead>
<tbody>';
while($row = $result->fetch_assoc()){
echo '<tr>';
echo '<th scope="row">'.$row["r_login_id"].'</th>';
echo '<td>'. $row["r_name"].'</td>';
echo '<td>'.$row["r_email"].'</td>';
}
echo '</tbody>
</table>';
} else {
echo "0 Result";
}
?>
</div>
</div>
</div>
</div>
<?php
include('includes/footer.php');
?>

```

## Work.php

	Req ID	Request Info	Name	Address	City	Mobile	Technician	Assigned Date	Action
Work Order	23	Hard Disk makes noise	Rahul Kumar	Sector IV	Bokaro	2147483647		2018-09-30	
Requests	49	Mic not working	Jay	Col	Bokaro	656567	Jay Kisan	2018-10-14	
Assets	50	Jack and Jones	Raj	Sector Five	Bokaro	234234234	Kabir	2018-10-16	
Technician	50	Jack and Jones	Raj	Sector Five	Bokaro	234234234	Jay	2018-10-21	
Requester	52	LCD Not working	Rahul	Railway	Bokaro	234566	Kunal	2018-10-21	

```

<?php
define('TITLE', 'Work Order');
define('PAGE', 'work');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
?>
<div class="col-sm-9 col-md-10 mt-5">
    <?php
    $sql = "SELECT * FROM assignwork_tb";
    $result = $conn->query($sql);
    if($result->num_rows > 0){
        echo '<table class="table">
            <thead>
                <tr>
                    <th scope="col">Req ID</th>
                    <th scope="col">Request Info</th>
                    <th scope="col">Name</th>
                    <th scope="col">Address</th>
                    <th scope="col">City</th>
                    <th scope="col">Mobile</th>
                    <th scope="col">Technician</th>
                    <th scope="col">Assigned Date</th>
                    <th scope="col">Action</th>
                </tr>
            </thead>
            <tbody>';
        while($row = $result->fetch_assoc()){
            echo '<tr>
                <th scope="row">'.$row["request_id"].'</th>
                <td>'.$row["request_info"].'</td>
                <td>'.$row["requester_name"].'</td>
                <td>'.$row["requester_add2"].'</td>
                <td>'.$row["requester_city"].'</td>
                <td>'.$row["requester_mobile"].'</td>
                <td>'.$row["assign_tech"].'</td>
                <td>'.$row["assign_date"].'</td>
            </tr>
';
        }
    }
?>

```

```

<td><form action="viewassignwork.php" method="POST" class="d-inline"> <input type="hidden" name="id" value='.
$row["request_id"] .'><button type="submit" class="btn btn-warning" name="view" value="View"><i class="far fa-eye"></i></button></form>
<form action="" method="POST" class="d-inline"><input type="hidden" name="id" value='.
$row["request_id"] .'><button type="submit" class="btn btn-secondary" name="delete" value="Delete"><i class="far fa-trash-alt"></i></button></form>
</td>
</tr>';
}
echo '</tbody> </table>';
} else {
echo "0 Result";
}
if(isset($_REQUEST['delete'])){
$sql = "DELETE FROM assignwork_tb WHERE request_id = {$_REQUEST['id']}";
if($conn->query($sql) === TRUE){
// echo "Record Deleted Successfully";
// below code will refresh the page after deleting the record
echo '<meta http-equiv="refresh" content= "0;URL=?deleted" />';
} else {
echo "Unable to Delete Data";
}
}
?>
</div>
</div>
</div>
<?php
include('includes/footer.php');
?>

```

## viewassignwork.php

Assigned Work Details	
Request ID	23
Request Info	Hard Disk makes noise
Request Description	Hello My laptop hard disk makes noise
Name	Rahul Kumar
Address Line 1	House No 456
Address Line 2	Sector IV
City	Bokaro
State	Jharkhand
Pin Code	827004
Email	rahul@gmail.com
Mobile	2147483647
Assigned Date	2018-09-30
Technician Name	
Customer Sign	
Technician Sign	

[Print](#) [Close](#)

```

<?php
define('TITLE', 'Work Order');
define('PAGE', 'work');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
?>

<div class="col-sm-6 mt-5 mx-3">
<h3 class="text-center">Assigned Work Details</h3>
<?php
if(isset($_REQUEST['view'])){
    $sql = "SELECT * FROM assignwork_tb WHERE request_id = {$_REQUEST['id']}";
    $result = $conn->query($sql);
    $row = $result->fetch_assoc();
}
?>
<table class="table table-bordered">
<tbody>
<tr>
<td>Request ID</td>
<td>
<?php if(isset($row['request_id'])) {echo $row['request_id']; }?>
</td>

```

```
</tr>
<tr>
<td>Request Info</td>
<td>
<?php if(isset($row['request_info'])) {echo $row['request_info']; }?>
</td>
</tr>
<tr>
<td>Request Description</td>
<td>
<?php if(isset($row['request_desc'])) {echo $row['request_desc']; }?>
</td>
</tr>
<tr>
<td>Name</td>
<td>
<?php if(isset($row['requester_name'])) {echo $row['requester_name']; }?>
</td>
</tr>
<tr>
<td>Address Line 1</td>
<td>
<?php if(isset($row['requester_add1'])) {echo $row['requester_add1']; }?>
</td>
</tr>
<tr>
<td>Address Line 2</td>
<td>
<?php if(isset($row['requester_add2'])) {echo $row['requester_add2']; }?>
</td>
</tr>
<tr>
<td>City</td>
<td>
<?php if(isset($row['requester_city'])) {echo $row['requester_city']; }?>
</td>
</tr>
<tr>
<td>State</td>
<td>
<?php if(isset($row['requester_state'])) {echo $row['requester_state']; }?>
</td>
</tr>
<tr>
<td>Pin Code</td>
<td>
<?php if(isset($row['requester_zip'])) {echo $row['requester_zip']; }?>
</td>
</tr>
<tr>
<td>Email</td>
<td>
```

```

<?php if(isset($row['requester_email'])) {echo $row['requester_email']; }?>
</td>
</tr>
<tr>
<td>Mobile</td>
<td>
<?php if(isset($row['requester_mobile'])) {echo $row['requester_mobile']; }?>
</td>
</tr>
<tr>
<td>Assigned Date</td>
<td>
<?php if(isset($row['assign_date'])) {echo $row['assign_date']; }?>
</td>
</tr>
<tr>
<td>Technician Name</td>
<td>
<?php if(isset($row['assign_tech'])) {echo $row['assign_tech']; }?>
</td>
</tr>
<tr>
<td>Customer Sign</td>
<td></td>
</tr>
<tr>
<td>Technician Sign</td>
<td></td>
</tr>
</tbody>
</table>
<div class="text-center">
<form class='d-print-none d-inline mr-3'><input class='btn btn-danger' type='submit' value='Print'
onClick='window.print()'></form>
<form class='d-print-none d-inline' action="work.php"><input class='btn btn-secondary'
type='submit' value='Close'></form>
</div>
</div>

<?php
include('includes/footer.php');
?>

```

## Request.php

The screenshot shows the OSMS Request.php page. On the left, there is a sidebar with navigation links: Dashboard, Work Order, Requests (which is highlighted in red), Assets, Technician, Requester, SELL Report, Work Report, Change Password, and Logout. The main content area displays three request cards:

- Request ID : 50**  
Request Info : Jack and Jones  
Hello There have you seen this movie  
Request Date: 2018-10-13  
**View Close**
- Request ID : 51**  
Request Info : asdsadsa  
asdasda  
Request Date: 2018-10-20  
**View Close**
- Request ID : 52**  
Request Info : Rode Mic Note Working  
my rode mic is not working properly  
Request Date: 2018-10-20  
**View Close**

To the right, there is a form titled "Assign Work Order Request" with fields for Request ID, Request Info, Description, Name, Address Line 1, Address Line 2, City, State, Zip, Email, Mobile, Assign to Technician, Date (dd-mm-yyyy), and buttons for Assign and Reset.

```
<?php
define('TITLE', 'Requests');
define('PAGE', 'request');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
?>
<div class="col-sm-4 mb-5">
    <!-- Main Content area start Middle -->
    <?php
        $sql = "SELECT request_id, request_info, request_desc, request_date FROM submitrequest_tb";
        $result = $conn->query($sql);
        if($result->num_rows > 0){
            while($row = $result->fetch_assoc()){
                echo '<div class="card mt-5 mx-5">';
                echo '<div class="card-header">';
                echo 'Request ID : ' . $row['request_id'];
                echo '</div>';
                echo '<div class="card-body">';
                echo '<h5 class="card-title">Request Info : ' . $row['request_info'] . '</h5>';
                echo '<p class="card-text">' . $row['request_desc'] . '</p>';
                echo '<p class="card-text">Request Date: ' . $row['request_date'] . '</p>';
                echo '<div class="float-right">';
                echo '<form action="" method="POST"> <input type="hidden" name="id" value=' .
                    $row["request_id"] . '><input type="submit" class="btn btn-danger mr-3" name="view" value="View"><input type="submit" class="btn btn-secondary" name="close" value="Close"></form>';
                echo '</div>';
                echo '</div>';
                echo'</div>';
            }
        }
    ?>
```

```

} else {
echo '<div class="alert alert-info mt-5 col-sm-6" role="alert">
<h4 class="alert-heading">Well done!</h4>
<p>Aww yeah, you successfully assigned all Requests.</p>
<hr>
<h5 class="mb-0">No Pending Requests</h5>
</div>';
}

// after assigning work we will delete data from submitrequesttable by pressing close button
if(isset($_REQUEST['close'])){
$sql = "DELETE FROM submitrequest_tb WHERE request_id = {$_REQUEST['id']}";
if($conn->query($sql) === TRUE){
// echo "Record Deleted Successfully";
// below code will refresh the page after deleting the record
echo '<meta http-equiv="refresh" content= "0;URL=?closed" />';
} else {
echo "Unable to Delete Data";
}
}
?>
</div> <!-- Main Content area End Middle -->

<?php
include('assignworkform.php');
include('includes/footer.php');
$conn->close();
?>

```

## Assets.php

Product/Parts Details							
Product ID	Name	DOP	Available	Total	Original Cost Each	Selling Price Each	Action
1	Keyboard	2018-10-03	3	10	400	500	
3	Mouse	2018-10-02	18	30	500	600	

```

<?php
define('TITLE', 'Assets');
define('PAGE', 'assets');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
?>
<div class="col-sm-9 col-md-10 mt-5 text-center">
    <!--Table-->
    <p class=" bg-dark text-white p-2">Product/Parts Details</p>
    <?php
        $sql = "SELECT * FROM assets_tb";
        $result = $conn->query($sql);
        if($result->num_rows > 0){
            echo '<table class="table">
                <thead>
                    <tr>
                        <th scope="col">Product ID</th>
                        <th scope="col">Name</th>
                        <th scope="col">DOP</th>
                        <th scope="col">Available</th>
                        <th scope="col">Total</th>
                        <th scope="col">Original Cost Each</th>
                        <th scope="col">Selling Price Each</th>
                        <th scope="col">Action</th>
                    </tr>
                </thead>
                <tbody>';
            while($row = $result->fetch_assoc()){
                echo '<tr>
                    <th scope="row">'.$row["pid"].'</th>
                    <td>'.$row["pname"].'</td>
                    <td>'.$row["pdop"].'</td>
                    <td>'.$row["pava"].'</td>
                    <td>'.$row["ptotal"].'</td>
                    <td>'.$row["poriginalcost"].'</td>
                    <td>'.$row["psellingcost"].'</td>
                    <td>
                        <form action="editproduct.php" method="POST" class="d-inline"><input type="hidden" name="id" value='.$row["pid"].'><button type="submit" class="btn btn-info" name="view" value="View"><i class="fas fa-pen"></i></button></form>
                        <form action="" method="POST" class="d-inline"><input type="hidden" name="id" value='.$row["pid"].'><button type="submit" class="btn btn-secondary" name="delete" value="Delete"><i class="far fa-trash-alt"></i></button></form>
                        <form action="sellproduct.php" method="POST" class="d-inline"><input type="hidden" name="id" value='.$row["pid"].'><button type="submit" class="btn btn-success" name="issue" value="Issue"><i class="fas fa-handshake"></i></button></form>
                    </td>
                </tr>
            ';
            }
        }
    }
?>

```

```

        </td>
        </tr>';
    }
    echo '</tbody>
</table>';
} else {
    echo "0 Result";
}
if(isset($_REQUEST['delete'])){
    $sql = "DELETE FROM assets_tb WHERE pid = {$_REQUEST['id']}";
    if($conn->query($sql) === TRUE){
        // echo "Record Deleted Successfully";
        // below code will refresh the page after deleting the record
        echo '<meta http-equiv="refresh" content="0;URL=?deleted" />';
    } else {
        echo "Unable to Delete Data";
    }
}
?>
</div>
</div>
<a class="btn btn-danger box" href="addproduct.php"><i class="fas fa-plus fa-2x"></i></a>
</div>

<?php
include('includes/footer.php');
?>

```

## Addproduct.php

The screenshot shows a web-based application interface for adding a new product. The title bar says 'OSMS'. On the left is a sidebar with navigation links: Dashboard, Work Order, Requests, Assets (which is highlighted in red), Technician, Requester, Sell Report, Work Report, Change Password, and Logout. The main content area is titled 'Add New Product'. It has several input fields: 'Product Name', 'Date of Purchase' (with a placeholder 'dd-mm-yyyy'), 'Available', 'Total', 'Original Cost Each', and 'Selling Cost Each'. At the bottom right are two buttons: 'Submit' (in red) and 'Close'.

```

<?php
define('TITLE', 'Add New Product');
define('PAGE', 'assets');
include('includes/header.php');
include('../dbConnection.php');

```

```

session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
if(isset($_REQUEST['psubmit'])){
    // Checking for Empty Fields
    if($_REQUEST['pname'] == "") || ($_REQUEST['pdop'] == "") || ($_REQUEST['pava'] == "") ||
    ($_REQUEST['ptotal'] == "") || ($_REQUEST['poriginalcost'] == "") || ($_REQUEST['psellingcost'] ==
    "")){
        // msg displayed if required field missing
        $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        // Assigning User Values to Variable
        $pname = $_REQUEST['pname'];
        $pdop = $_REQUEST['pdop'];
        $pava = $_REQUEST['pava'];
        $ptotal = $_REQUEST['ptotal'];
        $poriginalcost = $_REQUEST['poriginalcost'];
        $psellingcost = $_REQUEST['psellingcost'];
        $sql = "INSERT INTO assets_tb (pname, pdop, pava, ptotal, poriginalcost, psellingcost) VALUES
        ('$pname', '$pdop', '$pava', '$ptotal', '$poriginalcost', '$psellingcost')";
        if($conn->query($sql) == TRUE){
            // below msg display on form submit success
            $msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Added Successfully
        </div>';
        } else {
            // below msg display on form submit failed
            $msg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Add </div>';
        }
    }
}
?>
<div class="col-sm-6 mt-5 mx-3 jumbotron">
    <h3 class="text-center">Add New Product</h3>
    <form action="" method="POST">
        <div class="form-group">
            <label for="pname">Product Name</label>
            <input type="text" class="form-control" id="pname" name="pname">
        </div>
        <div class="form-group">
            <label for="pdop">Date of Purchase</label>
            <input type="date" class="form-control" id="pdop" name="pdop">
        </div>
        <div class="form-group">
            <label for="pava">Available</label>
            <input type="text" class="form-control" id="pava" name="pava"
onkeypress="isInputNumber(event)">
        </div>
        <div class="form-group">
            <label for="ptotal">Total</label>

```

```
<input type="text" class="form-control" id="ptotal" name="ptotal"
onkeypress="isInputNumber(event)">
</div>
<div class="form-group">
<label for="poriginalcost">Original Cost Each</label>
<input type="text" class="form-control" id="poriginalcost" name="poriginalcost"
onkeypress="isInputNumber(event)">
</div>
<div class="form-group">
<label for="psellingcost">Selling Cost Each</label>
<input type="text" class="form-control" id="psellingcost" name="psellingcost"
onkeypress="isInputNumber(event)">
</div>
<div class="text-center">
<button type="submit" class="btn btn-danger" id="psubmit" name="psubmit">Submit</button>
<a href="assets.php" class="btn btn-secondary">Close</a>
</div>
<?php if(isset($msg)) {echo $msg; } ?>
</form>
</div>
<!-- Only Number for input fields --&gt;
&lt;script&gt;
function isInputNumber(evt) {
  var ch = String.fromCharCode(evt.which);
  if (!(/[0-9]/.test(ch))) {
    evt.preventDefault();
  }
}
&lt;/script&gt;
&lt;?php
include('includes/footer.php');
?&gt;</pre>
```

## editproduct.php

The screenshot shows a web-based application for managing service requests. On the left, there's a sidebar with various menu items: Dashboard, Work Order, Requests, Assets, Technician, Requester, Sell Report, Work Report, Change Password, and Logout. The main area is titled "Update Product Details". It contains several input fields: Product ID (4), Name (Rode Mic), DOP (20-10-2018), Available (10), Total (10), Original Cost Each (15000), and Selling Price Each (18000). At the bottom right of the form are two buttons: a red "Update" button and a grey "Close" button.

```
<?php
define('TITLE', 'Update Product');
define('PAGE', 'assets');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
// update
if(isset($_REQUEST['pupdate'])){
    // Checking for Empty Fields
    if($_REQUEST['pname'] == "") || ($_REQUEST['pdop'] == "") || ($_REQUEST['pava'] == "") || 
    ($_REQUEST['ptotal'] == "") || ($_REQUEST['poriginalcost'] == "") || ($_REQUEST['psellingcost'] == ""))
    // msg displayed if required field missing
    $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
} else {
    // Assigning User Values to Variable
    $pid = $_REQUEST['pid'];
    $pname = $_REQUEST['pname'];
    $pdop = $_REQUEST['pdop'];
    $pava = $_REQUEST['pava'];
    $ptotal = $_REQUEST['ptotal'];
    $poriginalcost = $_REQUEST['poriginalcost'];
    $psellingcost = $_REQUEST['psellingcost'];
    $sql = "UPDATE assets_tb SET pname = '$pname', pdop = '$pdop', pava = '$pava', ptotal = '$ptotal',
    poriginalcost = '$poriginalcost', psellingcost = '$psellingcost' WHERE pid = '$pid'";
}
```

```

if($conn->query($sql) == TRUE){
    // below msg display on form submit success
    $msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Updated Successfully
</div>';
} else {
    // below msg display on form submit failed
    $msg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Update </div>';
}
}

?>
<div class="col-sm-6 mt-5 mx-3 jumbotron">
    <h3 class="text-center">Update Product Details</h3>
    <?php
if(isset($_REQUEST['view'])){
    $sql = "SELECT * FROM assets_tb WHERE pid = {$_REQUEST['id']}";
    $result = $conn->query($sql);
    $row = $result->fetch_assoc();
}
?>
<form action="" method="POST">
    <div class="form-group">
        <label for="pid">Product ID</label>
        <input type="text" class="form-control" id="pid" name="pid" value="<?php if(isset($row['pid'])) {echo $row['pid']; }?>">
            readonly
    </div>
    <div class="form-group">
        <label for="pname">Name</label>
        <input type="text" class="form-control" id="pname" name="pname" value="<?php if(isset($row['pname'])) {echo $row['pname']; }?>">
    </div>
    <div class="form-group">
        <label for="pdop">DOP</label>
        <input type="date" class="form-control" id="pdop" name="pdop" value="<?php if(isset($row['pdop'])) {echo $row['pdop']; }?>">
    </div>
    <div class="form-group">
        <label for="pava">Available</label>
        <input type="text" class="form-control" id="pava" name="pava" value="<?php if(isset($row['pava'])) {echo $row['pava']; }?>">
            onkeypress="isInputNumber(event)"
    </div>
    <div class="form-group">
        <label for="ptotal">Total</label>
        <input type="text" class="form-control" id="ptotal" name="ptotal" value="<?php if(isset($row['ptotal'])) {echo $row['ptotal']; }?>">
            onkeypress="isInputNumber(event)"
    </div>
    <div class="form-group">
        <label for="poriginalcost">Original Cost Each</label>

```

```
<input type="text" class="form-control" id="poriginalcost" name="poriginalcost" value="<?php
if(isset($row['poriginalcost'])) {echo $row['poriginalcost']; }?>"  
    onkeypress="isInputNumber(event)">  
</div>  
<div class="form-group">  
    <label for="psellingcost">Selling Price Each</label>  
    <input type="text" class="form-control" id="psellingcost" name="psellingcost" value="<?php  
if(isset($row['psellingcost'])) {echo $row['psellingcost']; }?>"  
    onkeypress="isInputNumber(event)">  
</div>  
<div class="text-center">  
    <button type="submit" class="btn btn-danger" id="pupdate" name="pupdate">Update</button>  
    <a href="assets.php" class="btn btn-secondary">Close</a>  
</div>  
    <?php if(isset($msg)) {echo $msg; } ?>  
</form>  
</div>  
<!-- Only Number for input fields -->  
<script>  
function isInputNumber(evt) {  
    var ch = String.fromCharCode(evt.which);  
    if (!(/[0-9]/.test(ch))) {  
        evt.preventDefault();  
    }  
}  
</script>  
<?php  
include('includes/footer.php');  
?>
```

## sellproduct.php

Customer Bill

Product ID	4
Customer Name	
Customer Address	
Product Name	Rode Mic
Available	10
Quantity	
Price Each	18000
Total Price	
Date	dd-mm-yyyy
<input type="button" value="Submit"/> <input type="button" value="Close"/>	

```

<?php
define('TITLE', 'Sell Product');
define('PAGE', 'assets');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
if(isset($_REQUEST['psubmit'])){
    // Checking for Empty Fields
    if(($_REQUEST['cname'] == "") || ($_REQUEST['cadd'] == "") || ($_REQUEST['pname'] == "") || ($_REQUEST['pquantity'] == "") || ($_REQUEST['psellingcost'] == "") || ($_REQUEST['totalcost'] == "") || ($_REQUEST['seldate'] == "")){
        // msg displayed if required field missing
        $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        // Assigning User Values to Variable for update
        $pid = $_REQUEST['pid'];
        $pava = ($_REQUEST['pava'] - $_REQUEST['pquantity']);
        // Assigning User Values to Variable for insert
        $custname = $_REQUEST['cname'];
    }
}

```

```

$custadd = $_REQUEST['cadd'];
$cpname = $_REQUEST['pname'];
$cpquantity = $_REQUEST['pquantity'];
$cpeach = $_REQUEST['psellingcost'];
$cptotal = $_REQUEST['totalcost'];
$cpdate = $_REQUEST['selldate'];
$sqlin = "INSERT INTO customer_tb(custname, custadd, cpname, cpquantity, cpeach, cptotal,
cpdate) VALUES ('$custname', '$custadd', '$cpname', '$cpquantity', '$cpeach', '$cptotal', '$cpdate')";
if($conn->query($sqlin) == TRUE){
    // below function captures inserted id
    $genid = mysqli_insert_id($conn);
    session_start();
    $_SESSION['myid'] = $genid;
    echo "<script> location.href='productsellsuccess.php'; </script>";
}
// Updating Assest data for available product after sell
$sql = "UPDATE assets_tb SET pava = '$pava' WHERE pid = '$pid'";
$conn->query($sql);
}
}
?>
<div class="col-sm-6 mt-5 mx-3 jumbotron">
    <h3 class="text-center">Customer Bill</h3>
    <?php
if(isset($_REQUEST['issue'])){
    $sql = "SELECT * FROM assets_tb WHERE pid = {$_REQUEST['id']}";
    $result = $conn->query($sql);
    $row = $result->fetch_assoc();
}
?>
<form action="" method="POST">
    <div class="form-group">
        <label for="pid">Product ID</label>
        <input type="text" class="form-control" id="pid" name="pid" value="<?php if(isset($row['pid'])) {echo $row['pid']; }?>">
        <readonly>
    </div>
    <div class="form-group">
        <label for="cname">Customer Name</label>
        <input type="text" class="form-control" id="cname" name="cname">
    </div>
    <div class="form-group">
        <label for="cadd">Customer Address</label>
        <input type="text" class="form-control" id="cadd" name="cadd">
    </div>
    <div class="form-group">
        <label for="pname">Product Name</label>
        <input type="text" class="form-control" id="pname" name="pname" value="<?php if(isset($row['pname'])) {echo $row['pname']; }?>">
    </div>
    <div class="form-group">
        <label for="pava">Available</label>

```

```

<input type="text" class="form-control" id="pava" name="pava" value=<?php
if(isset($row['pava'])) {echo $row['pava']; }?>
    readonly onkeypress="isInputNumber(event)">
</div>
<div class="form-group">
    <label for="pquantity">Quantity</label>
    <input type="text" class="form-control" id="pquantity" name="pquantity"
onkeypress="isInputNumber(event)">
</div>
<div class="form-group">
    <label for="psellingcost">Price Each</label>
    <input type="text" class="form-control" id="psellingcost" name="psellingcost" value=<?php
if(isset($row['psellingcost'])) {echo $row['psellingcost']; }?>
        onkeypress="isInputNumber(event)">
</div>
<div class="form-group">
    <label for="totalcost">Total Price</label>
    <input type="text" class="form-control" id="totalcost" name="totalcost"
onkeypress="isInputNumber(event)">
</div>
<div class="form-group col-md-4">
    <label for="inputDate">Date</label>
    <input type="date" class="form-control" id="inputDate" name="selldate">
</div>
<div class="text-center">
    <button type="submit" class="btn btn-danger" id="psubmit" name="psubmit">Submit</button>
    <a href="assets.php" class="btn btn-secondary">Close</a>
</div>
<?php if(isset($msg)) {echo $msg; } ?>
</form>
</div>
<!-- Only Number for input fields --&gt;
&lt;script&gt;
    function isInputNumber(evt) {
        var ch = String.fromCharCode(evt.which);
        if (!(/[0-9]/.test(ch))) {
            evt.preventDefault();
        }
    }
&lt;/script&gt;
&lt;?php
include('includes/footer.php');
?&gt;
</pre>

```

## productsellsuccess.php

The screenshot shows a web application titled "OSMS" with a red header bar. On the left, there is a sidebar with various menu items: Dashboard, Work Order, Requests, Assets, Technician, Requester, Sell Report, Work Report, Change Password, and Logout. The main content area is titled "Customer Bill" and displays the following information:

<b>Customer ID</b>	28
<b>Customer Name</b>	Kunal
<b>Address</b>	Ranchi
<b>Product</b>	Rode Mic
<b>Quantity</b>	1
<b>Price Each</b>	18000
<b>Total Cost</b>	18000
<b>Date</b>	2018-10-20

At the bottom of the main content area are two buttons: "Print" (red background) and "Close".

```

<?php
session_start();
define('TITLE', 'Success');
include('includes/header.php');
include('../dbConnection.php');

if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}

$sql = "SELECT * FROM customer_tb WHERE custid = {$_SESSION['myid']}";
$result = $conn->query($sql);
if($result->num_rows == 1){
    $row = $result->fetch_assoc();
    echo "<div class='ml-5 mt-5'>
        <h3 class='text-center'>Customer Bill</h3>
        <table class='table'>
            <tbody>
                <tr>
                    <th>Customer ID</th>
                    <td>".$row['custid']."'</td>
                </tr>
                <tr>
                    <th>Customer Name</th>
                    <td>".$row['custname']."'</td>
                </tr>
                <tr>
                    <th>Address</th>
                    <td>".$row['custadd']."'</td>
                </tr>
            </tbody>
        </table>
    </div>";
}

```

```

<tr>
<th>Product</th>
<td>".$row['cpname']."'</td>
</tr>
<tr>
<th>Quantity</th>
<td>".$row['cpquantity']."'</td>
</tr>
<tr>
<th>Price Each</th>
<td>".$row['cpeach']."'</td>
</tr>
<tr>
<th>Total Cost</th>
<td>".$row['cptotal']."'</td>
</tr>
<tr>
<th>Date</th>
<td>".$row['cpdate']."'</td>
</tr>
<tr>
<td><form class='d-print-none'><input class='btn btn-danger' type='submit' value='Print'
onClick='window.print()'></form></td>
<td><a href='assets.php' class='btn btn-secondary d-print-none'>Close</a></td>
</tr>
</tbody>
</table> </div>
";
}

} else {
    echo "Failed";
}
?>

<?php
include('includes/footer.php');
$conn->close();
?>

```

## technician.php

Emp ID	Name	City	Mobile	Email	Action
12	Tech1	Delhi 4	1234	tech@gmail.com	

```

<?php
define('TITLE', 'Technician');
define('PAGE', 'technician');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
?>
<div class="col-sm-9 col-md-10 mt-5 text-center">
    <!--Table-->
    <p class=" bg-dark text-white p-2">List of Technicians</p>
    <?php
        $sql = "SELECT * FROM technician_tb";
        $result = $conn->query($sql);
        if($result->num_rows > 0){
            echo '<table class="table">
                <thead>
                    <tr>
                        <th scope="col">Emp ID</th>
                        <th scope="col">Name</th>
                        <th scope="col">City</th>
                        <th scope="col">Mobile</th>
                        <th scope="col">Email</th>
                        <th scope="col">Action</th>
                    </tr>
                </thead>
                <tbody>';
            while($row = $result->fetch_assoc()){
                echo '<tr>';
                echo '<th scope="row">'.$row["empid"].'</th>';
                echo '<td>'.$row["empName"].'</td>';
                echo '<td>'.$row["empCity"].'</td>';
                echo '<td>'.$row["empMobile"].'</td>';
            }
        }
    <?php
}

```

```

echo '<td>'.$row["empEmail"].'</td>';
echo '<td><form action="editemp.php" method="POST" class="d-inline"> <input type="hidden" name="id" value='.$row["empid"].'><button type="submit" class="btn btn-info mr-3" name="view" value="View"><i class="fas fa-pen"></i></button></form> <form action="" method="POST" class="d-inline"><input type="hidden" name="id" value='.$row["empid"].'><button type="submit" class="btn btn-secondary" name="delete" value="Delete"><i class="far fa-trash-alt"></i></button></form></td>
</tr>';
}

echo '</tbody>
</table>';
} else {
echo "0 Result";
}
if(isset($_REQUEST['delete'])){
$sql = "DELETE FROM technician_tb WHERE empid = {$_REQUEST['id']}";
if($conn->query($sql) === TRUE){
// echo "Record Deleted Successfully";
// below code will refresh the page after deleting the record
echo '<meta http-equiv="refresh" content= "0;URL=?deleted" />';
} else {
echo "Unable to Delete Data";
}
}
?>
</div>
</div>
<div><a class="btn btn-danger box" href="insertemp.php"><i class="fas fa-plus fa-2x"></i></a>
</div>
</div>

<?php
include('includes/footer.php');
?>

```

## inserttemp.php

The screenshot shows the 'OSMS' application's admin panel. On the left, a sidebar menu lists various options: Dashboard, Work Order, Requests, Assets, Technician (which is selected and highlighted in red), Requester, Sell Report, Work Report, Change Password, and Logout. The main content area is titled 'Add New Technician'. It contains four input fields: 'Name' (with a red asterisk indicating it is required), 'City', 'Mobile', and 'Email'. Below the fields are two buttons: 'Submit' (in red) and 'Close'.

```

<?php
define('TITLE', 'Add New Technician');
define('PAGE', 'technician');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
if(isset($_REQUEST['empsubmit'])){
    // Checking for Empty Fields
    if(($_REQUEST['empName'] == "") || ($_REQUEST['empCity'] == "") || ($_REQUEST['empMobile'] == "") || ($_REQUEST['empEmail'] == "")){
        // msg displayed if required field missing
        $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        // Assigning User Values to Variable
        $eName = $_REQUEST['empName'];
        $eCity = $_REQUEST['empCity'];
        $eMobile = $_REQUEST['empMobile'];
        $eEmail = $_REQUEST['empEmail'];
        $sql = "INSERT INTO technician_tb (empName, empCity, empMobile, empEmail) VALUES
        ('$eName', '$eCity', '$eMobile', '$eEmail')";
        if($conn->query($sql) == TRUE){
            // below msg display on form submit success
            $msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Added Successfully
            </div>';
        } else {
            // below msg display on form submit failed
            $msg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Add </div>';
        }
    }
}

```

```

?>
<div class="col-sm-6 mt-5 mx-3 jumbotron">
  <h3 class="text-center">Add New Technician</h3>
  <form action="" method="POST">
    <div class="form-group">
      <label for="empName">Name</label>
      <input type="text" class="form-control" id="empName" name="empName">
    </div>
    <div class="form-group">
      <label for="empCity">City</label>
      <input type="text" class="form-control" id="empCity" name="empCity">
    </div>
    <div class="form-group">
      <label for="empMobile">Mobile</label>
      <input type="text" class="form-control" id="empMobile" name="empMobile" onkeypress="isInputNumber(event)">
    </div>
    <div class="form-group">
      <label for="empEmail">Email</label>
      <input type="email" class="form-control" id="empEmail" name="empEmail">
    </div>
    <div class="text-center">
      <button type="submit" class="btn btn-danger" id="empsubmit" name="empsubmit">Submit</button>
      <a href="technician.php" class="btn btn-secondary">Close</a>
    </div>
    <?php if(isset($msg)) {echo $msg; } ?>
  </form>
</div>
<!-- Only Number for input fields -->
<script>
  function isInputNumber(evt) {
    var ch = String.fromCharCode(evt.which);
    if (!(/[0-9]/.test(ch))) {
      evt.preventDefault();
    }
  }
</script>
<?php
include('includes/footer.php');
?>

```

## editemp.php

The screenshot shows a web application titled "OSMS" with a red header bar. On the left, there is a sidebar menu with various options: Dashboard, Work Order, Requests, Assets, **Technician** (which is highlighted in red), Requester, Sell Report, Work Report, Change Password, and Logout. The main content area has a title "Update Technician Details". It contains five input fields: "Emp ID" with value "12", "Name" with value "Tech1", "City" with value "Delhi 4", "Mobile" with value "1234", and "Email" with value "tech@gmail.com". At the bottom right of the form are two buttons: a red "Update" button and a grey "Close" button.

```
<?php
define('TITLE', 'Update Technician');
define('PAGE', 'technician');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
// update
if(isset($_REQUEST['empupdate'])){
    // Checking for Empty Fields
    if(($_REQUEST['empName'] == "") || ($_REQUEST['empCity'] == "") || ($_REQUEST['empMobile'] == "") || ($_REQUEST['empEmail'] == "")){
        // msg displayed if required field missing
        $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        // Assigning User Values to Variable
        $eId = $_REQUEST['empId'];
        $eName = $_REQUEST['empName'];
        $eCity = $_REQUEST['empCity'];
        $eMobile = $_REQUEST['empMobile'];
        $eEmail = $_REQUEST['empEmail'];
        $sql = "UPDATE technician_tb SET empName = '$eName', empCity = '$eCity', empMobile = '$eMobile', empEmail = '$eEmail' WHERE empid = '$eId'";
        if($conn->query($sql) == TRUE){

```

```

// below msg display on form submit success
$msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Updated Successfully
</div>';
} else {
// below msg display on form submit failed
$msg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Update </div>';
}
}
}
?>
<div class="col-sm-6 mt-5 mx-3 jumbotron">
<h3 class="text-center">Update Technician Details</h3>
<?php
if(isset($_REQUEST['view'])){
$sql = "SELECT * FROM technician_tb WHERE empid = {$_REQUEST['id']}";
$result = $conn->query($sql);
$row = $result->fetch_assoc();
}
?>
<form action="" method="POST">
<div class="form-group">
<label for="empId">Emp ID</label>
<input type="text" class="form-control" id="empId" name="empId" value="<?php
if(isset($row['empid'])) {echo $row['empid']; }?>">
<div class="form-group">
<label for="empName">Name</label>
<input type="text" class="form-control" id="empName" name="empName" value="<?php
if(isset($row['empName'])) {echo $row['empName']; }?>">
<div class="form-group">
<label for="empCity">City</label>
<input type="text" class="form-control" id="empCity" name="empCity" value="<?php
if(isset($row['empCity'])) {echo $row['empCity']; }?>">
<div class="form-group">
<label for="empMobile">Mobile</label>
<input type="text" class="form-control" id="empMobile" name="empMobile" value="<?php
if(isset($row['empMobile'])) {echo $row['empMobile']; }?>">
<div class="form-group">
<label for="empEmail">Email</label>
<input type="email" class="form-control" id="empEmail" name="empEmail" value="<?php
if(isset($row['empEmail'])) {echo $row['empEmail']; }?>">
<div class="text-center">
<button type="submit" class="btn btn-danger" id="empupdate"
name="empupdate">Update</button>
<a href="technician.php" class="btn btn-secondary">Close</a>
</div>

```

```

<?php if(isset($msg)) {echo $msg; } ?>
</form>
</div>
<!-- Only Number for input fields --&gt;
&lt;script&gt;
function isInputNumber(evt) {
  var ch = String.fromCharCode(evt.which);
  if (!(/[0-9]/.test(ch))) {
    evt.preventDefault();
  }
}
&lt;/script&gt;
&lt;?php
include('includes/footer.php');
?&gt;
</pre>

```

## requester.php

The screenshot shows a web browser window with the URL `localhost/osms_php/Admin/requester.php`. The title bar says "OSMS". The left sidebar has a red header "OSMS" and a list of navigation items: Dashboard, Work Order, Requests, Assets, Technician, Requester (which is highlighted in red), Sell Report, Work Report, Change Password, and Logout. The main content area has a header "List of Requesters". Below it is a table with four columns: Requester ID, Name, Email, and Action. There are two rows of data:

Requester ID	Name	Email	Action
9	Rajesh	raj@gmail.com	
10	User	user@gmail.com	

A large red "+" button is located at the bottom right of the table.

```

<?php
define('TITLE', 'Requesters');
define('PAGE', 'requesters');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
  $aEmail = $_SESSION['aEmail'];
} else {
  echo "<script> location.href='login.php'; </script>";
}
?>
<div class="col-sm-9 col-md-10 mt-5 text-center">
  <!--Table-->
  <p class="bg-dark text-white p-2">List of Requesters</p>
  <?php
    $sql = "SELECT * FROM requesterlogin_tb";
    $result = $conn->query($sql);
    if($result->num_rows > 0){
      echo '<table class="table">

```

```

<thead>
<tr>
<th scope="col">Requester ID</th>
<th scope="col">Name</th>
<th scope="col">Email</th>
<th scope="col">Action</th>
</tr>
</thead>
<tbody>';
while($row = $result->fetch_assoc()){
echo '<tr>';
echo '<th scope="row">'.$row["r_login_id"].'</th>';
echo '<td>'. $row["r_name"].'</td>';
echo '<td>'.$row["r_email"].'</td>';
echo '<td><form action="editreq.php" method="POST" class="d-inline"> <input type="hidden" name="id" value='.$row["r_login_id"].'><button type="submit" class="btn btn-info mr-3" name="view" value="View"><i class="fas fa-pen"></i></button></form>
<form action="" method="POST" class="d-inline"><input type="hidden" name="id" value='.$row["r_login_id"].'><button type="submit" class="btn btn-secondary" name="delete" value="Delete"><i class="far fa-trash-alt"></i></button></form></td>
</tr>';
}
echo '</tbody>
</table>';
} else {
echo "0 Result";
}
if(isset($_REQUEST['delete'])){
$sql = "DELETE FROM requesterlogin_tb WHERE r_login_id = {$_REQUEST['id']}";
if($conn->query($sql) === TRUE){
// echo "Record Deleted Successfully";
// below code will refresh the page after deleting the record
echo '<meta http-equiv="refresh" content= "0;URL=?deleted" />';
} else {
echo "Unable to Delete Data";
}
}
?>
</div>
</div>
<div><a class="btn btn-danger box" href="insertreq.php"><i class="fas fa-plus fa-2x"></i></a>
</div>
</div>
<?php
include('includes/footer.php');
?>

```

## insertreq.php

The screenshot shows a web-based application interface for 'OSMS'. On the left, there's a vertical sidebar with various menu items: Dashboard, Work Order, Requests, Assets, Technician, Requester (which is currently selected and highlighted in red), Sell Report, Work Report, Change Password, and Logout. The main content area is titled 'Add New Requester' and contains three input fields: 'Name', 'Email', and 'Password'. Below these fields are two buttons: 'Submit' (in red) and 'Close'.

```
<?php
define('TITLE', 'Add New Requester');
define('PAGE', 'requesters');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
if(isset($_REQUEST['reqsubmit'])){
    // Checking for Empty Fields
    if(($_REQUEST['r_name'] == "") || ($_REQUEST['r_email'] == "") || ($_REQUEST['r_password'] == "")){
        // msg displayed if required field missing
        $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        // Assigning User Values to Variable
        $rname = $_REQUEST['r_name'];
        $rEmail = $_REQUEST['r_email'];
        $rPassword = $_REQUEST['r_password'];
        $sql = "INSERT INTO requesterlogin_tb (r_name, r_email, r_password) VALUES ('$rname', '$rEmail', '$rPassword')";
        if($conn->query($sql) == TRUE){
            // below msg display on form submit success
            $msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Added Successfully </div>';
        } else {
            // below msg display on form submit failed
            $msg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Add </div>';
        }
    }
}
?>
```

```

<div class="col-sm-6 mt-5 mx-3 jumbotron">
  <h3 class="text-center">Add New Requester</h3>
  <form action="" method="POST">
    <div class="form-group">
      <label for="r_name">Name</label>
      <input type="text" class="form-control" id="r_name" name="r_name">
    </div>
    <div class="form-group">
      <label for="r_email">Email</label>
      <input type="email" class="form-control" id="r_email" name="r_email">
    </div>
    <div class="form-group">
      <label for="r_password">Password</label>
      <input type="password" class="form-control" id="r_password" name="r_password">
    </div>
    <div class="text-center">
      <button type="submit" class="btn btn-danger" id="reqsubmit"
name="reqsubmit">Submit</button>
      <a href="requester.php" class="btn btn-secondary">Close</a>
    </div>
    <?php if(isset($msg)) {echo $msg; } ?>
  </form>
</div>

<?php
include('includes/footer.php');
?>

```

## editreq.php

The screenshot shows the 'OSMS' Admin interface. The left sidebar has a red header 'OSMS' and a menu with 'Requester' selected. The main content area shows a form titled 'Update Requester Details' with fields for Requester ID (10), Name (User), and Email (user@gmail.com). There are 'Update' and 'Close' buttons at the bottom.

```

<?php
define('TITLE', 'Update Requester');
define('PAGE', 'requesters');

```

```

include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
// update
if(isset($_REQUEST['requpdate'])){
    // Checking for Empty Fields
    if($_REQUEST['r_login_id'] == "") || ($_REQUEST['r_name'] == "") || ($_REQUEST['r_email'] == ""))
    {
        // msg displayed if required field missing
        $msg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        // Assigning User Values to Variable
        $rid = $_REQUEST['r_login_id'];
        $rname = $_REQUEST['r_name'];
        $remail = $_REQUEST['r_email'];

        $sql = "UPDATE requesterlogin_tb SET r_login_id = '$rid', r_name = '$rname', r_email = '$remail' WHERE r_login_id = '$rid'";
        if($conn->query($sql) == TRUE){
            // below msg display on form submit success
            $msg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Updated Successfully </div>';
        } else {
            // below msg display on form submit failed
            $msg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Update </div>';
        }
    }
}
?>
<div class="col-sm-6 mt-5 mx-3 jumbotron">
    <h3 class="text-center">Update Requester Details</h3>
    <?php
if(isset($_REQUEST['view'])){
    $sql = "SELECT * FROM requesterlogin_tb WHERE r_login_id = {$_REQUEST['id']}";
    $result = $conn->query($sql);
    $row = $result->fetch_assoc();
}
?>
<form action="" method="POST">
    <div class="form-group">
        <label for="r_login_id">Requester ID</label>
        <input type="text" class="form-control" id="r_login_id" name="r_login_id" value="<?php
if(isset($row['r_login_id'])) {echo $row['r_login_id']; }?>">
    </div>
    <div class="form-group">
        <label for="r_name">Name</label>

```

```


<input type="text" class="form-control" id="r_name" name="r_name" value="<?php
if(isset($row['r_name'])) {echo $row['r_name']; }?>">
</div>
<div class="form-group">
<label for="r_email">Email</label>
<input type="text" class="form-control" id="r_email" name="r_email" value="<?php
if(isset($row['r_email'])) {echo $row['r_email']; }?>">
</div>

<div class="text-center">
<button type="submit" class="btn btn-danger" id="requpdate"
name="requpdate">Update</button>
<a href="requester.php" class="btn btn-secondary">Close</a>
</div>
<?php if(isset($msg)) {echo $msg; } ?>
</form>
</div>

<?php
include('includes/footer.php');
?>

```

## soldproductreport.php

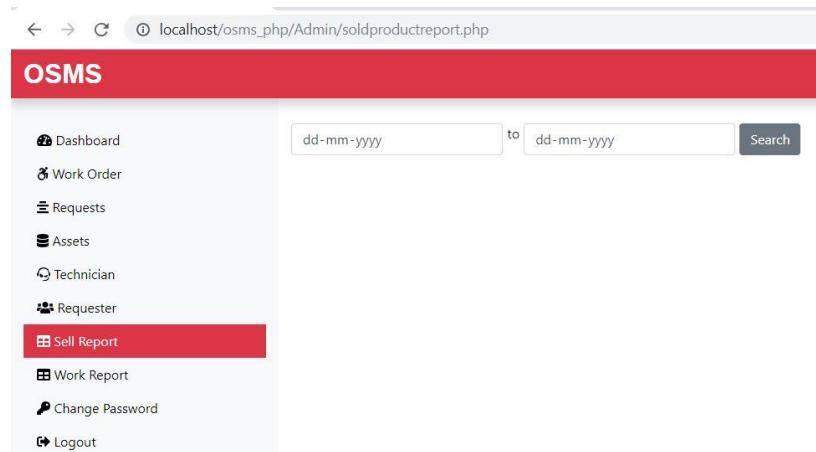

The screenshot shows a web browser window with the URL 'localhost/osms\_php/Admin/soldproductreport.php'. The page has a red header bar with the text 'OSMS'. Below the header is a navigation menu on the left with the following items:

- Dashboard
- Work Order
- Requests
- Assets
- Technician
- Requester
- Sell Report** (highlighted in red)
- Work Report
- Change Password
- Logout

At the top of the main content area, there are two input fields for dates: 'dd-mm-yyyy' and 'to dd-mm-yyyy', followed by a 'Search' button.

```

<?php
define('TITLE', 'Product Report');
define('PAGE', 'sellreport');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
?>
<div class="col-sm-9 col-md-10 mt-5 text-center">
<form action="" method="POST" class="d-print-none">

```

```

<div class="form-row">
  <div class="form-group col-md-2">
    <input type="date" class="form-control" id="startdate" name="startdate">
  </div> <span> to </span>
  <div class="form-group col-md-2">
    <input type="date" class="form-control" id="enddate" name="enddate">
  </div>
  <div class="form-group">
    <input type="submit" class="btn btn-secondary" name="searchsubmit" value="Search">
  </div>
</div>
</form>
<?php
if(isset($_REQUEST['searchsubmit'])){
  $startdate = $_REQUEST['startdate'];
  $enddate = $_REQUEST['enddate'];
  // $sql = "SELECT * FROM customer_tb WHERE cupdate BETWEEN '2018-10-11' AND '2018-10-13'";
  $sql = "SELECT * FROM customer_tb WHERE cupdate BETWEEN '$startdate' AND '$enddate'";
  $result = $conn->query($sql);
  if($result->num_rows > 0){
    echo '
<p class=" bg-dark text-white p-2 mt-4">Details</p>
<table class="table">
  <thead>
    <tr>
      <th scope="col">Customer ID</th>
      <th scope="col">Customer Name</th>
      <th scope="col">Address</th>
      <th scope="col">Product Name</th>
      <th scope="col">Quantity</th>
      <th scope="col">Price Each</th>
      <th scope="col">Total</th>
      <th scope="col">Date</th>
    </tr>
  </thead>
  <tbody>';
    while($row = $result->fetch_assoc()){
      echo '<tr>
        <th scope="row">'.$row["custid"].'</th>
        <td>'.$row["custname"].'</td>
        <td>'.$row["custadd"].'</td>
        <td>'.$row["cpname"].'</td>
        <td>'.$row["cpquantity"].'</td>
        <td>'.$row["cpeach"].'</td>
        <td>'.$row["cptotal"].'</td>
        <td>'.$row["cpdate"].'</td>
      </tr>';
    }
    echo '<tr>
      <td><form class="d-print-none"><input class="btn btn-danger" type="submit" value="Print"
onClick="window.print()"></form></td>
    </tr></tbody>
  </table>
</p>
';
  }
}

```

```

        </table>';
    } else {
        echo "<div class='alert alert-warning col-sm-6 ml-5 mt-2' role='alert'> No Records Found ! </div>";
    }
}
?>
</div>
</div>
</div>

<?php
include('includes/footer.php');
?>

```

## workreport.php

```

<?php
define('TITLE', 'Work Report');
define('PAGE', 'workreport');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
?>
<div class="col-sm-9 col-md-10 mt-5 text-center">
    <form action="" method="POST" class="d-print-none">
        <div class="form-row">
            <div class="form-group col-md-2">
                <input type="date" class="form-control" id="startdate" name="startdate">
            </div> <span> to </span>
            <div class="form-group col-md-2">
                <input type="date" class="form-control" id="enddate" name="enddate">
            </div>
        </div>
    </form>

```

```

<div class="form-group">
    <input type="submit" class="btn btn-secondary" name="searchsubmit" value="Search">
</div>
</div>
</form>
<?php
if(isset($_REQUEST['searchsubmit'])){
    $startdate = $_REQUEST['startdate'];
    $enddate = $_REQUEST['enddate'];
    $sql = "SELECT * FROM assignwork_tb WHERE assign_date BETWEEN '$startdate' AND
'$enddate'";
    $result = $conn->query($sql);
    if($result->num_rows > 0){
        echo '
<p class=" bg-dark text-white p-2 mt-4">Details</p>
<table class="table">
<thead>
<tr>
<th scope="col">Req ID</th>
<th scope="col">Request Info</th>
<th scope="col">Name</th>
<th scope="col">Address</th>
<th scope="col">City</th>
<th scope="col">Mobile</th>
<th scope="col">Technician</th>
<th scope="col">Assigned Date</th>
</tr>
</thead>
<tbody>';
        while($row = $result->fetch_assoc()){
            echo '<tr>
<th scope="row">'.$row["request_id"].'</th>
<td>'.$row["request_info"].'</td>
<td>'.$row["requester_name"].'</td>
<td>'.$row["requester_add2"].'</td>
<td>'.$row["requester_city"].'</td>
<td>'.$row["requester_mobile"].'</td>
<td>'.$row["assign_tech"].'</td>
<td>'.$row["assign_date"].'</td>
</tr>';
        }
        echo '<tr>
<td><form class="d-print-none"><input class="btn btn-danger" type="submit" value="Print"
onClick="window.print()"></form></td>
</tr></tbody>
</table>';
    } else {
        echo "<div class='alert alert-warning col-sm-6 ml-5 mt-2' role='alert'> No Records Found ! </div>";
    }
}
?>
</div>

```

```
</div>
</div>

<?php
include('includes/footer.php');
?>
```

## changePass.php

The screenshot shows the OSMS Admin interface. The left sidebar contains navigation links: Dashboard, Work Order, Requests, Assets, Technician, Requester, Sell Report, Work Report, and Change Password (highlighted in red), and Logout. The main content area has fields for Email (admin@gmail.com) and New Password, with Update and Reset buttons.

```
<?php
define('TITLE', 'Change Password');
define('PAGE', 'changePass');
include('includes/header.php');
include('../dbConnection.php');
session_start();
if(isset($_SESSION['is_adminlogin'])){
    $aEmail = $_SESSION['aEmail'];
} else {
    echo "<script> location.href='login.php'; </script>";
}
$aEmail = $_SESSION['aEmail'];
if(isset($_REQUEST['passupdate'])){
    if($_REQUEST['aPassword'] == ""){
        // msg displayed if required field missing
        $passmsg = '<div class="alert alert-warning col-sm-6 ml-5 mt-2" role="alert"> Fill All Fileds </div>';
    } else {
        $sql = "SELECT * FROM adminlogin_tb WHERE a_email='$aEmail'";
        $result = $conn->query($sql);
        if($result->num_rows == 1){
            $aPass = $_REQUEST['aPassword'];
            $sql = "UPDATE adminlogin_tb SET a_password = '$aPass' WHERE a_email = '$aEmail'";
            if($conn->query($sql) == TRUE){
                // below msg display on form submit success
            }
        }
    }
}
```

```

$passmsg = '<div class="alert alert-success col-sm-6 ml-5 mt-2" role="alert"> Updated
Successfully </div>';
} else {
    // below msg display on form submit failed
    $passmsg = '<div class="alert alert-danger col-sm-6 ml-5 mt-2" role="alert"> Unable to Update
</div>';
}
}
}
}
}
?>
<div class="col-sm-9 col-md-10">
<div class="row">
<div class="col-sm-6">
<form class="mt-5 mx-5">
<div class="form-group">
<label for="inputEmail">Email</label>
<input type="email" class="form-control" id="inputEmail" value=" <?php echo $aEmail ?>" readonly>
</div>
<div class="form-group">
<label for="inputnewpassword">New Password</label>
<input type="text" class="form-control" id="inputnewpassword" placeholder="New Password" name="aPassword">
</div>
<button type="submit" class="btn btn-danger mr-4 mt-4" name="passupdate">Update</button>
<button type="reset" class="btn btn-secondary mt-4">Reset</button>
<?php if(isset($passmsg)) {echo $passmsg; } ?>
</form>
</div>
</div>
</div>
</div>
<?php
include('includes/footer.php');
?>
```

## Logout.php

```

<?php
session_start();
session_destroy();
echo "<script> location.href='index.php'; </script>";
?>
```

## Custom.css

```

/* Change Brand Font */
.navbar-brand {
    font-family: 'Ubuntu', sans-serif;
    font-size: 2em;
    font-weight: bold;
}

/* Change Navigation Color */
.navbar #myMenu .custom-nav .nav-item a {
    color: #ffff;
}

.navbar #myMenu .custom-nav .nav-item a:hover {
    color: #F0AAB1;
}

/* Make Header Image Responsive */
.back-image {
    background-size: cover;
    background-position: center center;
    background-repeat: no-repeat;
    min-height: 90vh;
    border-radius: 0px;
    margin-top: 74px;
}

/* Header Image Sub-Title */
.font-italic {
    font-size: 24px;
}

a {
    color: black;
}

.active {
    color: white;
    background-color: #DC3545;
}

a:hover {
    color: #f26571;
}

/* Change Footer Icon Link Color */
.fi-color {
    color: #DC3545;
}

fi-color:hover {

```

```
color: #E994A2;
}

/* Plus Button for adding New Users Bottom Right */
.box {
position: fixed;
bottom: 10px;
right: 20px;
margin-bottom: 30px;
}

/* Setting Margin for Welcome to OSMS */
.mainHeading {
margin-top: 50px;
}

/* Setting Margin and Alignment for Welcome to OSM Mobile View */
@media only screen and (max-width: 600px) {
.myclass {
margin-top: 350px;
text-align: center;
}
}
```

## Chapter 7: Testing

---

Software testing is a process used to identify the correctness, completeness and quality of developed computer software. It includes a set of activities conducted with the intent of finding errors in software so that it could be corrected before the product is released to the end users. In other word software testing is an activity to check that the software system is defect free.

Software testing is primarily a broad process that is composed of several interlinked processes. The primary objective of software testing is to measure software health along with its completeness in terms of core requirements.

Software testing involves examining and checking software through different testing processes.

The objectives of these processes can include:

- Completeness - Verifying software completeness in regards to functional/business requirements
- Errors Free - Identifying technical bugs/errors and ensuring the software is error-free
- Stability - Assessing usability, performance, security, localization, compatibility and installation

This phase determine the error in the project. If there is any error then it must be removed before delivery of the project.

## 7.1 Type of Testing

For determining errors various types of test action are performed: -

**Unit Testing:** - Unit testing focuses verification effort on the smallest unit of software design – the module. Using the detail design description as a guide, important control paths are tested to uncover errors within the boundary of the module. The relative complexity of tests and the errors detected as a result is limited by the constrained scope established for unit testing. The unit test is always white box oriented, and the step can be conducted in parallel for multiple modules.

Unit testing is normally considered an adjunct to the coding step. After source level code has been developed, reviewed, and verified for correct syntax, unit test case design begins.

**Integration Testing** - A level of the software testing process where individual units are combined and tested as a group. The purpose of this level of testing is to expose faults in the interaction between integrated units.

**System Testing:** - Software is only one element of a larger computer based system. Ultimately, software is incorporated with other system elements (e.g. new hardware, information), and a series of system integration and validation tests are conducted. Steps taken during software design and testing can greatly improve the probability of successful software integration in the larger system.

A classics system testing problem is “finger pointing”. This occurs when a defect is uncovered, and one system element developer blames another for the problem. The software engineer should anticipate potential interfacing problems and design error handling paths that test all information coming from other elements of the system, conduct a series

of tests that simulate bad data or other potential errors at the software interface, record the results or tests to use as “evidence” if finger pointing does occur, participate in the planning and design of system test to ensure that software is adequately tested.

There are many types of system tests that are worthwhile for software-based systems:-

**Usability Testing** - Usability Testing is a type of testing done from an end-user's perspective to determine if the system is easily usable.

**Functionality testing** - Tests all functionalities of the software against the requirement.

**Performance testing** – Performance testing is designed to test the run-time performance of software within the context of an integrated system

**Security testing** – Security testing attempts to verify that protection mechanisms built into a system will protect it from improper penetration

**Stress tests** – Stress tests are designed to confront programs with abnormal situations.


## 7.2 Use Case

A use case diagram is essentially a picture showing system behavior along with the key actors that interact with the system. The use case represents complete functionality. Use case diagram can be imagined as a black box where only the input, output, and the function of the black box are known. Use Case elements are used to make test cases when performing the testing. The use case should contain all system activities that have significance to the users. A use case can be thought of as a collection of possible scenarios related to a particular goal, indeed. Use cases can be employed during several stages of software development, such as planning system requirements, validating design and testing software.


### Use case Diagram Objects

Use case diagrams mostly consist of 3 objects: -

**Actor** - Actor is a use case diagram is any entity that performs a role in one given system. This could be a person, organization or an external system.



**Use Case** - A Use case represents a function or an action within the system. its drawn as an oval and named with the function.




**System** - System is used to define the scope of the use case and drawn as rectangle.




There are two functions: -

**Include** – This represents required. Symbol of this function is dashed arrow and arrow is labeled with the keyword <<include>>



**Extend** – This represents optional and it is also shown with dashed arrow the arrow is labeled with the keyword <<extend>>



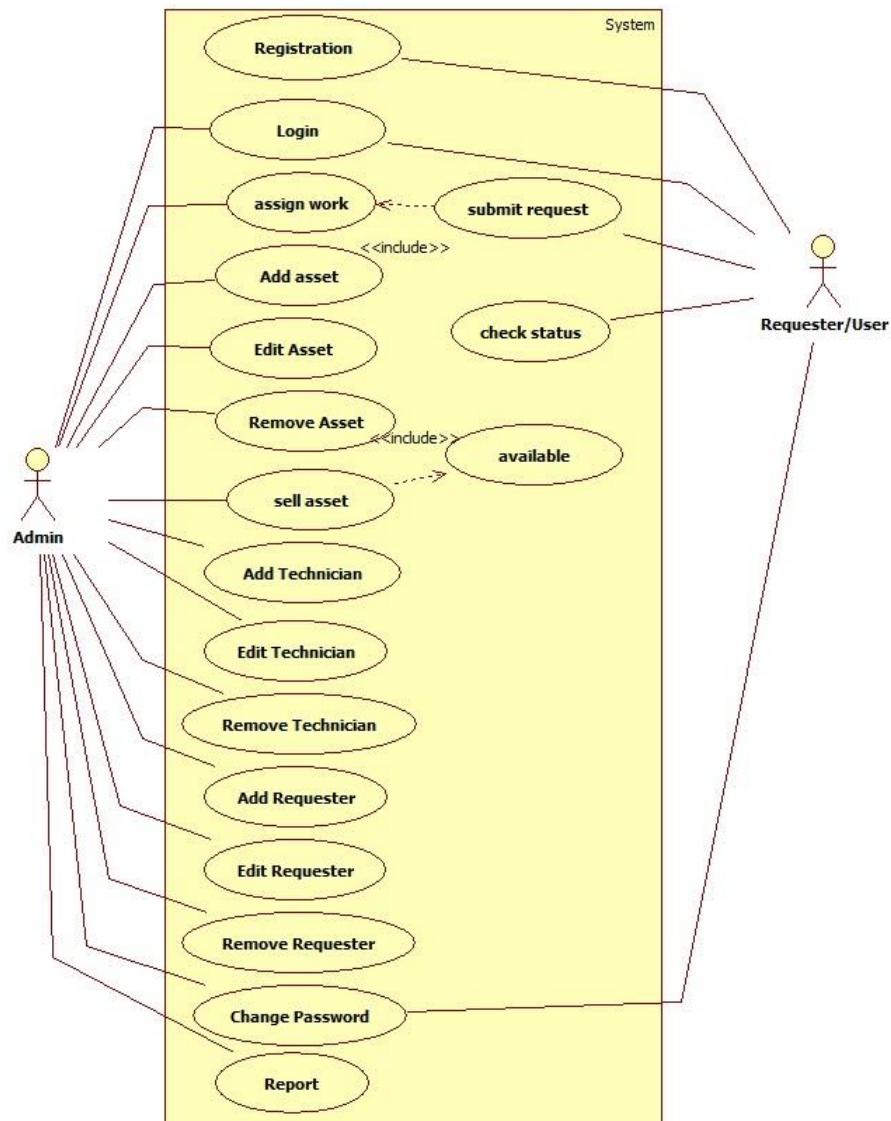

### 7.3 Test Case

A test case is a set of conditions or variables under which a tester will determine whether an application, software system or one of its features is working as it was originally established for it to do.

#### Login:

Test Case ID	Test Scenario	Test Case	Pre-Condition	Test Steps	Test Data	Expected Result	Actual Result	Status Pass/Fail
TC_Login_1	Verify Login	Enter Valid username and valid password	Need a valid username and password to do login	1. Enter username 2. Enter Password 3. Click Login	Valid username Valid password	Successful login, Main screen of application should displayed	Successful login, Main screen of application displayed	Pass
TC_Login_2	Verify Login	Enter Valid username and invalid password	Need a valid username and password to do login	1. Enter username 2. Enter Password 3. Click Login	Valid username Invalid Password	No Matched Username/Password	No Matched Username/Password	Pass
TC_Login_3	Verify Login	Enter Invalid username and valid password	Need a valid username and password to do login	1. Enter username 2. Enter Password 3. Click Login	Invalid username Valid Password	No Matched Username/Password	No Matched Username/Password	Pass
TC_Login_4	Verify Login	Enter Invalid username and invalid password	Need a valid username and password to do login	1. Enter username 2. Enter Password 3. Click Login	Invalid username Invalid Password	No Matched Username/Password	No Matched Username/Password	Pass

#### Registration

Test Case ID	Test Scenario	Test Case	Pre-Condition	Test Steps	Test Data	Expected Result	Actual Result	Status Pass/Fail
TC_REG_1	Verify Registration Detail	Enter Valid and correct data	Need valid text and number Data to be entered	1. Enter Valid Data in appropriate fields 2. Click Submit	Valid Text and Number Data	Successful, Member Added Successfully	Successful, Member Added Successfully	Pass
TC_REG_2	Verify Registration Detail	Enter invalid and incorrect data	Need text and number Data to be entered	Enter invalid Data in fields	Invalid Text and Number Data	Enter Valid Data	Enter Valid Data	Pass
TC_REG_3	Verify Registration Detail	Entering Nothing, Required Fields are blank	-	Click Submit	Nothing to enter Required fields are blank	Fill required field	Fill required field	Pass

## Chapter 8: Implementation

---

Our dedication to our Clients goes well beyond the deployment of our software. We are committed to providing our Client with a positive experience that starts with a successful implementation.

Implementation is the stage in the project where the theoretical design is turned into a working system. The implementation phase constructs, installs and operates the new system. The most stage is achieving a new successful system is that it will work efficiently and effectively.

Security and integrity of database are very important for any software system because databases are the backbone of the system. Security need to be implanted at every level of the system so that only authorized user can access the system for updation and other significance process.

## Chapter 9: Limitation

---

- SMS alert facility is not available.
- Portal is not SEO friendly
- Registration Email Verification Not available
- Risk unauthorized accessibility

## Chapter 10: Future Scope

---

The various things can be made it simple and user friendly. As by increasing some of the coding we can improve its functionality. An online payment system is yet not integrated to the system which can be featured in the near future.

Till now it does not have the facility of back up the database. By as the next advancement we can make it able to bundle the backup facility so that one can perform operation based on previous records.

As the technology emerges, it is possible to upgrade the system and can be adaptable to desired environment.

Based on the future security issued, security can be improved using emerging technologies.

## Chapter 11: Conclusion

---

The Online Service Management System has been computed successfully and was also tested successfully by taking "Test Cases". It is user friendly, and has required options, which can be utilized by the user to perform the desired operations.

The Software is developed using HTML, CSS, JS as front end and PHP, MySql as back end in windows environment.

The goals that are achieved by the software are:

- Simplification of the operations
- Less processing time and getting required information
- User friendly
- Portable and flexible for further enhancement

# Bibliography

---

The following reference has been used to develop the project “Online Service Management System” :-

**Books: -**

- The Complete Reference PHP
- Head First SQL: Your Brain on SQL by Lynn Beighley

**Web Source: -**

- [www.google.co.in](http://www.google.co.in)
- [www.wikipedia.org](http://www.wikipedia.org)
- [www.tutorialspoint.com](http://www.tutorialspoint.com)
- [www.stackoverflow.com](http://www.stackoverflow.com)
- [www.docs.microsoft.com](http://www.docs.microsoft.com)