作业一 ：云计算与微服务-服务注册

Nacos 是阿里巴巴开源的动态服务发现、配置和服务管理平台。

简介

Nacos 提供服务发现、配置管理和服务管理，用于构建云原生应用。

安装

参见官方文档：https://nacos.io/zh-cn/docs/quick-start.html

下载 2.2.3 版本

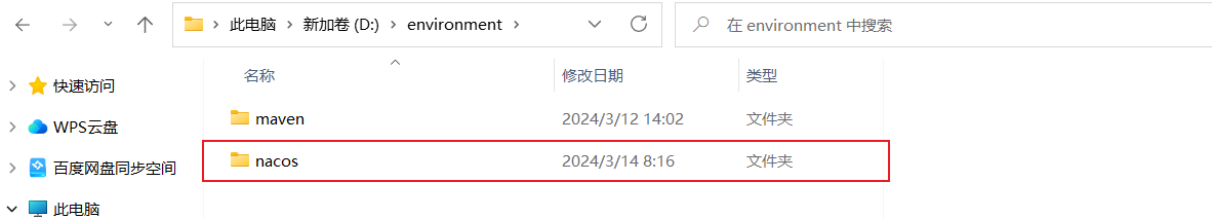

进入 nacos 的 bin 根目录页面输入 cmd



输入 startup -m standalone 启动 nacos

```
Microsoft Windows [版本 10.0.22000.1696]
(c) Microsoft Corporation。保留所有权利。

D:\environment\nacos\bin>startup -m standalone
"nacos is starting with standalone"

                                                      Nacos 2.2.3
                                                      Running in stand alone mode, All function modules
                                                      Port: 8848
                                                      Pid: 2668
                                                      Console: http://192.168.121.1:8848/nacos/index.html

                                                          https://nacos.io

2024-03-14 08:16:50,447 INFO Tomcat initialized with port(s): 8848 (http)

2024-03-14 08:16:50,662 INFO Root WebApplicationContext: initialization completed in 5197 ms

2024-03-14 08:16:59,307 INFO Adding welcome page: class path resource [static/index.html]

2024-03-14 08:16:59,991 WARN You are asking Spring Security to ignore Ant [pattern='/**']. This is not recommended -- pl
ease use permitAll via HttpSecurity#authorizeHttpRequests instead.

2024-03-14 08:16:59,995 INFO Will not secure Ant [pattern='/**']

2024-03-14 08:17:00,035 INFO Will secure any request with [org.springframework.security.web.context.request.async.WebAsy
ncManagerIntegrationFilter@32fe9d0a, org.springframework.security.web.context.SecurityContextPersistenceFilter@5990e6c5,
 org.springframework.security.web.header.HeaderWriterFilter@50687efb, org.springframework.security.web.csrf.CsrfFilter@1
601e47, org.springframework.security.web.authentication.logout.LogoutFilter@724f138e, org.springframework.security.web.s
avedrequest.RequestCacheAwareFilter@35d6ca49, org.springframework.security.web.servletapi.SecurityContextHolderAwareRequ
estFilter@47289387, org.springframework.security.web.authentication.AnonymousAuthenticationFilter@c9413d8, org.springfra
mework.security.web.session.SessionManagementFilter@142eef62, org.springframework.security.web.access.ExceptionTranslati
onFilter@66971f6b]

2024-03-14 08:17:00,091 INFO Exposing 1 endpoint(s) beneath base path '/actuator'

2024-03-14 08:17:00,159 INFO Tomcat started on port(s): 8848 (http) with context path '/nacos'

2024-03-14 08:17:00,207 INFO Nacos started successfully in stand alone mode. use embedded storage
```

```
选择 C:\Windows\System32\cmd.exe - startup -m standalone
2024-03-14 08:16:59,991 WARN You are asking Spring Security to ignore Ant [pattern='/**']. This is not recommended -- pl
ease use permitAll via HttpSecurity#authorizeHttpRequests instead.

2024-03-14 08:16:59,995 INFO Will not secure Ant [pattern='/**']

2024-03-14 08:17:00,035 INFO Will secure any request with [org.springframework.security.web.context.request.async.WebAsy
ncManagerIntegrationFilter@32fe9d0a, org.springframework.security.web.context.SecurityContextPersistenceFilter@5990e6c5,
 org.springframework.security.web.header.HeaderWriterFilter@50687efb, org.springframework.security.web.csrf.CsrfFilter@1
601e47, org.springframework.security.web.authentication.logout.LogoutFilter@724f138e, org.springframework.security.web.s
avedrequest.RequestCacheAwareFilter@35d6ca49, org.springframework.security.web.servletapi.SecurityContextHolderAwareRequ
estFilter@47289387, org.springframework.security.web.authentication.AnonymousAuthenticationFilter@c9413d8, org.springfra
mework.security.web.session.SessionManagementFilter@142eef62, org.springframework.security.web.access.ExceptionTranslati
onFilter@66971f6b]

2024-03-14 08:17:00,091 INFO Exposing 1 endpoint(s) beneath base path '/actuator'

2024-03-14 08:17:00,159 INFO Tomcat started on port(s): 8848 (http) with context path '/nacos'

2024-03-14 08:17:00,207 INFO Nacos started successfully in stand alone mode. use embedded storage

2024-03-14 08:17:30,885 INFO Initializing Servlet 'dispatcherServlet'

2024-03-14 08:17:30,889 INFO Completed initialization in 4 ms
```

点击 console 网址，进入 nacos 后台展示

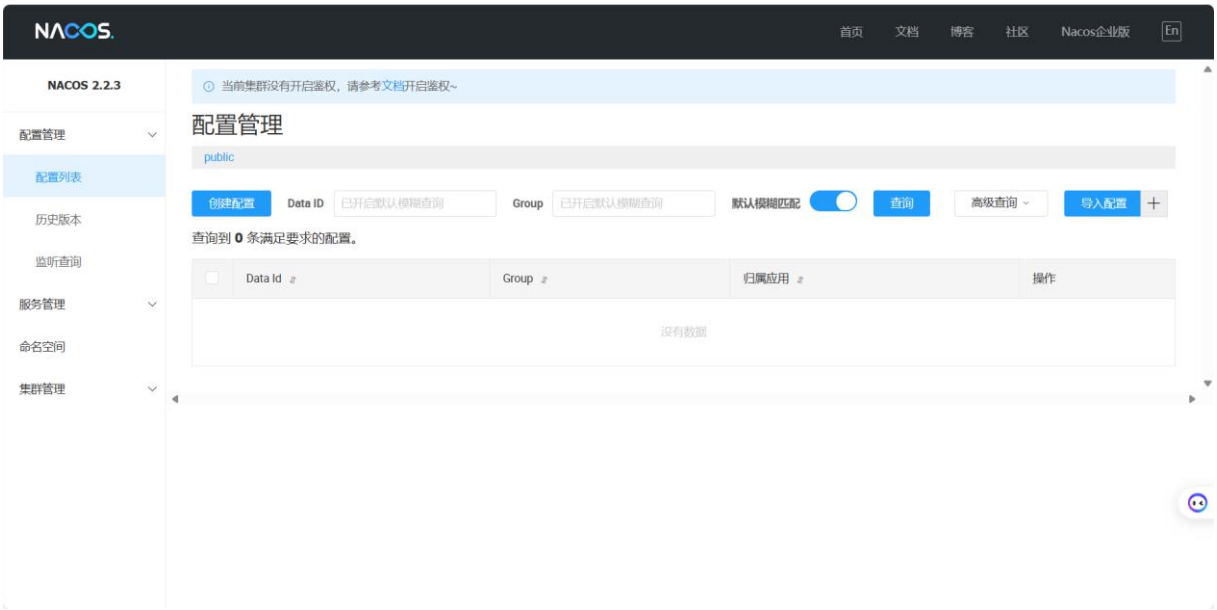

配置

配置文件：application.yml

增加以下代码块（注意空格与换行）

```
    cloud:
      nacos:
        server-addr: 127.0.0.1:8848
```

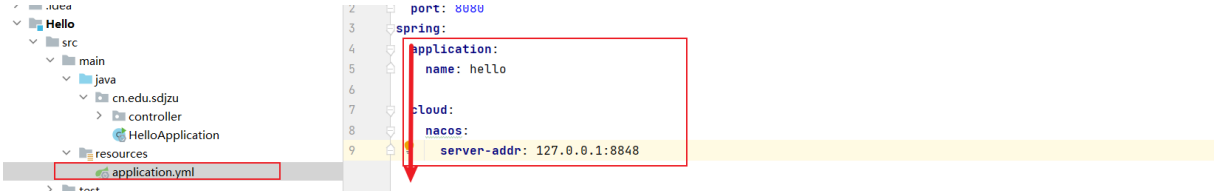

配置文件：pom.xml

增加以下依赖

```
<dependency>
            <groupId>com.alibaba.cloud</groupId>
            <artifactId>spring-cloud-starter-alibaba-nacos-
discovery</artifactId>
        </dependency>
```

使用运行

运行之前的 Hello 程序

发现增加了一新服务名，及运行成功。

维护上传 gitee
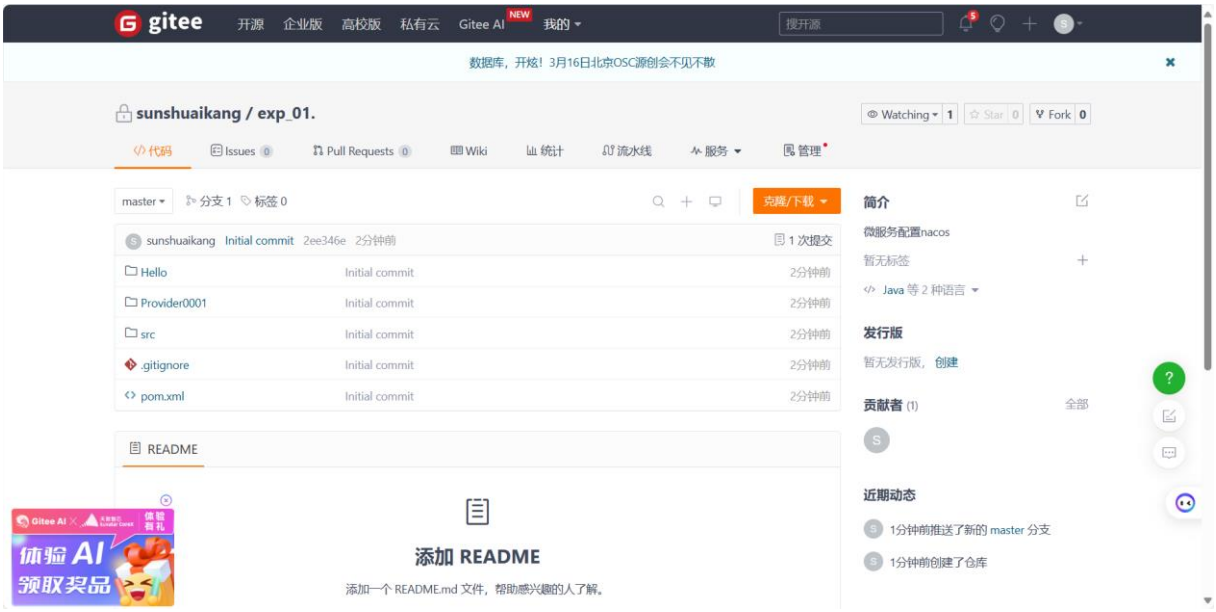
参见链接：https://gitee.com/zhang-jike-kang/exp_01..git