
## **BPO MANAGEMENT SYSTEM**


K.V.Sai Sanjana

192011124

## Usecase diagram:

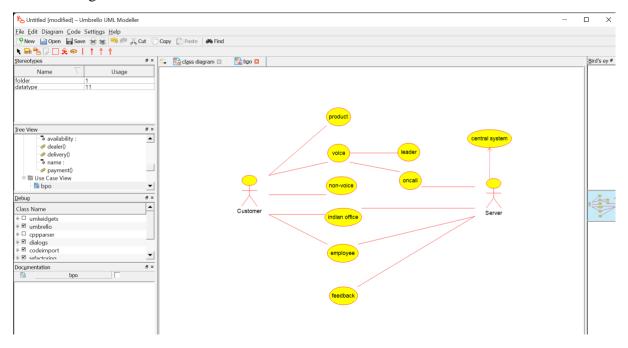

## Class diagram:

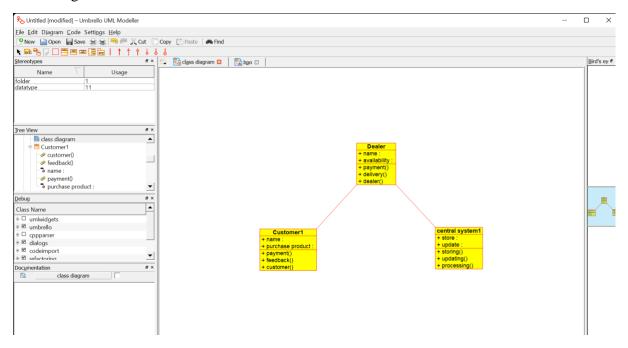

```
Code generation:
C++:
#include "central_system1.h"
// Constructors/Destructors
//
central_system1::central_system1 () {
initAttributes();
}
central_system1::~central_system1 () { }
//
// Methods
// Accessor methods
// Other methods
//
void central_system1::initAttributes () {
}
#include "Customer1.h"
// Constructors/Destructors
//
Customer1::Customer1 () {
initAttributes();
}
Customer1::~Customer1 () { }
//
// Methods
//
// Accessor methods
//
```

```
// Other methods
//
void Customer1::initAttributes () {
}
#include "Dealer.h"
// Constructors/Destructors
//
Dealer::Dealer() {
initAttributes();
Dealer::~Dealer() { }
//
// Methods
//
// Accessor methods
//
// Other methods
void Dealer::initAttributes () {
}
```