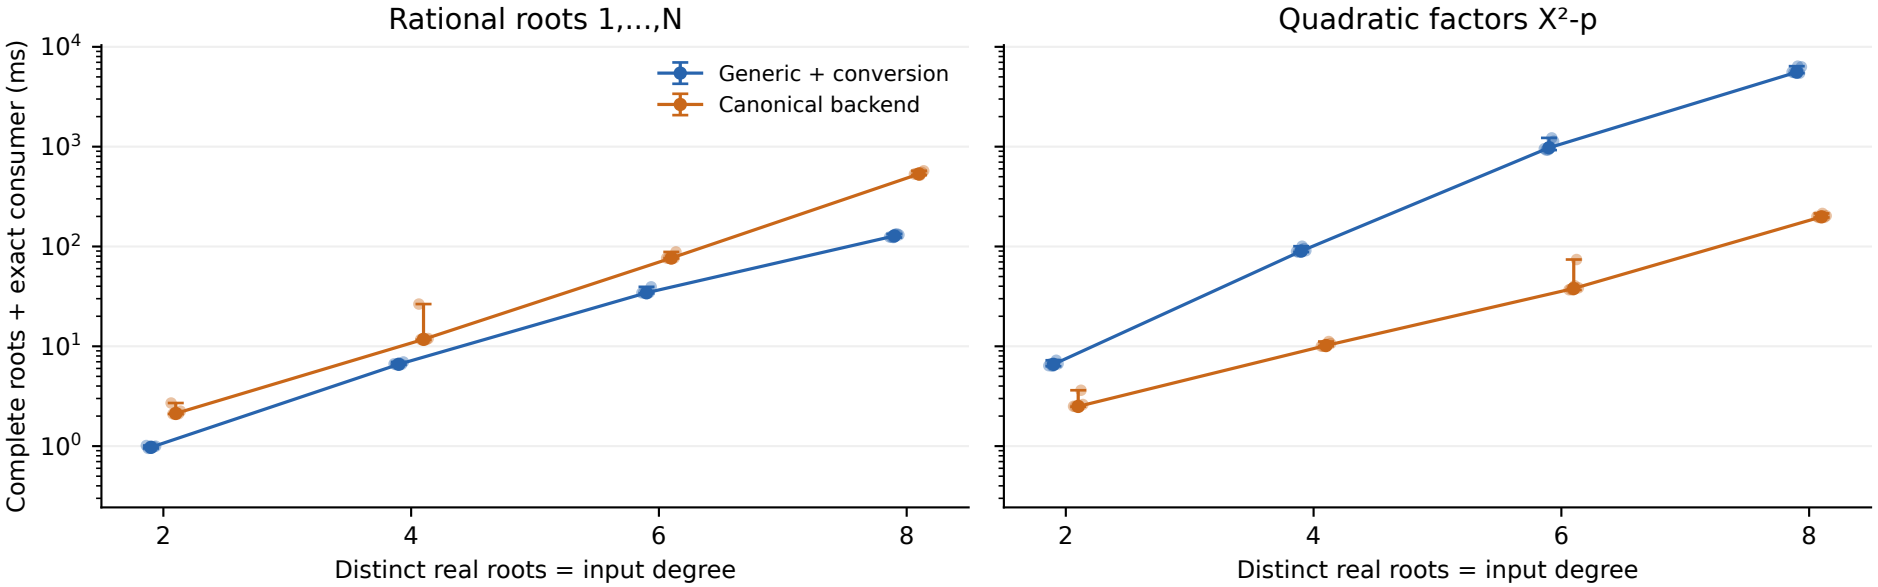
Complete root routes on rational inputs
Rational roots 1,...,N
Quadratic factors X²-p
Complete roots + exact consumer (ms)
Generic + conversion
Canonical backend
Distinct real roots = input degree
Distinct real roots = input degree
Six paired batch estimates; markers are medians, bars show full ranges. No scaling fit.
Source 85720b978d on chungus2