

# GOOD MORNING!

早上好!

안녕하세요!

---

DAY 2

# DAY I RECAP

---

# 2 PROJECTS

---

- Mini Project (Individual Team)
  - For learning techniques

| 차시 | 구분              | 세부사항                      |
|----|-----------------|---------------------------|
| 1  | 프로젝트 계획 및 환경 구축 | 시스템 개발 프로세스의 이해, 개발 환경 구축 |
| 2  | 기술 탐색 및 검증      | AI VISION 기술 탐색 및 검증      |
| 3  | 기술 탐색 및 검증      | AMR 제어 기술 탐색 및 검증         |
| 4  | 기술 탐색 및 검증      | Mini project 완성 및 발표      |

# 2 PROJECTS

---

- Final Project (2 Teams in One)

| 차시 | 구분             | 세부사항  |
|----|----------------|---|
| 5  | 프로젝트 설계        | 외부 시스템 모니터 기술 탐색 및 검증<br>파이널 프로젝트 시스템 요구사항 설계 및 프로세스 정립 |
| 6  | 개발             | 기능 구현 및 Unit Test                                       |
| 7  | 개발             | 기능 구현 및 Unit Test                                       |
| 8  | 개발             | 통합 시스템 구축 및 테스트   |
| 9  | 개발             | 통합 시스템 구축 및 테스트   |
| 10 | 최종 프레젠테이션 및 시연 | 프로젝트 발표 및 시연, 산출물 정리, 기술 컨퍼런스                           |

# DAY I

---

- Welcome
- Project Introduction
- Introduction to Project Development Process
- Business Requirement Development
- System Requirement Development
- System and Development environment Setup

# DAY 2 (MINI PROJECT)

---

- Yolo 객체 인식 모델 활용과 성능 평가 방법 이해
  - Custom Dataset과 Fine Tuning으로 자체 객체 인식 모델 구현 및 평가
  - (Optional) 경량화 모델 등 개별 요구사항에 적합한 모델 탐색 및 성능 검증

# DAY 2 (MINI PROJECT)

---

## WEB-CAM 기반 객체 인식

- YOLOv8 기반 데이터 수집/학습/deploy (Detection Alert)
  - 감시용 데이터 수집(rc\_car, dummy, 등)
  - 감시용 데이터 라벨링
  - YOLOv8 기반 학습
  - YOLOv8 Object Detection

## AMR-CAM 기반 객체 인식

- AMR(Autonomous Mobile Robot) Turtlebot4 개발 환경 구축
- 로봇 개발 환경에 완성 모델 서빙 및 테스트 / 로봇 H/W, 제반 환경의 한계점 도출
  - Tracking 데이터 수집((rc\_car, dummy, 등))
  - Tracking 데이터 라벨링
  - YOLOv8 기반 학습
  - YOLOv8 Object **Tracking**

# DAY 3 (MINI PROJECT)

---

- Auto. Driving 시스템 학습
  - Digital Mapping of environment
  - Operate AMR (Sim. & Real)
  - Tutorial 실행
  - Detection, Depth and AMR 주행
  - 로봇 개발 환경에 적용 및 테스트 / 로봇 H/W, 제반 환경의 한계점 도출

## TURTLEBOT4 시뮬레이션 DEMO

- SLAM과 AutoSLAM으로 맵 생성
- Sim.Tutorial 실행
- Detection, Depth and AMR 주행 example

# DAY 3 (MINI PROJECT)

---

## REAL ROBOT

- Manually operating the AMR (Teleops)
- autonomous driving 시스템 with obstacle avoidance
  - Digital Mapping of environment
  - Launching Localization, Nav2, and using Rviz to operate a robot
  - Goal Setting and Obstacle Avoidance using Navigation

## TUTORIAL

- Turtlebot4 API를 활용한 Initial Pose Navigate\_to Pose 구현
- Turtlebot4 API를 활용한 Navigate\_Through\_pose, Follow Waypoints 구현

# HOW TO WORK TOGETHER

---

- Participate, Participate, Participate!!!
- No long emails or Kakaotalk, prefer face to face
- Be open to suggestions and idea
- Be proactive (적극적), take initiative (주도적)
- HOW is as important as WHAT
- Ask the right questions? (to **YOU, team** and me)
- Investigate/Research/Analyze

## 프로젝트 RULE

---

80/20 → 20/80

# TEAMWORK AND PROJECT MANAGEMENT


---



PROJECT DEVELOPMENT IS A PROCESS

---


# SW DEVELOPMENT PROCESS

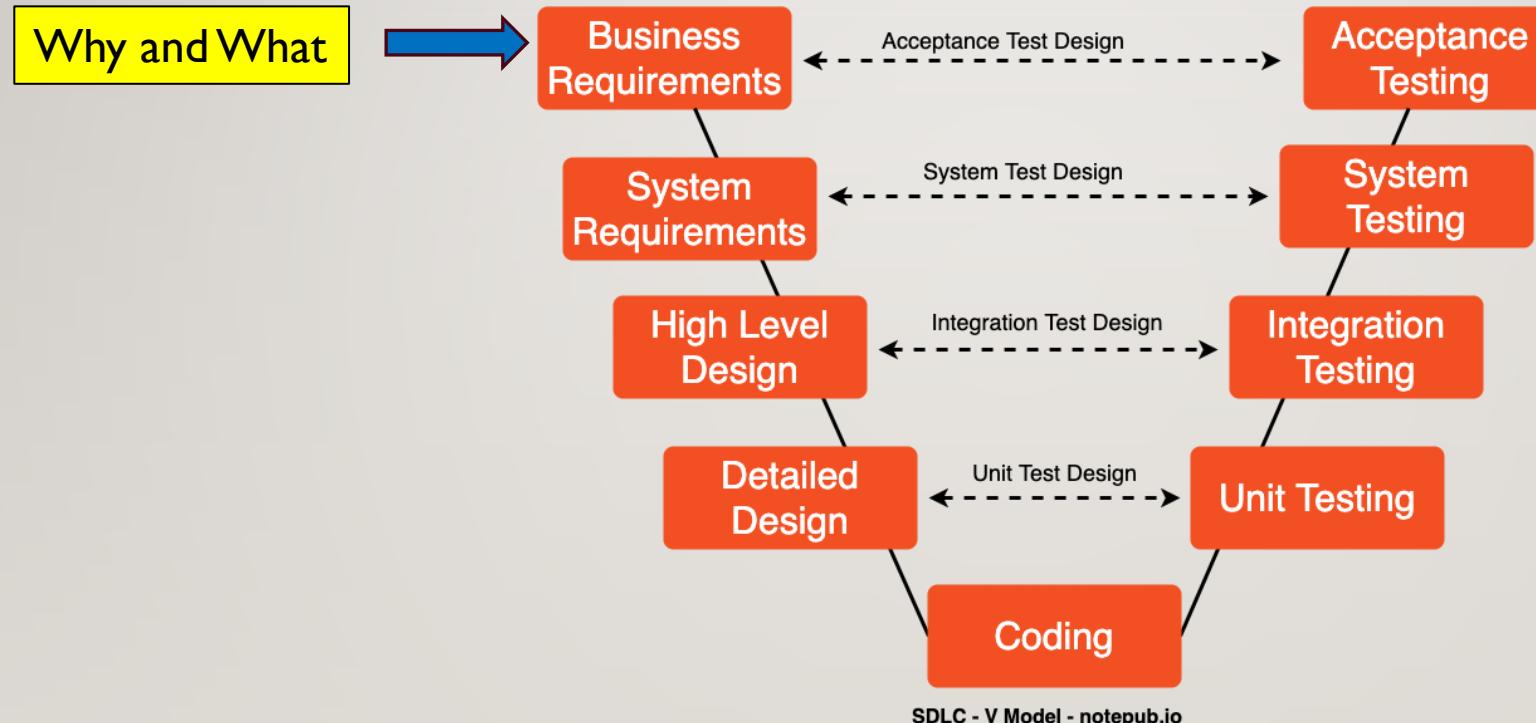

# ADVANCED TECHNIQUES THAT WE HAVE

---

- AI Object Detection

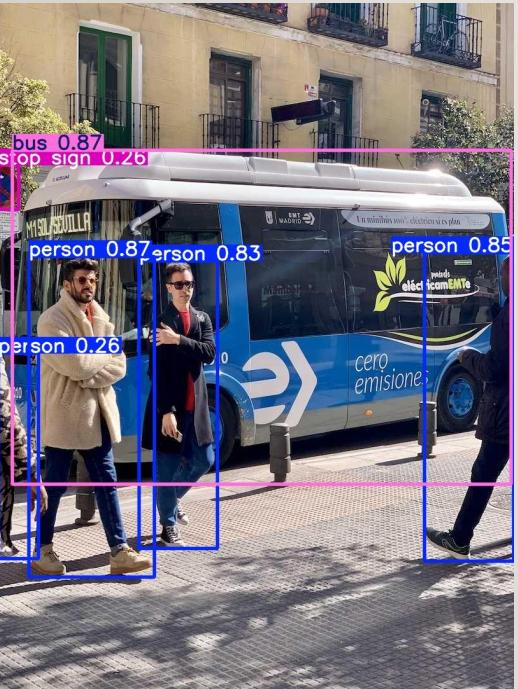


- AMR

- Navigation with obstruction avoidance
- Sensors



- ROS2

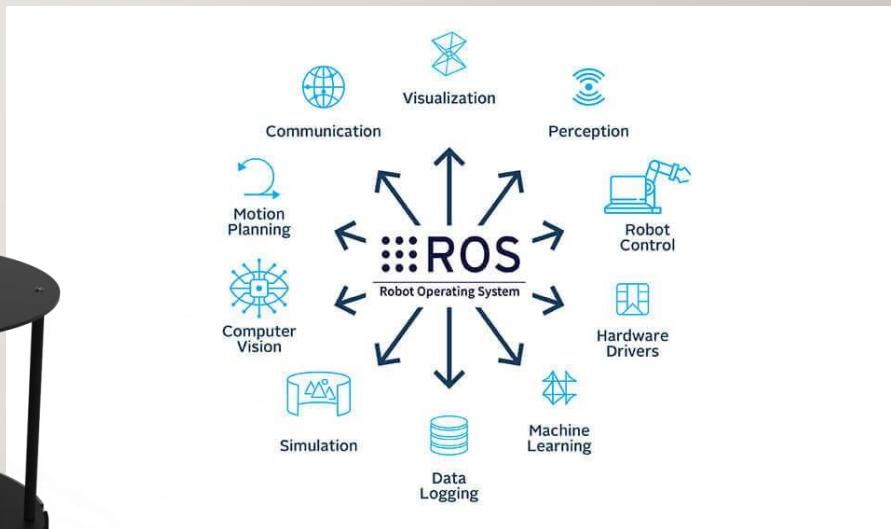

# BRAINSTORM A SITUATION THAT WILL BENEFIT FROM **YOUR** SOLUTION

---

Must have measurable benefits. Search for them online

# BRAINSTORMING RULES


---

- Every input is good input
- Do not critique inputs only seek to understand
- Organize inputs into logical groupings
- Sequence or show relationships as needed
- Use Posted Notes on Flip Chart




# SW DEVELOPMENT PROCESS

---

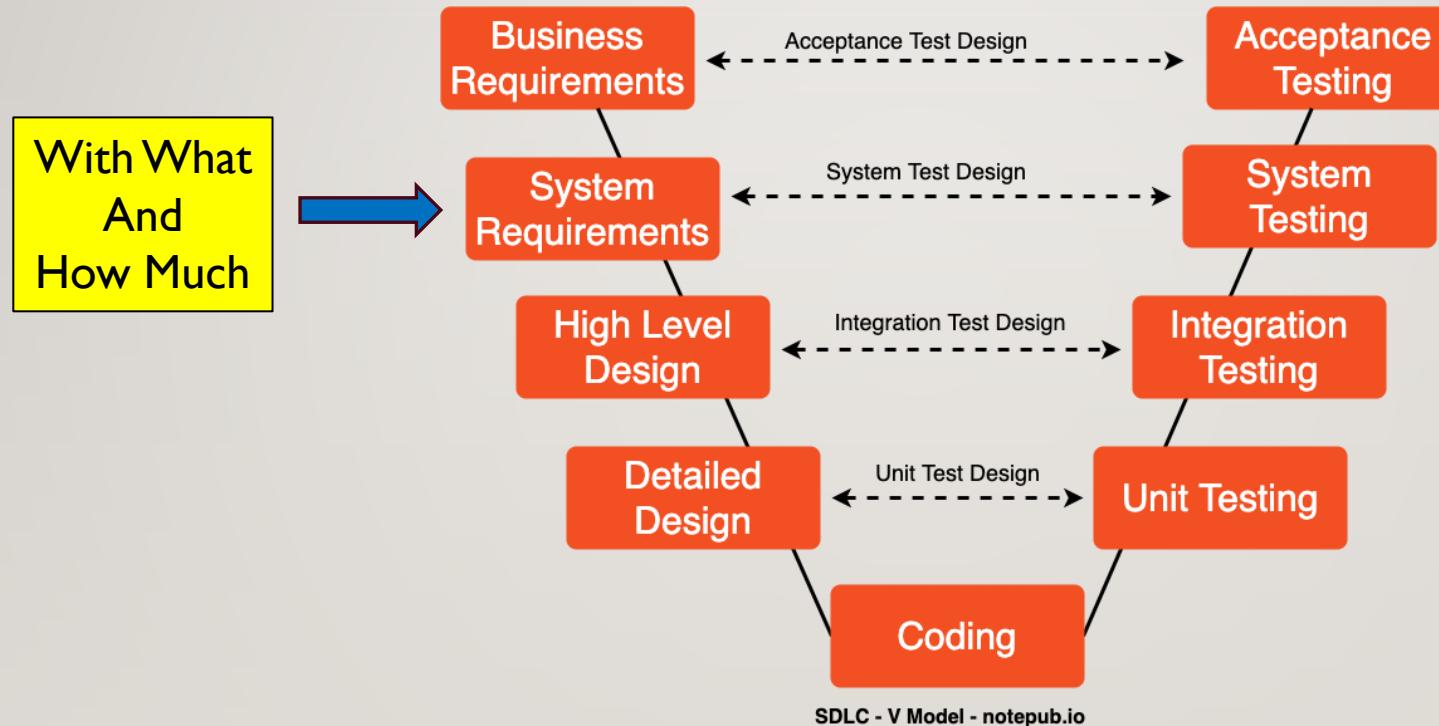

# MINI PROJECT DESCRIPTION

---

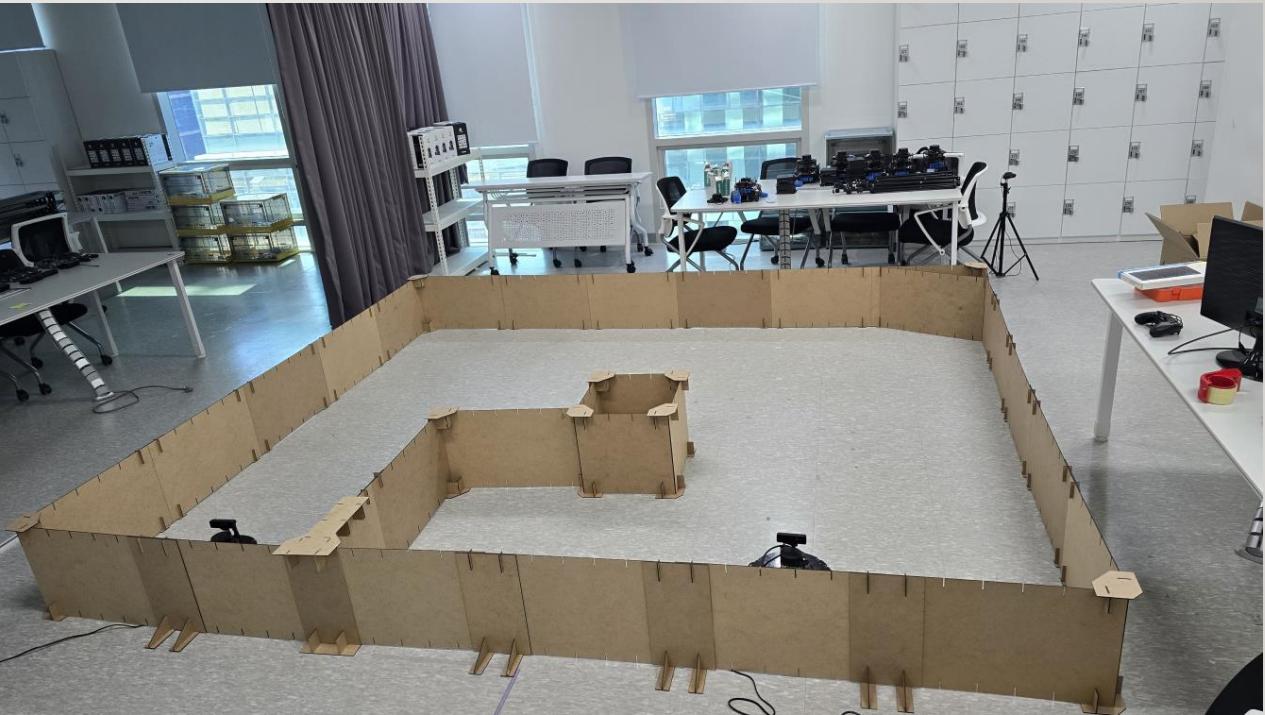


# DETECTION ALERT

---




**START**

---

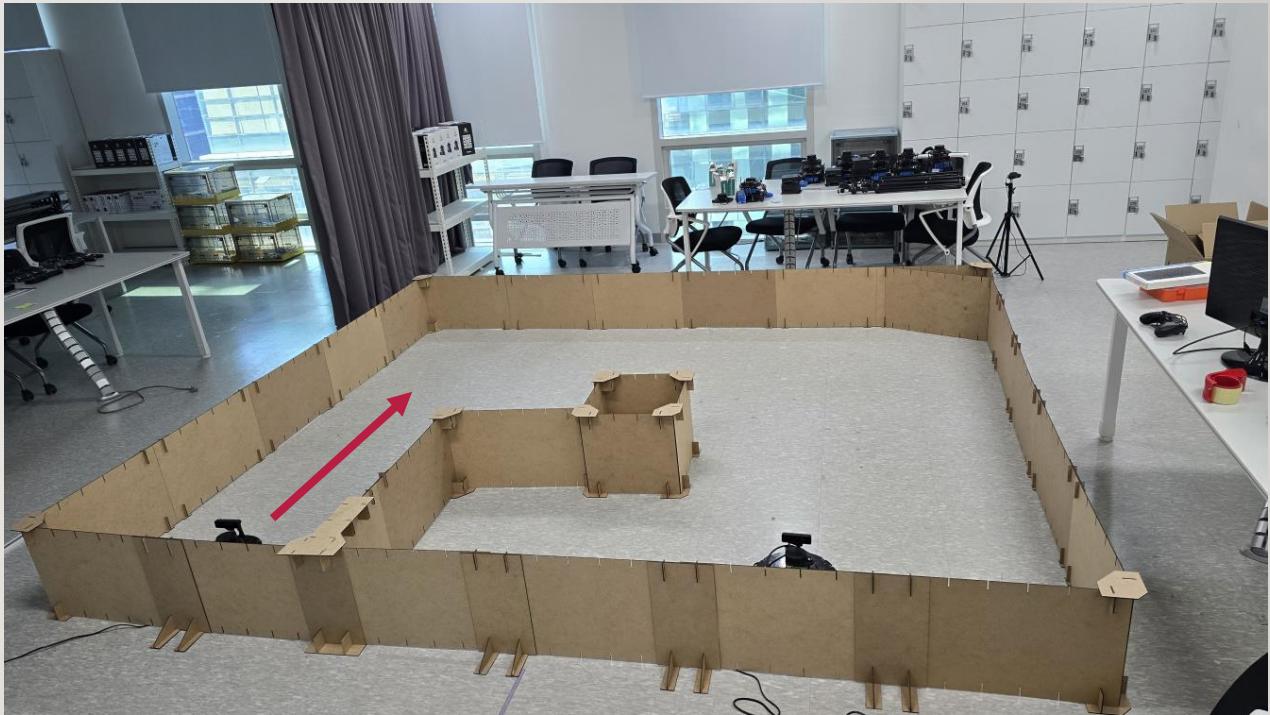

## NAVIGATE TO A POSITION

---

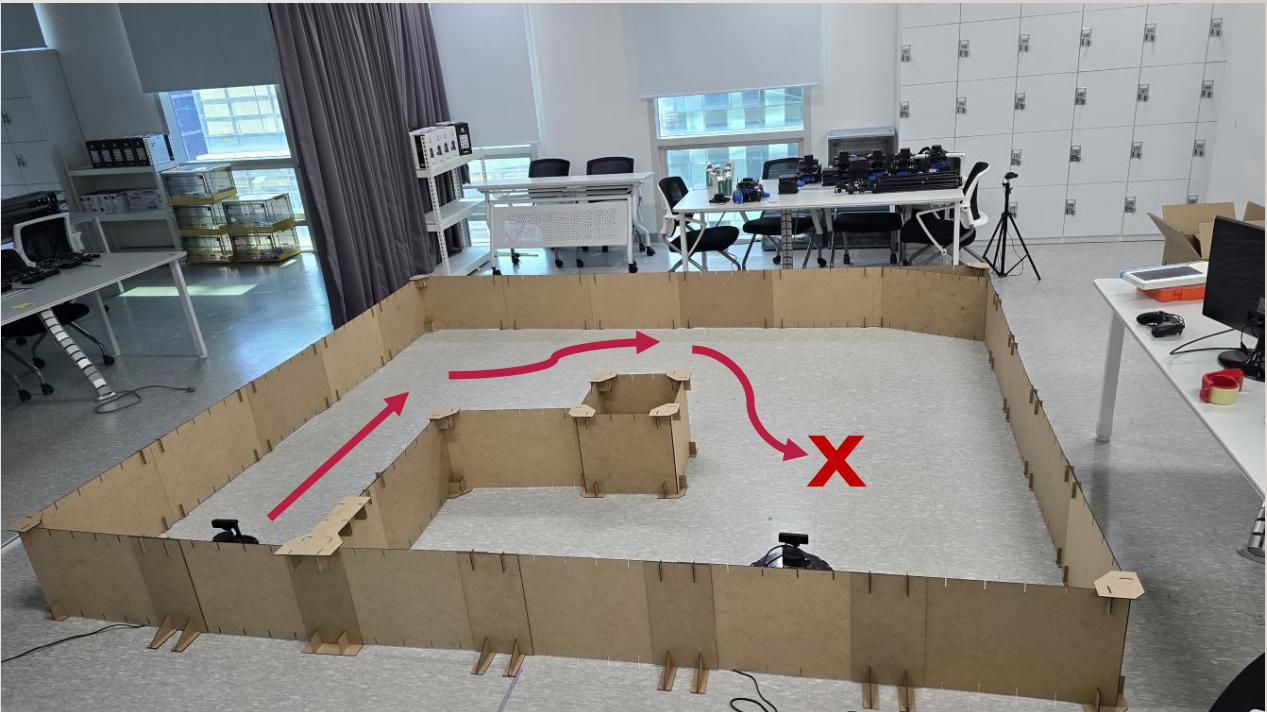


## TRACK & APPROACH

---



# VISUALIZATION – SCENARIO PROCESS DIAGRAMS

- As-Is Functional Process Diagram
  - Current states
- To-Be Functional Process Diagram
  - Future states
- [Untitled Diagram - draw.io](#)
- <https://app.diagrams.net/>

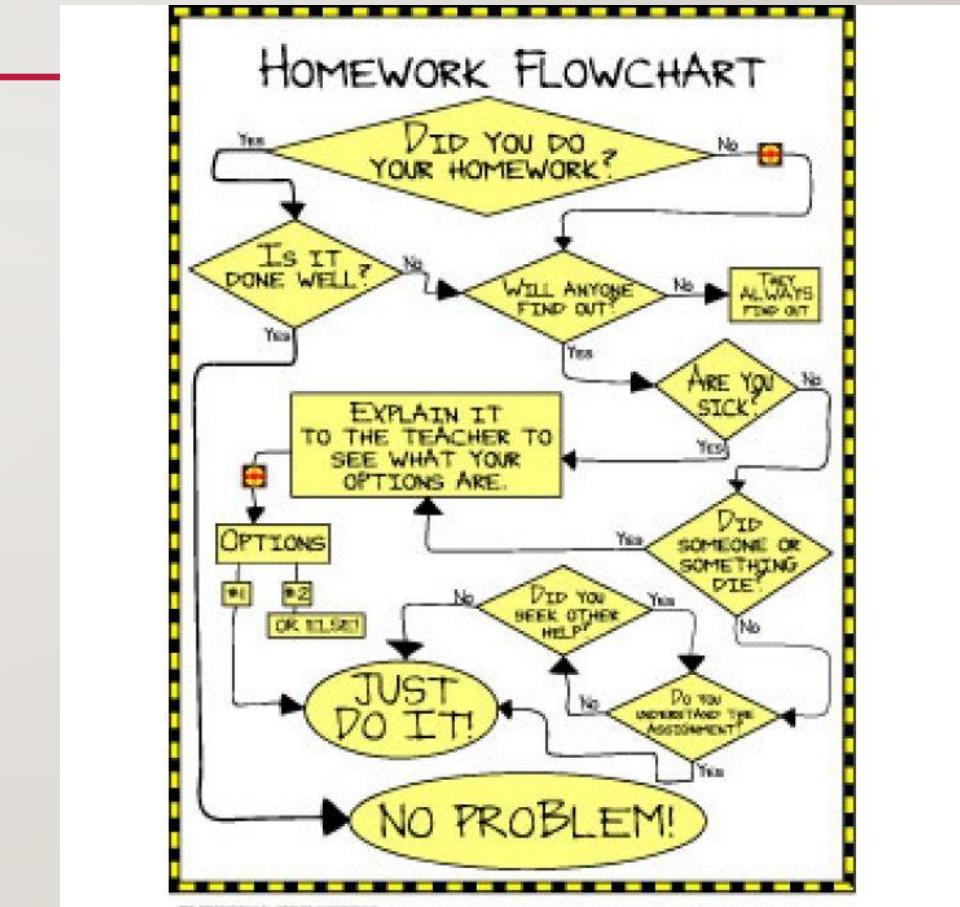

# DEVELOP MINI PROJECT SCENARIO (USE-CASE) PROCESS DIAGRAM

---

Using the posted notes and flipchart as needed

**WITH WHAT**

---

# YOUR PROJECT ENVIRONMENT

---



# BASE HW/OS

---

- PC
  - Ubuntu 22.04
  - USB Camera




- Network
  - Wifi

- AMR
  - TurtleBot4
  - Ubuntu 22.04




# YOLO OBJ. DET. VS. YOLO TRACKING

---

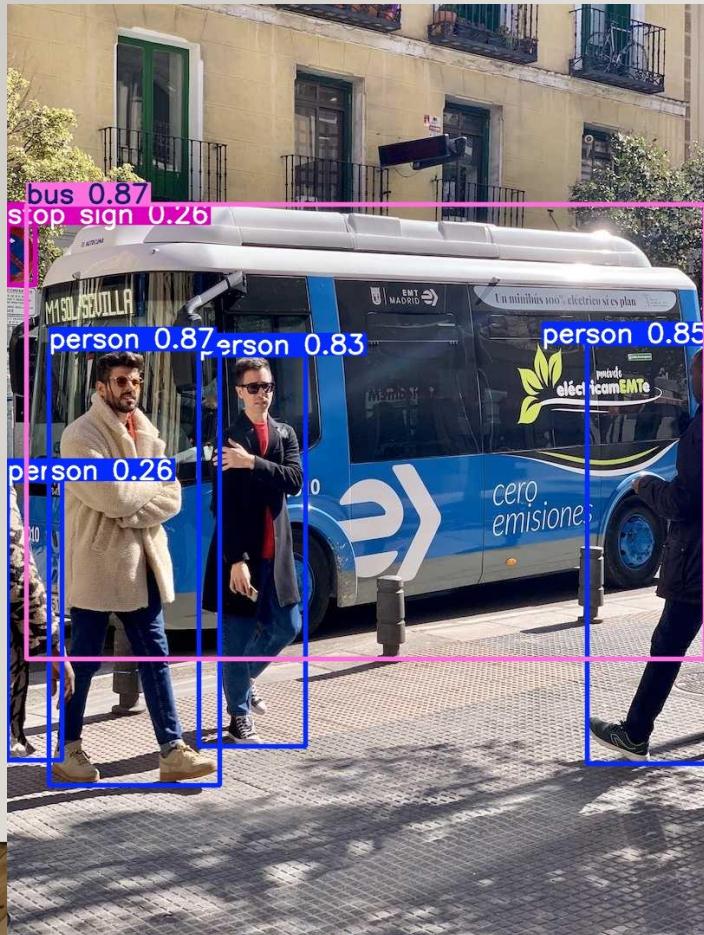

- [Track - Ultralytics YOLO Docs](#)
  - [\(469\) YOLO people detection + SORT tracking – YouTube](#)
  - [Bing Videos](#)

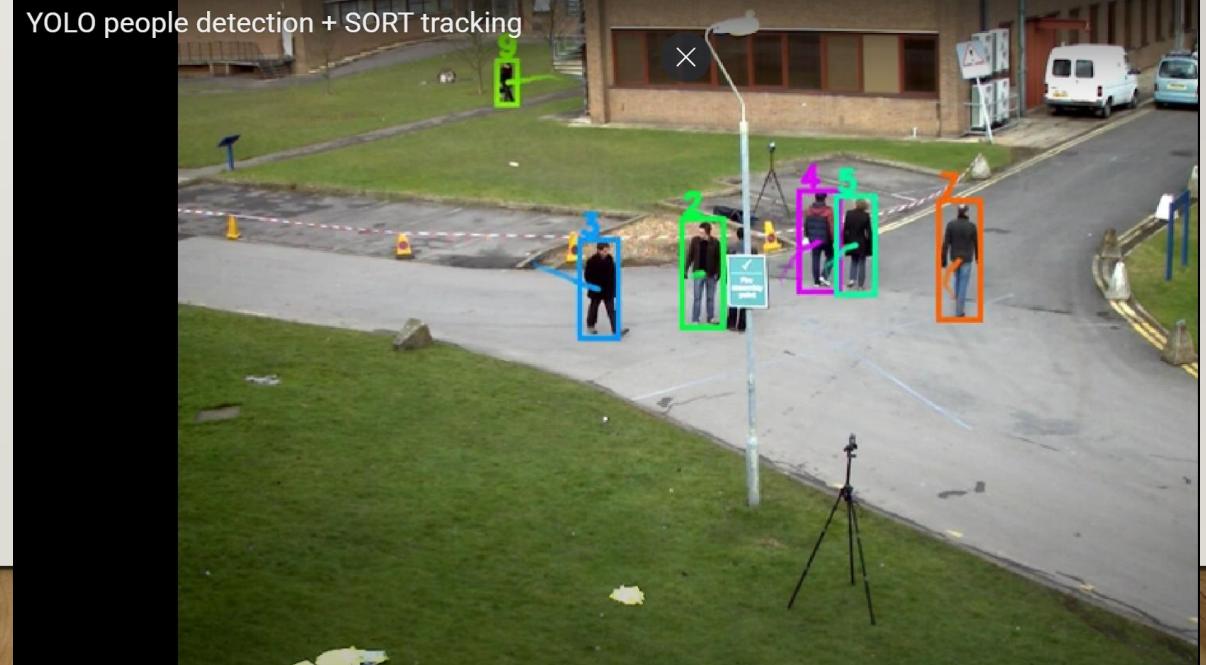

# KEY SUBSYSTEM (MODULES) TO DEVELOP

---

- Detection Alert
  - Camera Capture
  - Object Detection
  - Send messages to other subsystems
- AMR Controller
  - Receive messages and act accordingly
  - Move using (SLAM) with Obstruction avoidance
  - Target Acquisition (Obj. Det.) and Tracking
  - Follow target using camera and motor control

## TEAM EXERCISE 2-2

---

Brainstorm **mini-project** System Requirement for the project and document

Using the posted notes and flipchart as needed

Include where, when, what will be used

# SYSTEM AND DEVELOPMENT ENVIRONMENT SETUP

---

- PC 환경 구성

- Turtlebot4 SW 구성

- User PC Network Setup(Single Robot Setup)

- .bashrc 구성

- Move Robot CLI

- ROS Workspace Example

- YOLO Setup

# HOMEWORK CHECK

---

# REVIEW AMR (TURTLEBOT4) E-MANUAL

---

- [Features · User Manual](#)
- <https://turtlebot.github.io/turtlebot4-user-manual/overview/features.html>



# PLEASE REVIEW YOU WORK FROM EARLIER ONLINE CLASS

---

- Yolo obj. Det. Vs. Yolo Tracking
  - [Object Detection - Ultralytics YOLO Docs](#)
  - [Track - Ultralytics YOLO Docs](#)
  - [Model Training with Ultralytics YOLO - Ultralytics YOLO Docs](#)
- Yolo
  - Data Labelling (ex: LabelImg/roboflow)
  - Data pre-processing for YoloV8 Training
  - YoloV8 training to create .pt file
  - Using .pt file to predict/inference
- ROS
  - colcon build
  - Node, Topic, Service, Action, Interface, etc. coding

# ROS EXERCISE I

---

Create a ROS2 Package with these publisher and subscribers

- 2\_0\_a\_image\_publisher.py
- 2\_0\_b\_image\_subscriber.py
- 2\_0\_c\_data\_publisher.py
- 2\_0\_d\_data\_subscriber.py

Try these CLI

```
$ ros2 run rqt_graph rqt_graph  
$ ros2 node list  
$ ros2 node info <node_name>  
$ ros2 topic list  
$ ros2 topic info <topic_name>  
$ ros2 topic echo <topic_name>  
$ ros2 interface list  
$ ros2 interface show  
<package_name>/msg/<MessageName>
```

# ROS EXERCISE 2

---

## DAY 2 - AI VISION (YOLO)

Aa 이름

status

● Homework\_삐뽀삐뽀 소리내기 노드 만들기

● 완료

● RGB Camera

● 완료

● Depth Camera

● 완료

● Robot\_Depth

● 완료

# 프로젝트 RULE NUMBER ONE!!!

---

Are we having  
Fun???



# DAY 2

---

# KEY SUBSYSTEM (MODULES) TO DEVELOP

- Detection Alert
  - Camera Capture
  - Object Detection
  - Send messages to other subsystems
- AMR Controller
  - Receive messages and act accordingly
  - Move using (SLAM) with Obstruction avoidance
  - Target Acquisition (Obj. Det.) and Tracking
  - Approach target using camera and motor control

**PERFORM DATA COLLECTION FOR  
DETECTION ALERT**

---

# COLLECTION IMAGES FROM WEBCAM

---

- Image Capture (WEBCAM)

[  2\_1\_a\_capture\_wc\_image.py  
 2\_1\_b\_cont\_capture\_wc\_image.py  
 2\_1\_c\_capture\_wc\_thread.py

- Resolution vs Dimension

# COLLECTION IMAGES FROM AMR CAMERA

---



- Undock to see camera topics
- Are all camera topics available?
- Which image topic to use?
- Which dimensions and resolution?
- Are Depth and RGB pixel aligned?
- ...

# NEED TO UNDOCK AMR TO ACTIVATE IMAGE TOPICS TO PUBLISH

---

## UNDOCK

```
$ ros2 topic list
```

Check the list

```
$ ros2 action send_goal
```

```
/robot<n>/undock
```

```
irobot_create_msgs/action/Undock
```

```
“{}”
```

```
$ ros2 topic list
```

Check the list and compare

## DOCK

```
$ ros2 action send_goal /robot<n>/dock
```

```
irobot_create_msgs/action/Dock “{}”
```

# RGB CAMERA

---



## DAY 2 - AI VISION (YOLO)

Aa 이름

status

● Homework\_삐뽀삐뽀 소리내기 노드 만들기

● 완료

● RGB Camera

● 완료

● Depth Camera

● 완료

● Robot\_Depth

● 완료

# DIMENSIONS AND RESOLUTION AND FPS

---

## Supported `i_resolution` values (RGB):

| Resolution Keyword | Width × Height | Notes   |
|--------------------|----------------|---|
| 1080P              | 1920 × 1080    | Default, high-res   |
| 720P               | 1280 × 720     | Medium-res  |
| 800P               | 1280 × 800     | Slightly taller   |
| 480P               | 640 × 480      | <input checked="" type="checkbox"/> Ideal for alignment with stereo |
| 400P               | 640 × 400      | Wide, cropped top/bottom  |
| 320P               | 640 × 360      | Lower-res   |
| 240P               | 320 × 240      | Very low-res, fast  |

```
i_usb_speed: SUPER_PLUS  
rgb:  
    i_board_socket_id: 0  
    i_fps: 30.0 ←  
    i_height: 720  
    i_interleaved: false  
    i_max_q_size: 10  
    i_preview_size: 320
```

Use `rqt` to check and compare the different image topics


# USING DEPTH

---

| DAY 2 - AI VISION (YOLO)  |        |
|---------------------------|--------|
| Aa 이름                     | status |
| Homework_삐뽀삐뽀 소리내기 노드 만들기 | 완료     |
| RGB Camera                | 완료     |
| Depth Camera              | 완료     |
| Robot_Depth               | 완료     |

# DEPTH INTRO


---

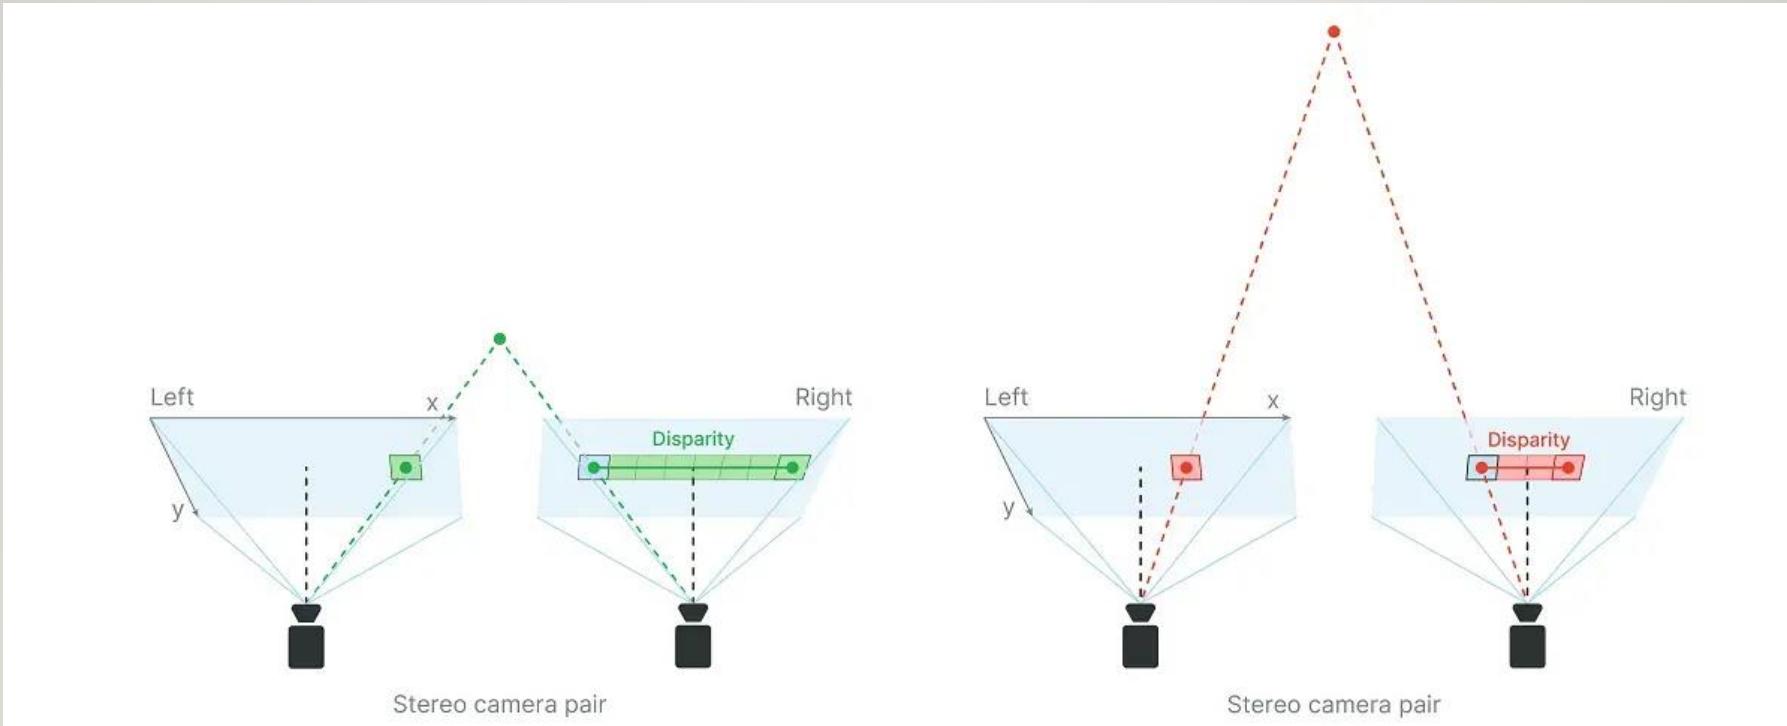

# UPDATING THE OAKD CONFIG (ROBOT)

## ON TURTLEBOT4:

```
$ cd  
/opt/ros/humble/share/turtlebot4_bringup/co  
nfig  
  
$ sudo cp oakd_pro.yaml oakd_pro_orig.yaml  
  
$ sudo cp oakd_pro_new.yaml oakd_pro.yaml  
  
  
$ turtlebot4-service-restart  
  
Or  
  
$ sudo reboot
```

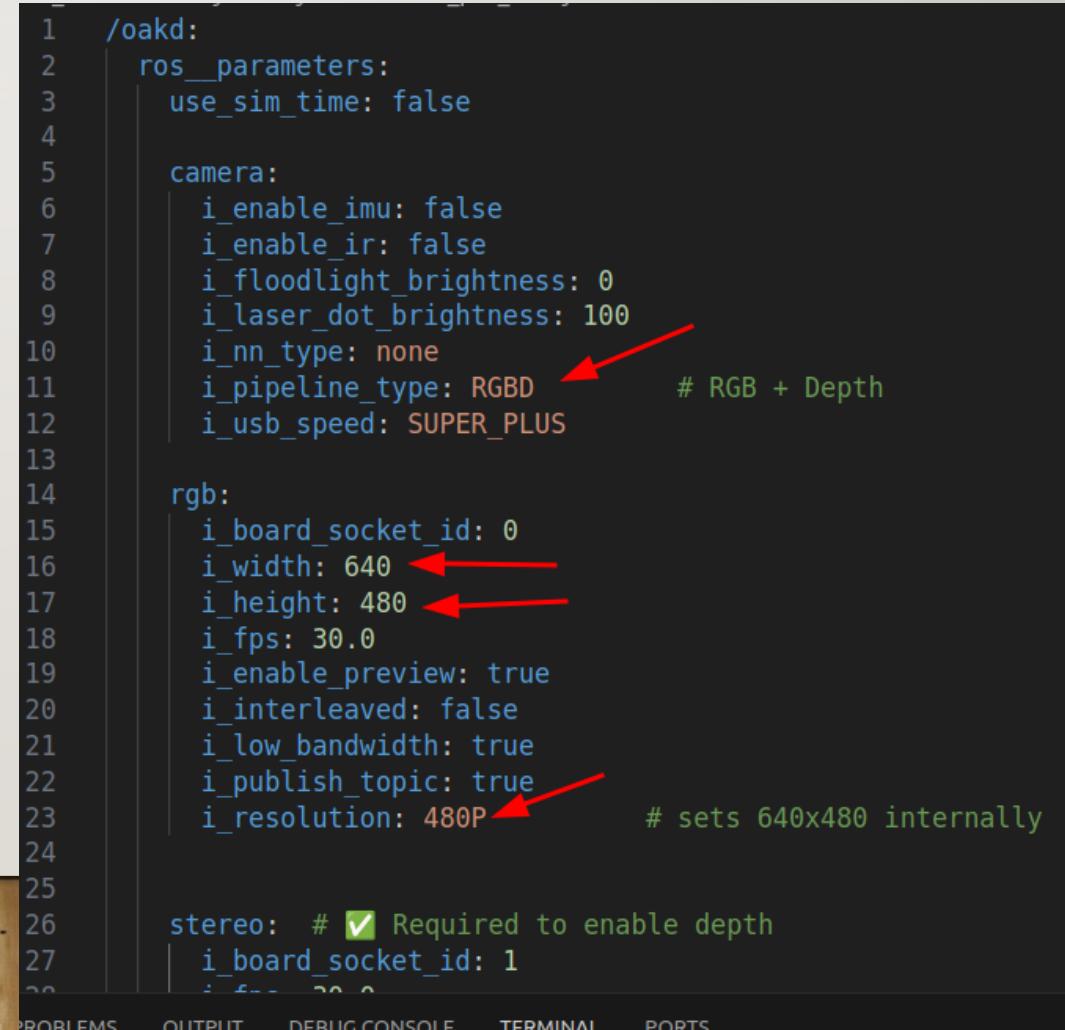

```
1 /oakd:  
2   ros_parameters:  
3     use_sim_time: false  
4  
5   camera:  
6     i_enable_imu: false  
7     i_enable_ir: false  
8     i_floodlight_brightness: 0  
9     i_laser_dot_brightness: 100  
10    i_nn_type: none  
11    i_pipeline_type: RGBD      # RGB + Depth  
12    i_usb_speed: SUPER_PLUS  
13  
14   rgb:  
15     i_board_socket_id: 0  
16     i_width: 640             ←  
17     i_height: 480             ←  
18     i_fps: 30.0  
19     i_enable_preview: true  
20     i_interleaved: false  
21     i_low_bandwidth: true  
22     i_publish_topic: true  
23     i_resolution: 480P        ←  
24                                         # sets 640x480 internally  
25  
26   stereo: #  Required to enable depth  
27     i_board_socket_id: 1  
28
```

# WHICH IMAGE TOPIC TO USE?

---

- /oakd/rgb/preview/image\_raw
  - /oakd/rgb/image\_raw
  - /oakd/rgb/image\_raw/compressed
  - /oakd/stereo/image\_raw
  - ...
- 
- **EXERCISE**
    - **Use rqt to view different image topics**
    - **Are all the topics viewable?**
- 
- **\*\*\* not all of the topics are visible, initially**

# **EXERCISE: ACHIEVE ALIGNED FOV AND DIMENSION FOR BOTH DEPTH AND RGB**

---

Follow instruction on the notion to update the oakd config file.

Find config settings that will give same FOV for both Depth and RGB

Use rqt to view the topics

# GETTING DISTANCE VALUE FROM DEPTH IMAGE

---

## DAY 2 - AI VISION (YOLO)

Aa 이름

status

● Homework\_삐뽀삐뽀 소리내기 노드 만들기

완료

● RGB Camera

완료

● Depth Camera

완료

● Robot\_Depth

완료

# DATA COLLECTION FOR OBJ. DET.

---

# AIM OF THE GOOD OBJ. DET. TRAINING SET

---

- Training images matches the real inference images as much as possible
  - Lighting
  - Dimensions
  - FOV
  - Backgrounds
  - Objects
  - ...
- For RGB and Depth and ...

# CODING HINTS

---

- Image Capture
- Image Capture (AMR)




- 2\_1\_a\_capture\_wc\_image.py
- 2\_1\_b\_cont\_capture\_wc\_image.py
- 2\_1\_c\_capture\_wc\_thread.py
- 2\_1\_d\_capture\_image.py
- 2\_1\_e\_cont\_capture\_image.py

# CODING HINTS

---

- Image Capture
- Data Labelling
  - Goto the /labelImg/data/ directory
  - Rename the predefined\_classes.txt

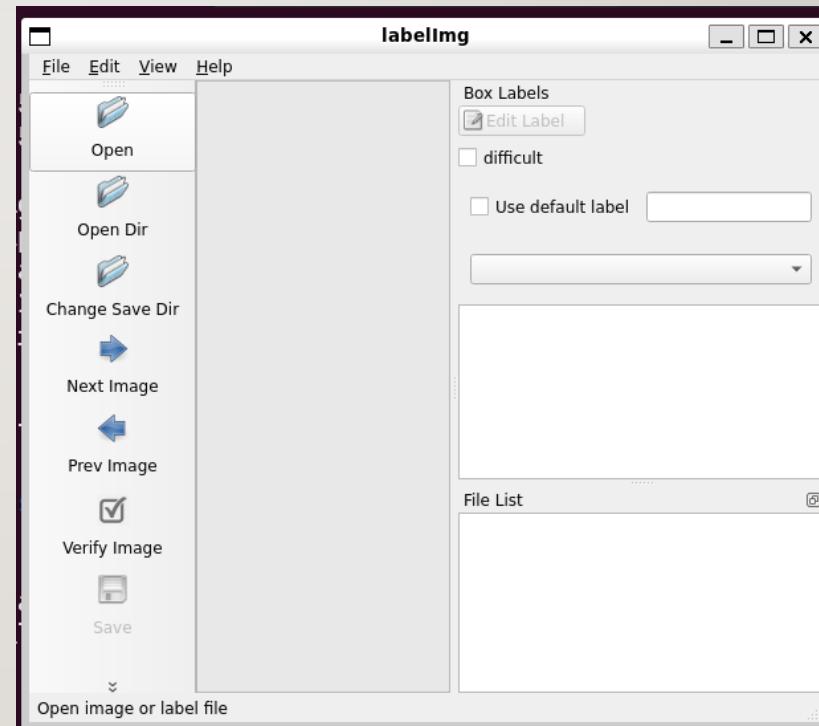

# CODING HINTS

---

- Data Labelling : LabelImg

## 라벨링 순서

1. 이미지파일 불러오기 (Open Dir)
2. 저장형식 변경 (PascalVOC, YOLO)
3. 이미지 선택
4. 바운딩 박스 그리기(create rectbox)
5. Class 지정
6. 저장경로 생성 및 변경(Change Save Dir)
7. 저장(Save)

## 단축키

|                  |   |
|------------------|---|
| Ctrl + u         | Load all of the images from a directory   |
| Ctrl + r         | Change the default annotation target dir  |
| Ctrl + s         | Save                                      |
| Ctrl + d         | Copy the current label and rect box       |
| Ctrl + Shift + d | Delete the current image                  |
| Space            | Flag the current image as verified        |
| w                | Create a rect box                         |
| d                | Next image                                |
| a                | Previous image                            |
| del              | Delete the selected rect box              |
| Ctrl++           | Zoom in                                   |
| Ctrl--           | Zoom out                                  |
| ↑→↓←             | Keyboard arrows to move selected rect box |

# CODING HINTS

---



- Image Capture
- Data Labelling
- Data Preprocessing



- 2\_1\_a\_capture\_wc\_image.py
- 2\_1\_b\_cont\_capture\_wc\_image.py
- 2\_1\_c\_capture\_wc\_thread.py
- 2\_1\_d\_capture\_image.py
- 2\_1\_e\_cont\_capture\_image.py
- 2\_3\_a\_create\_data\_dirs.py
- 2\_3\_b\_move\_image.py
- 2\_3\_c\_move\_labels.py

# ZIP TRAIN DATA SET

---

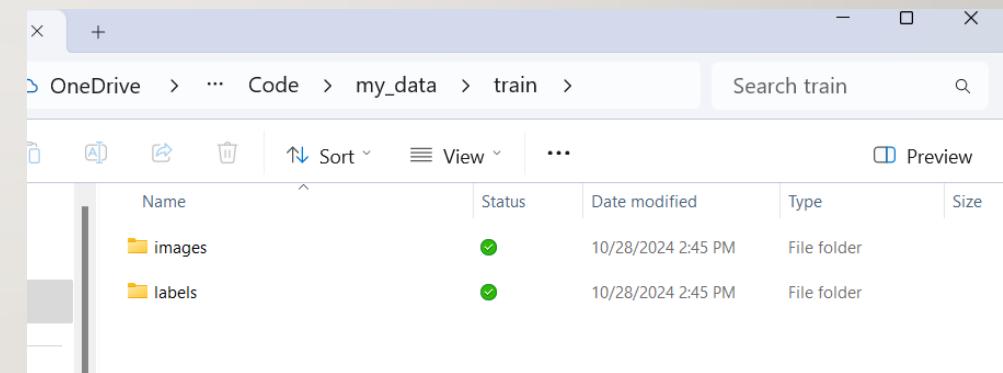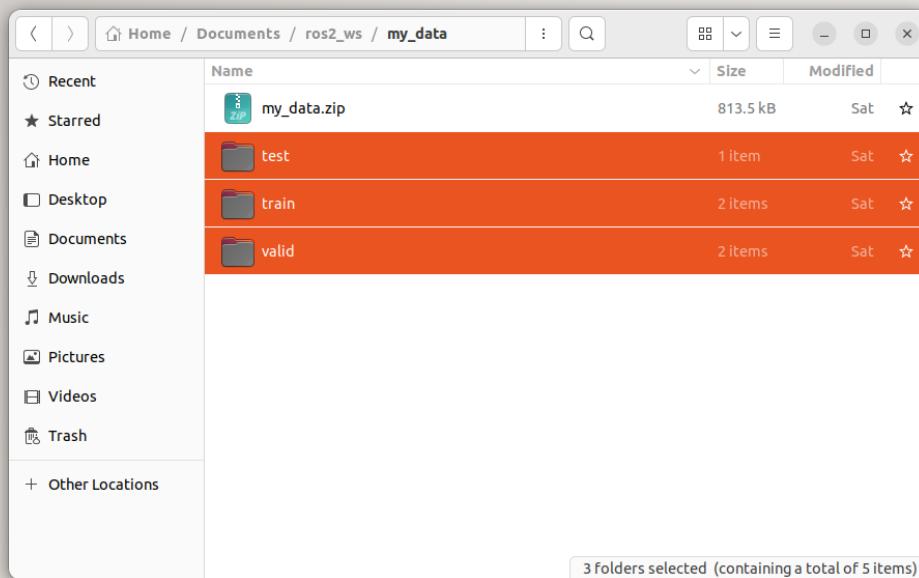

# PERFORM YOLO TRAINING & INFERENCE

---

# CODING HINTS

---

- Image Capture
- Data Labelling
- Preprocessing
- Yolo8 Object Det (Training)




- 2\_3\_a\_create\_data\_dirs.py
- 2\_3\_b\_move\_image.py
- 2\_3\_c\_move\_labels.py
- 2\_4\_a\_yolov8\_obj\_det\_ak.ipynb
- 2\_4\_b\_gpu\_test.py
- 2\_4\_c\_compare\_yolo.py

# USING GOOGLE COLAB TO CREATE CUSTOM MODEL


---

- Move the files to google drive
  - my\_data.zip
  - yolov8.obj.det.ak.ipynb

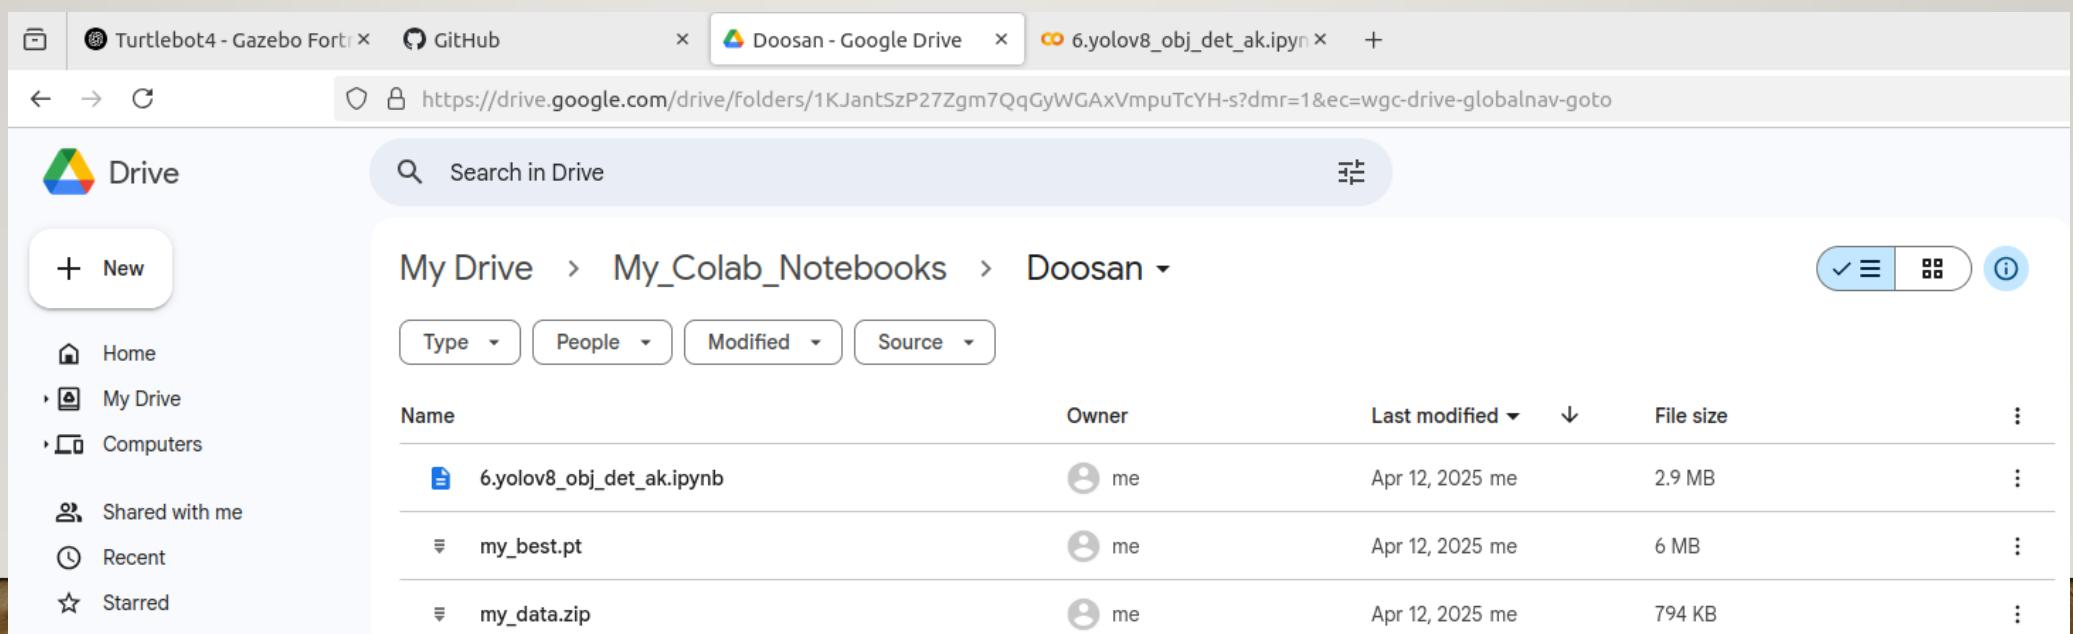

# USING GOOGLE COLAB TO CREATE CUSTOM MODEL

- Move the training script to google collab. and execute line by line

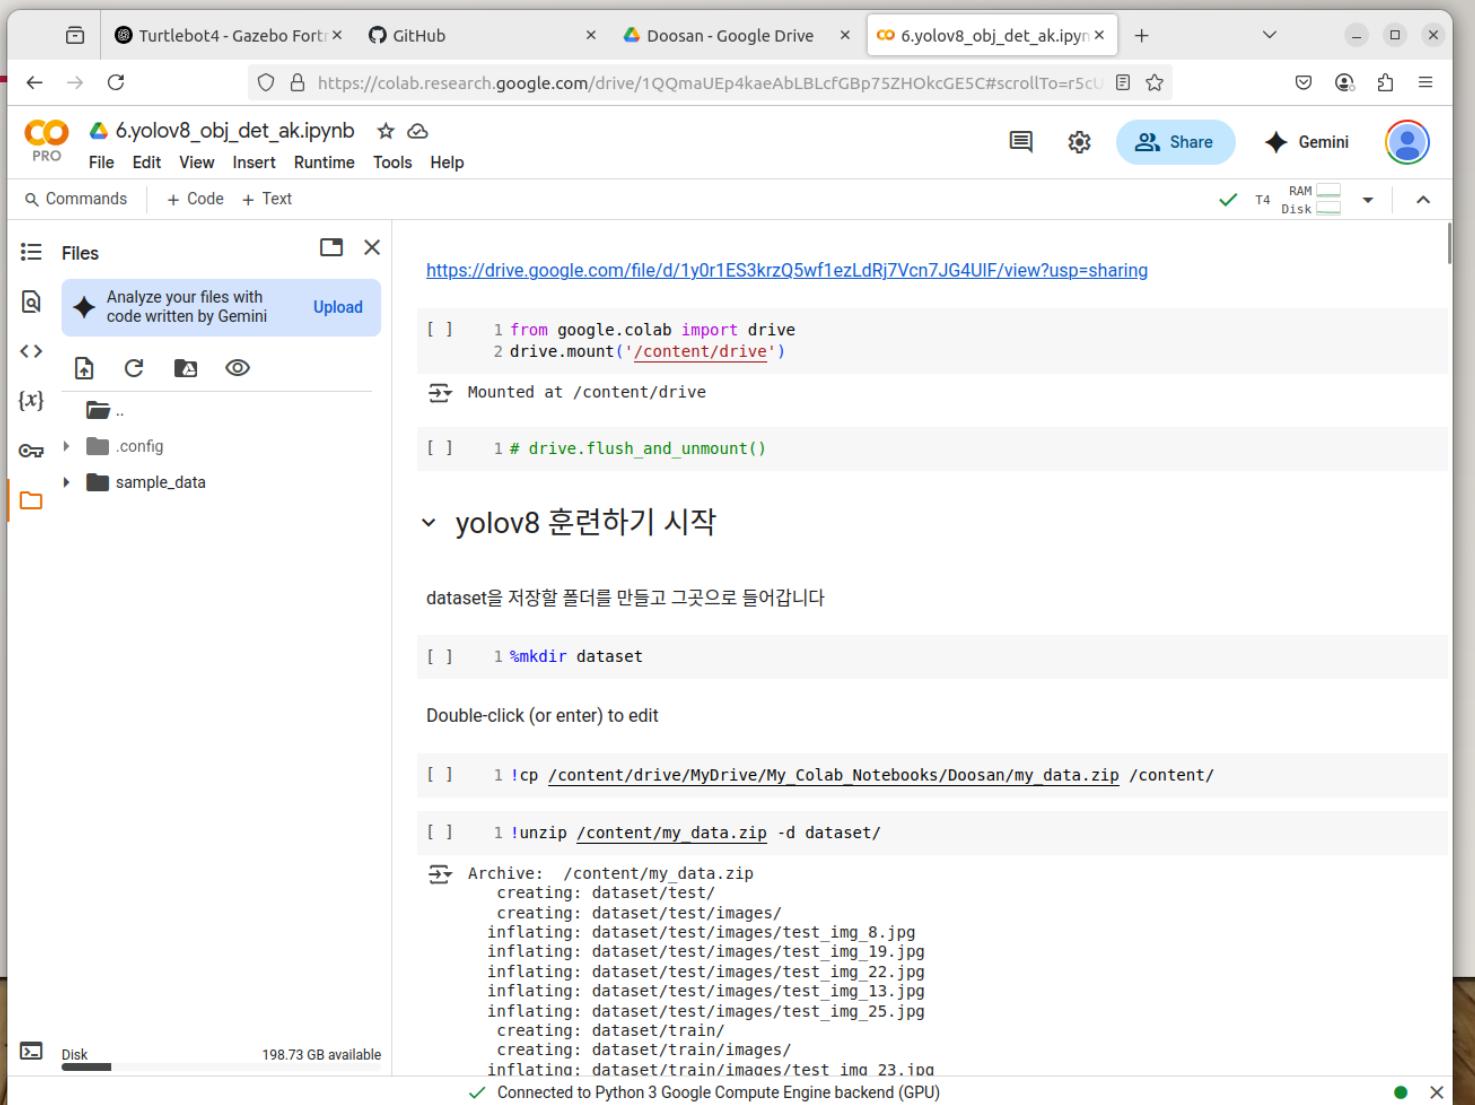

The screenshot shows a Google Colab notebook titled "6.yolov8\_obj\_det\_ak.ipynb". The sidebar displays a file tree with ".config" and "sample\_data" folders. The main area shows the following code execution:

```
https://drive.google.com/file/d/1y0r1ES3krzQ5wf1ezLdRj7Vcn7JG4UIF/view?usp=sharing

[ ] 1 from google.colab import drive
2 drive.mount('/content/drive')

↳ Mounted at /content/drive

[ ] 1 # drive.flush_and_unmount()

▽ yolov8 훈련하기 시작

dataset을 저장할 폴더를 만들고 그곳으로 들어갑니다

[ ] 1 %mkdir dataset

Double-click (or enter) to edit

[ ] 1 !cp /content/drive/MyDrive/My_Colab_Notebooks/Doosan/my_data.zip /content/

[ ] 1 !unzip /content/my_data.zip -d dataset/
↳ Archive: /content/my_data.zip
  creating: dataset/test/
  creating: dataset/test/images/
  inflating: dataset/test/images/test_img_8.jpg
  inflating: dataset/test/images/test_img_19.jpg
  inflating: dataset/test/images/test_img_22.jpg
  inflating: dataset/test/images/test_img_13.jpg
  inflating: dataset/test/images/test_img_25.jpg
  creating: dataset/train/
  creating: dataset/train/images/
  inflating: dataset/train/images/test_img_23.jpg

✓ Connected to Python 3 Google Compute Engine backend (GPU)
```

# CODING HINTS

---

- Image Capture
- Data Labelling
- Preprocessing
- Yolo8 Object Det (Analyze)



- ✚ 2\_3\_a\_create\_data\_dirs.py
- ✚ 2\_3\_b\_move\_image.py
- ✚ 2\_3\_c\_move\_labels.py
- ✚ 2\_4\_a\_yolov8\_obj\_det\_ak.ipynb
- ✚ 2\_4\_b\_gpu\_test.py
- ✚ 2\_4\_c\_compare\_yolo.py

# REQUIRED RESEARCH

---

1. 왜 yolov8n.pt 모델을 선정하였습니까?

- yolo 다른 버전과 비교 분석
- mAPVS Inference speed

2. 객체 탐지 속도를 높이기 위한 최선의 전략은?

- 데이터 사이즈
- processing 방식
- 노드 구조

3. 다른 Pre-trained model(Huggingface)을 사용한다면?

4. object detection이 아닌 segmentation, pose, obb 등을 활용할 수 없을까?

# CODING HINTS

---


- Image Capture
- Data Labelling
- Preprocessing
- Yolo8 Object Det (WEBCAM)




```
 2_4_a_yolov8_obj_det_ak.ipynb  
 2_4_b_gpu_test.py  
 2_4_c_compare_yolo.py  
 2_4_d_yolov8_obj_det_wc.py  
 2_4_e_yolo_publisher_wc.py  
 2_4_f_yolo_subscriber_wc.py
```

# YOLO OBJ. DET. VS. YOLO TRACKING

---

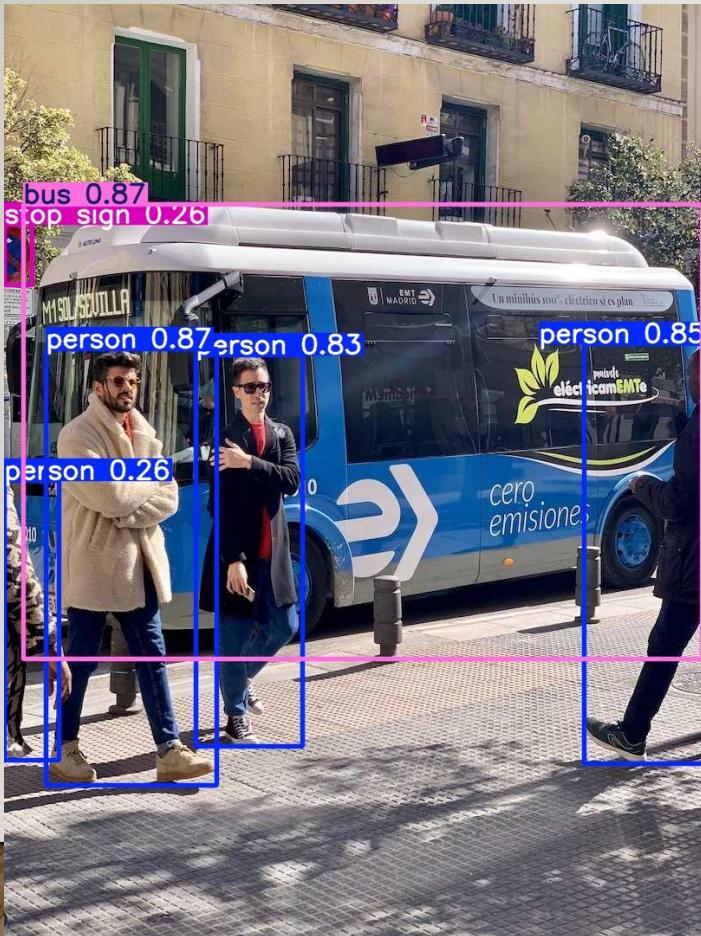

- [Track - Ultralytics YOLO Docs](#)
  - [\(469\) YOLO people detection + SORT tracking – YouTube](#)
  - [Bing Videos](#)

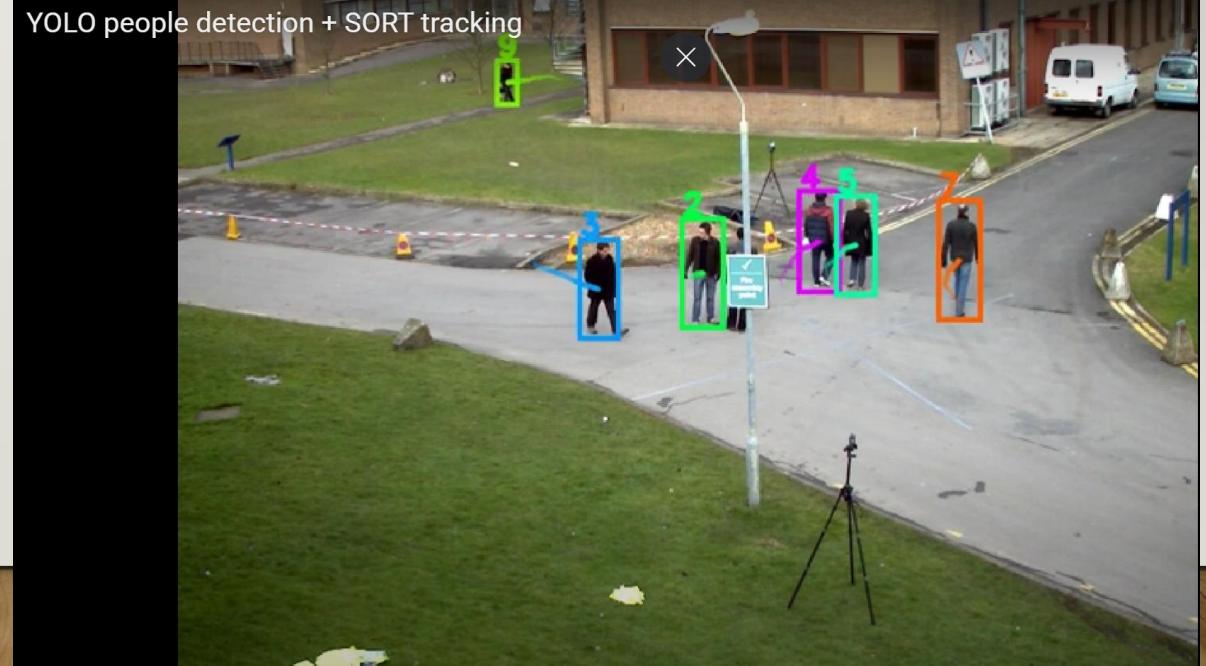

# CODING HINTS

---

- Image Capture
- Data Labelling
- Preprocessing
- Yolo8 Object Det (AMR)



- 2\_4\_a\_yolov8\_obj\_det\_ak.ipynb
- 2\_4\_b\_gpu\_test.py
- 2\_4\_c\_compare\_yolo.py
- 2\_4\_d\_yolov8\_obj\_det\_wc.py
- 2\_4\_e\_yolo\_publisher\_wc.py
- 2\_4\_f\_yolo\_subscriber\_wc.py
- 2\_4\_g\_yolov8\_obj\_det.py
- 2\_4\_h\_yolov8\_obj\_det\_thread.py
- 2\_4\_i\_yolov8\_obj\_det\_track.py

# OBJECT DETECTION EXERCISE

---

Create a version of real time yolo inference code that **publish a ROS topic with annotated image of detection results and view it with rqt or rviz**

# HOMEWORK

---

- **Achieve aligned RGB & Depth FOV**
- Object Detection
  - Collect various datasets (i.e. different topics/images sizes)
  - Create various models (i.e. v5, v8, v11, etc; arg: Epoch, Batch, ImgSz, augmentation, etc)
  - Analyze the results
  - Determine using key metrics which model best fit your solution
  - Using .pt file to predict/inference on pc
  - **Successfully publish the annotated image topic**
- Depth
  - **Find and display the distance to the center of the detected objects**
- Update System Requirement

# 프로젝트 RULE NUMBER ONE!!!

---

Are we still having  
FUN!

