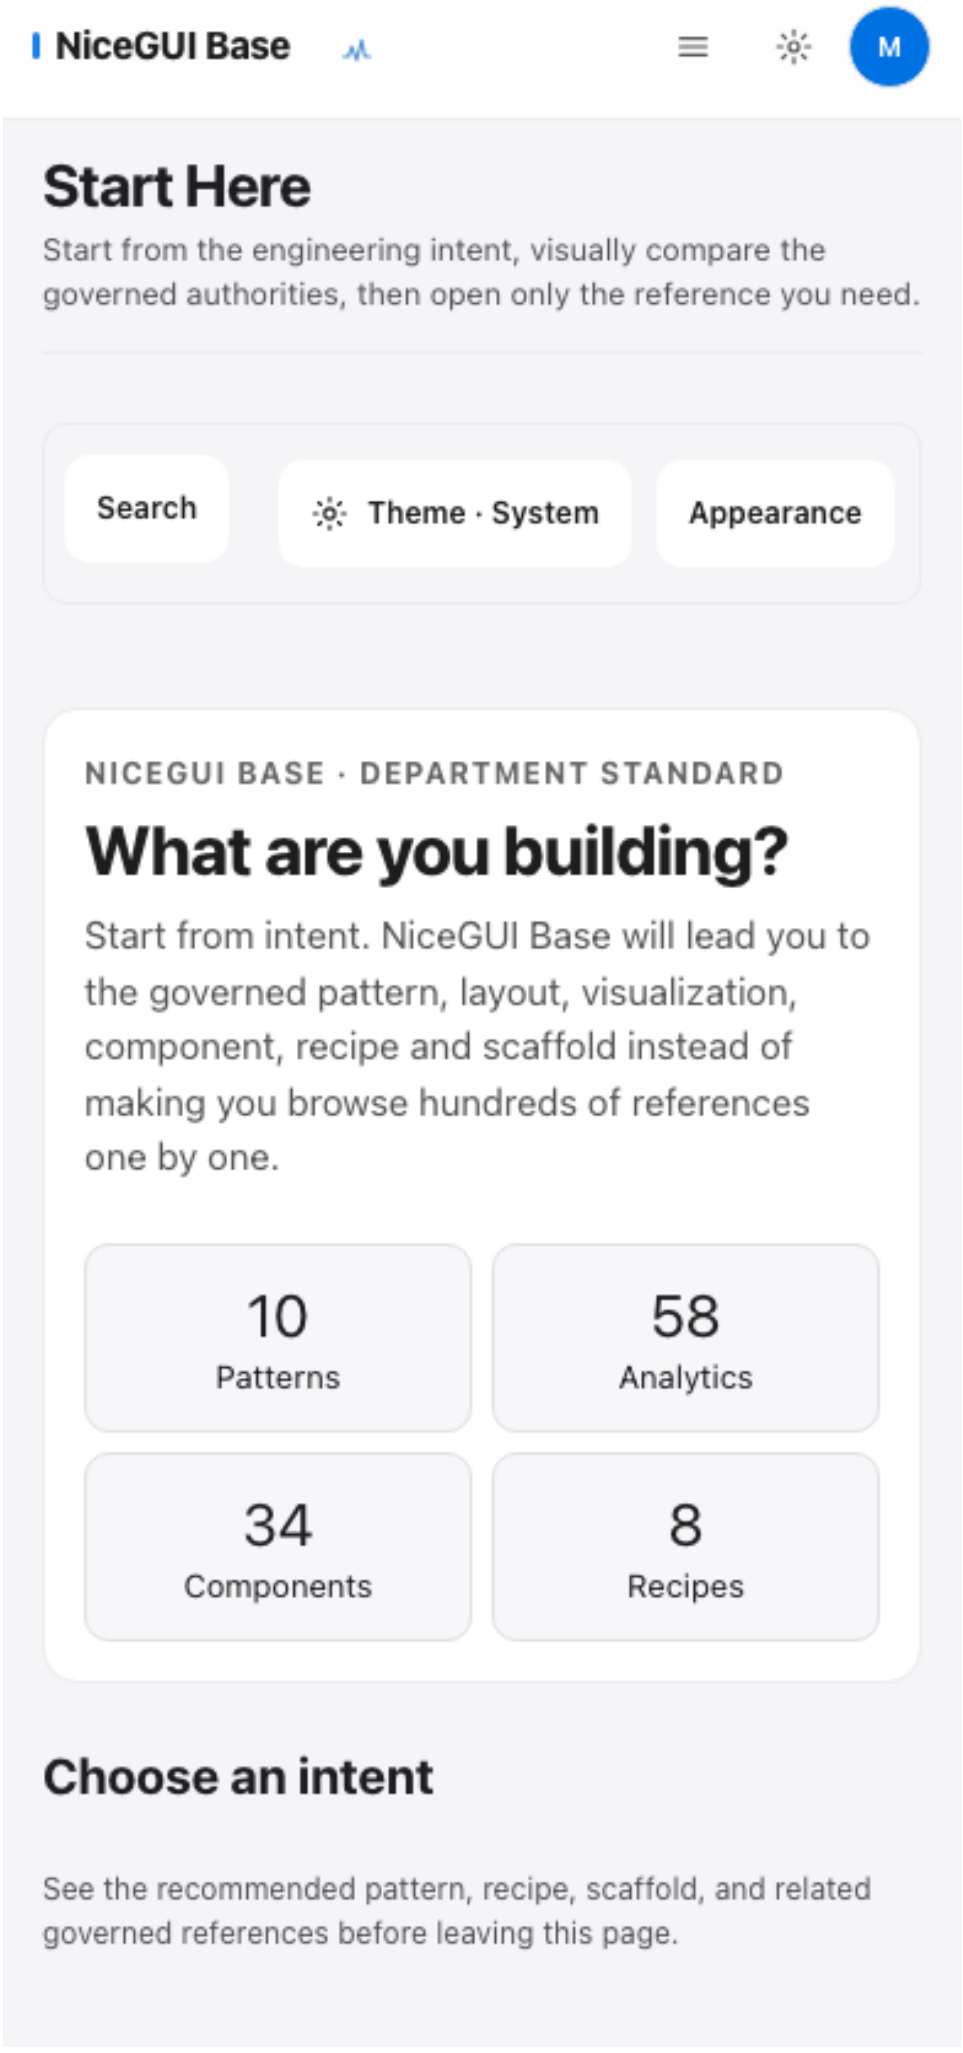
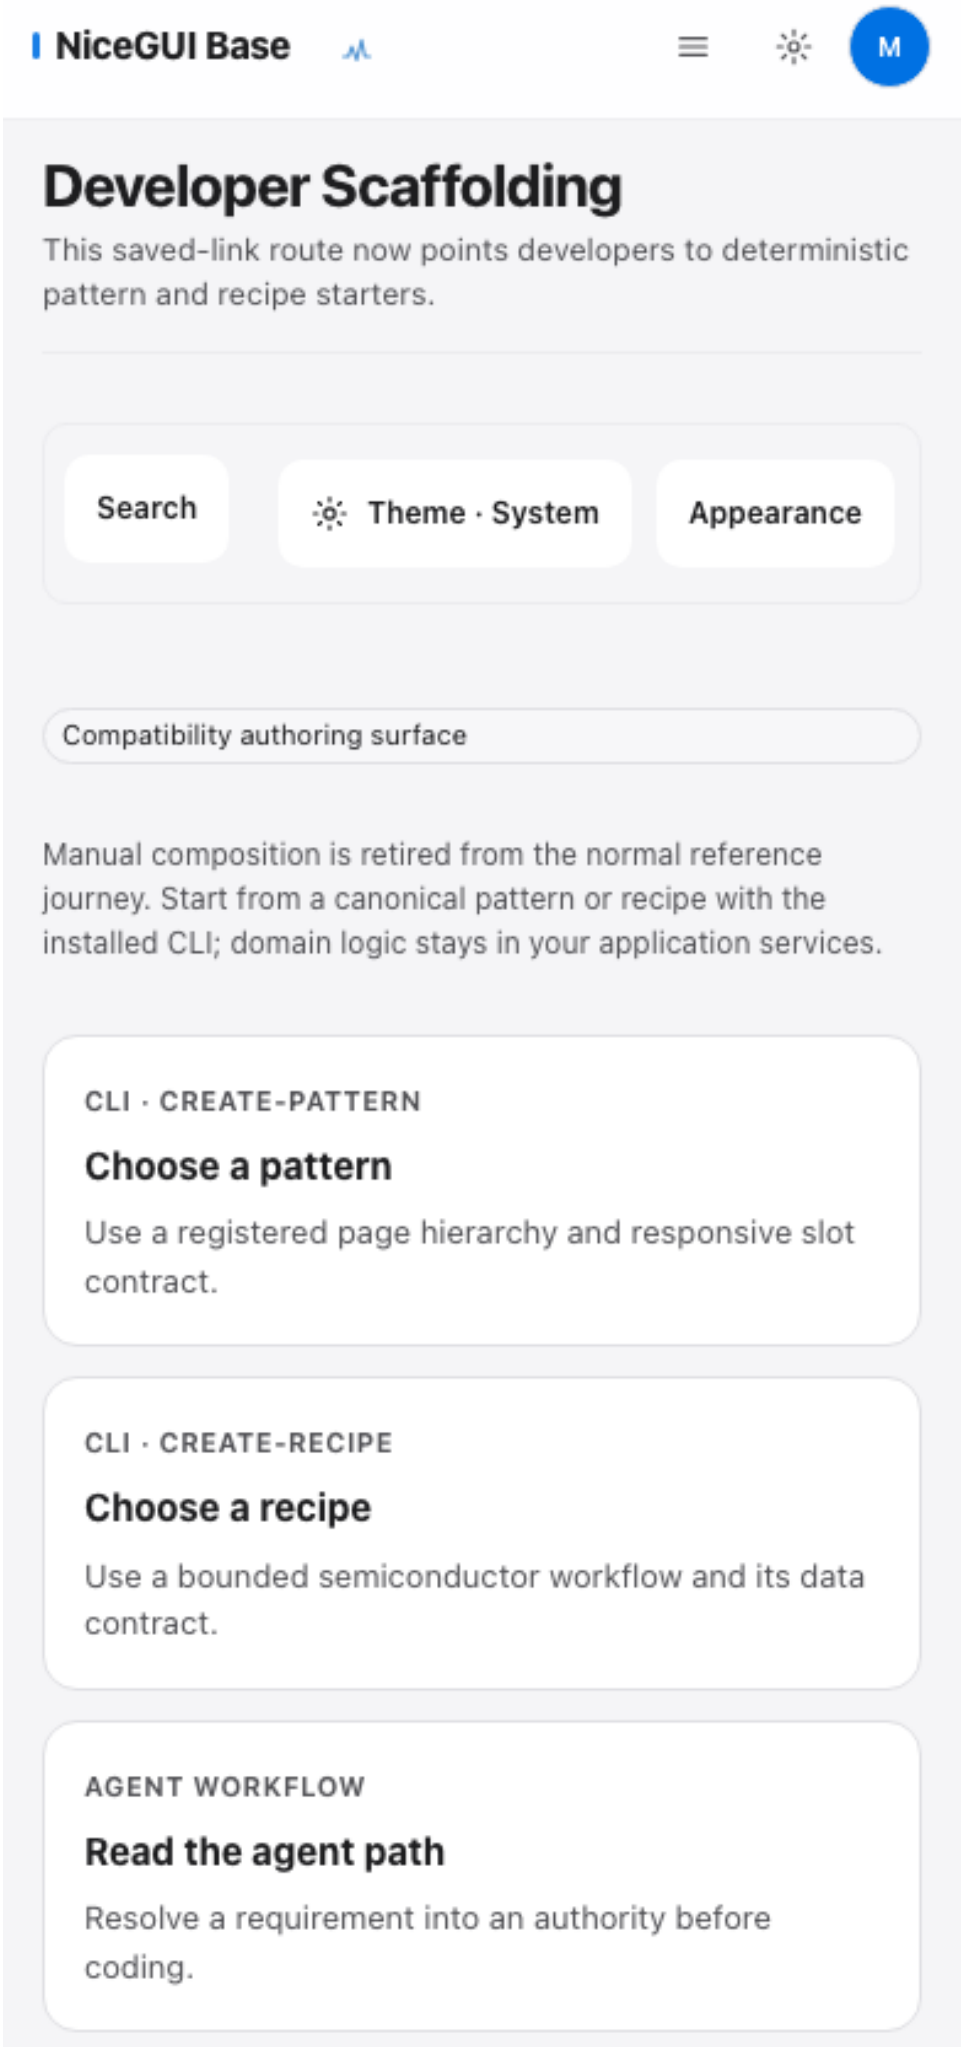
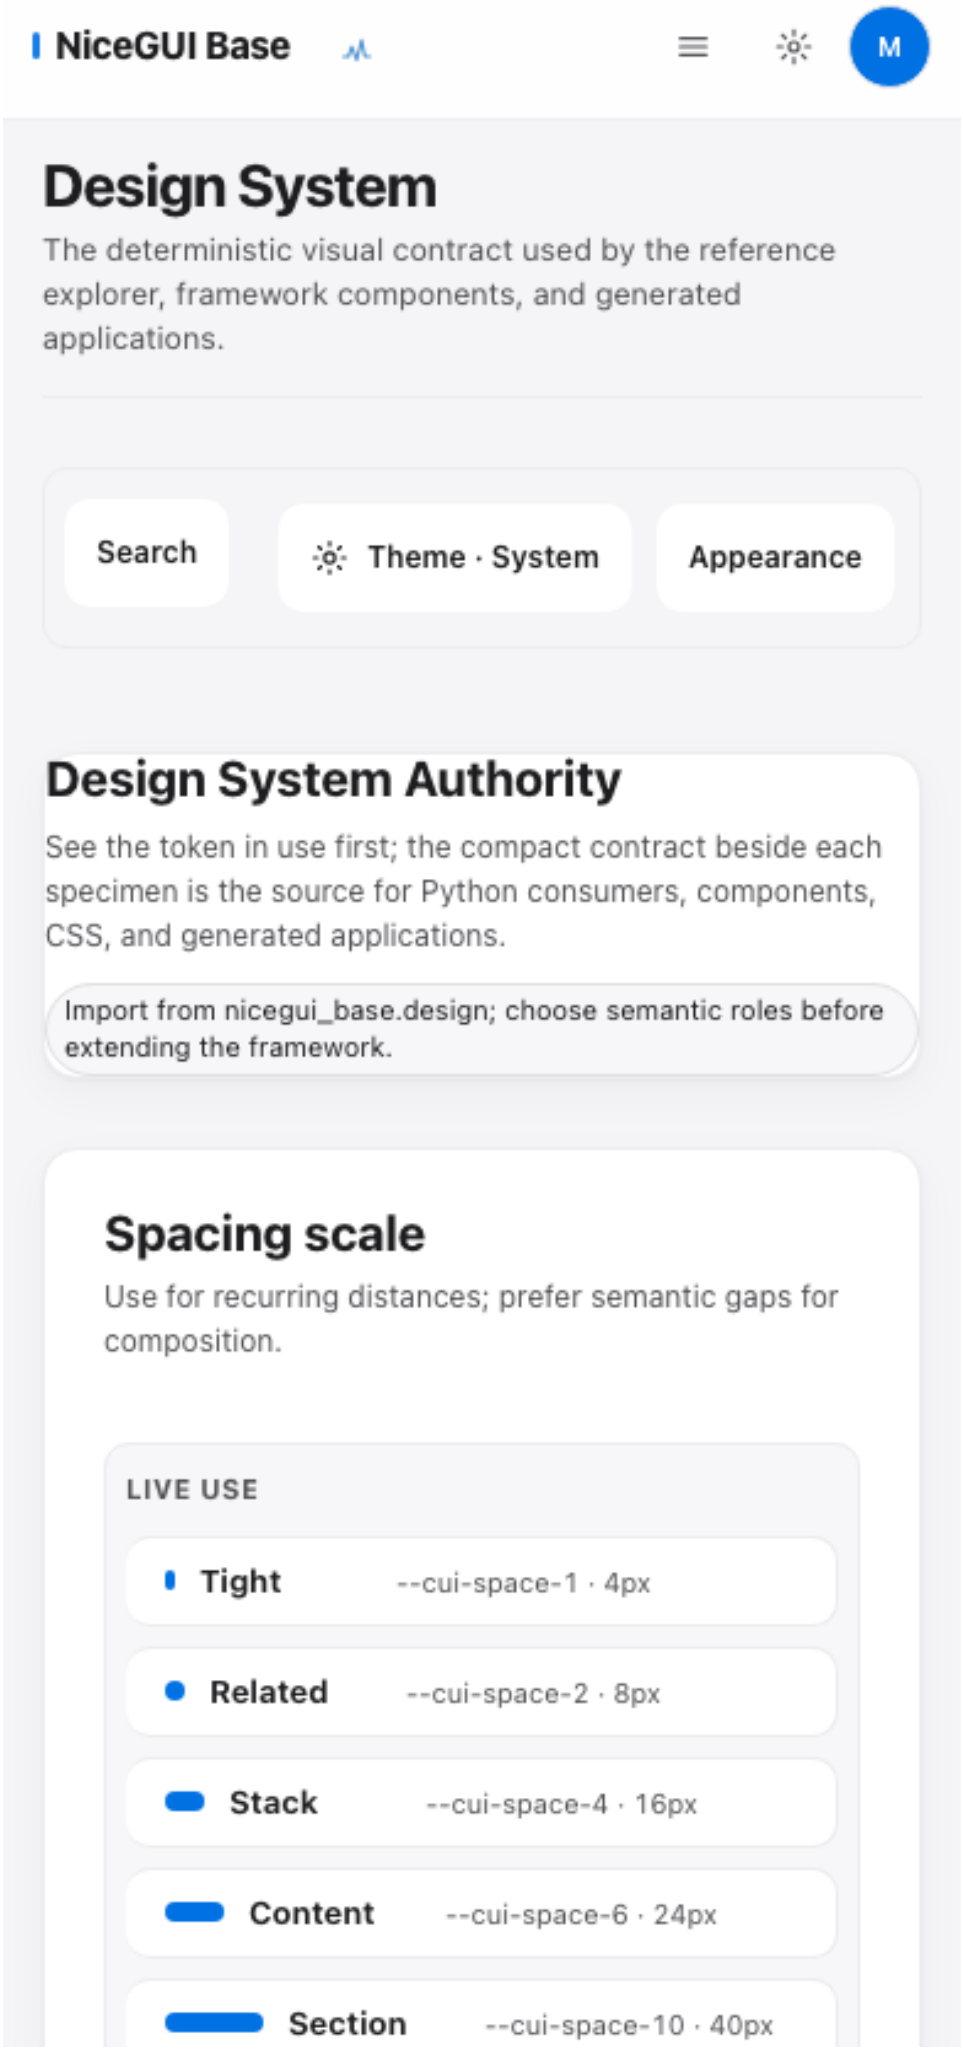
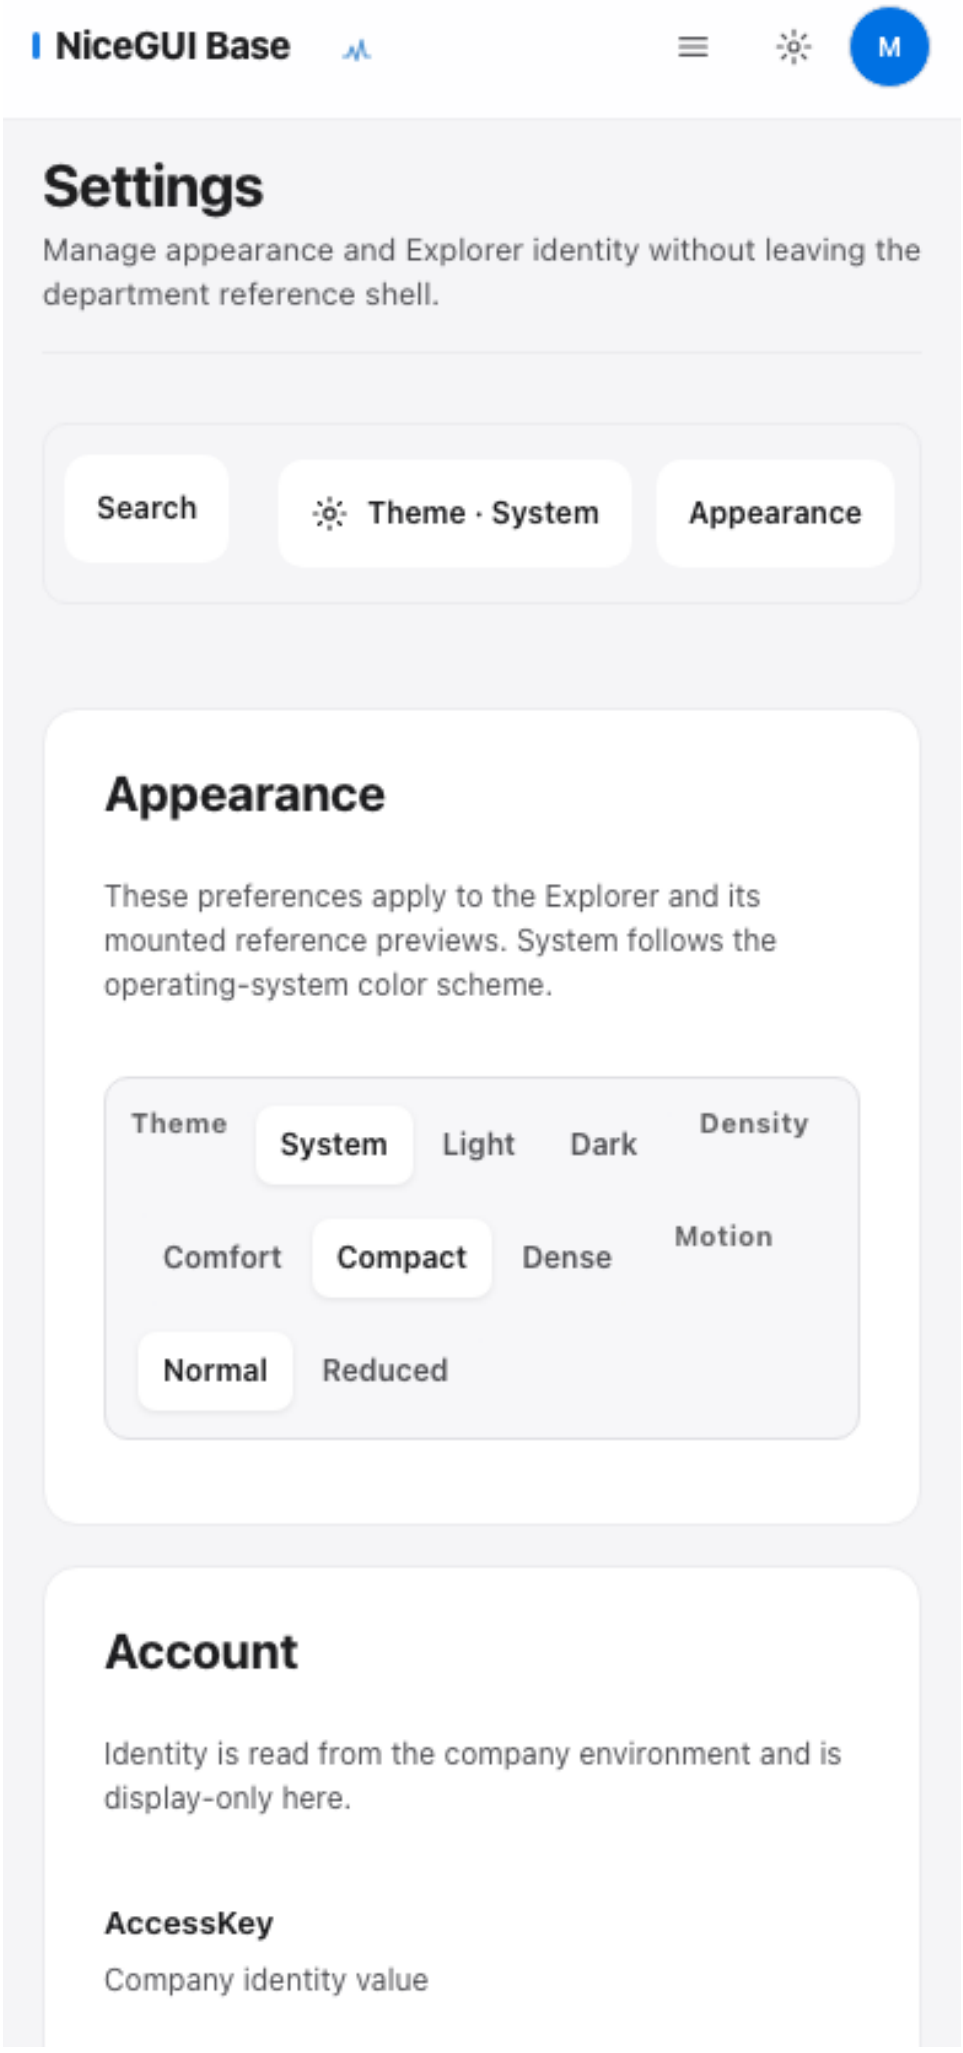
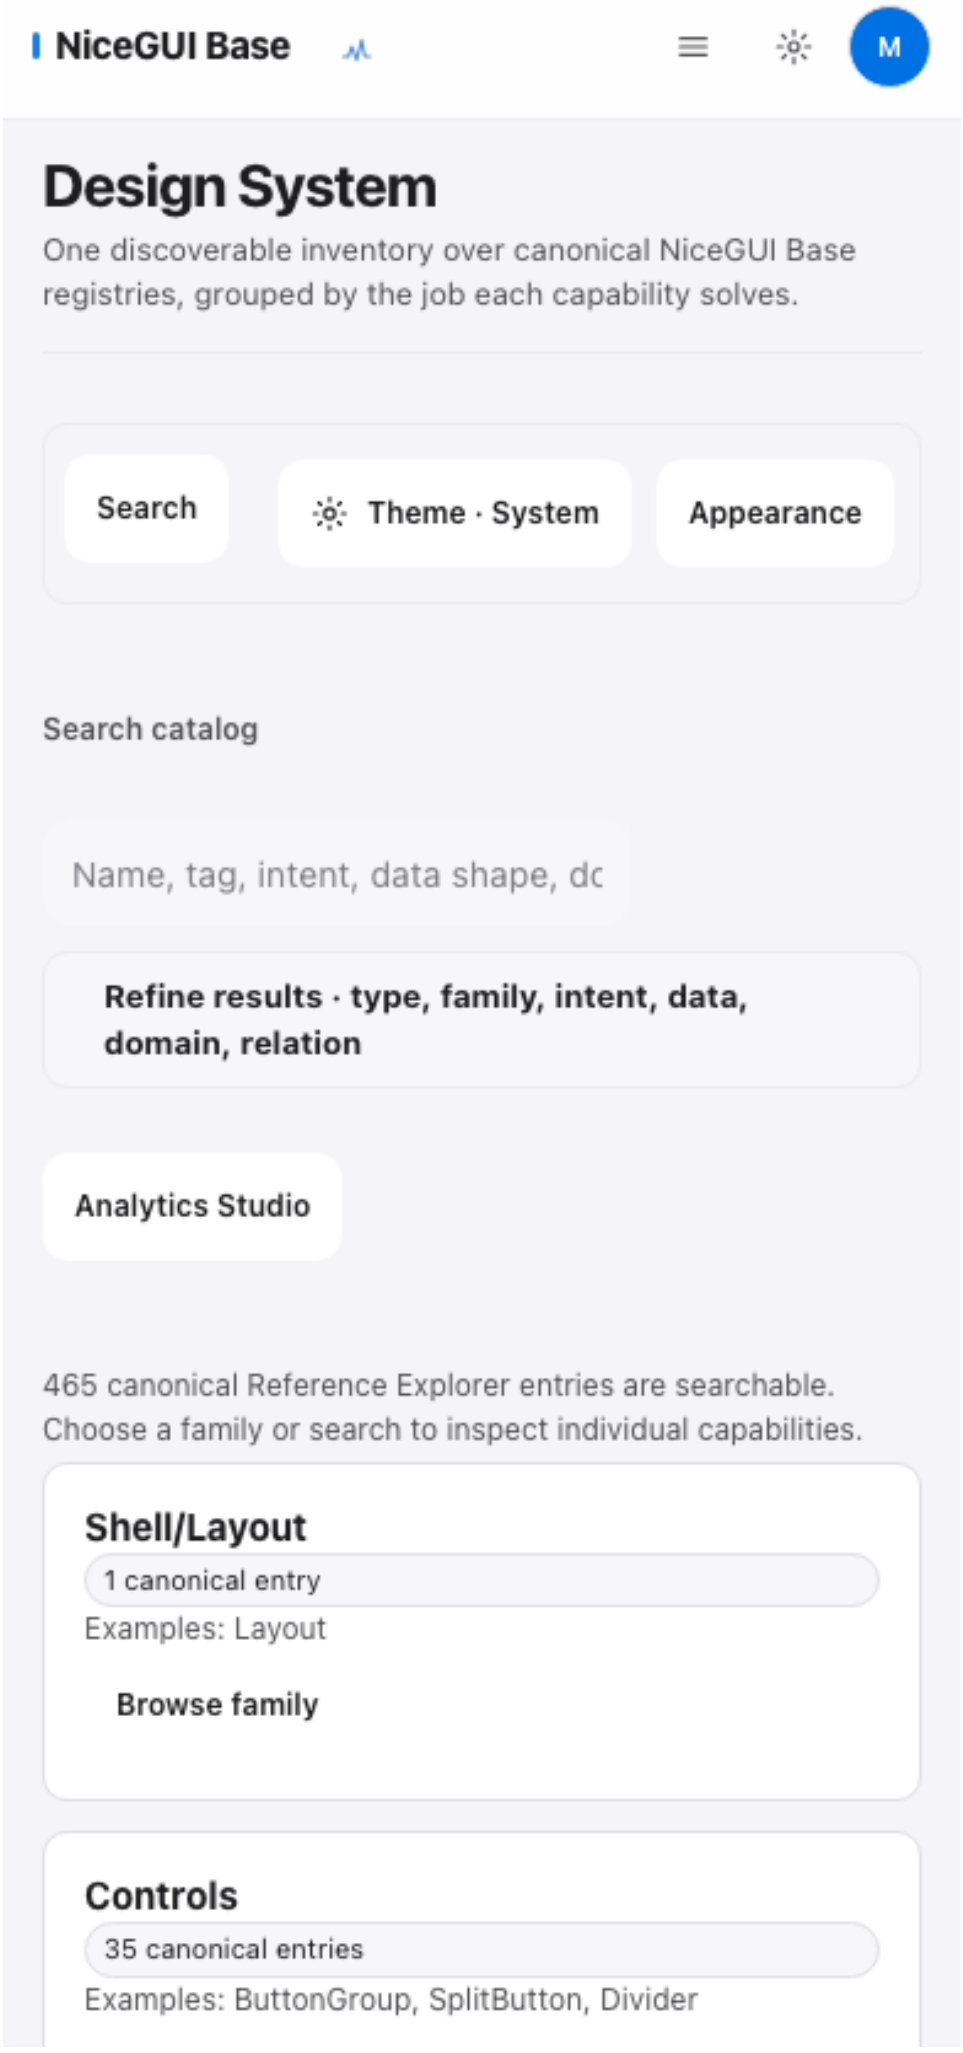
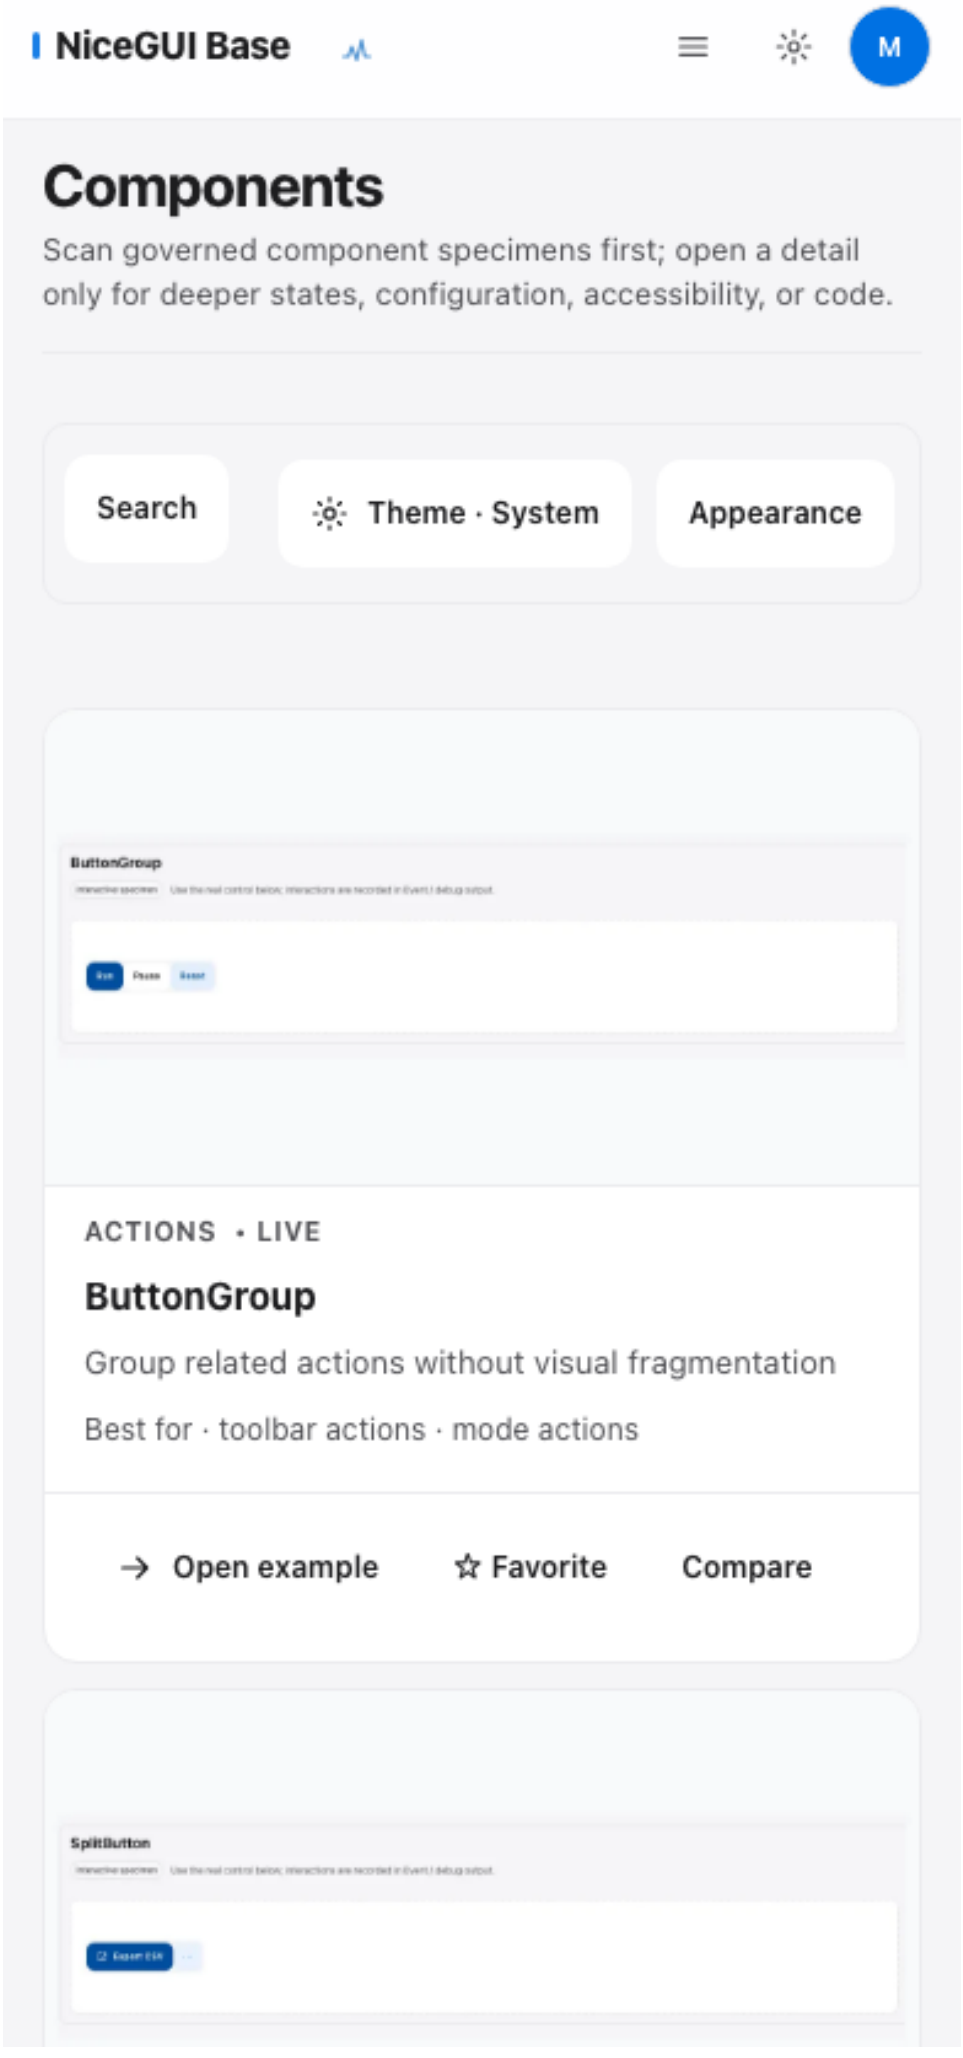

NiceGUI Base
M
Start Here
Start from the engineering intent, visually compare the governed authorities, then open only the reference you need.
Search
Theme · System
Appearance
NICEGUI BASE · DEPARTMENT STANDARD
What are you building?
Start from intent. NiceGUI Base will lead you to the governed pattern, layout, visualization, component, recipe and scaffold instead of making you browse hundreds of references one by one.
10
Patterns
58
Analytics
34
Components
8
Recipes
Choose an intent
See the recommended pattern, recipe, scaffold, and related governed references before leaving this page.

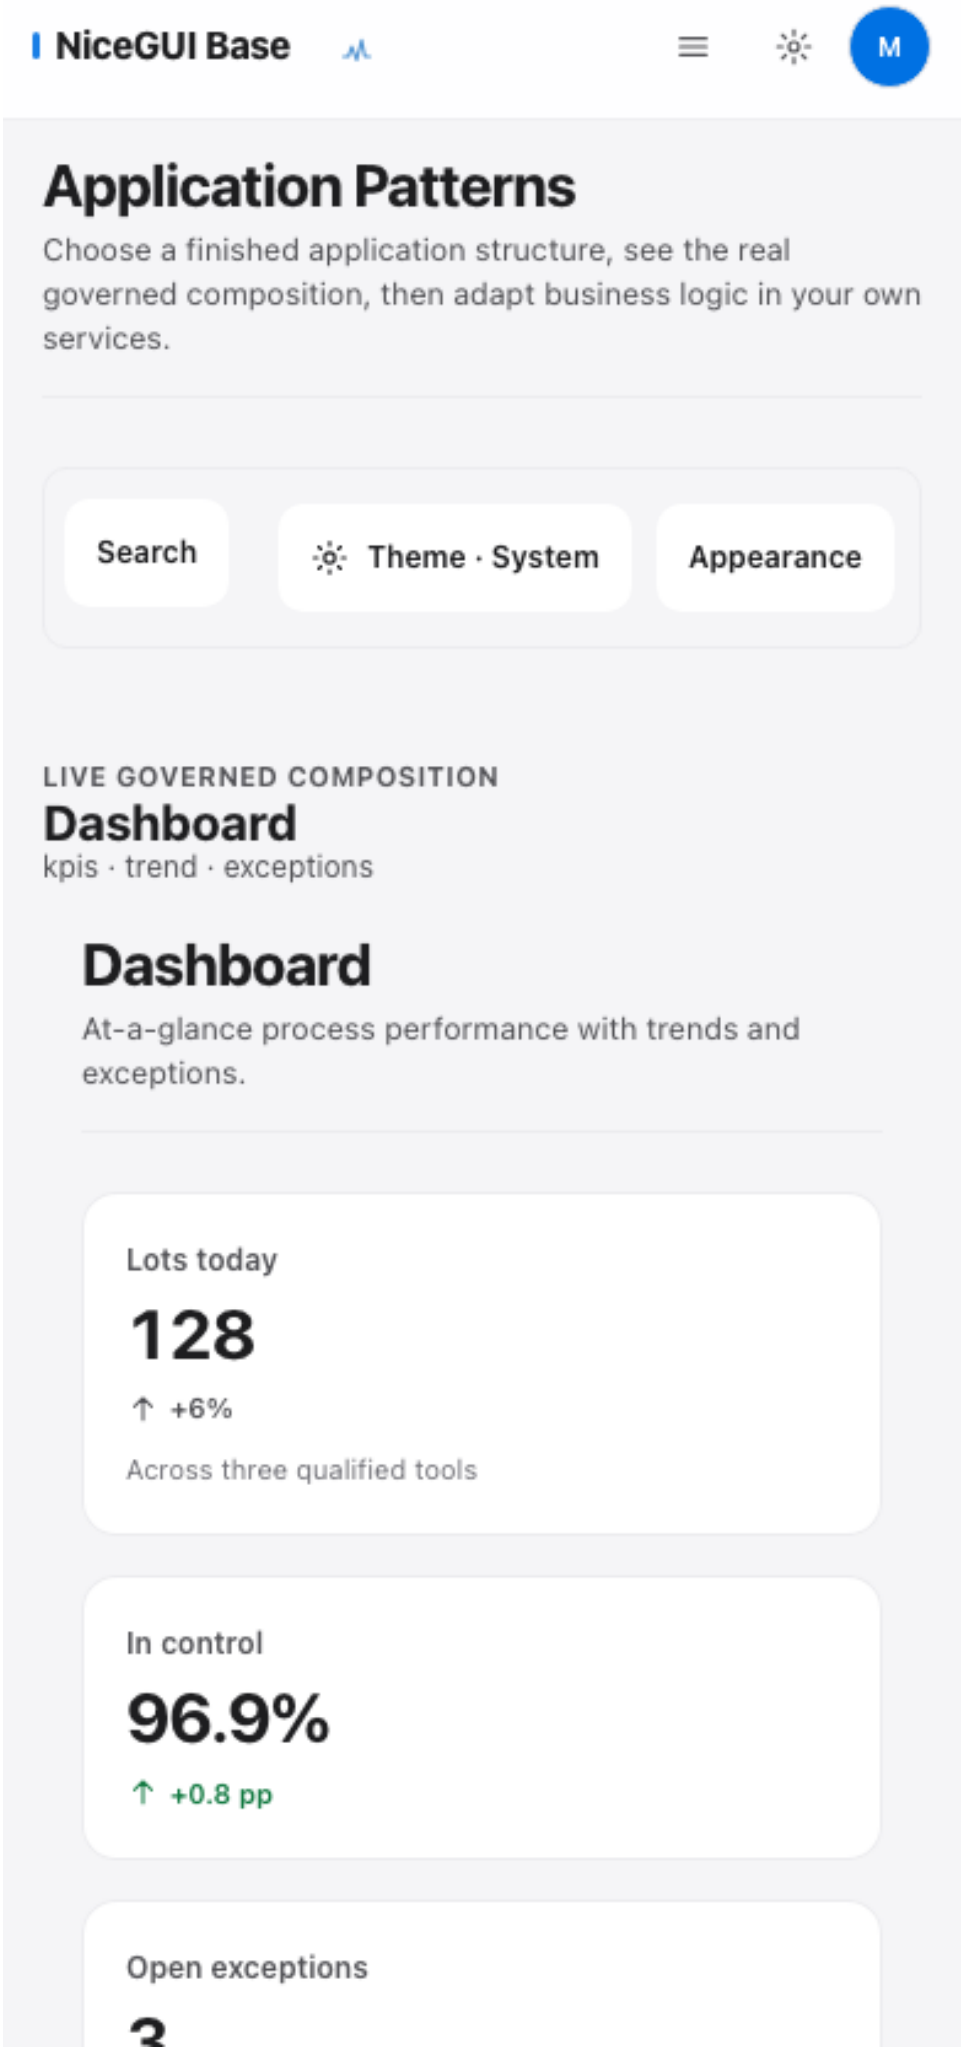

NiceGUI Base
M
Developer Scaffolding
This saved-link route now points developers to deterministic pattern and recipe starters.
Search
Theme · System
Appearance
Compatibility authoring surface
Manual composition is retired from the normal reference journey. Start from a canonical pattern or recipe with the installed CLI; domain logic stays in your application services.
CLI · CREATE-PATTERN
Choose a pattern
Use a registered page hierarchy and responsive slot contract.
CLI · CREATE-RECIPE
Choose a recipe
Use a bounded semiconductor workflow and its data contract.
AGENT WORKFLOW
Read the agent path
Resolve a requirement into an authority before coding.


NiceGUI Base
M
Design System
The deterministic visual contract used by the reference explorer, framework components, and generated applications.
Search
Theme · System
Appearance
Design System Authority
See the token in use first; the compact contract beside each specimen is the source for Python consumers, components, CSS, and generated applications.
Import from nicegui_base.design; choose semantic roles before extending the framework.
Spacing scale
Use for recurring distances; prefer semantic gaps for composition.
LIVE USE
Tight --cui-space-1 · 4px
Related --cui-space-2 · 8px
Stack --cui-space-4 · 16px
Content --cui-space-6 · 24px
Section --cui-space-10 · 40px


NiceGUI Base
M
Settings
Manage appearance and Explorer identity without leaving the department reference shell.
Search
Theme · System
Appearance
Appearance
These preferences apply to the Explorer and its mounted reference previews. System follows the operating-system color scheme.
Theme
System
Light
Dark
Density
Comfort
Compact
Dense
Motion
Normal
Reduced
Account
Identity is read from the company environment and is display-only here.
AccessKey
Company identity value


NiceGUI Base
M
Design System
One discoverable inventory over canonical NiceGUI Base registries, grouped by the job each capability solves.
Search
Theme · System
Appearance
Search catalog
Name, tag, intent, data shape, dc
Refine results · type, family, intent, data, domain, relation
Analytics Studio
465 canonical Reference Explorer entries are searchable. Choose a family or search to inspect individual capabilities.
Shell/Layout
1 canonical entry
Examples: Layout
Browse family
Controls
35 canonical entries
Examples: ButtonGroup, SplitButton, Divider


NiceGUI Base
M
Components
Scan governed component specimens first; open a detail only for deeper states, configuration, accessibility, or code.
Search
Theme · System
Appearance
ACTIONS • LIVE
ButtonGroup
Group related actions without visual fragmentation
Best for · toolbar actions · mode actions
Open example
Favorite
Compare
SplitButton


NiceGUI Base
M
Application Patterns
Choose a finished application structure, see the real governed composition, then adapt business logic in your own services.
Search
Theme · System
Appearance
LIVE GOVERNED COMPOSITION
Dashboard
kpis · trend · exceptions
Dashboard
At-a-glance process performance with trends and exceptions.
Lots today
128
↑ +6%
Across three qualified tools
In control
96.9%
↑ +0.8 pp
Open exceptions
3

NiceGUI Base

M

Visualizations

See what all 58 governed analytical surfaces actually look like before opening a full interactive reference.

Search

Theme · System

Appearance



SPC • LIVE

SPC I-MR

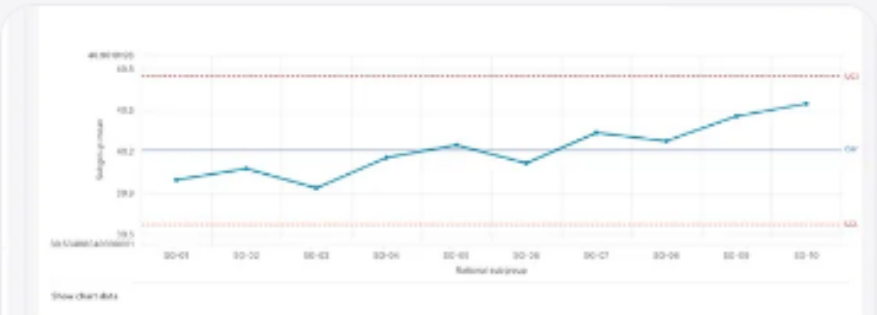
Individuals and moving-range control chart

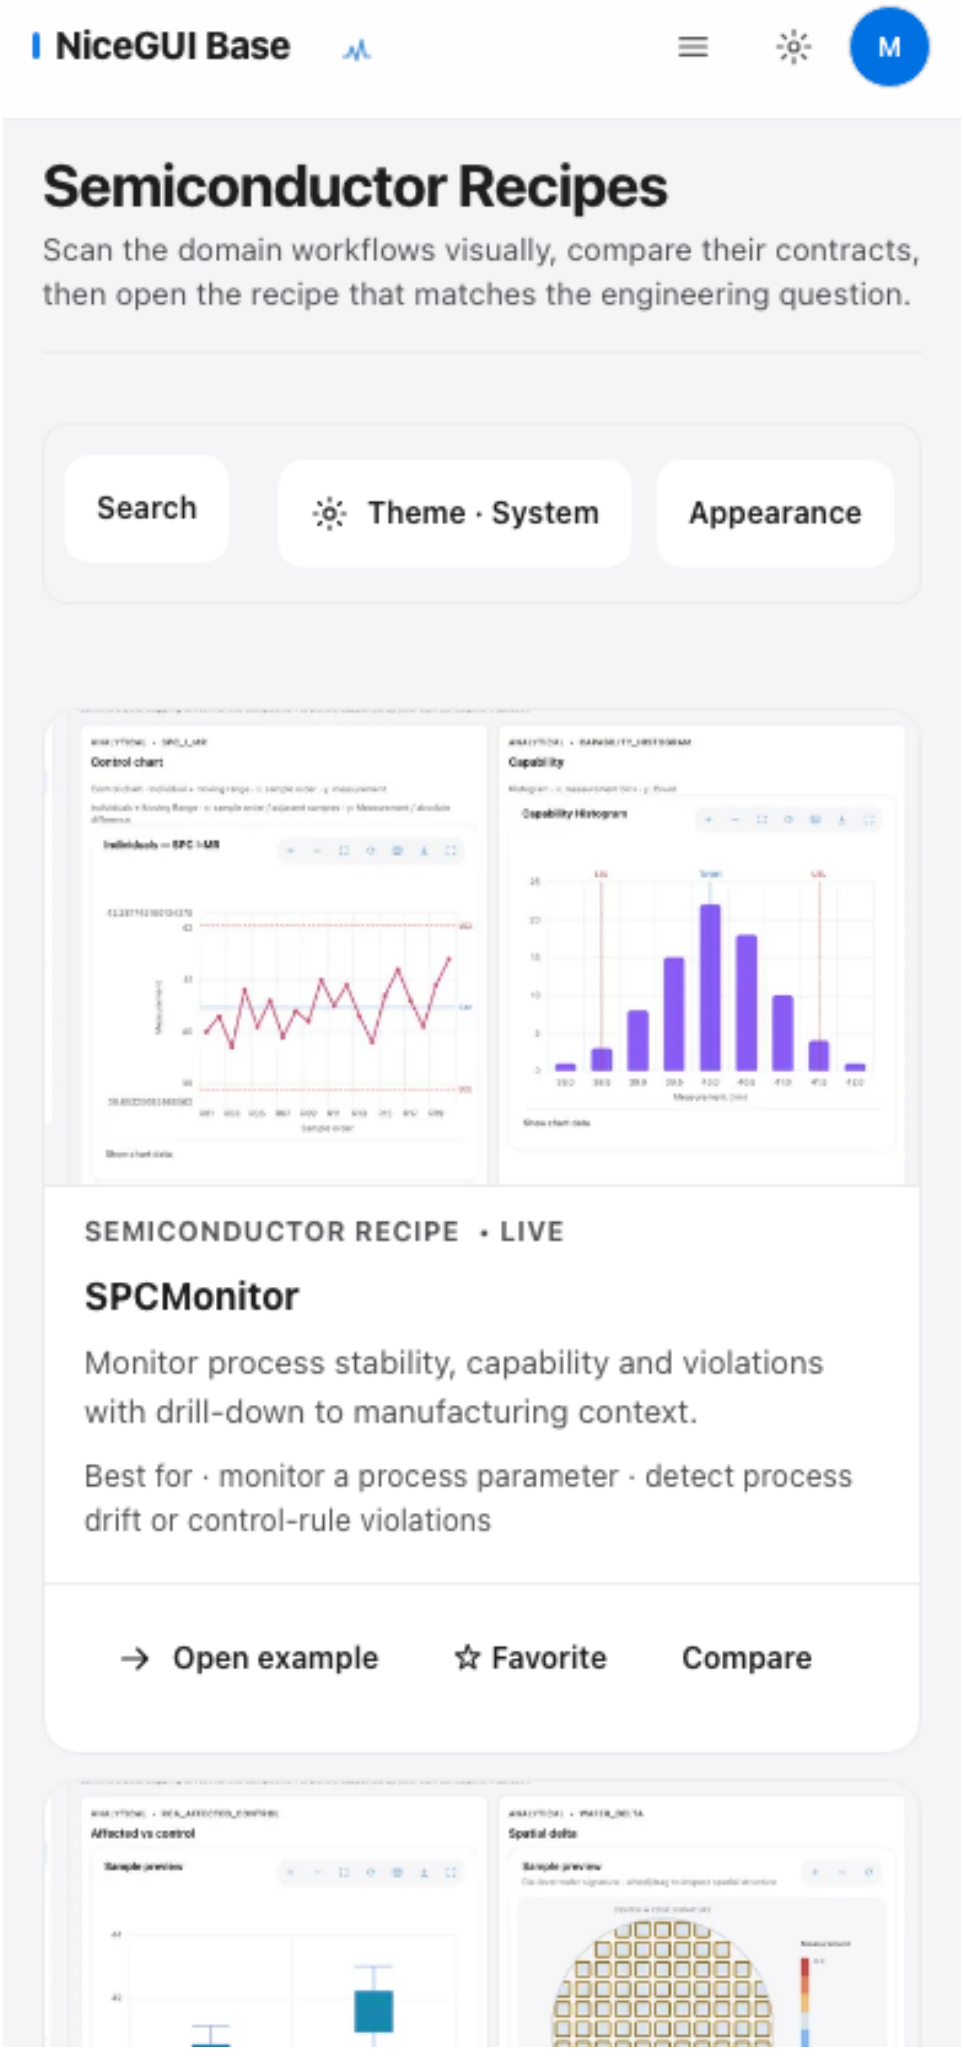
Best for · continuous measurements without rational subgroups

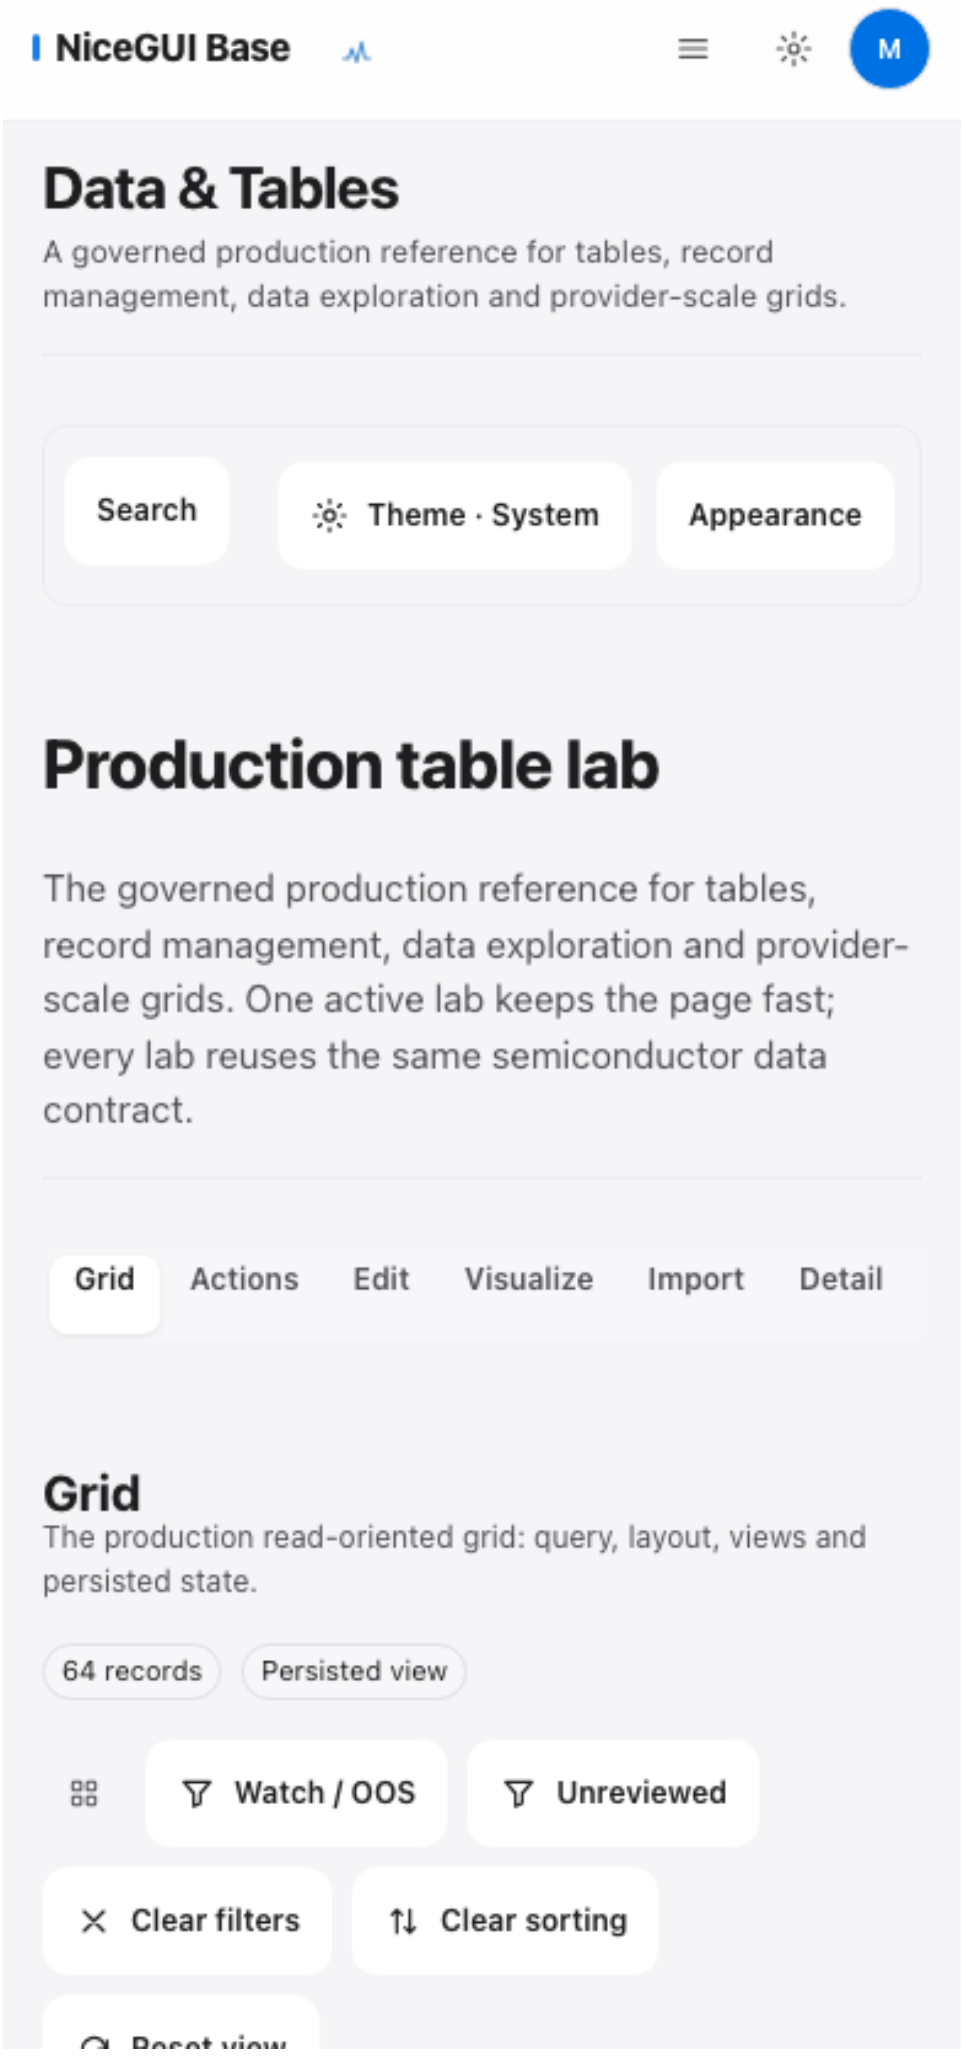
→ Open example

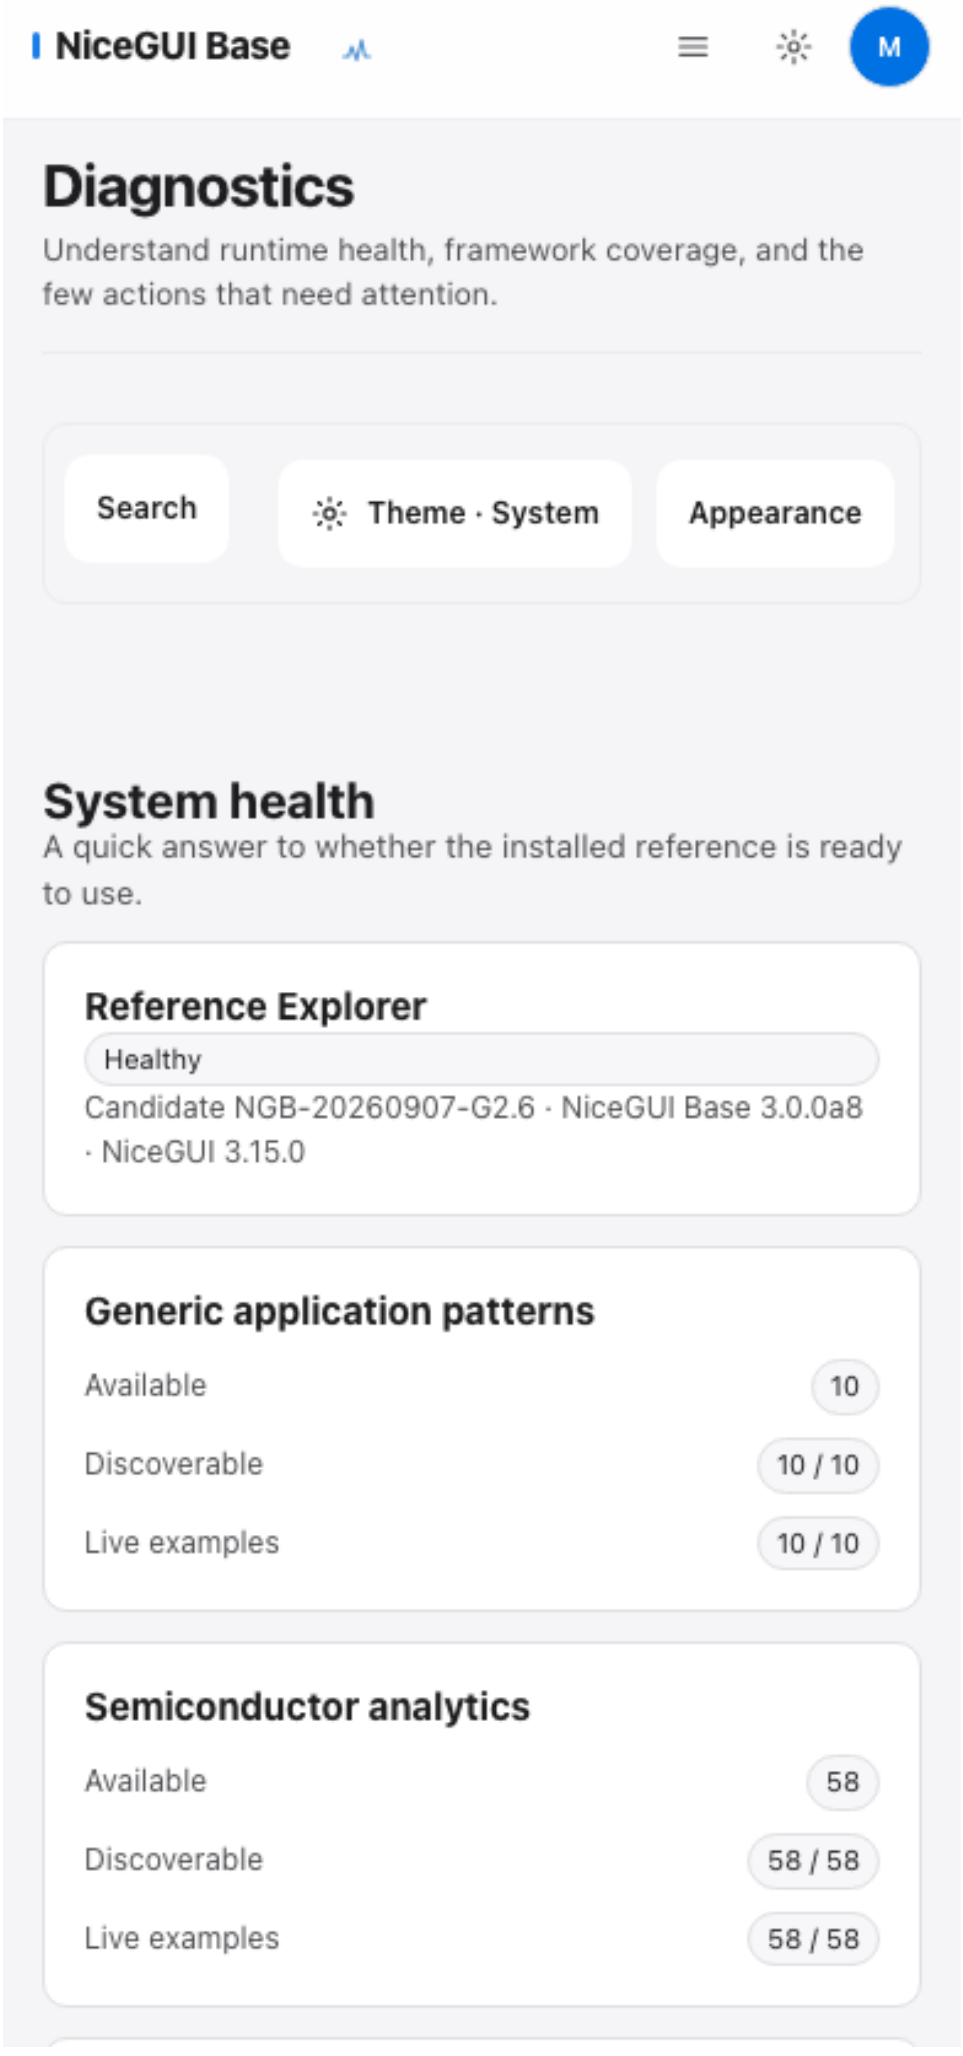
☆ Favorite

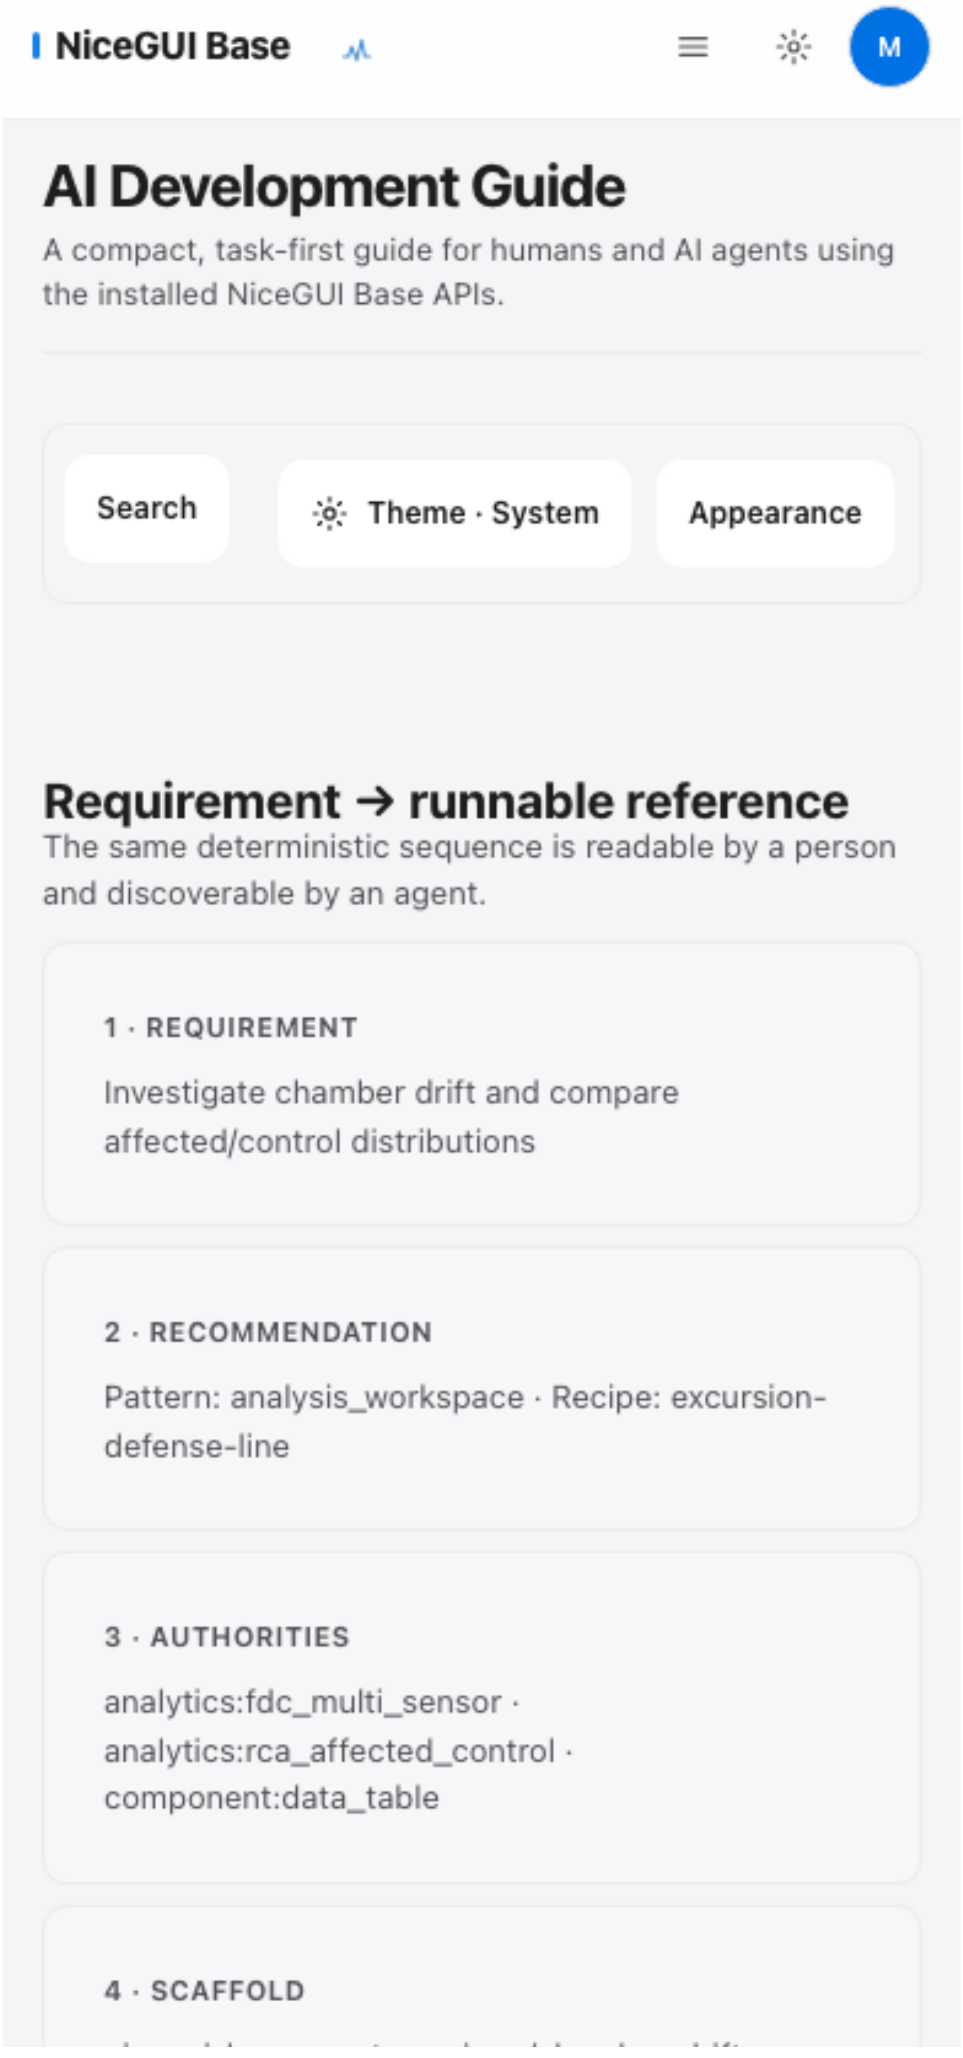
Compare

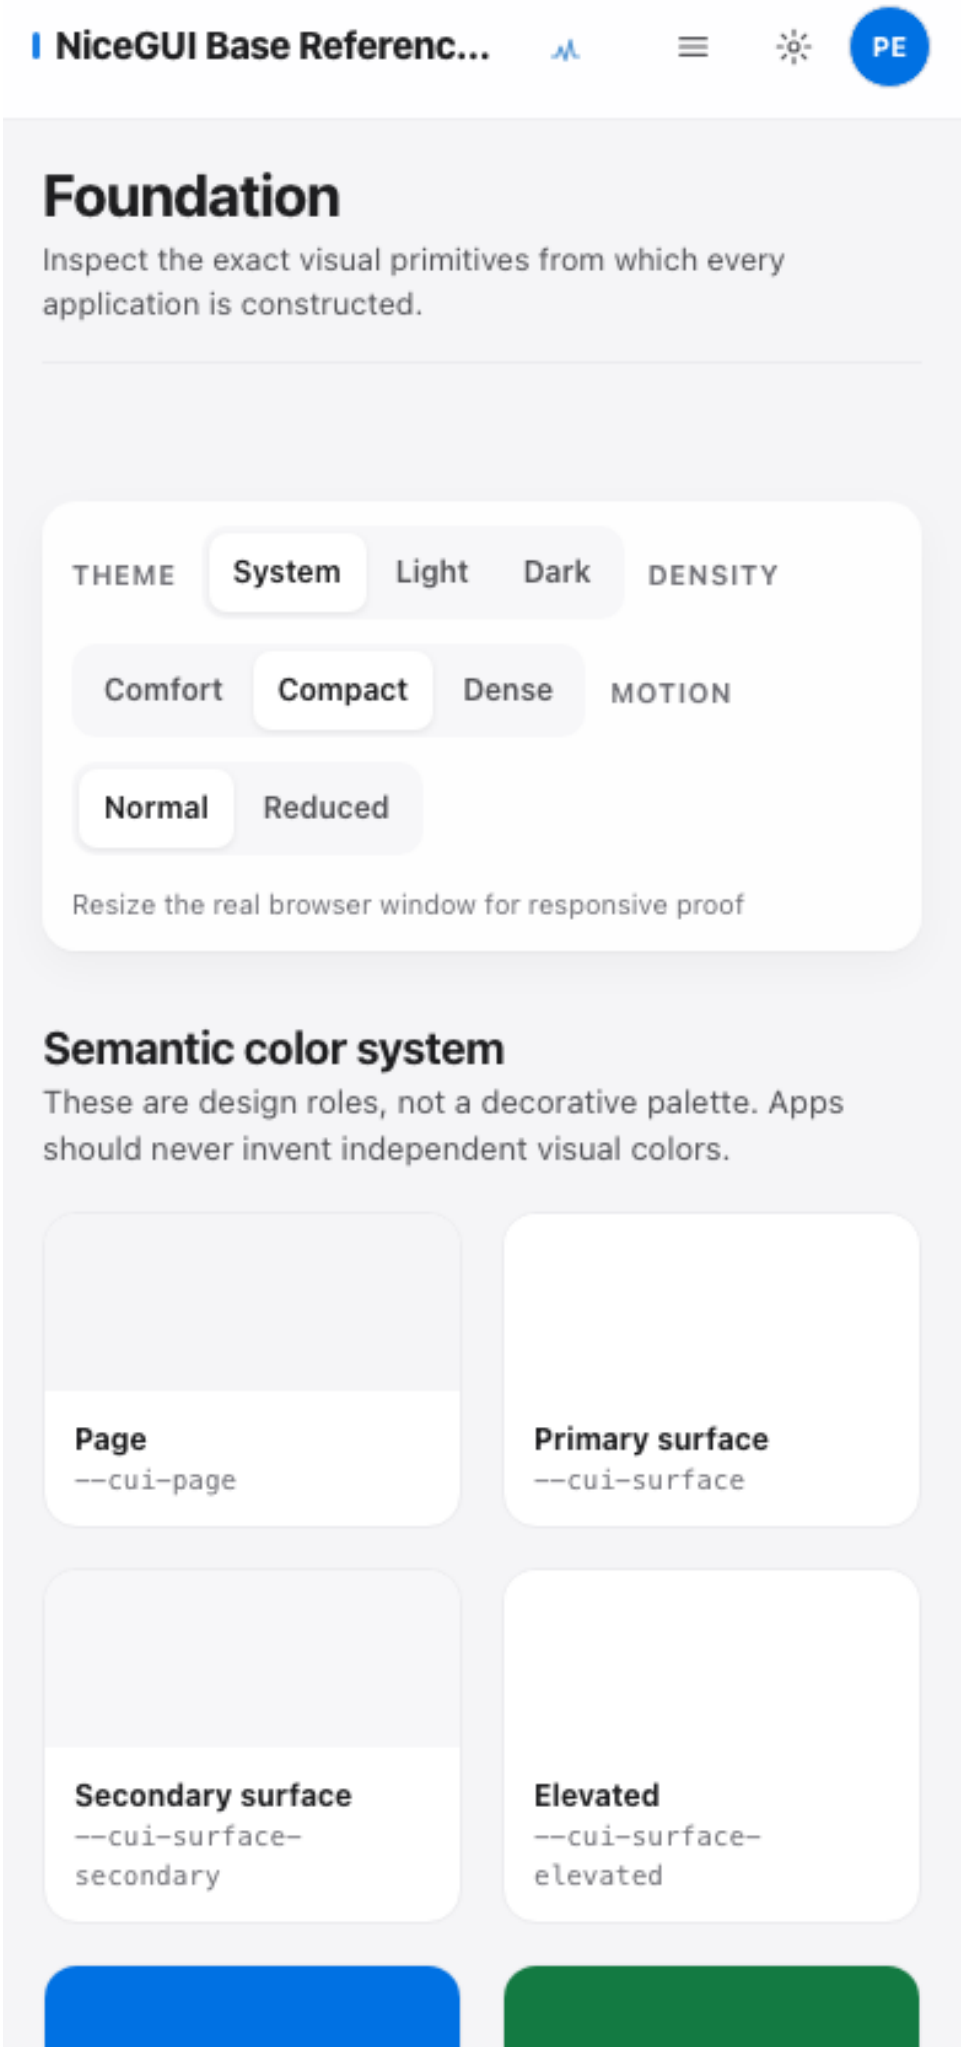


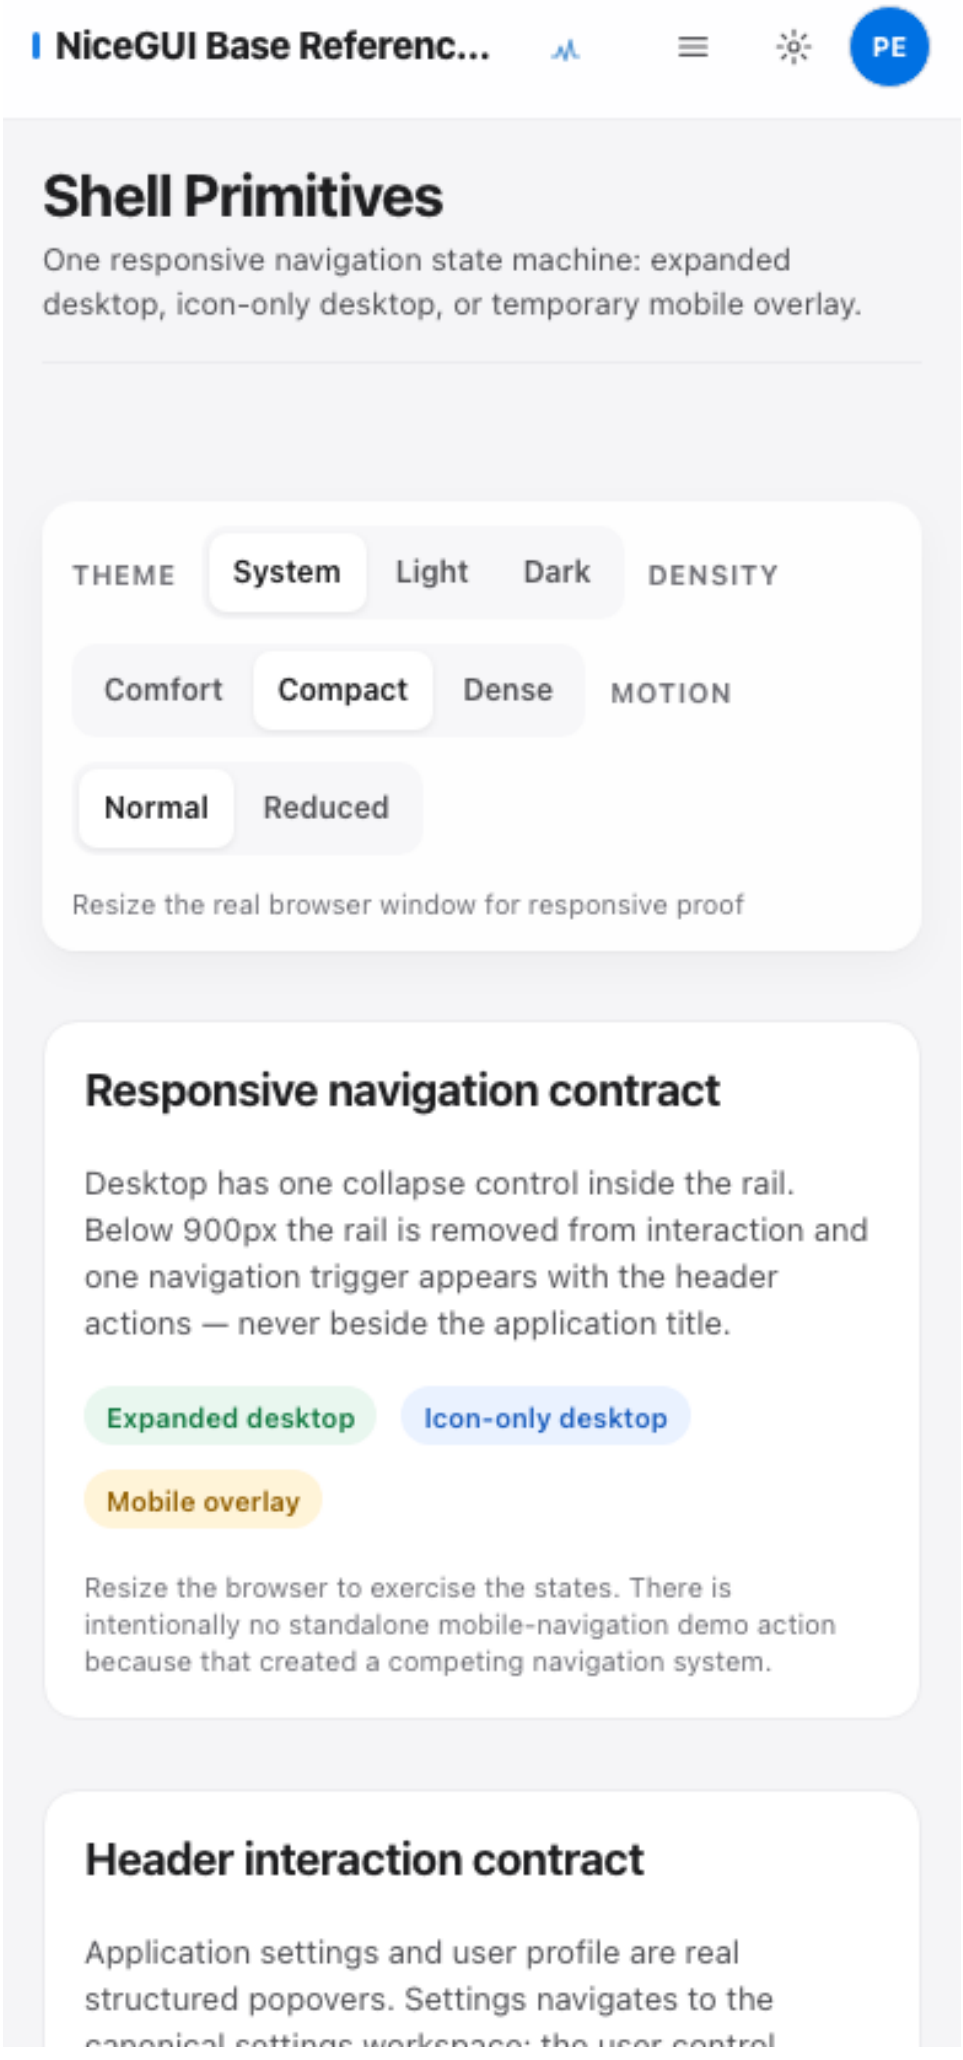

NiceGUI Base
M
Semiconductor Recipes
Scan the domain workflows visually, compare their contracts, then open the recipe that matches the engineering question.
Search
Theme · System
Appearance
Control chart
Capability
Capability Histogram
SEMICONDUCTOR RECIPE • LIVE
SPCMonitor
Monitor process stability, capability and violations with drill-down to manufacturing context.
Best for · monitor a process parameter · detect process drift or control-rule violations
→ Open example
☆ Favorite
Compare
Affected vs control
Spatial delta

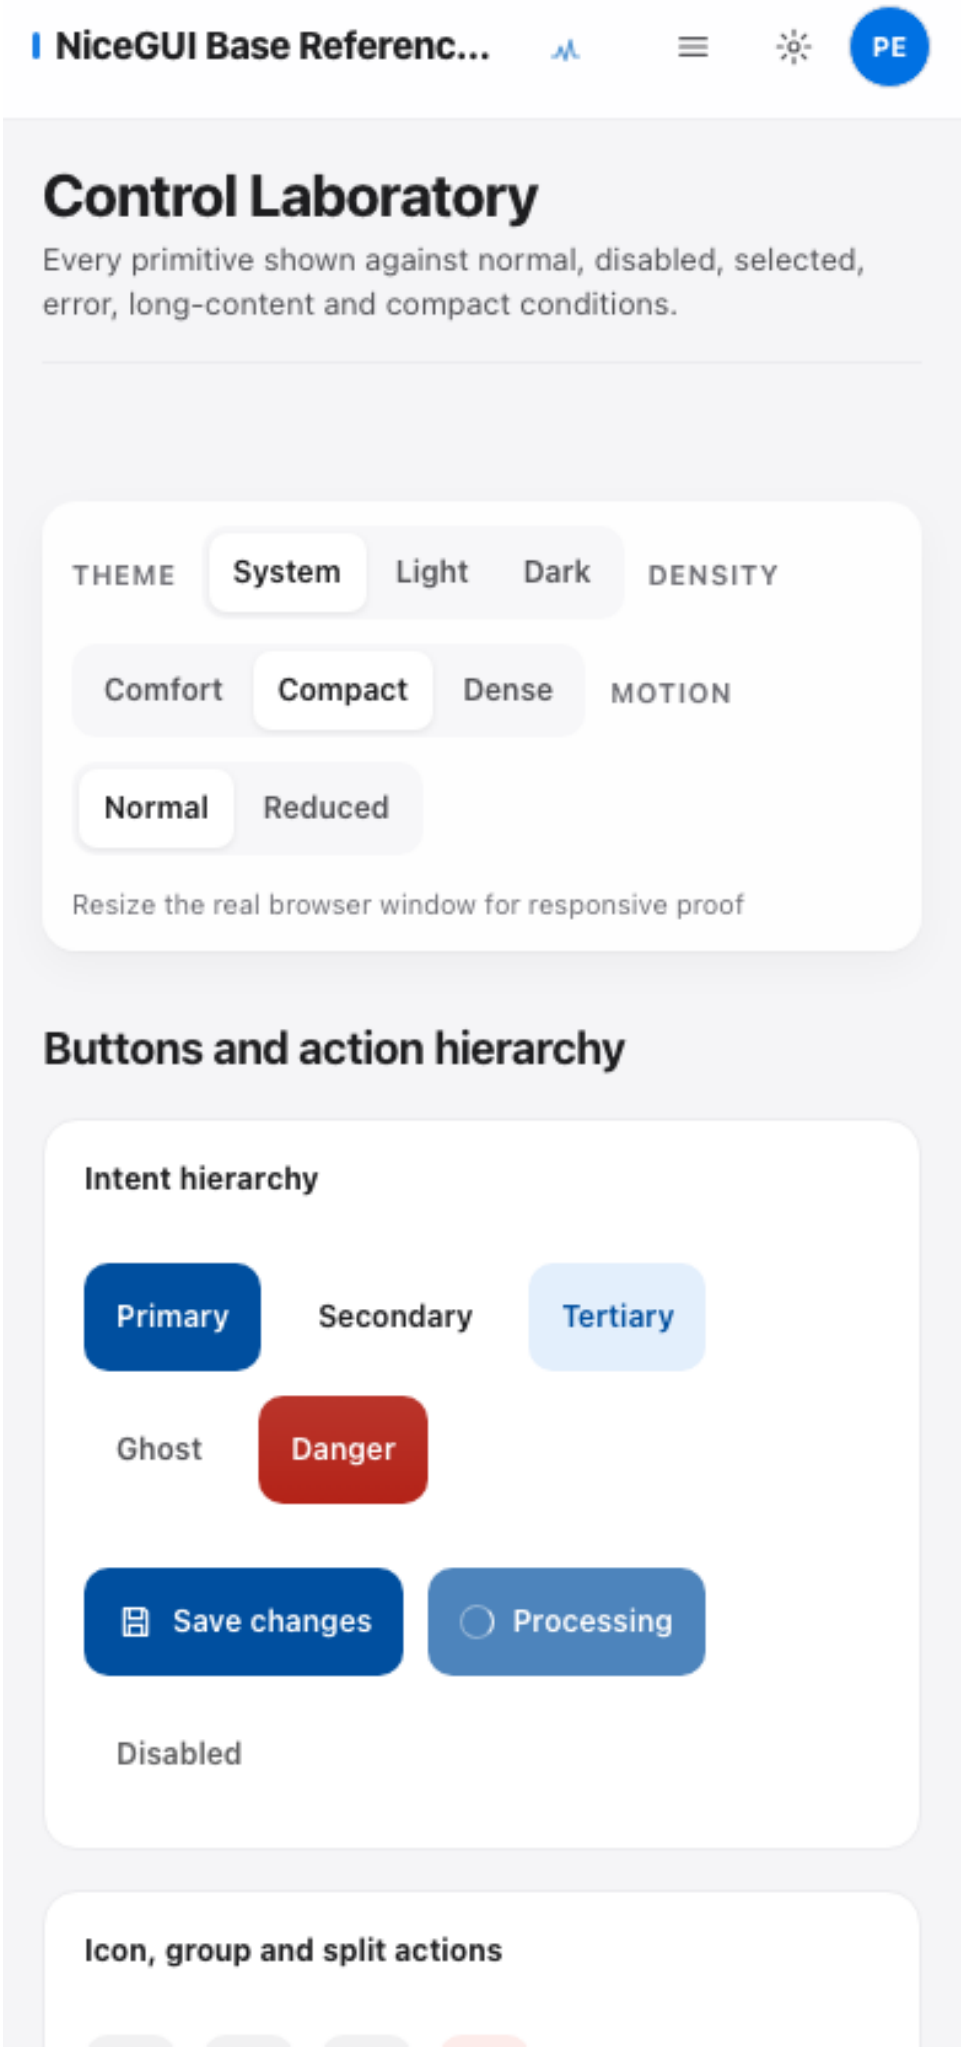

NiceGUI Base
M
Data & Tables
A governed production reference for tables, record management, data exploration and provider-scale grids.
Search
Theme · System
Appearance
Production table lab
The governed production reference for tables, record management, data exploration and provider-scale grids. One active lab keeps the page fast; every lab reuses the same semiconductor data contract.
Grid
Actions
Edit
Visualize
Import
Detail
Grid
The production read-oriented grid: query, layout, views and persisted state.
64 records
Persisted view
Watch / OOS
Unreviewed
Clear filters
Clear sorting

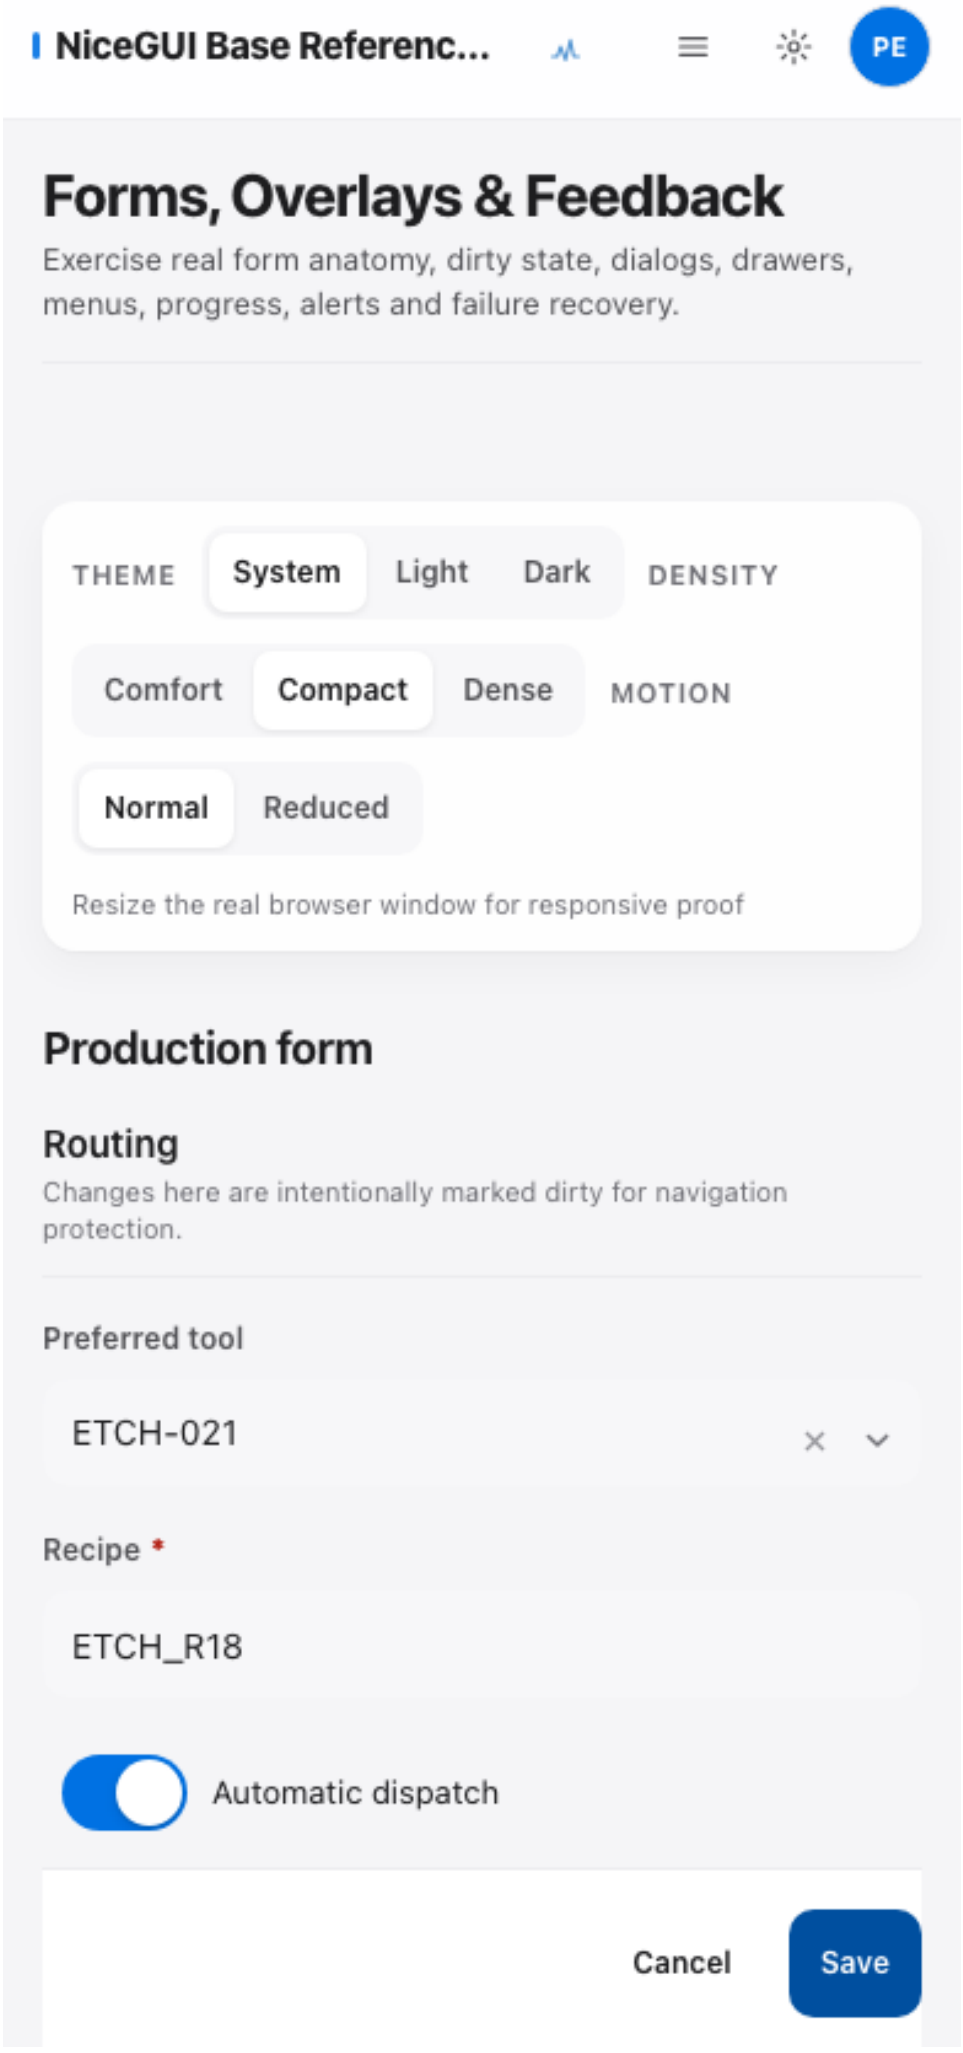

NiceGUI Base
M
Diagnostics
Understand runtime health, framework coverage, and the few actions that need attention.
Search
Theme · System
Appearance
System health
A quick answer to whether the installed reference is ready to use.
Reference Explorer
Healthy
Candidate NGB-20260907-G2.6 · NiceGUI Base 3.0.0a8 · NiceGUI 3.15.0
Generic application patterns
Available 10
Discoverable 10 / 10
Live examples 10 / 10
Semiconductor analytics
Available 58
Discoverable 58 / 58
Live examples 58 / 58

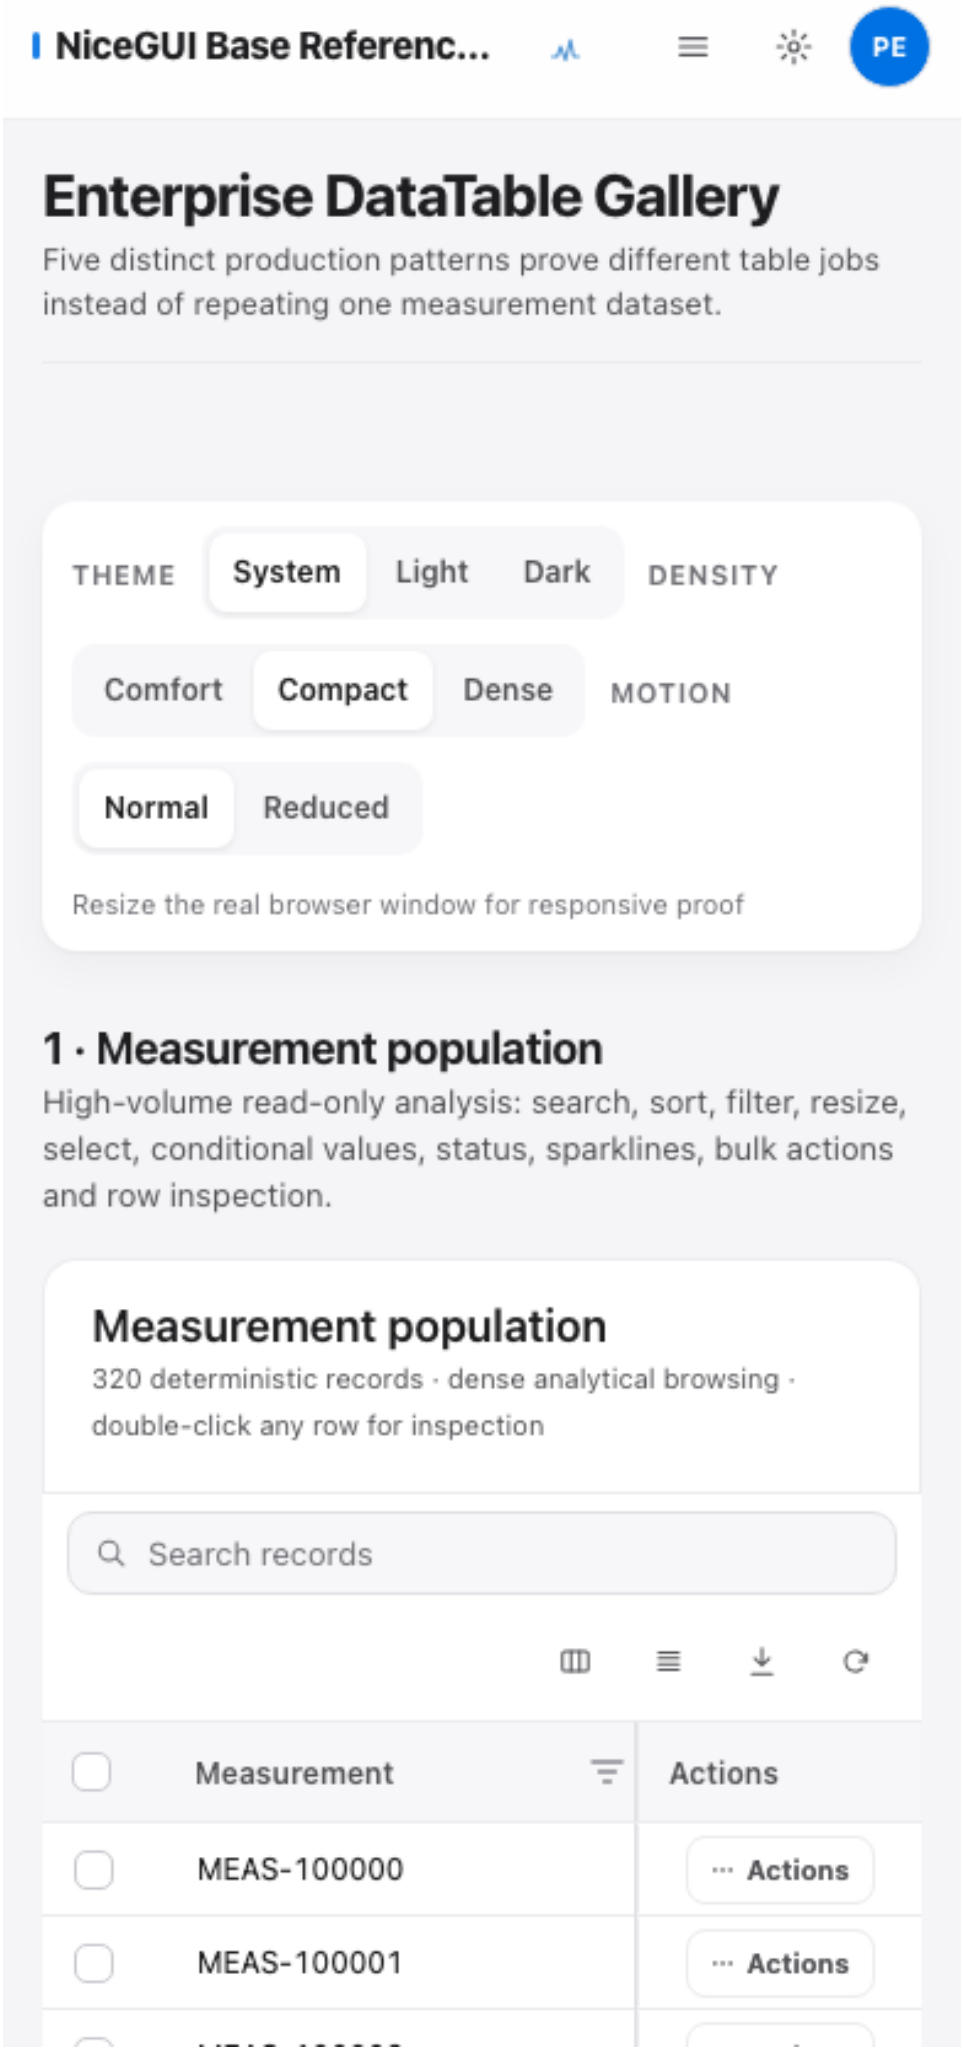

NiceGUI Base
M
AI Development Guide
A compact, task-first guide for humans and AI agents using the installed NiceGUI Base APIs.
Search
Theme · System
Appearance
Requirement → runnable reference
The same deterministic sequence is readable by a person and discoverable by an agent.
1 · REQUIREMENT
Investigate chamber drift and compare affected/control distributions
2 · RECOMMENDATION
Pattern: analysis_workspace · Recipe: excursion-defense-line
3 · AUTHORITIES
analytics:fdc_multi_sensor · analytics:rca_affected_control · component:data_table
4 · SCAFFOLD

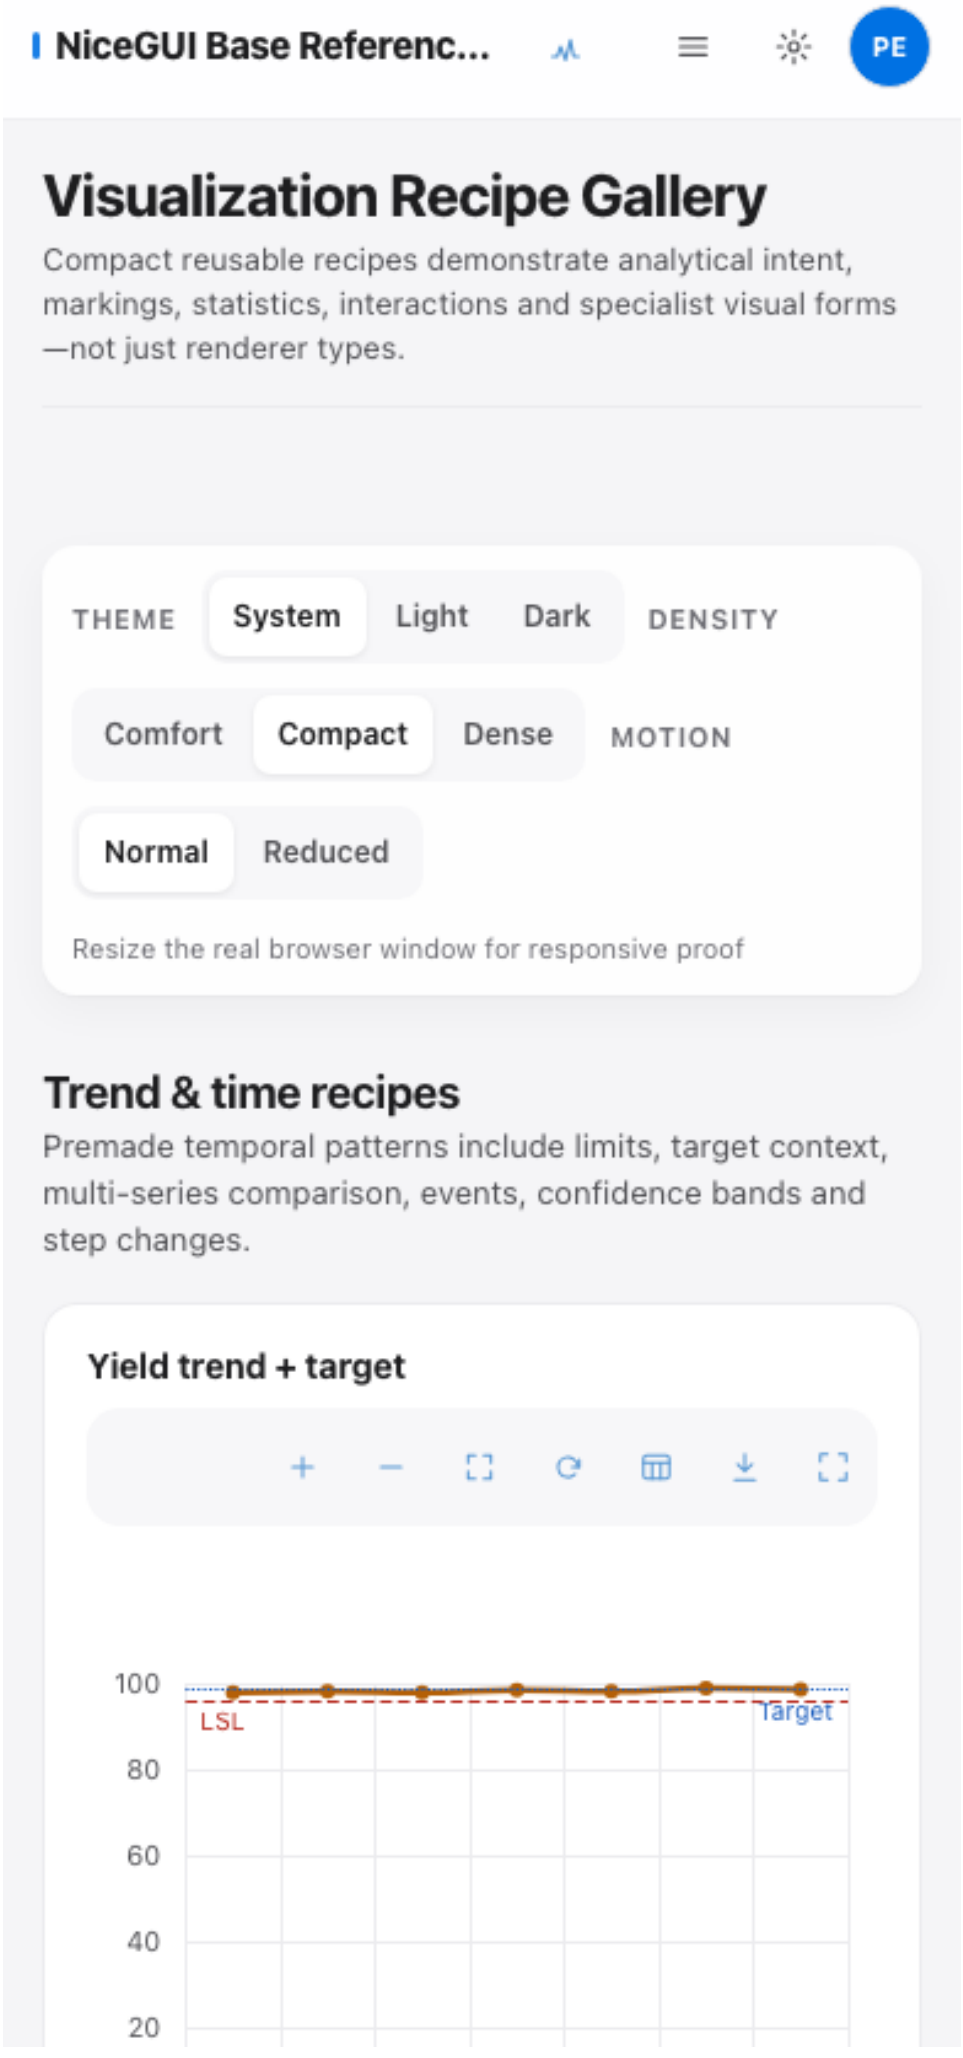

NiceGUI Base Referenc...
PE
Foundation
Inspect the exact visual primitives from which every application is constructed.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Semantic color system
These are design roles, not a decorative palette. Apps should never invent independent visual colors.
Page
--cui-page
Primary surface
--cui-surface
Secondary surface
--cui-surface-secondary
Elevated
--cui-surface-elevated

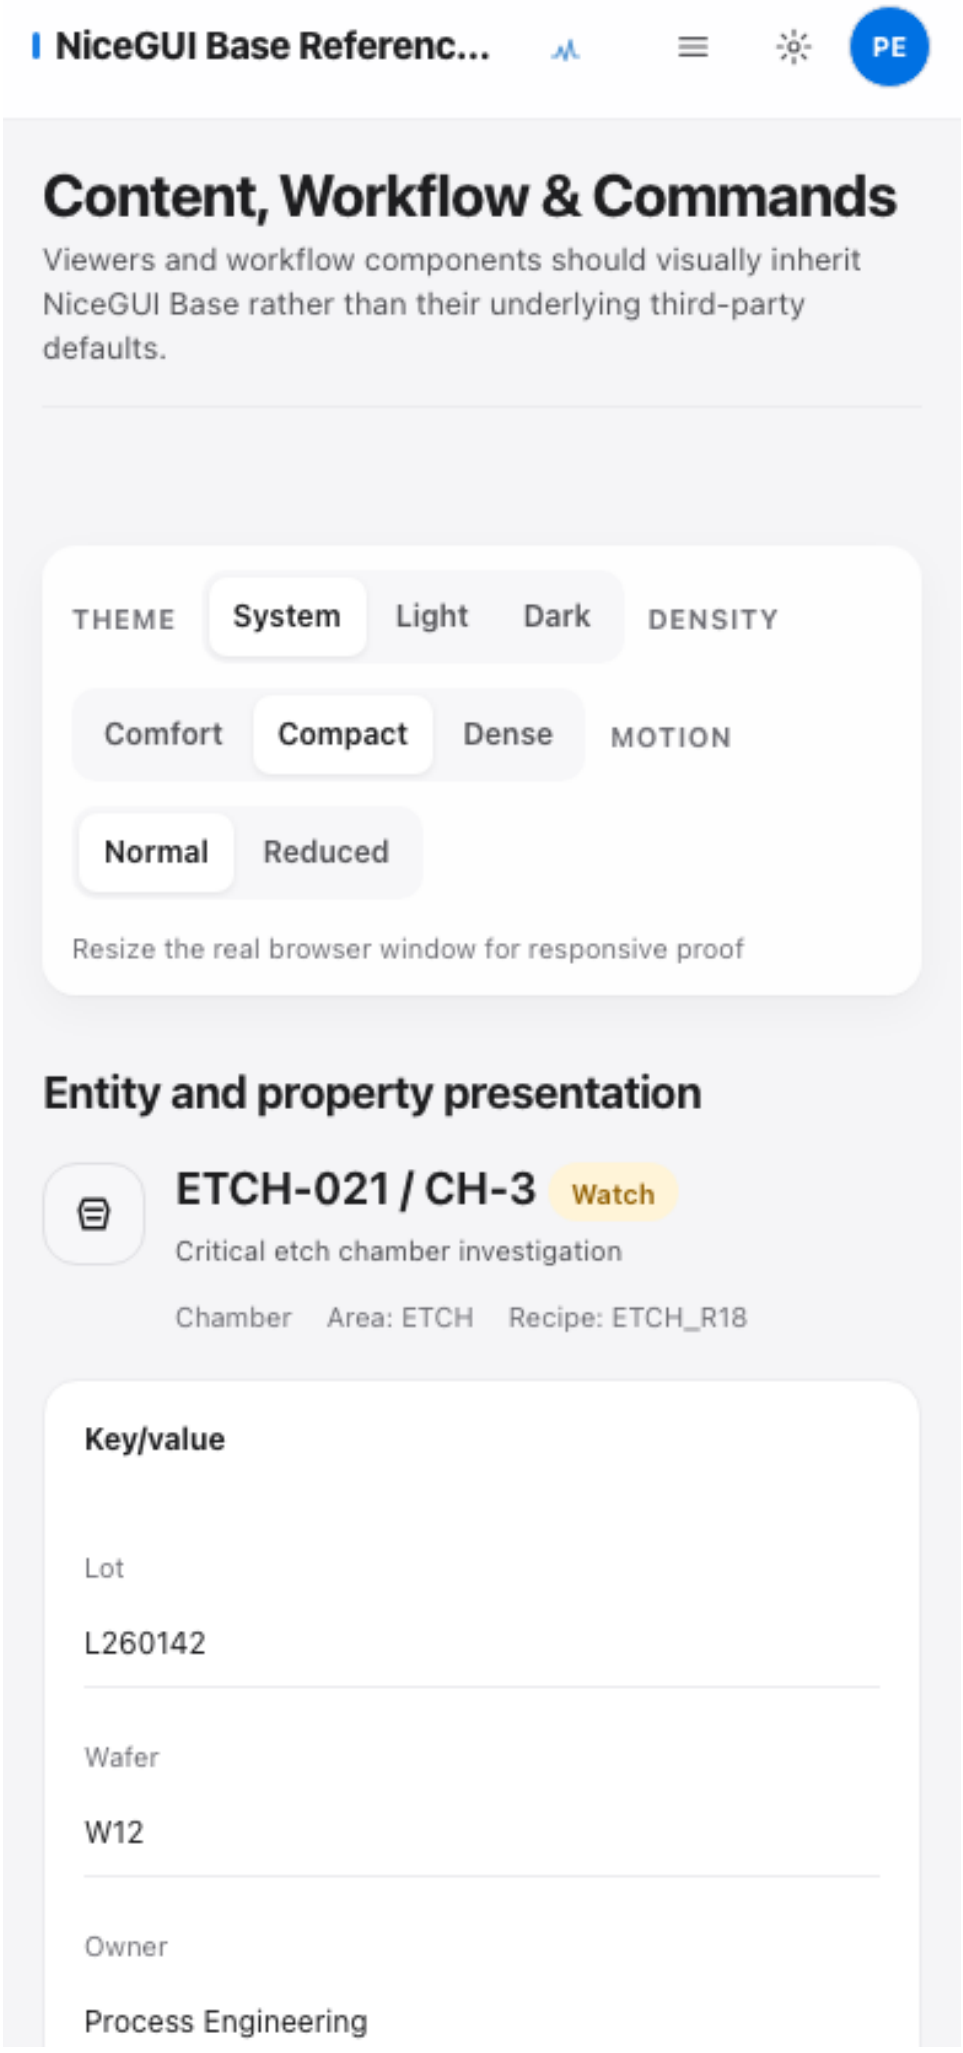

NiceGUI Base Referenc...
PE
Shell Primitives
One responsive navigation state machine: expanded desktop, icon-only desktop, or temporary mobile overlay.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Responsive navigation contract
Desktop has one collapse control inside the rail. Below 900px the rail is removed from interaction and one navigation trigger appears with the header actions — never beside the application title.
Expanded desktop
Icon-only desktop
Mobile overlay
Resize the browser to exercise the states. There is intentionally no standalone mobile-navigation demo action because that created a competing navigation system.
Header interaction contract
Application settings and user profile are real structured popovers. Settings navigates to the

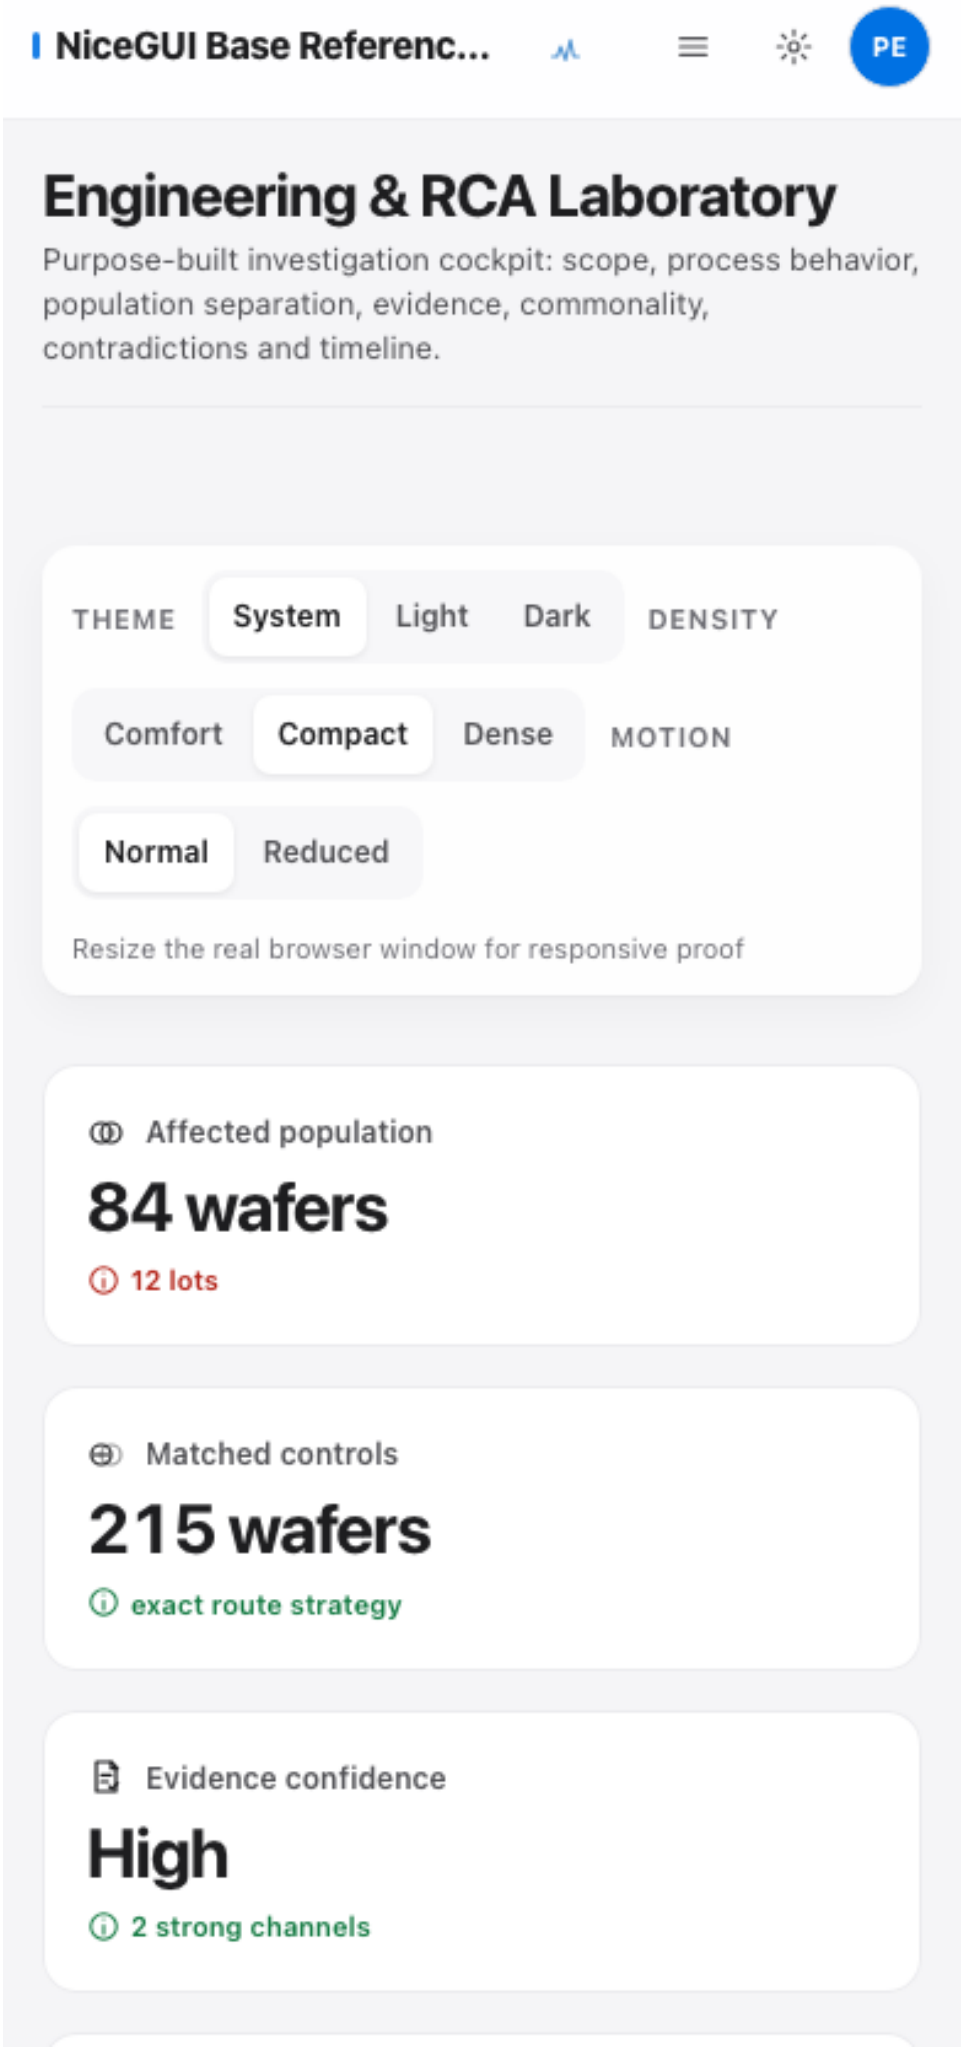

NiceGUI Base Referenc...
PE
Control Laboratory
Every primitive shown against normal, disabled, selected, error, long-content and compact conditions.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Buttons and action hierarchy
Intent hierarchy
Primary
Secondary
Tertiary
Ghost
Danger
Save changes
Processing
Disabled
Icon, group and split actions


NiceGUI Base Referenc...
PE
Forms, Overlays & Feedback
Exercise real form anatomy, dirty state, dialogs, drawers, menus, progress, alerts and failure recovery.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Production form
Routing
Changes here are intentionally marked dirty for navigation protection.
Preferred tool
ETCH-021
Recipe *
ETCH_R18
Automatic dispatch
Cancel
Save


NiceGUI Base Referenc...
PE
Enterprise DataTable Gallery
Five distinct production patterns prove different table jobs instead of repeating one measurement dataset.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
1 · Measurement population
High-volume read-only analysis: search, sort, filter, resize, select, conditional values, status, sparklines, bulk actions and row inspection.
Measurement population
320 deterministic records · dense analytical browsing · double-click any row for inspection
Search records
Measurement
Actions
MEAS-100000
Actions
MEAS-100001
Actions

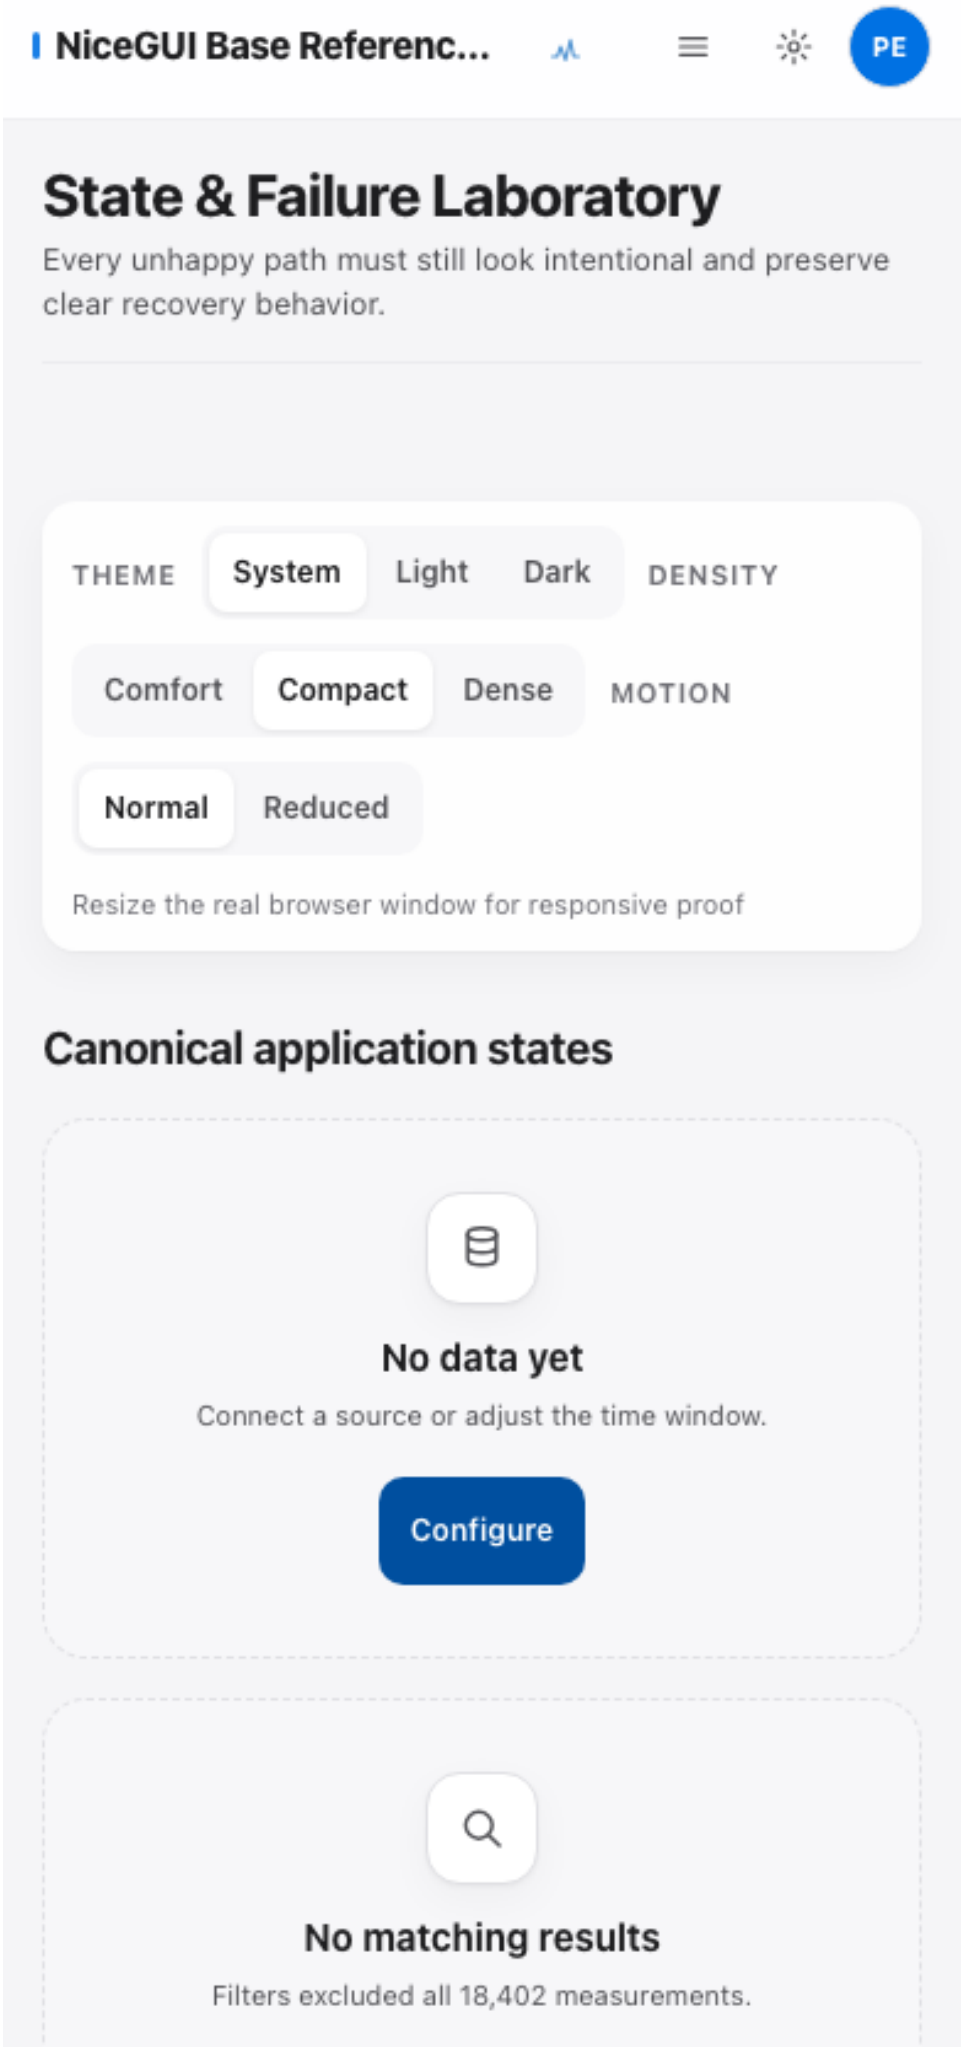

NiceGUI Base Referenc...
PE
Visualization Recipe Gallery
Compact reusable recipes demonstrate analytical intent, markings, statistics, interactions and specialist visual forms —not just renderer types.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Trend & time recipes
Premade temporal patterns include limits, target context, multi-series comparison, events, confidence bands and step changes.
Yield trend + target
100
80
60
40
20
LSL
Target

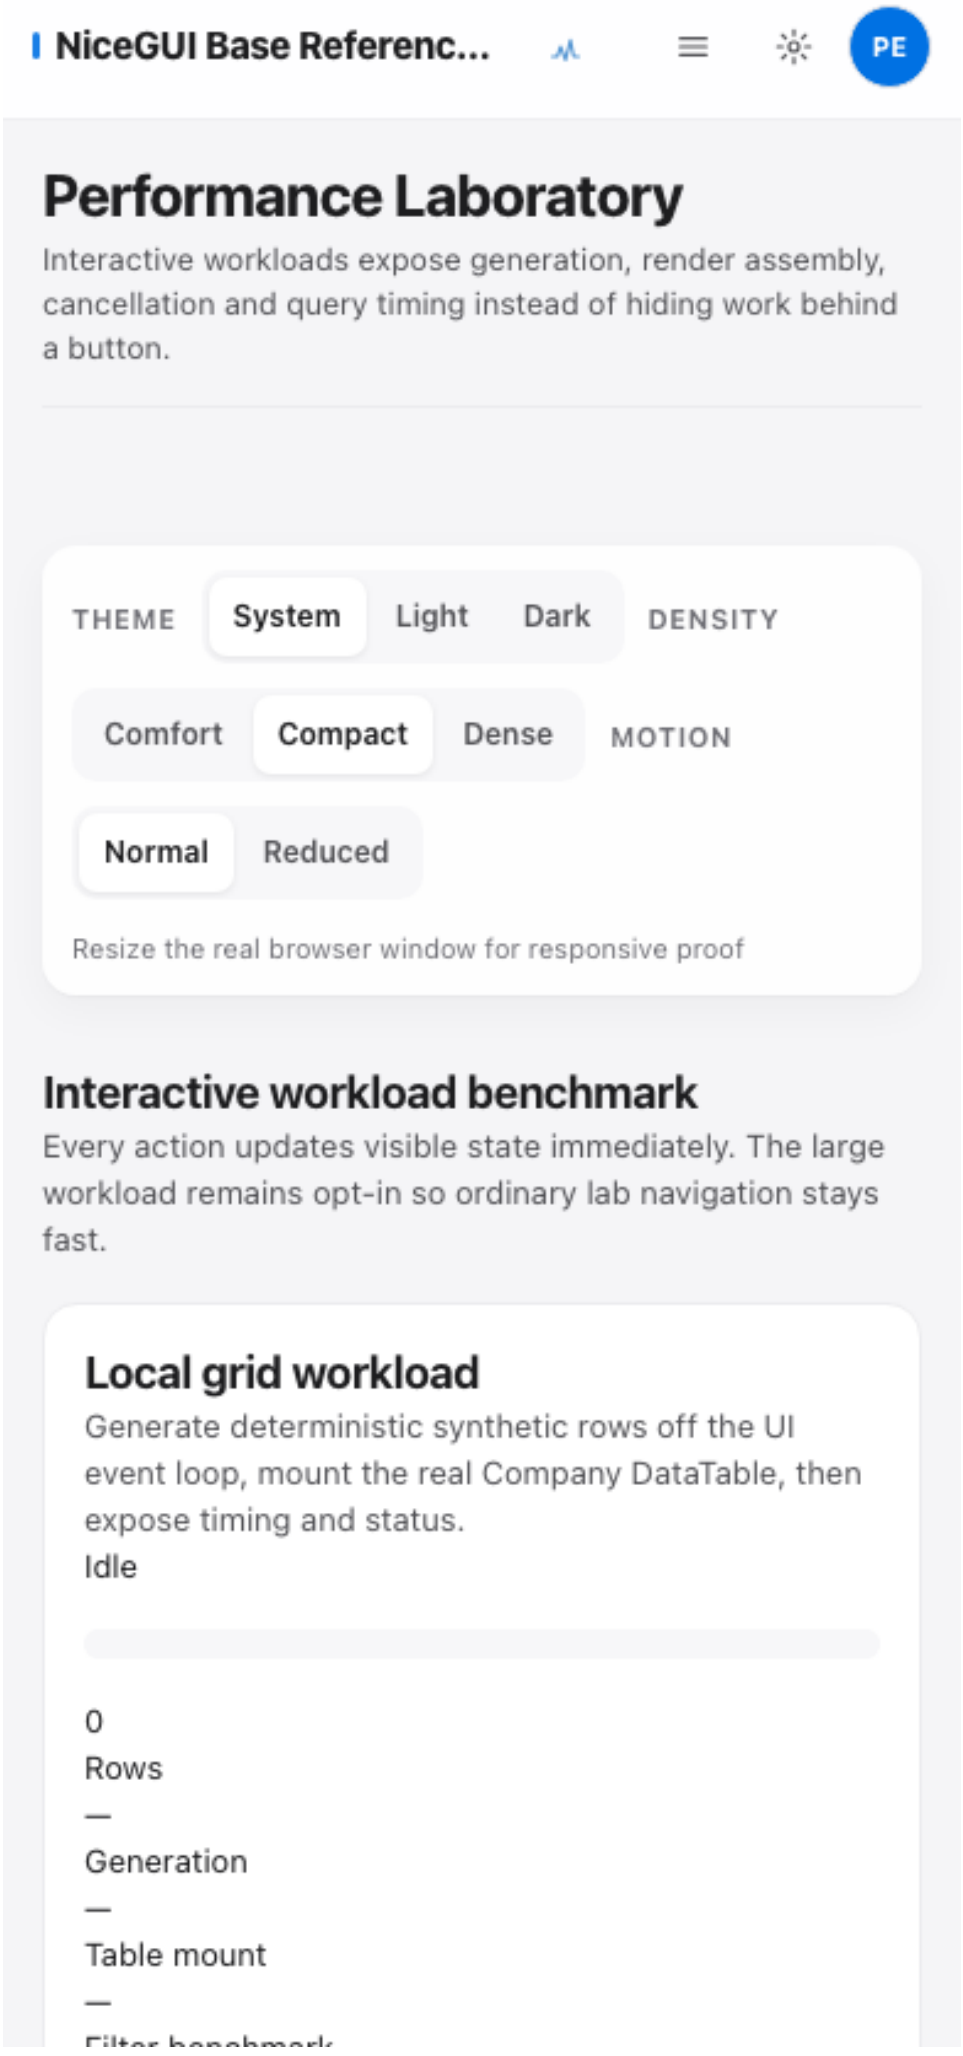

NiceGUI Base Referenc...
PE
Content, Workflow & Commands
Viewers and workflow components should visually inherit NiceGUI Base rather than their underlying third-party defaults.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Entity and property presentation
ETCH-021 / CH-3
Watch
Critical etch chamber investigation
Chamber
Area: ETCH
Recipe: ETCH_R18
Key/value
Lot
L260142
Wafer
W12
Owner
Process Engineering


NiceGUI Base Referenc...
PE
Engineering & RCA Laboratory
Purpose-built investigation cockpit: scope, process behavior, population separation, evidence, commonality, contradictions and timeline.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Affected population
84 wafers
12 lots
Matched controls
215 wafers
exact route strategy
Evidence confidence
High
2 strong channels

lab-states

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 e9e4dee015402ff8e09d26c736fcb0f427b3c711d42163f267a2795dcfb03d83

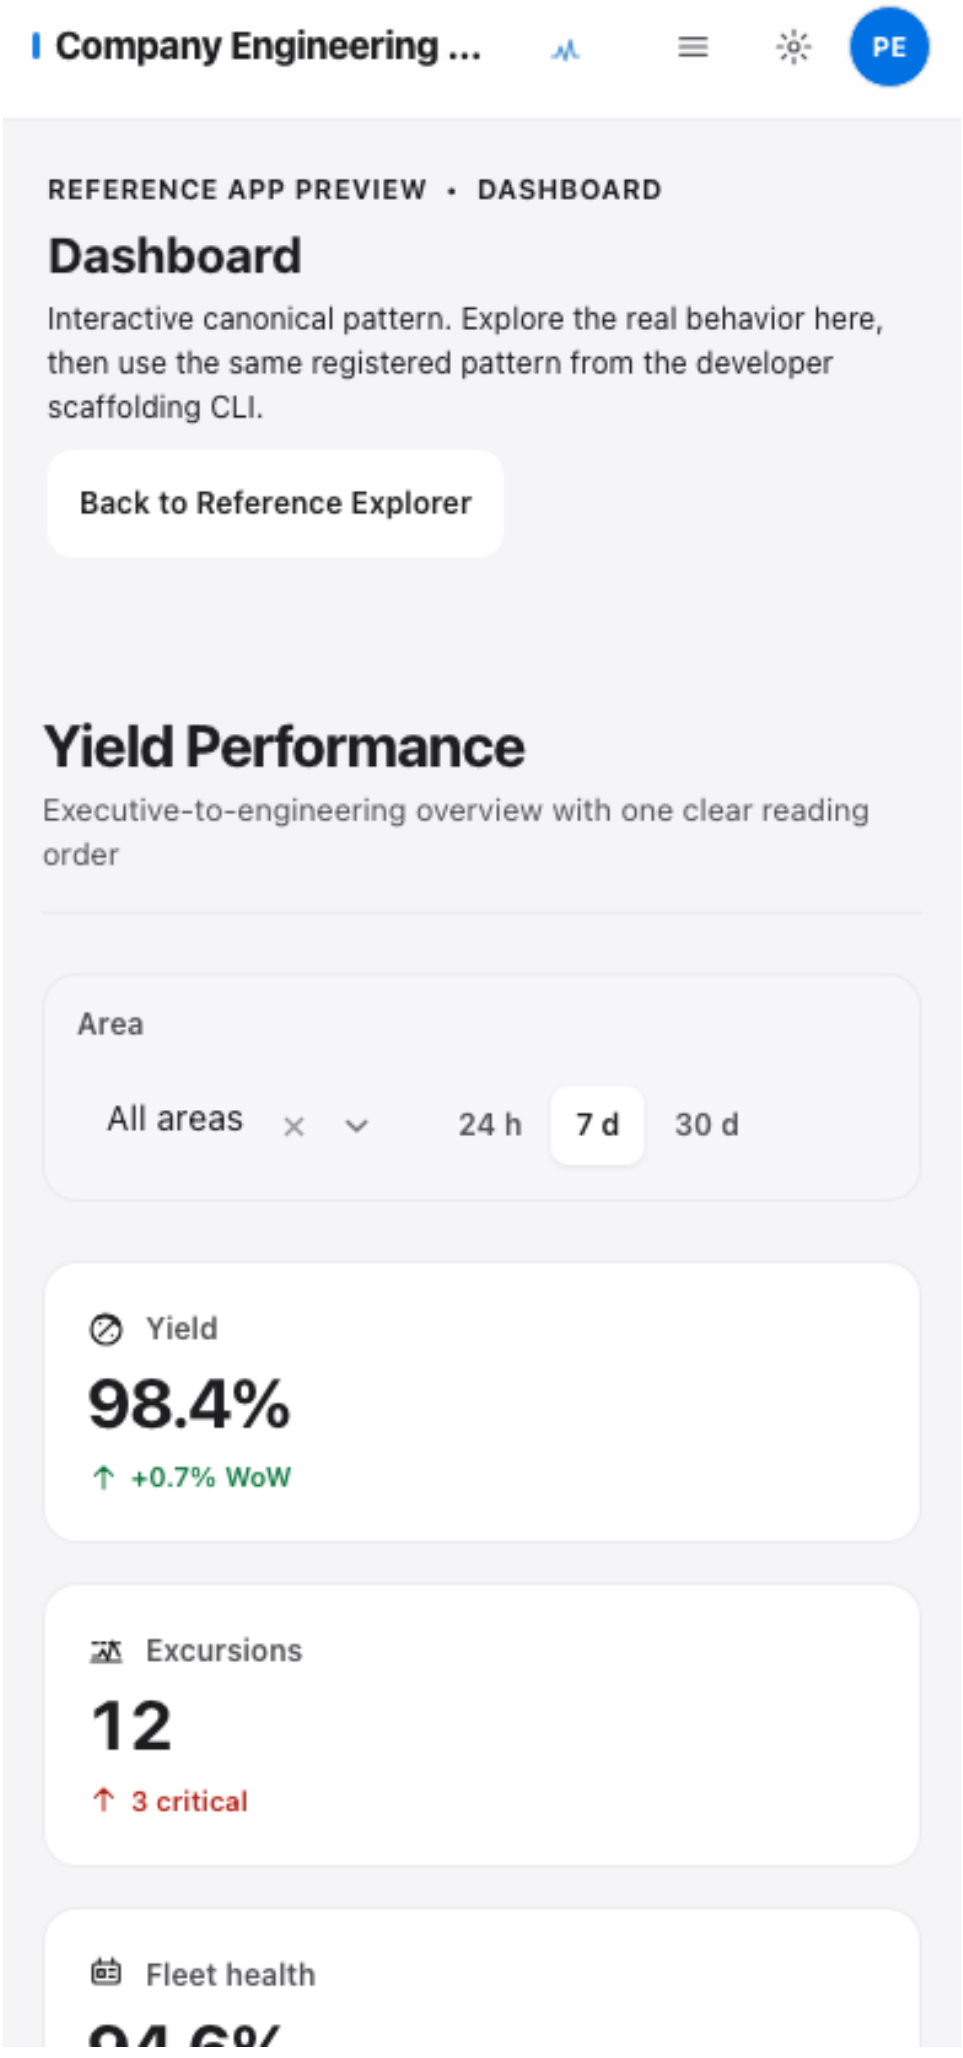


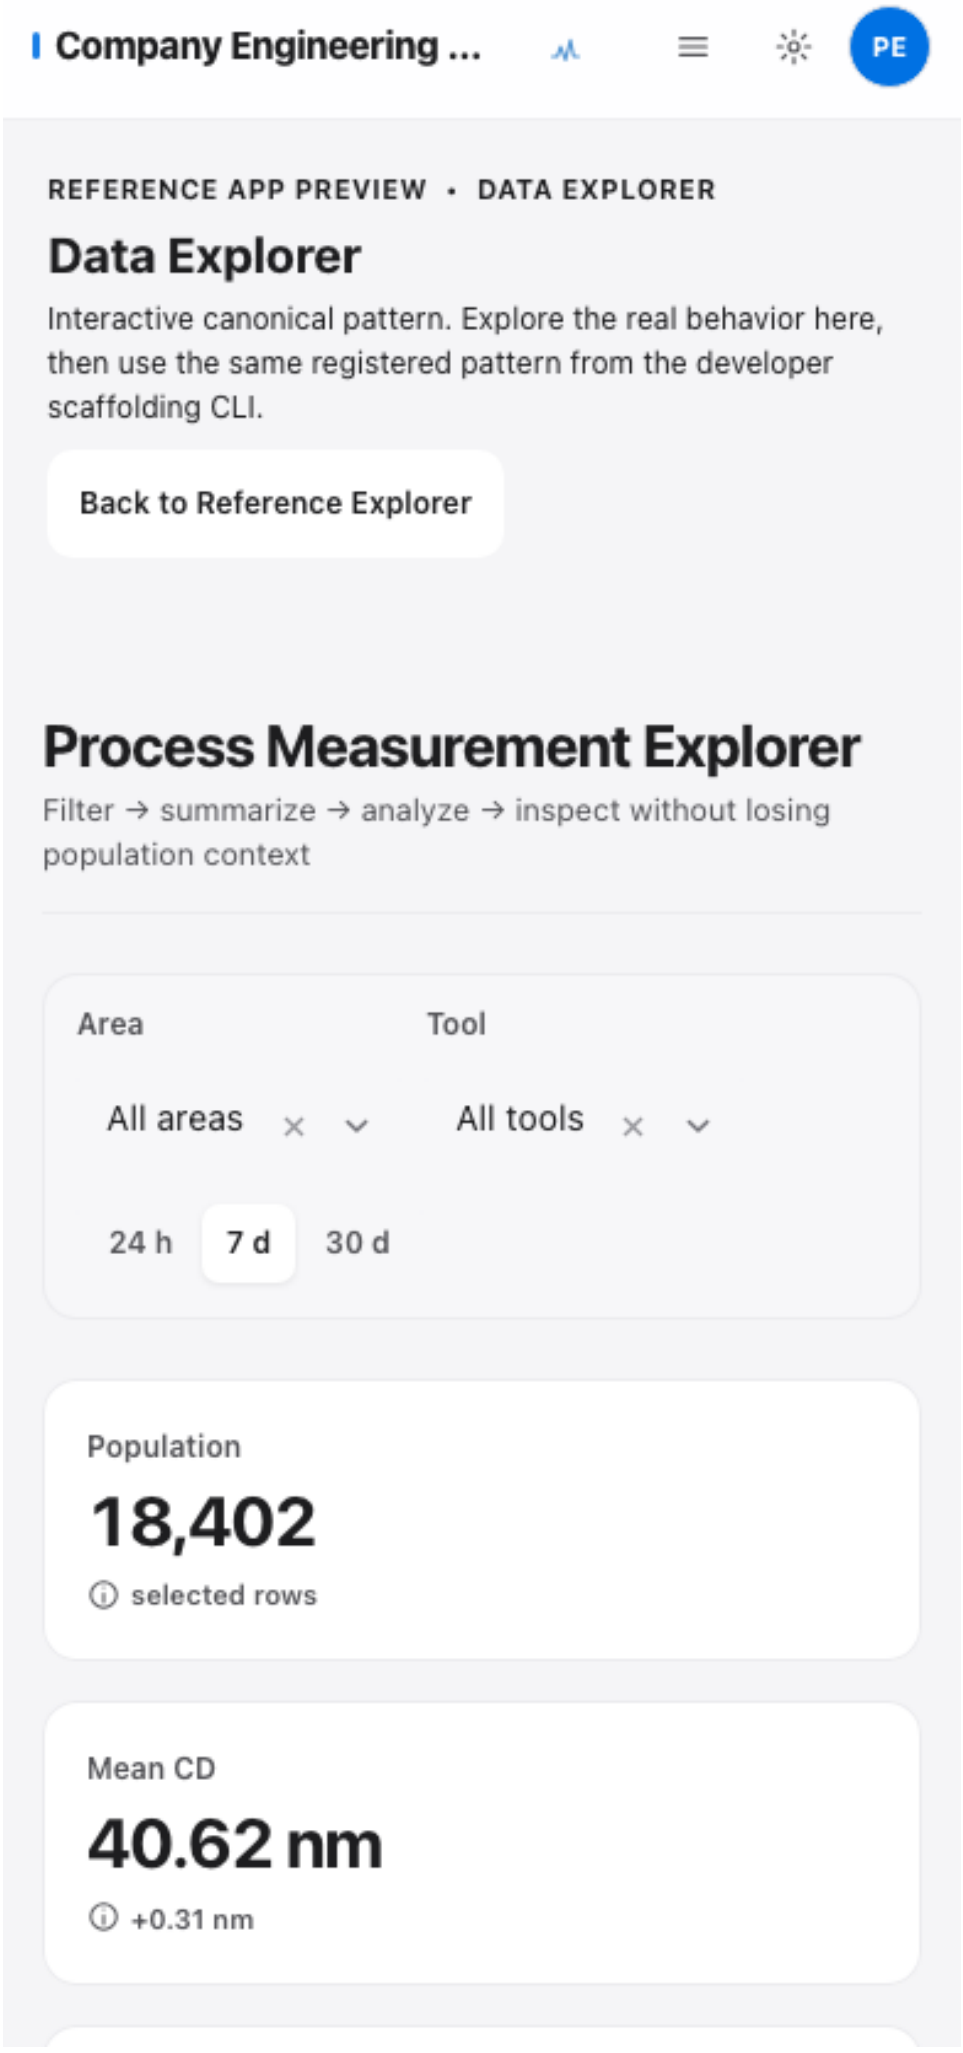

NiceGUI Base Referenc...
PE
Performance Laboratory
Interactive workloads expose generation, render assembly, cancellation and query timing instead of hiding work behind a button.
THEME
System
Light
Dark
DENSITY
Comfort
Compact
Dense
MOTION
Normal
Reduced
Resize the real browser window for responsive proof
Interactive workload benchmark
Every action updates visible state immediately. The large workload remains opt-in so ordinary lab navigation stays fast.
Local grid workload
Generate deterministic synthetic rows off the UI event loop, mount the real Company DataTable, then expose timing and status.
Idle
0
Rows
—
Generation
—
Table mount
—

reference-pattern-dashboard

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

PNG SHA-256 2c3634bdc9e35a05ed87a653d308dc94aa278e849cce5db39a59e5d84b428086

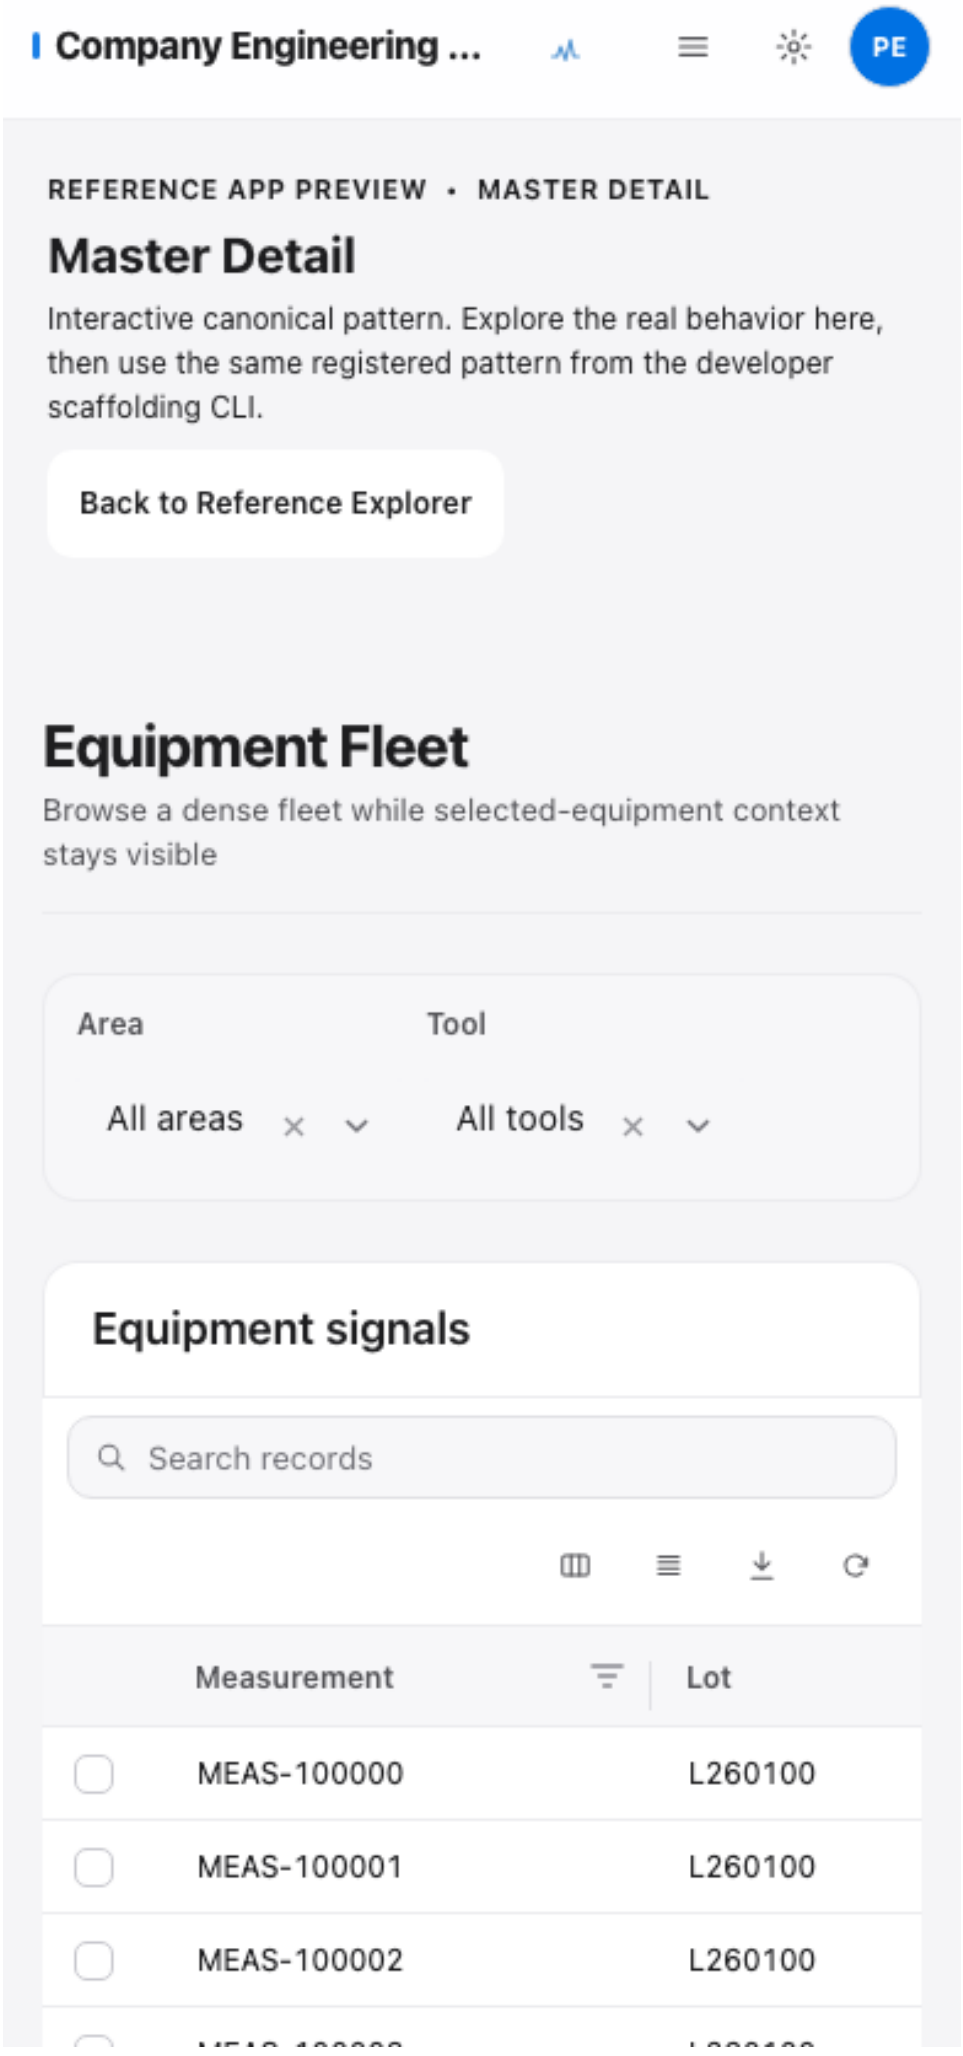



Company Engineering ...
PE
REFERENCE APP PREVIEW • DATA EXPLORER
Data Explorer
Interactive canonical pattern. Explore the real behavior here, then use the same registered pattern from the developer scaffolding CLI.
Back to Reference Explorer
Process Measurement Explorer
Filter → summarize → analyze → inspect without losing population context
Area
Tool
All areas
All tools
24 h
7 d
30 d
Population
18,402
selected rows
Mean CD
40.62 nm
+0.31 nm

reference-pattern-master_detail

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

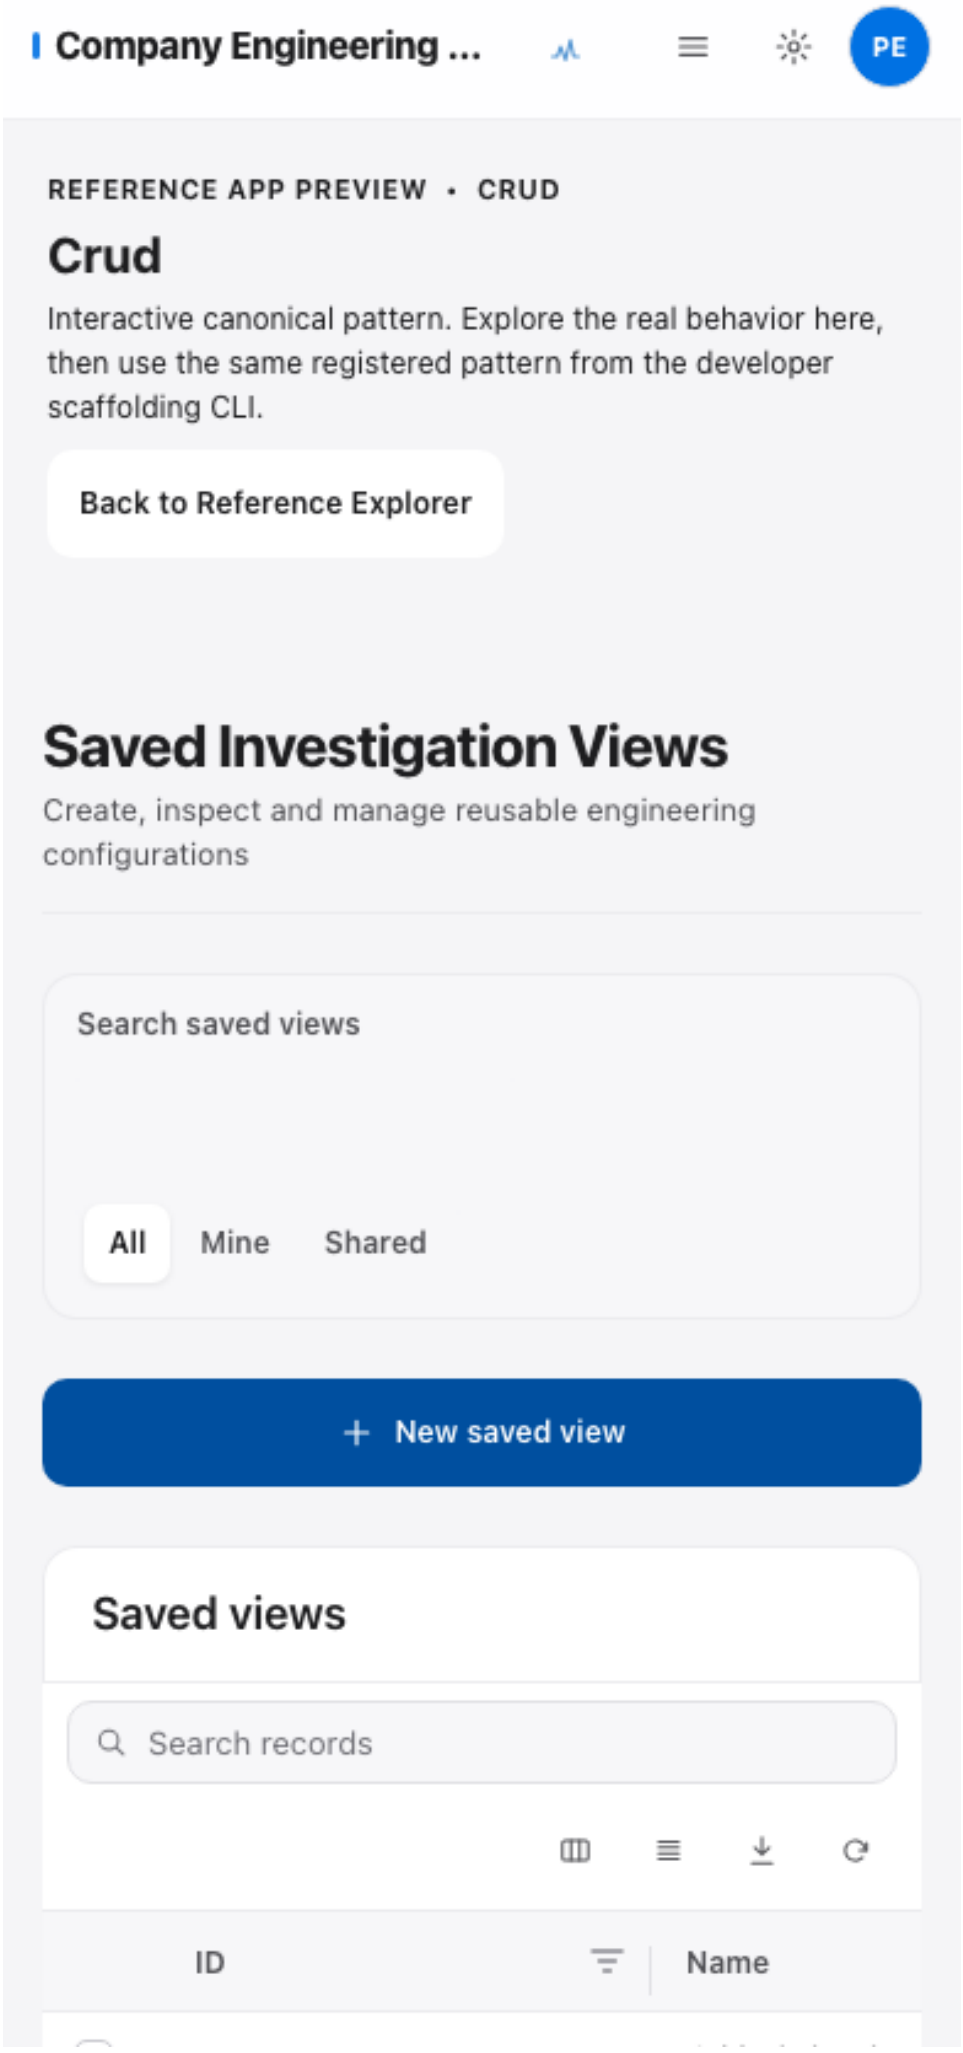
PNG SHA-256 f4afba7908e6943fb18b041b67c5f74335c97e97dbd512862daa192f0e8c7397

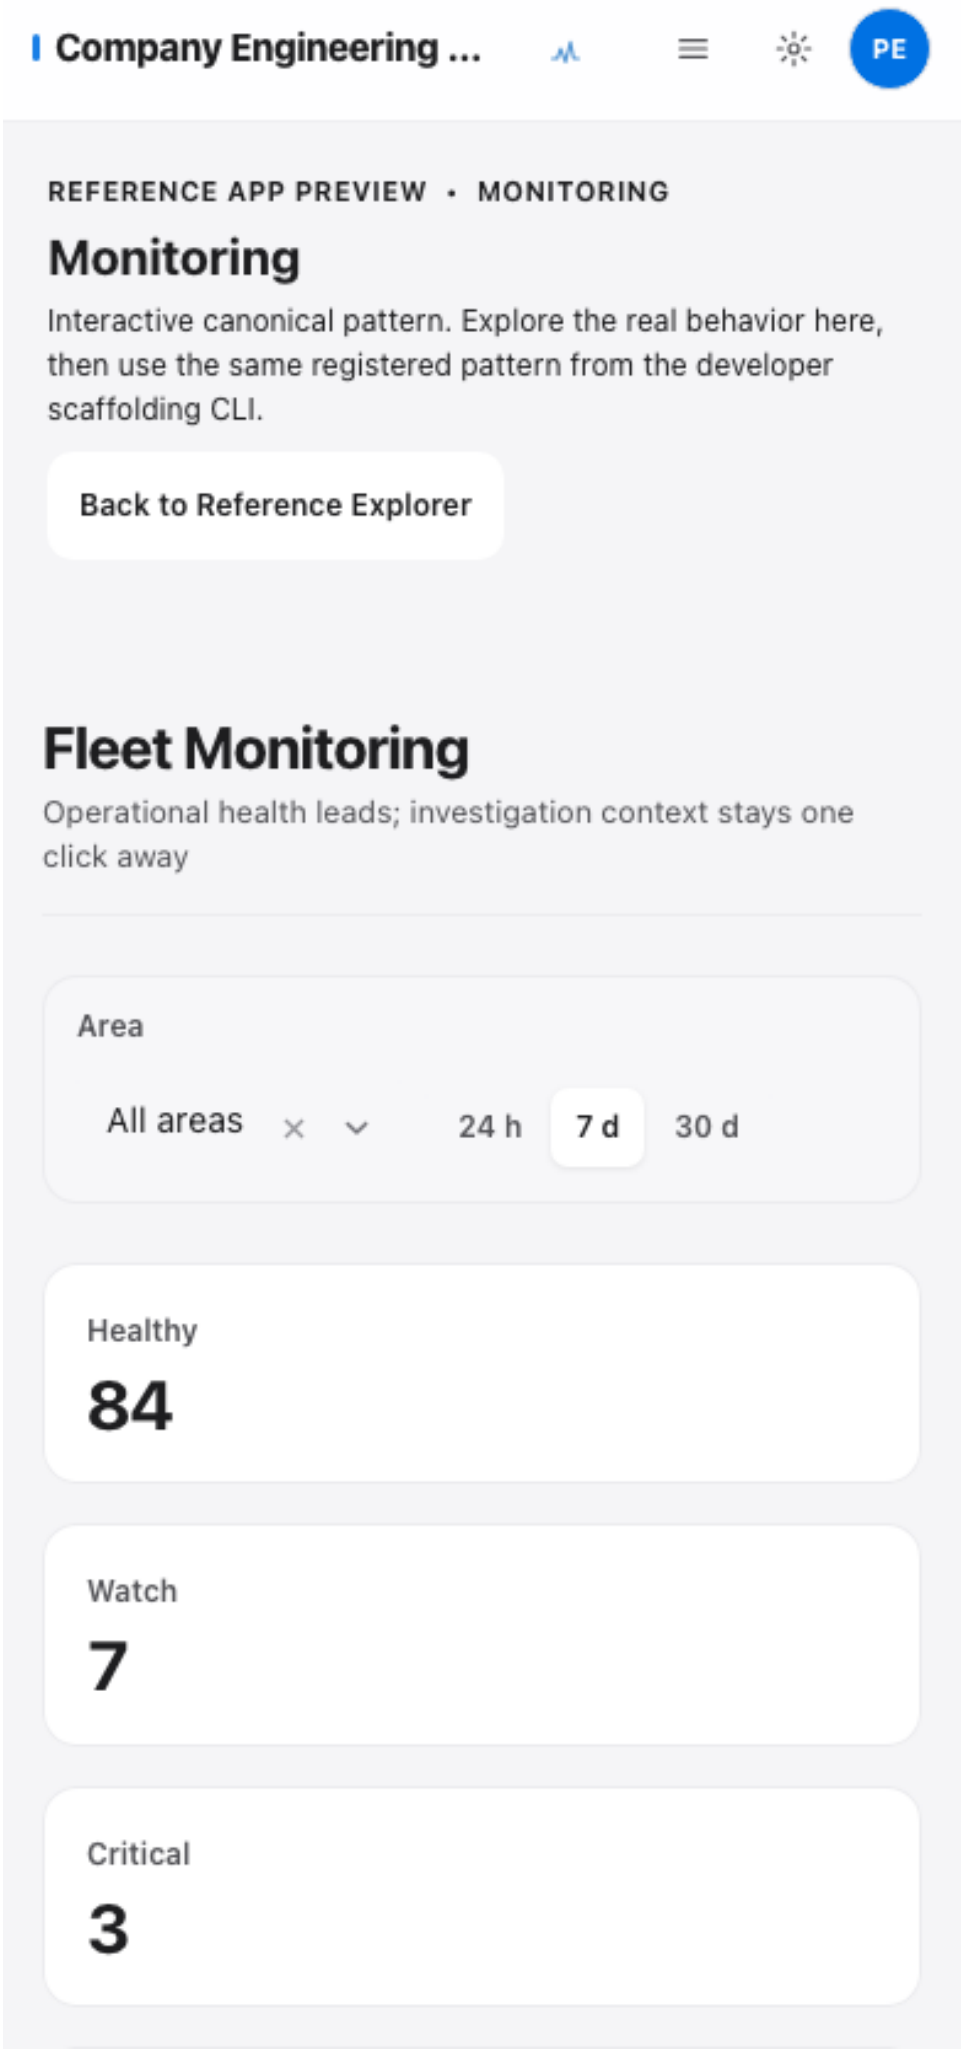


reference-pattern-crud

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

PNG SHA-256 2659008b90f3fcb47f5a6723c6dbec95a6a967549b9254edb1db342f1e2168c6

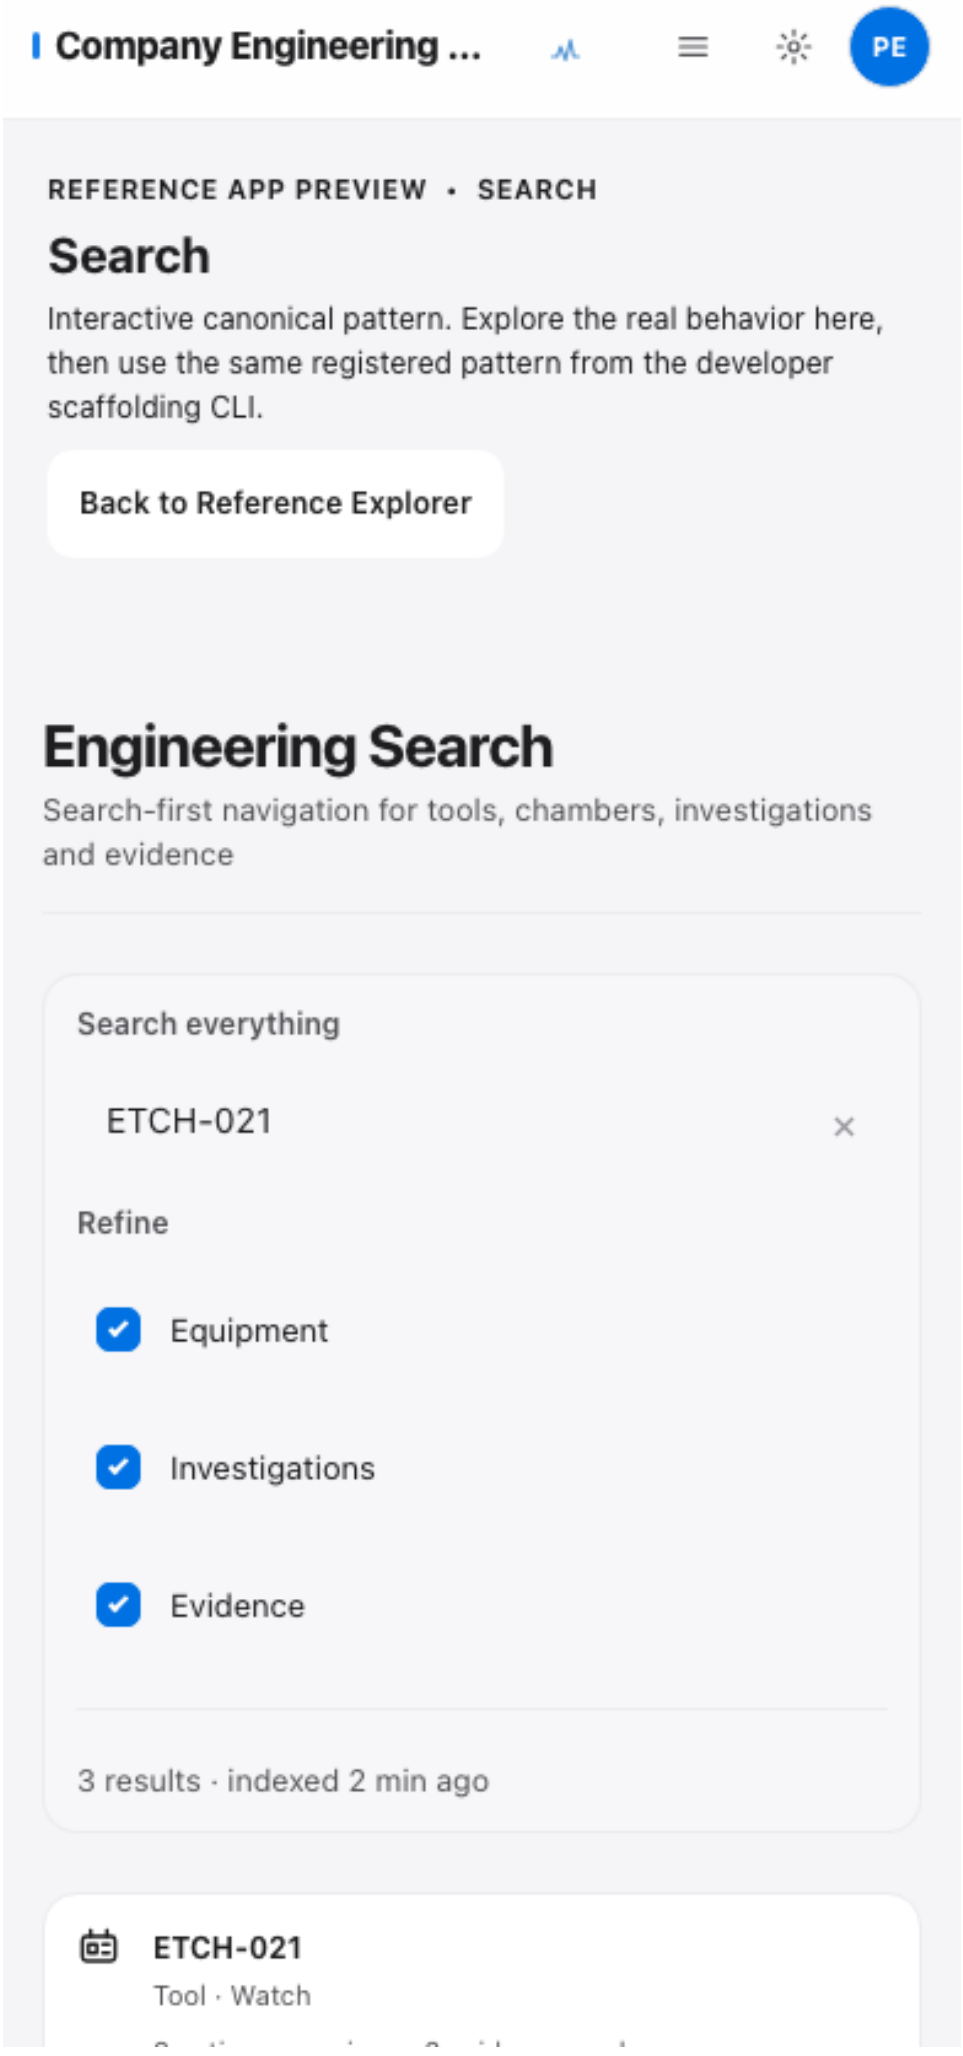


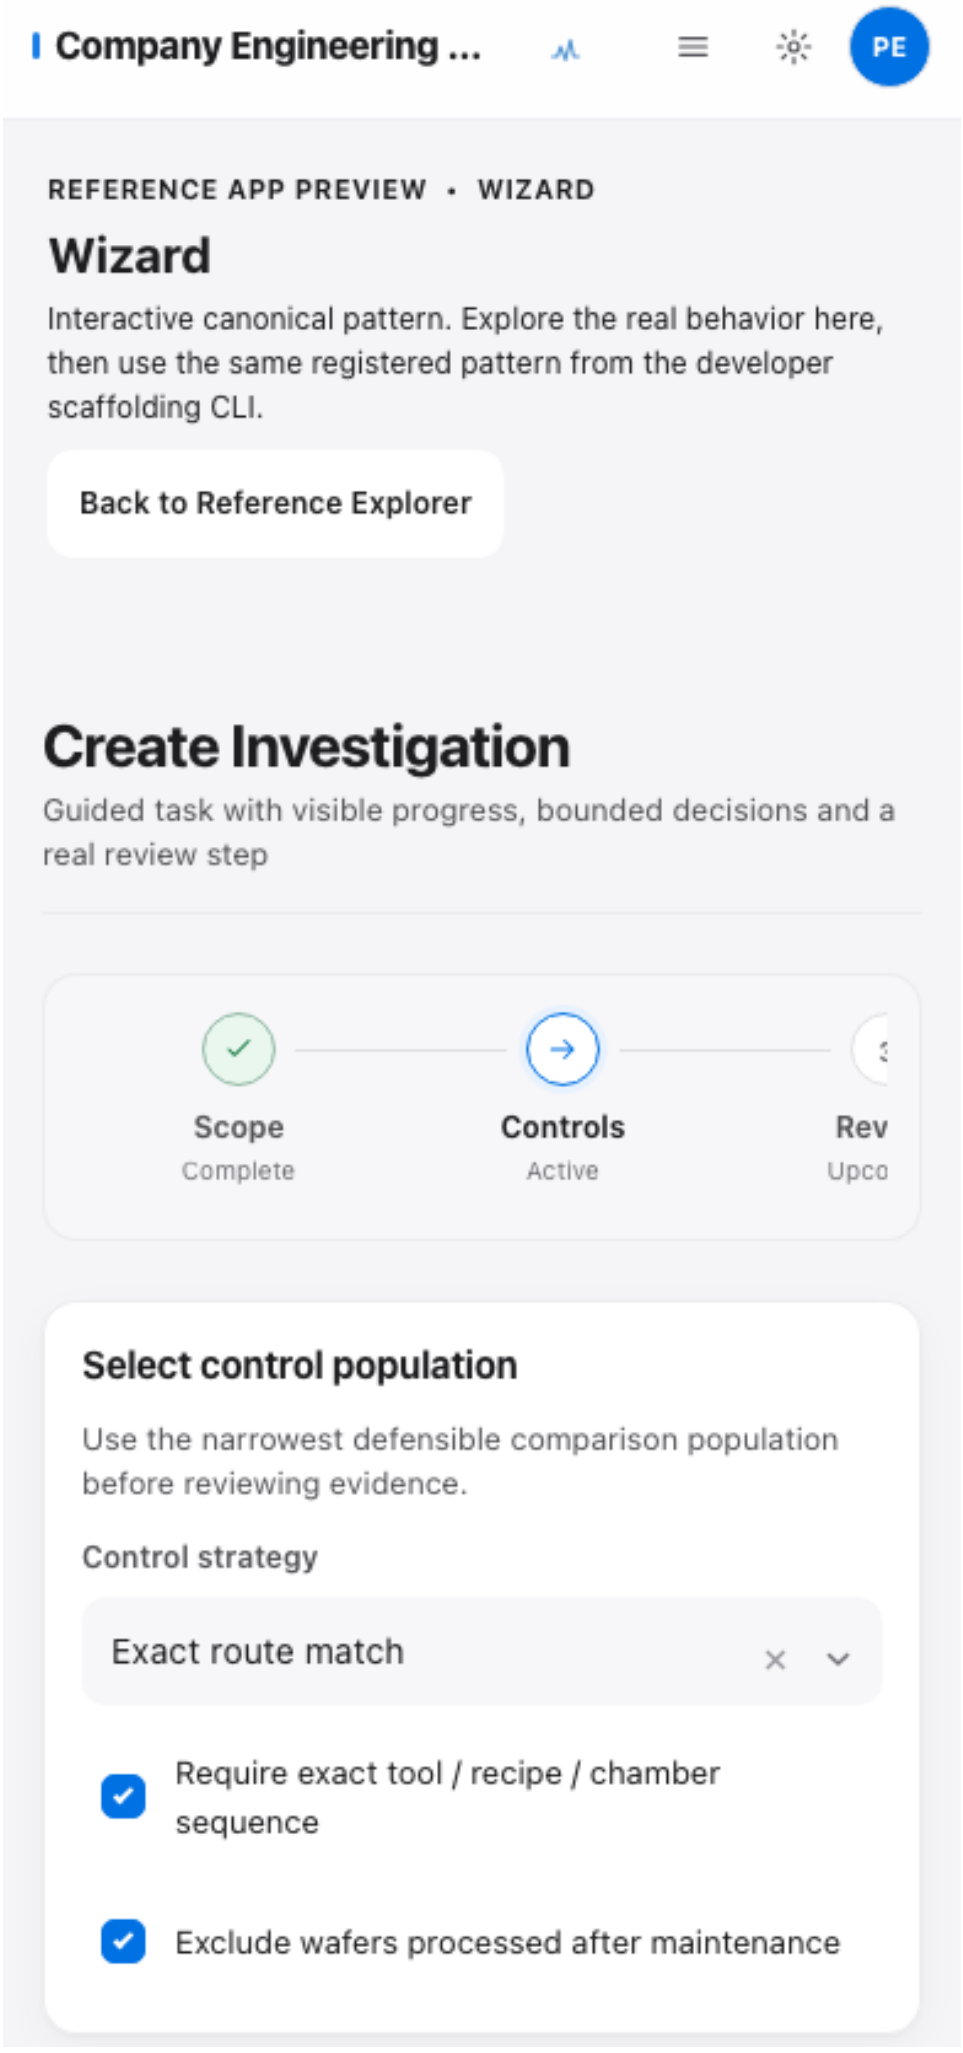

Company Engineering ...
PE
REFERENCE APP PREVIEW • MONITORING
Monitoring
Interactive canonical pattern. Explore the real behavior here, then use the same registered pattern from the developer scaffolding CLI.
Back to Reference Explorer
Fleet Monitoring
Operational health leads; investigation context stays one click away
Area
All areas
24 h
7 d
30 d
Healthy
84
Watch
7
Critical
3

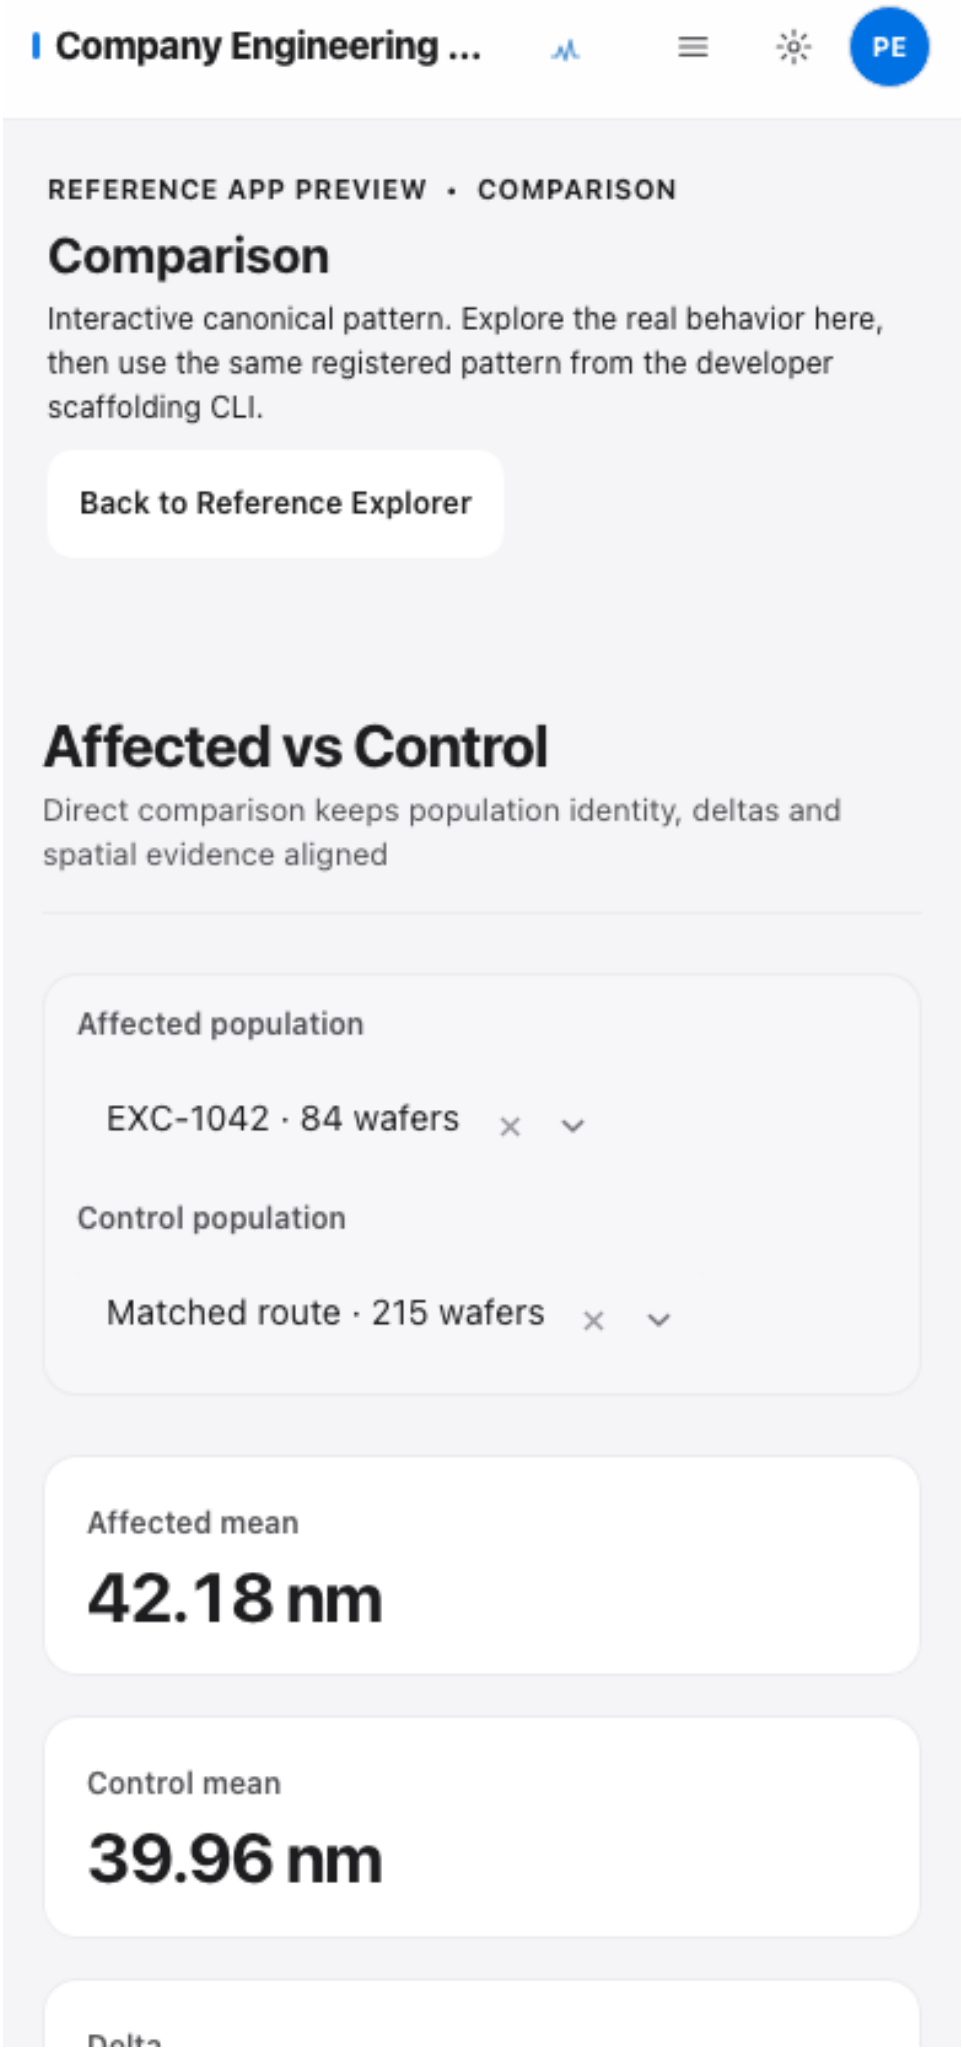
reference-pattern-search

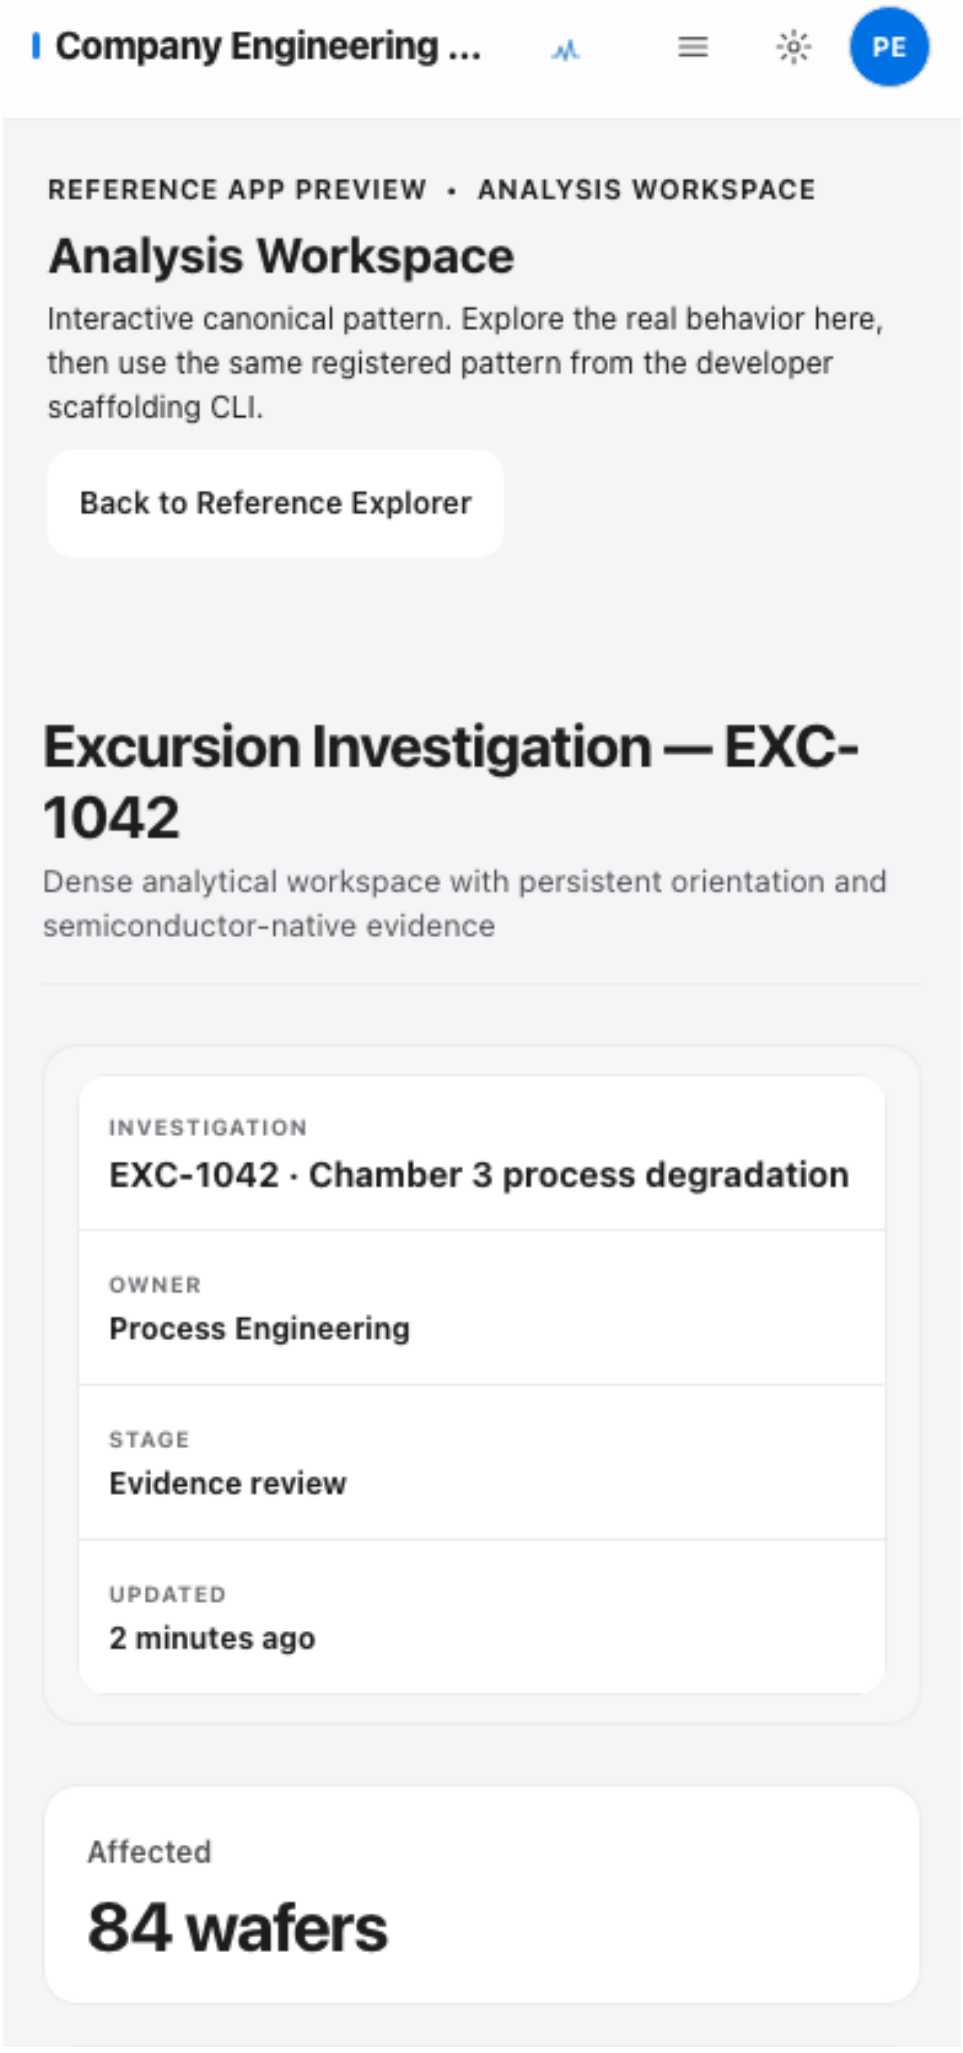
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

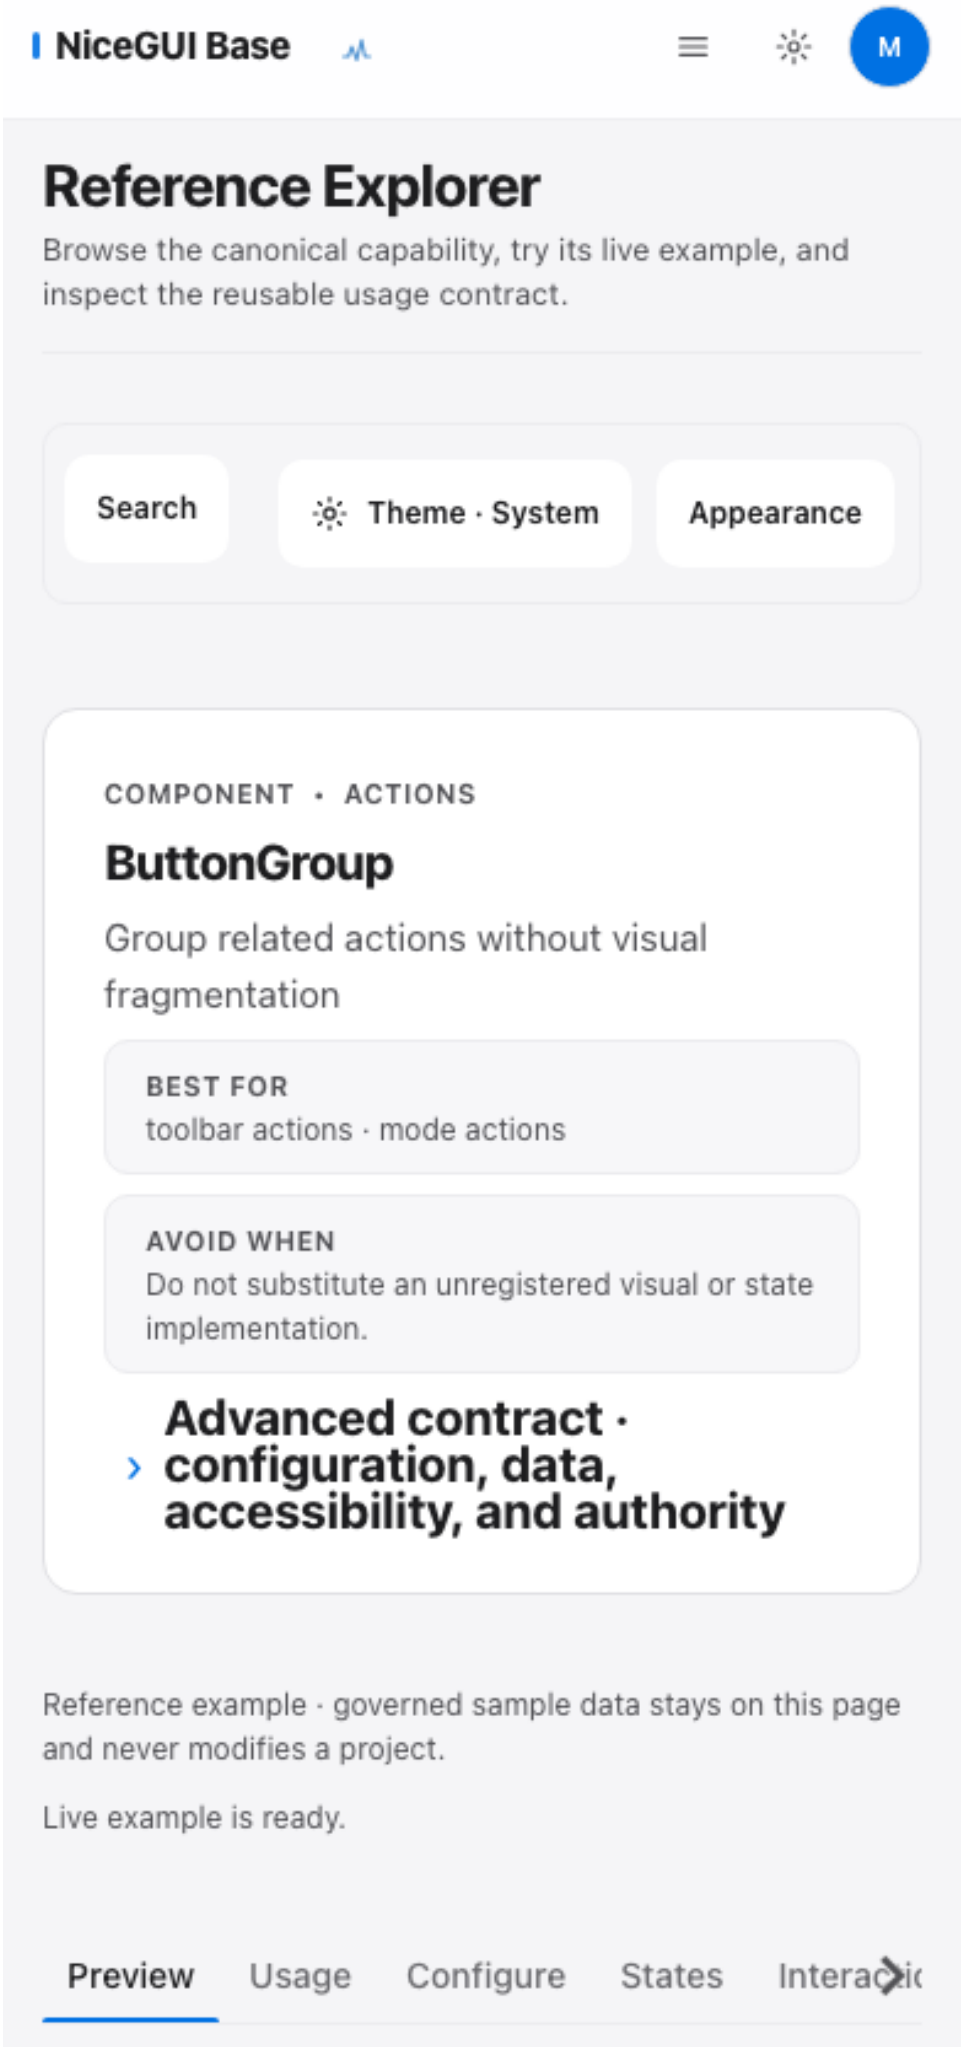
PNG SHA-256 930c101512c65537c5fbb3396e5da4ba5cd3675f26540a6a3a2adc13093b0f62

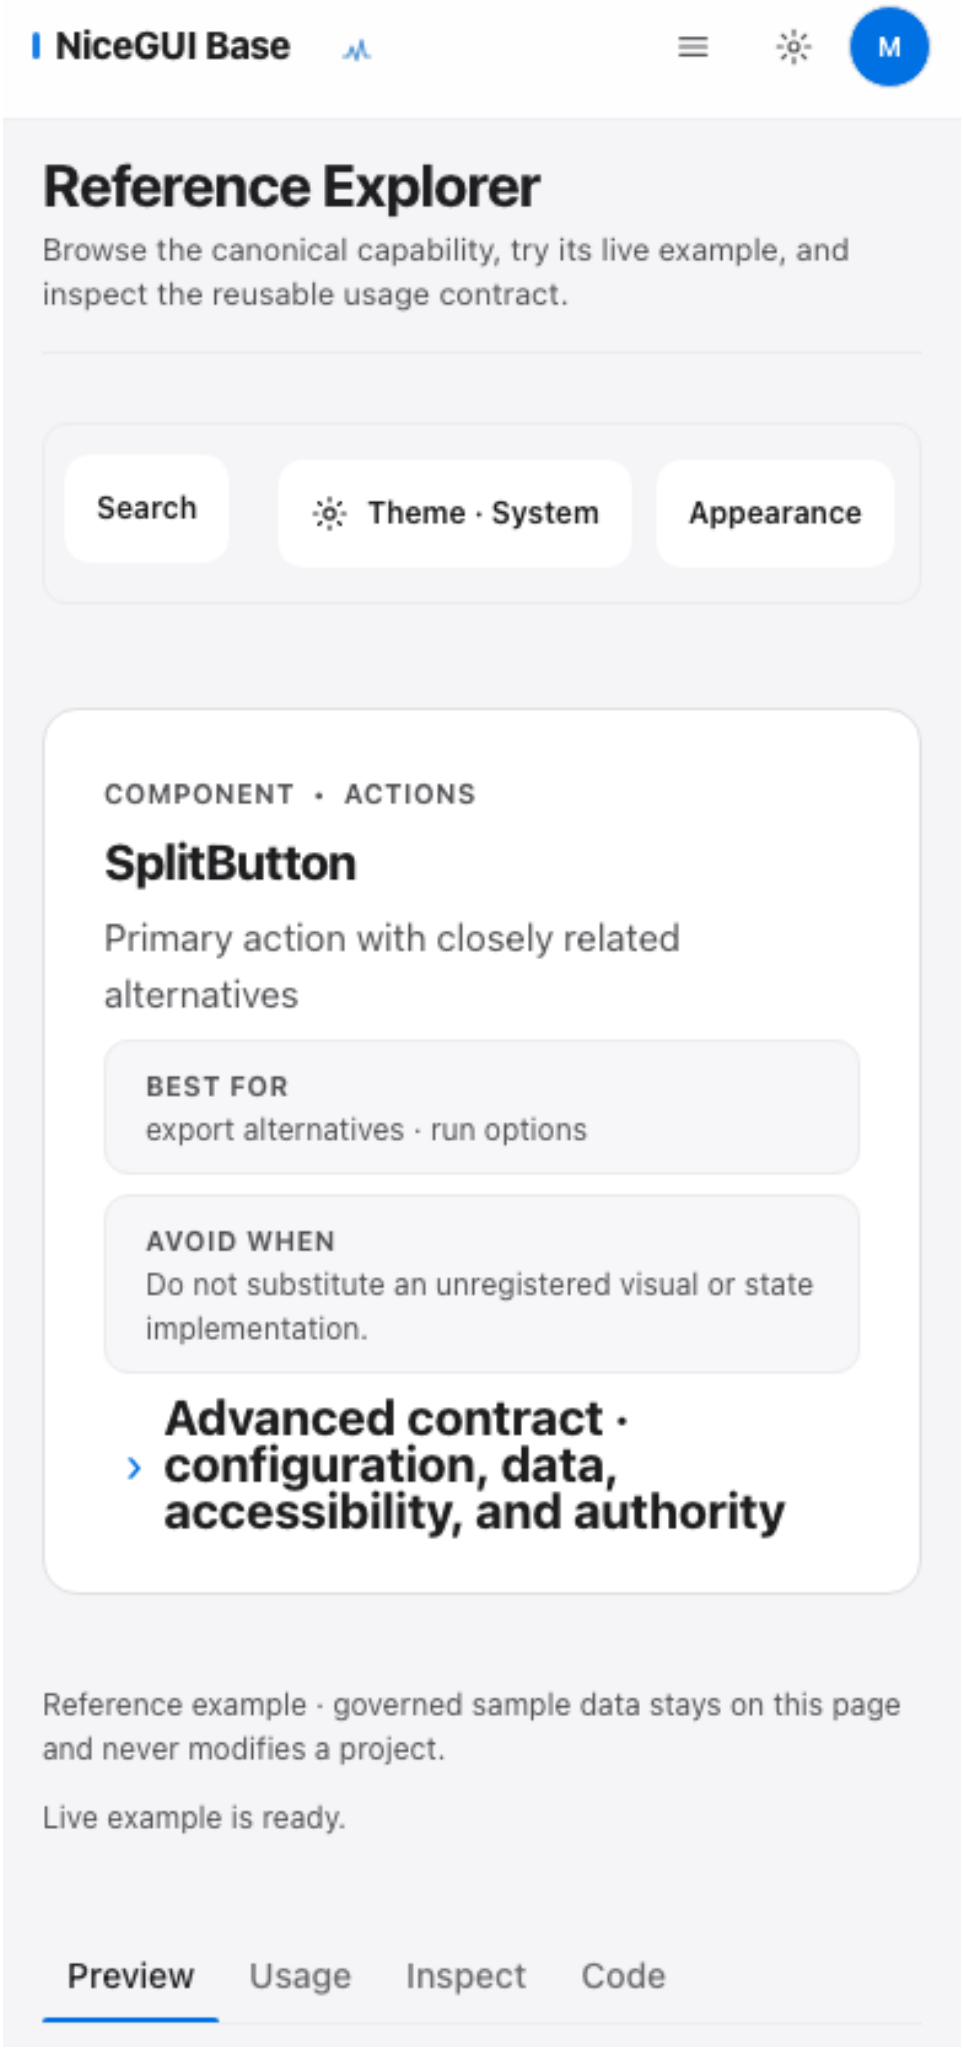


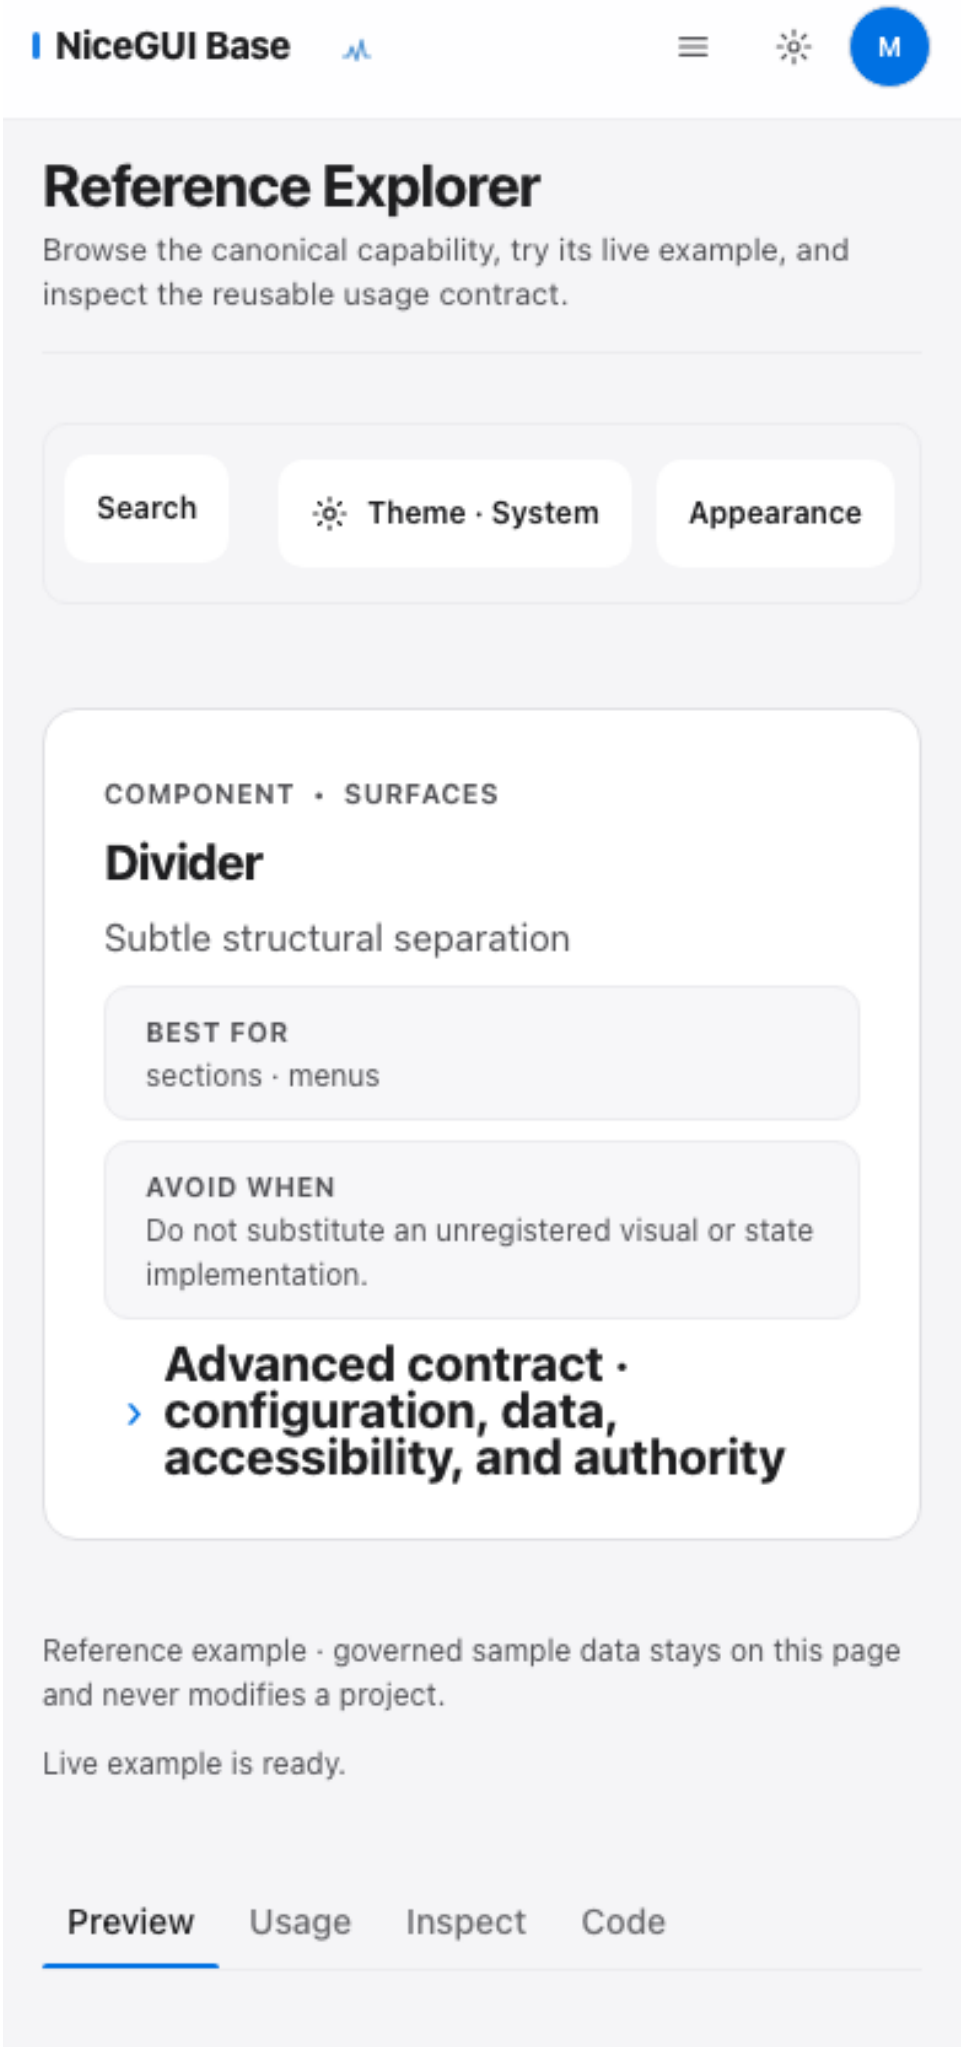

Company Engineering ...
PE
REFERENCE APP PREVIEW • WIZARD
Wizard
Interactive canonical pattern. Explore the real behavior here, then use the same registered pattern from the developer scaffolding CLI.
Back to Reference Explorer
Create Investigation
Guided task with visible progress, bounded decisions and a real review step
Scope
Complete
Controls
Active
Rev
Upco
Select control population
Use the narrowest defensible comparison population before reviewing evidence.
Control strategy
Exact route match
Require exact tool / recipe / chamber sequence
Exclude wafers processed after maintenance

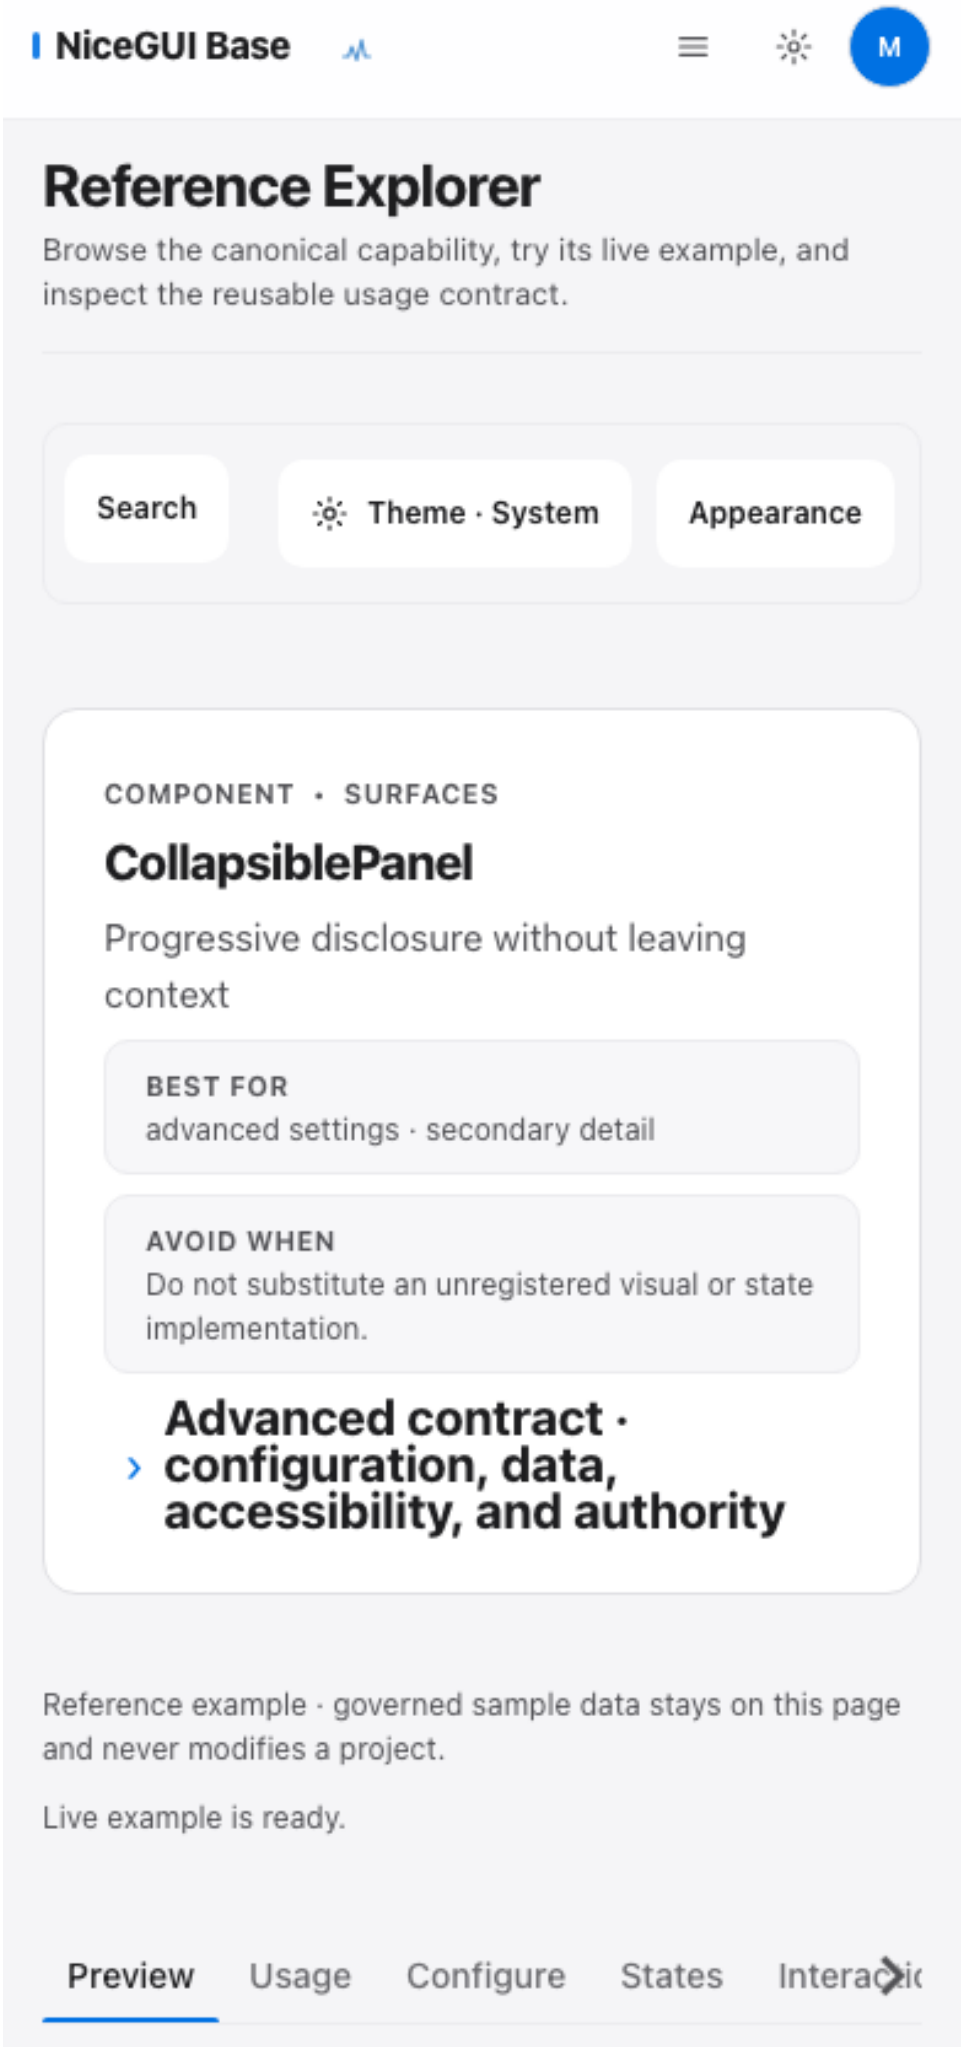

Company Engineering ...
PE
REFERENCE APP PREVIEW • COMPARISON
Comparison
Interactive canonical pattern. Explore the real behavior here, then use the same registered pattern from the developer scaffolding CLI.
Back to Reference Explorer
Affected vs Control
Direct comparison keeps population identity, deltas and spatial evidence aligned
Affected population
EXC-1042 · 84 wafers
Control population
Matched route · 215 wafers
Affected mean
42.18 nm
Control mean
39.96 nm
Delta

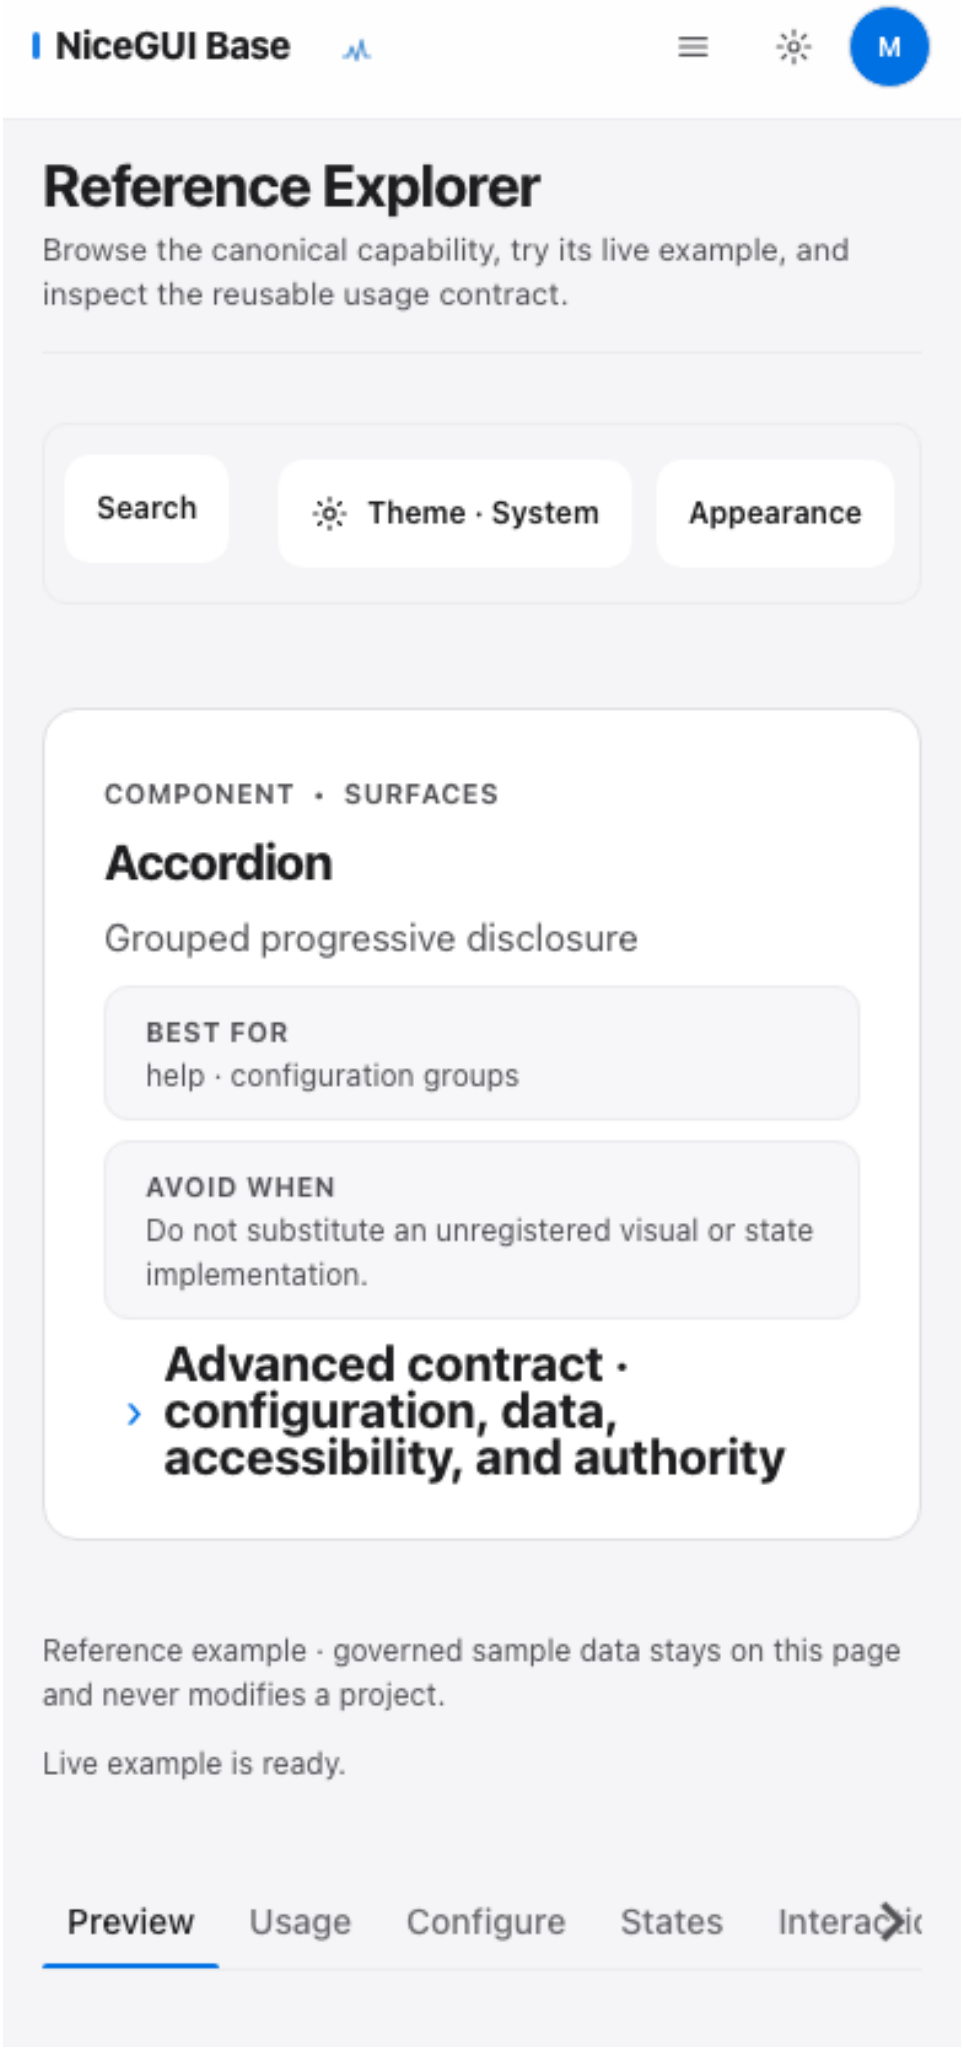

Company Engineering ...
PE
REFERENCE APP PREVIEW • ANALYSIS WORKSPACE
Analysis Workspace
Interactive canonical pattern. Explore the real behavior here, then use the same registered pattern from the developer scaffolding CLI.
Back to Reference Explorer
Excursion Investigation — EXC-1042
Dense analytical workspace with persistent orientation and semiconductor-native evidence
INVESTIGATION
EXC-1042 · Chamber 3 process degradation
OWNER
Process Engineering
STAGE
Evidence review
UPDATED
2 minutes ago
Affected
84 wafers

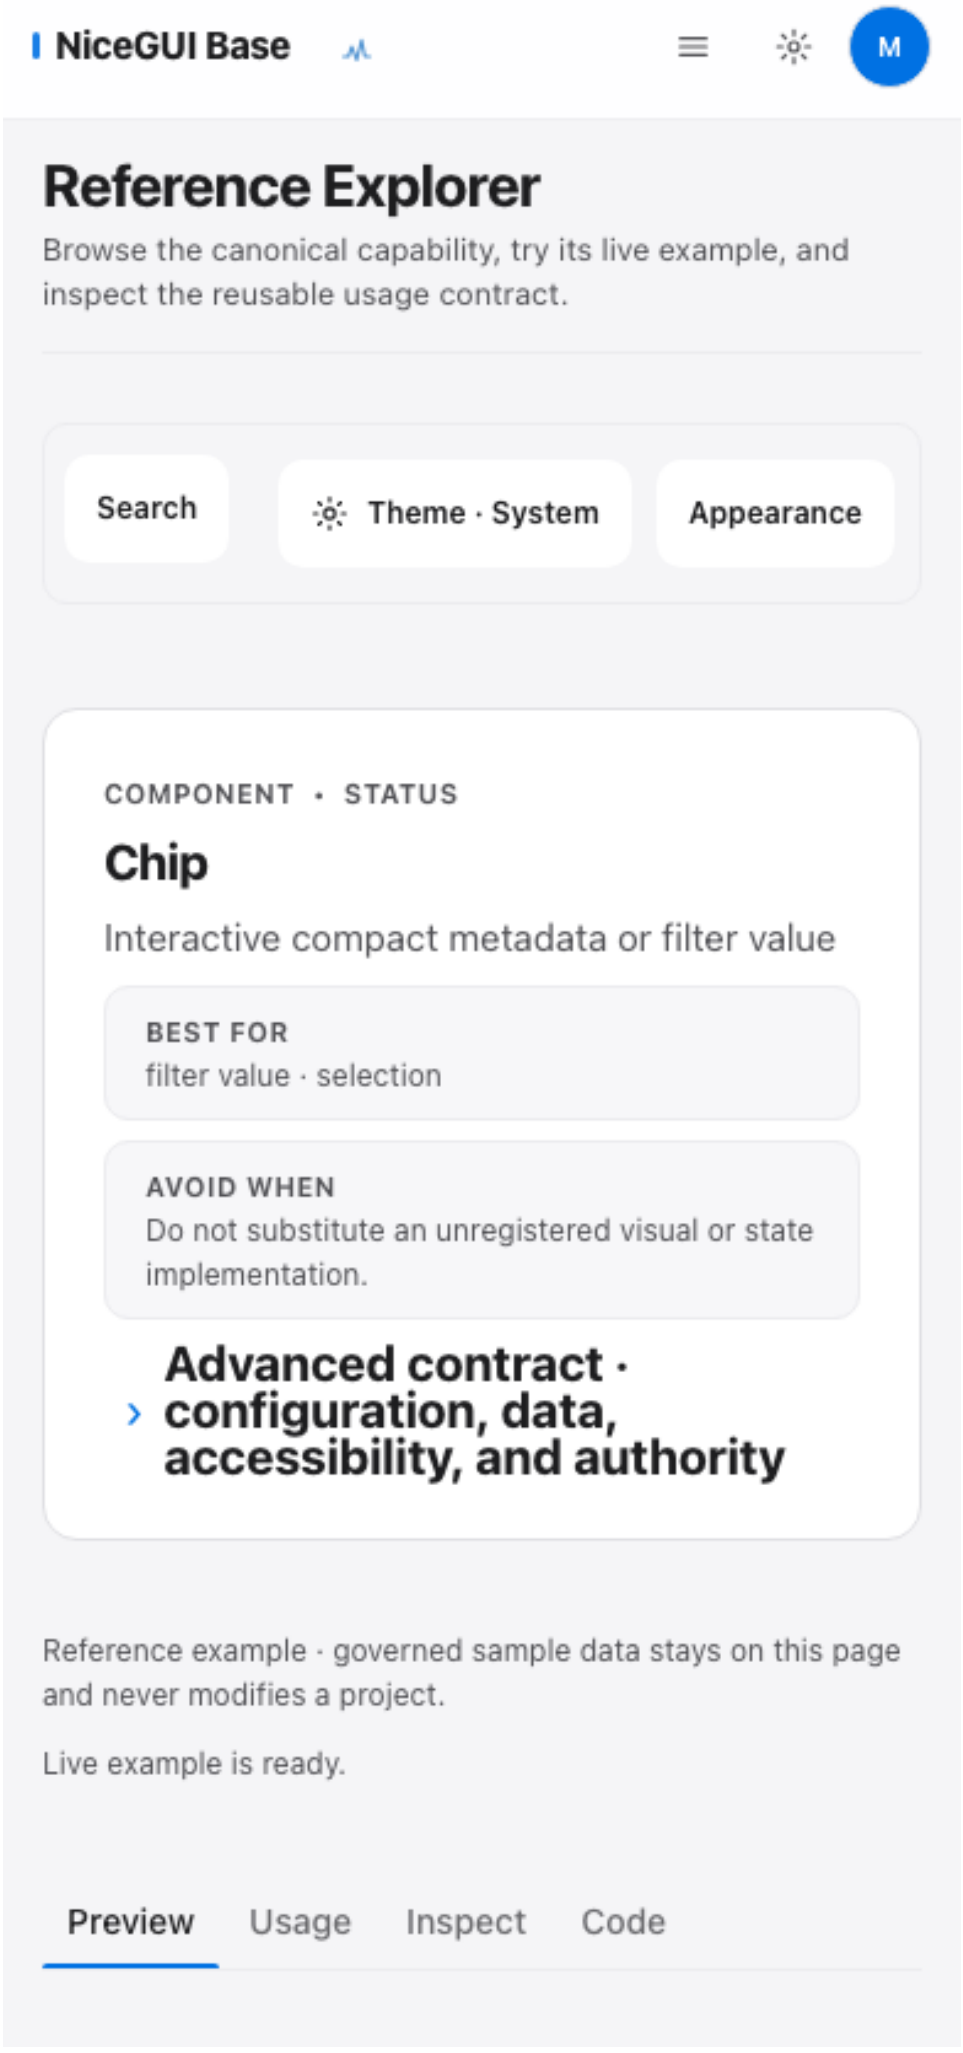

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • ACTIONS
ButtonGroup
Group related actions without visual fragmentation
BEST FOR
toolbar actions · mode actions
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • ACTIONS
SplitButton
Primary action with closely related alternatives
BEST FOR
export alternatives · run options
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • SURFACES
Divider
Subtle structural separation
BEST FOR
sections · menus
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code

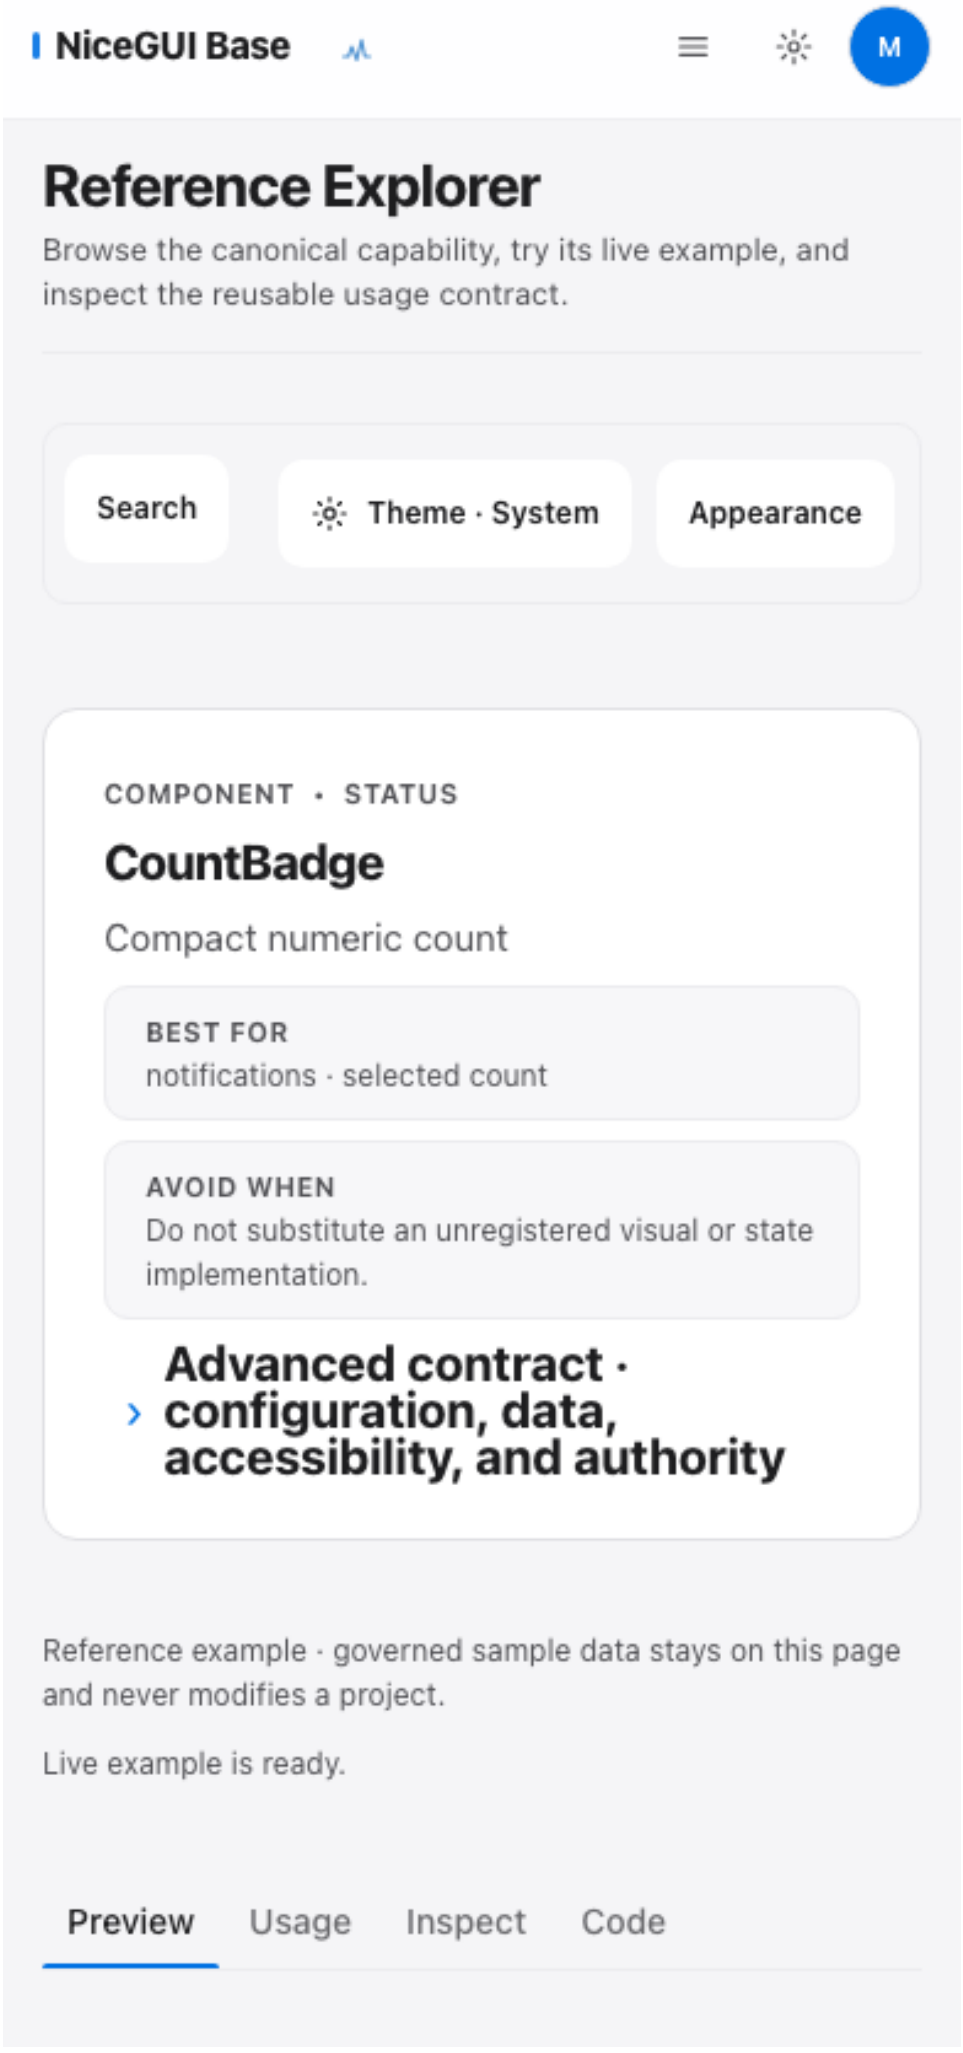

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • SURFACES
CollapsiblePanel
Progressive disclosure without leaving context
BEST FOR
advanced settings · secondary detail
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • SURFACES
Accordion
Grouped progressive disclosure
BEST FOR
help · configuration groups
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • STATUS
Chip
Interactive compact metadata or filter value
BEST FOR
filter value · selection
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code

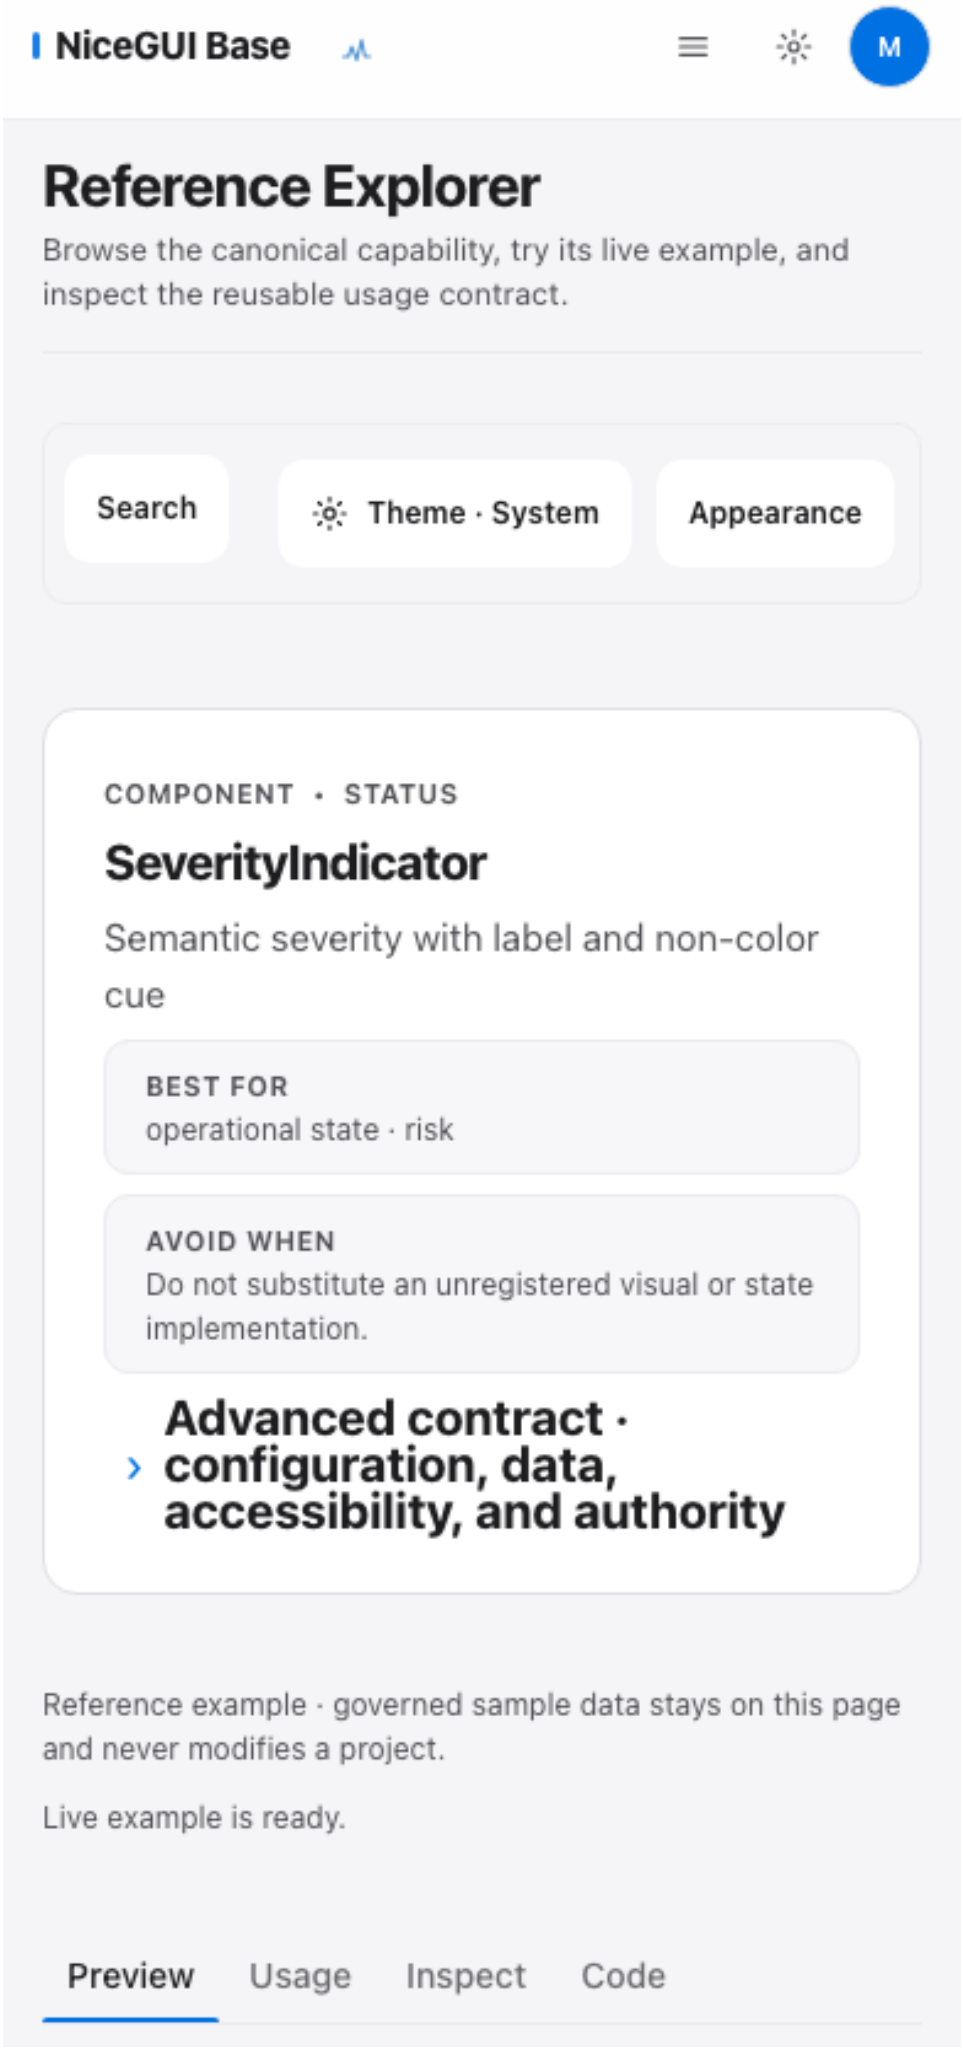
component-count_badge

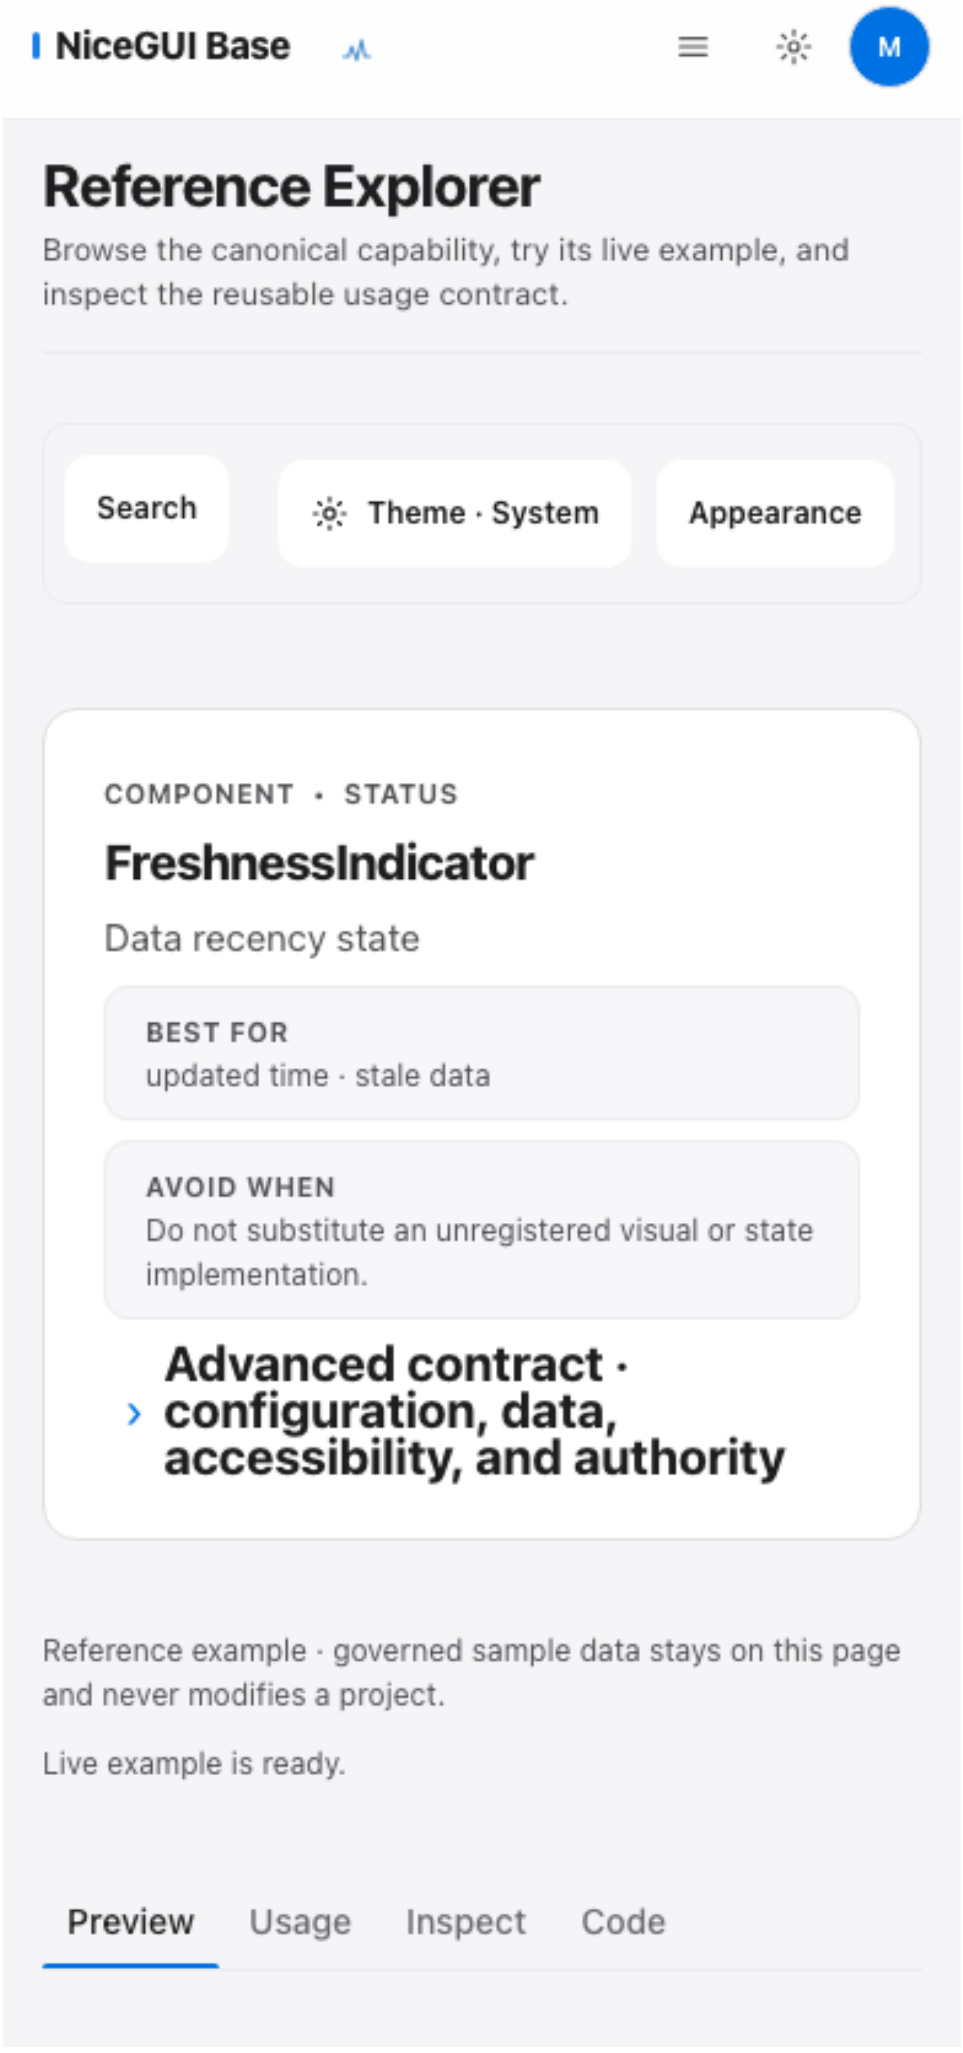
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 1cd0f02a788d4a733358e85615cf4cde02614937bc39d80f55041ff3252737dc



component-severity_indicator

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 e00fc46f3fc564246ca0a2437f241ddd018bfc01f0c97bc69529e61c5e8d6515

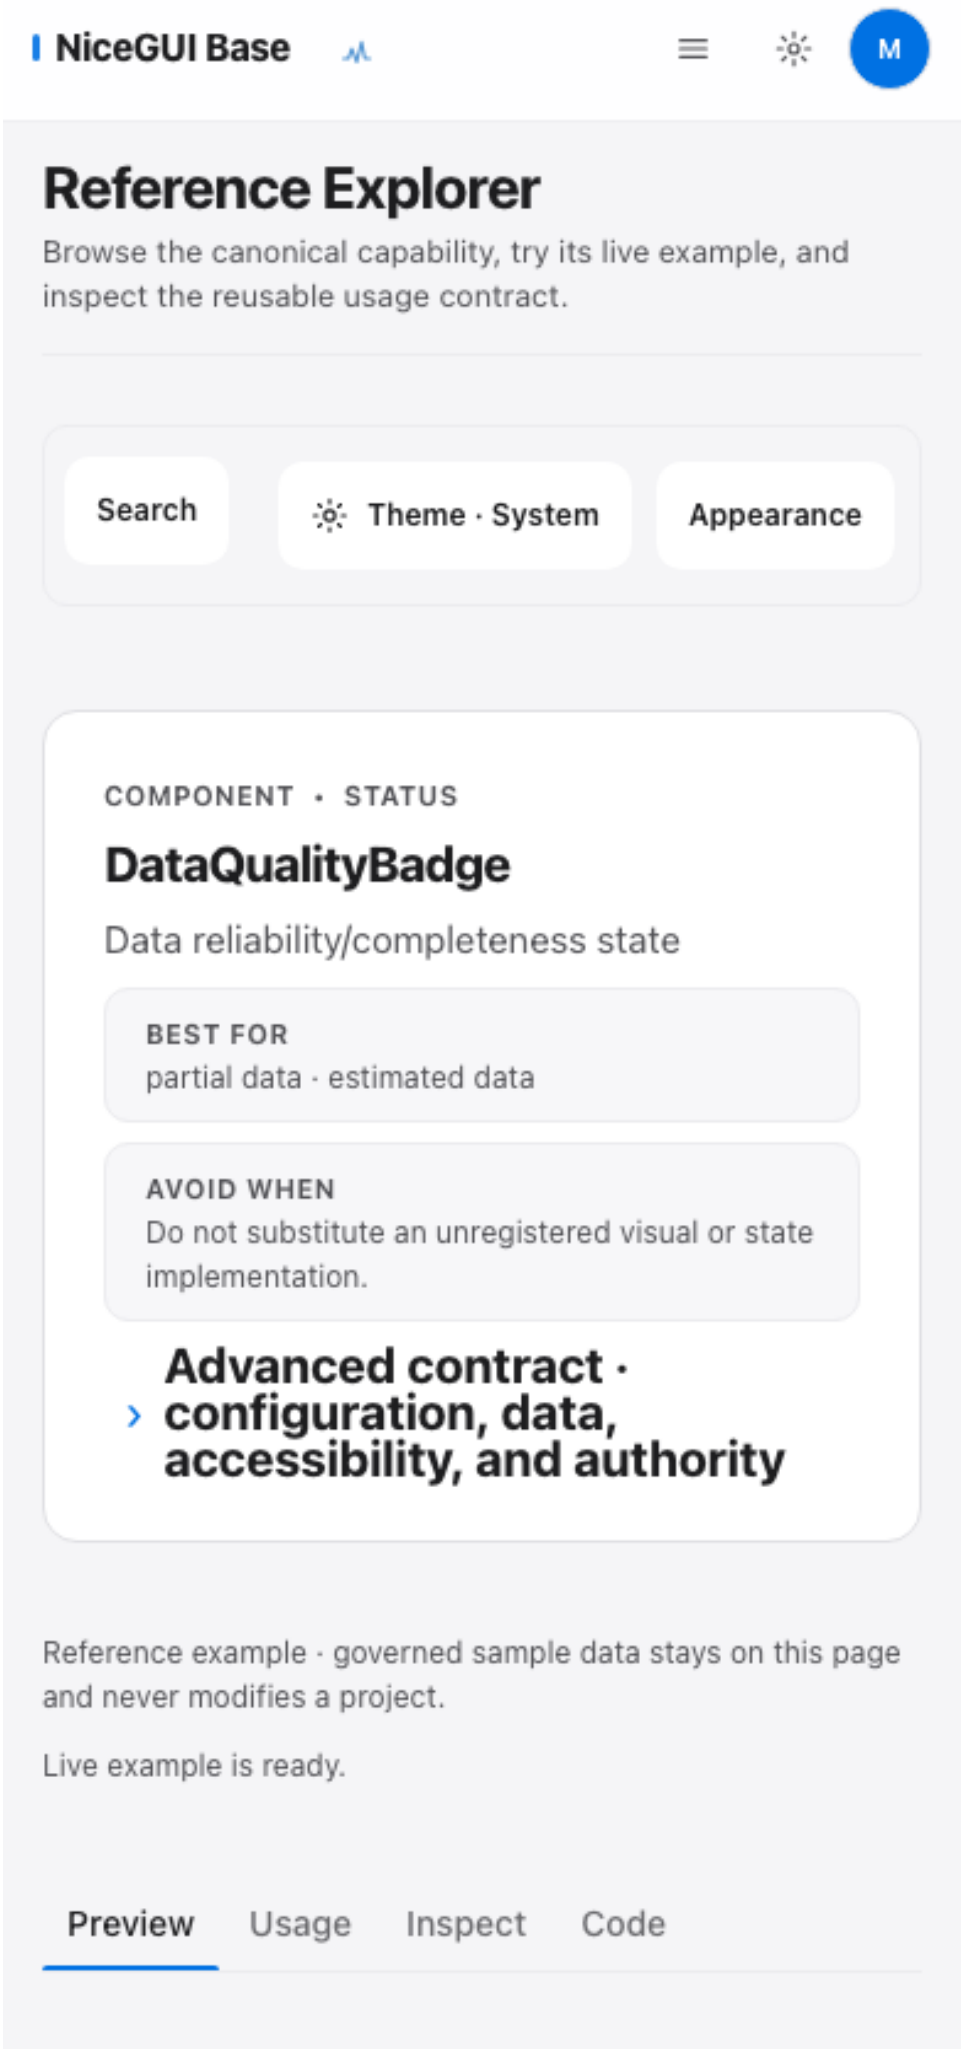


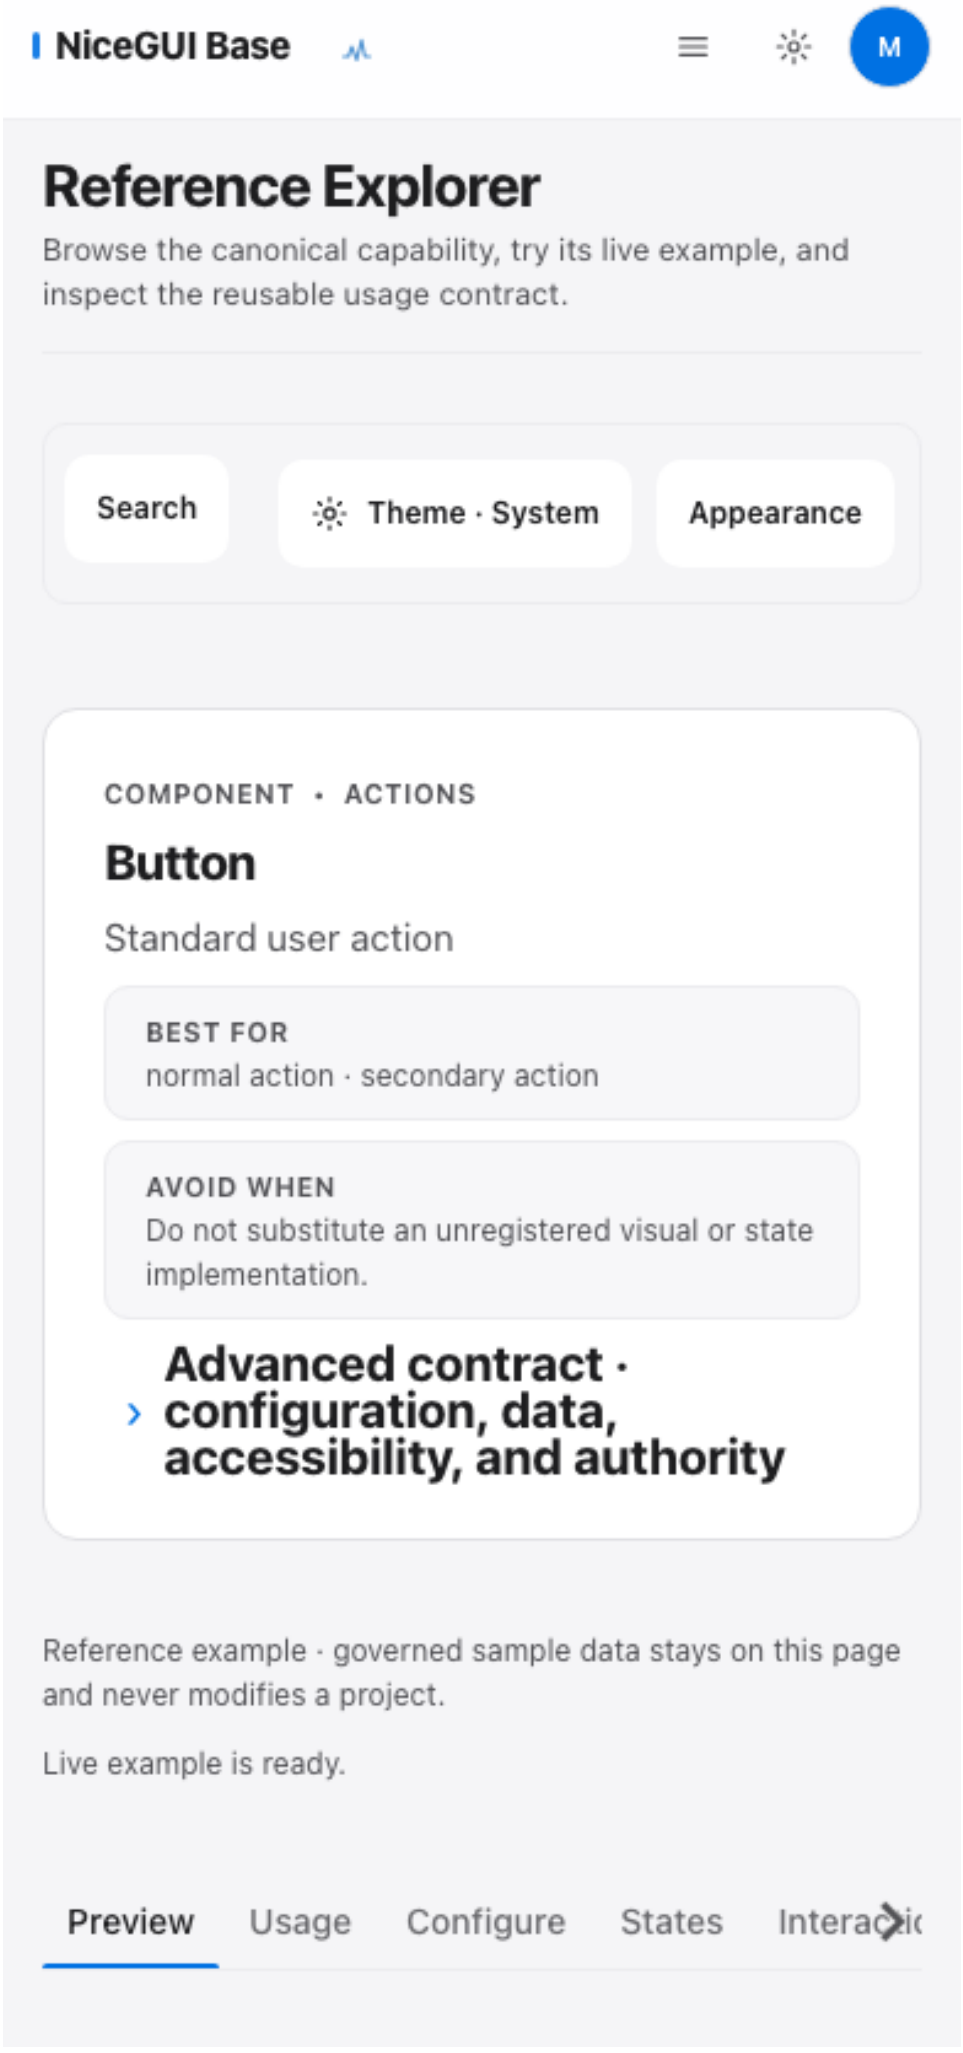

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • STATUS
FreshnessIndicator
Data recency state
BEST FOR
updated time · stale data
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code

component-data_quality_badge

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

PNG SHA-256 5a3120247475ba5c991f1b99cb538d7bc50b499db36272566ad63073017f1d79

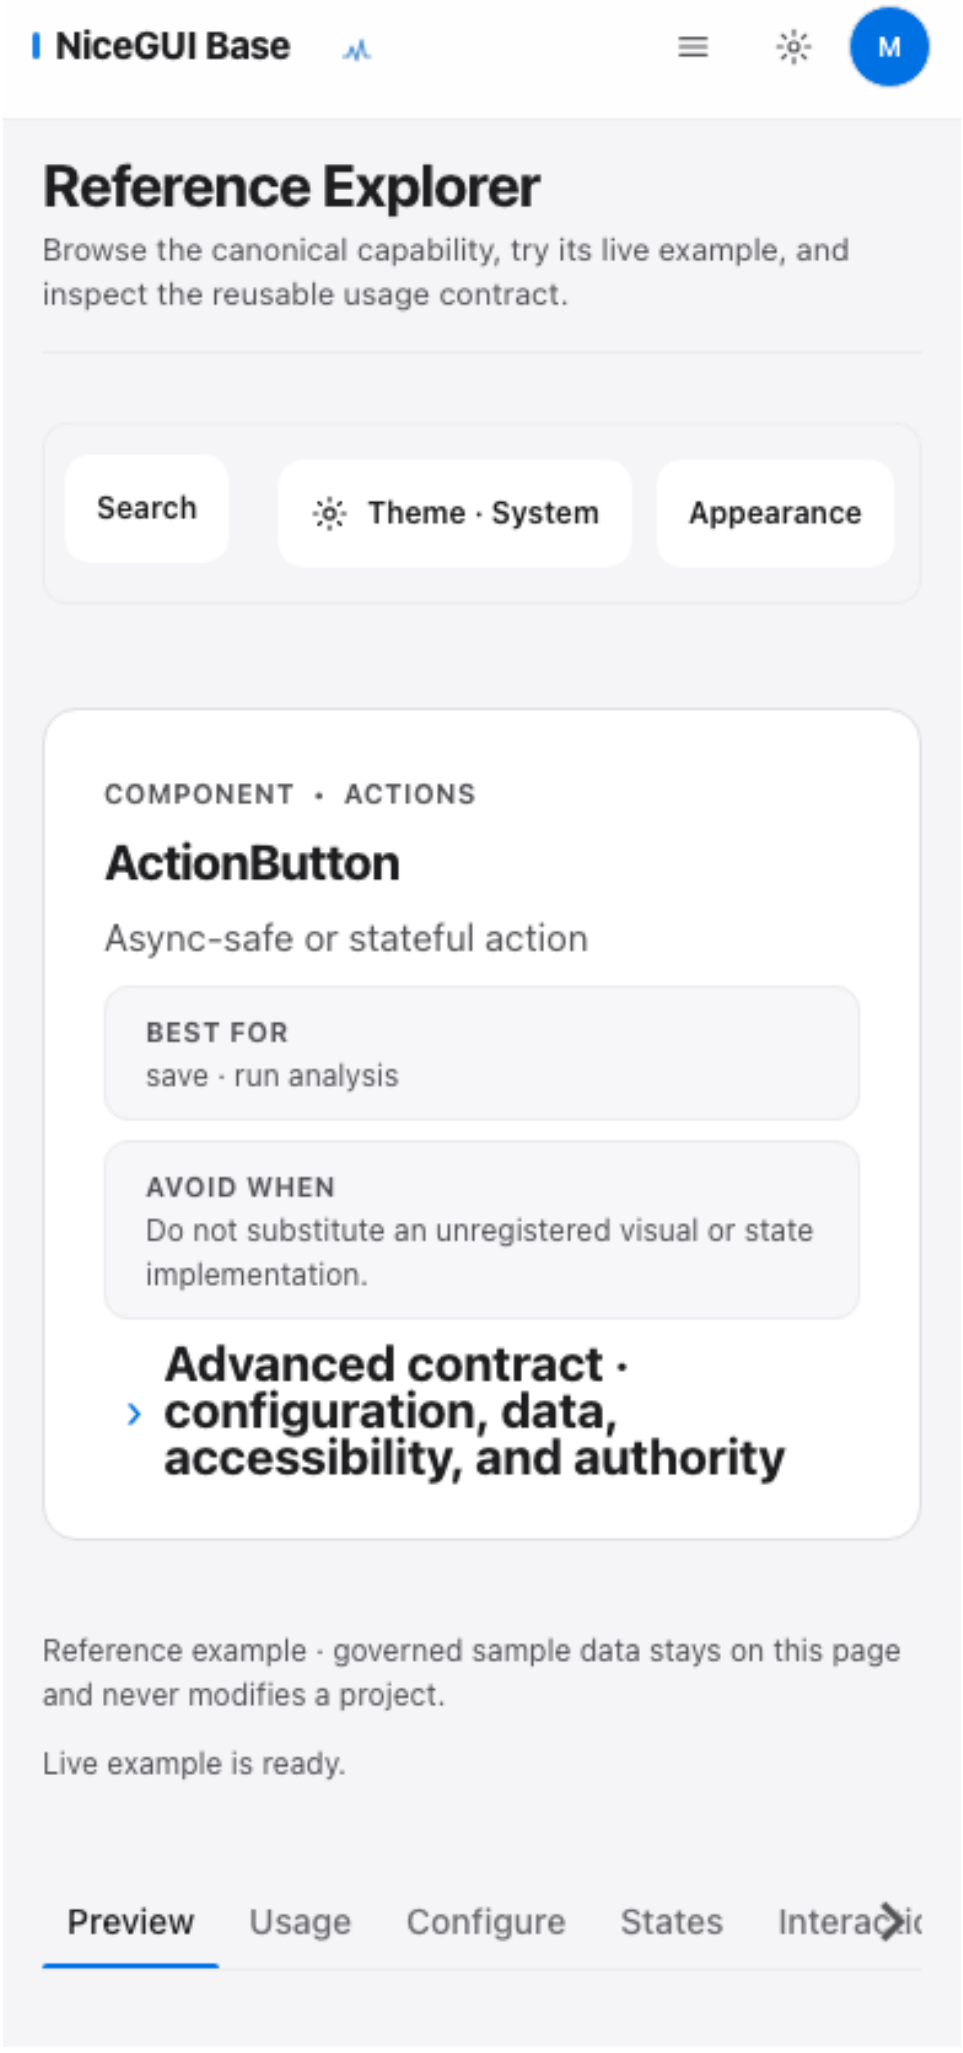


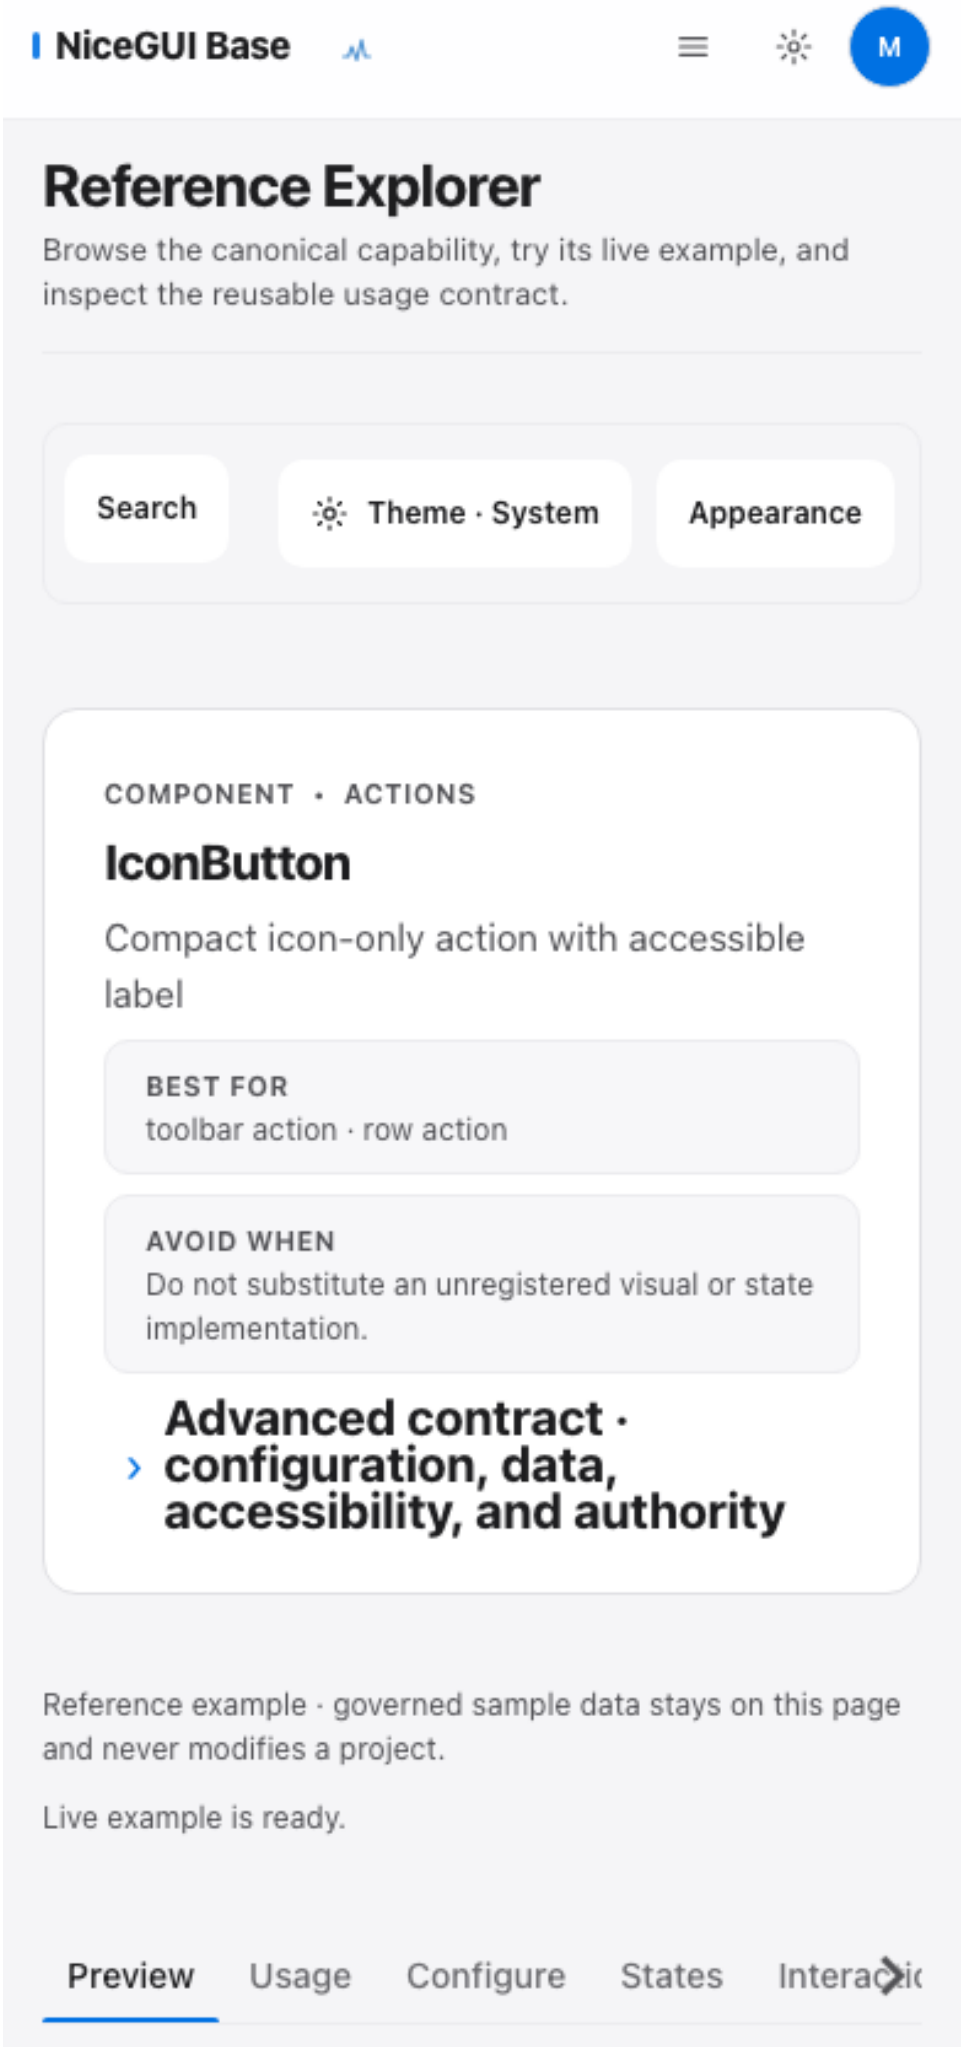

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • ACTIONS
Button
Standard user action
BEST FOR
normal action · secondary action
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

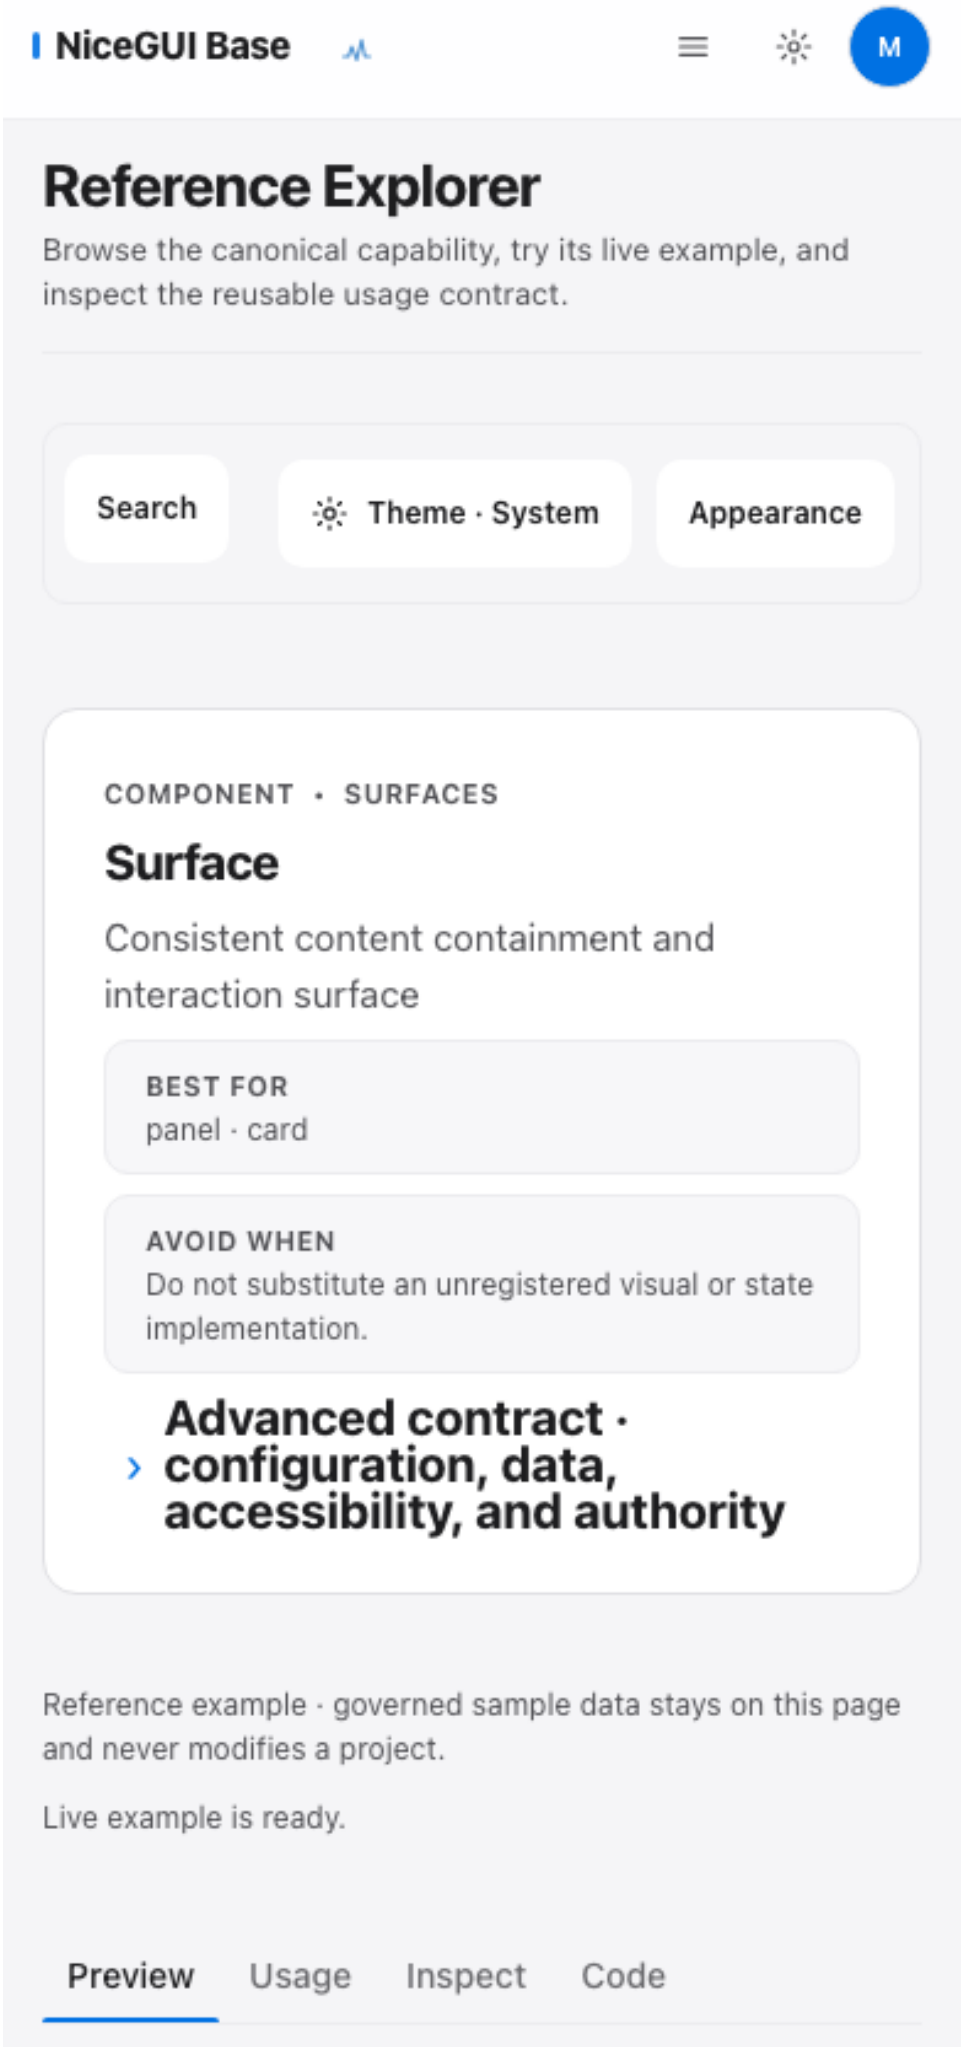
component-action_button

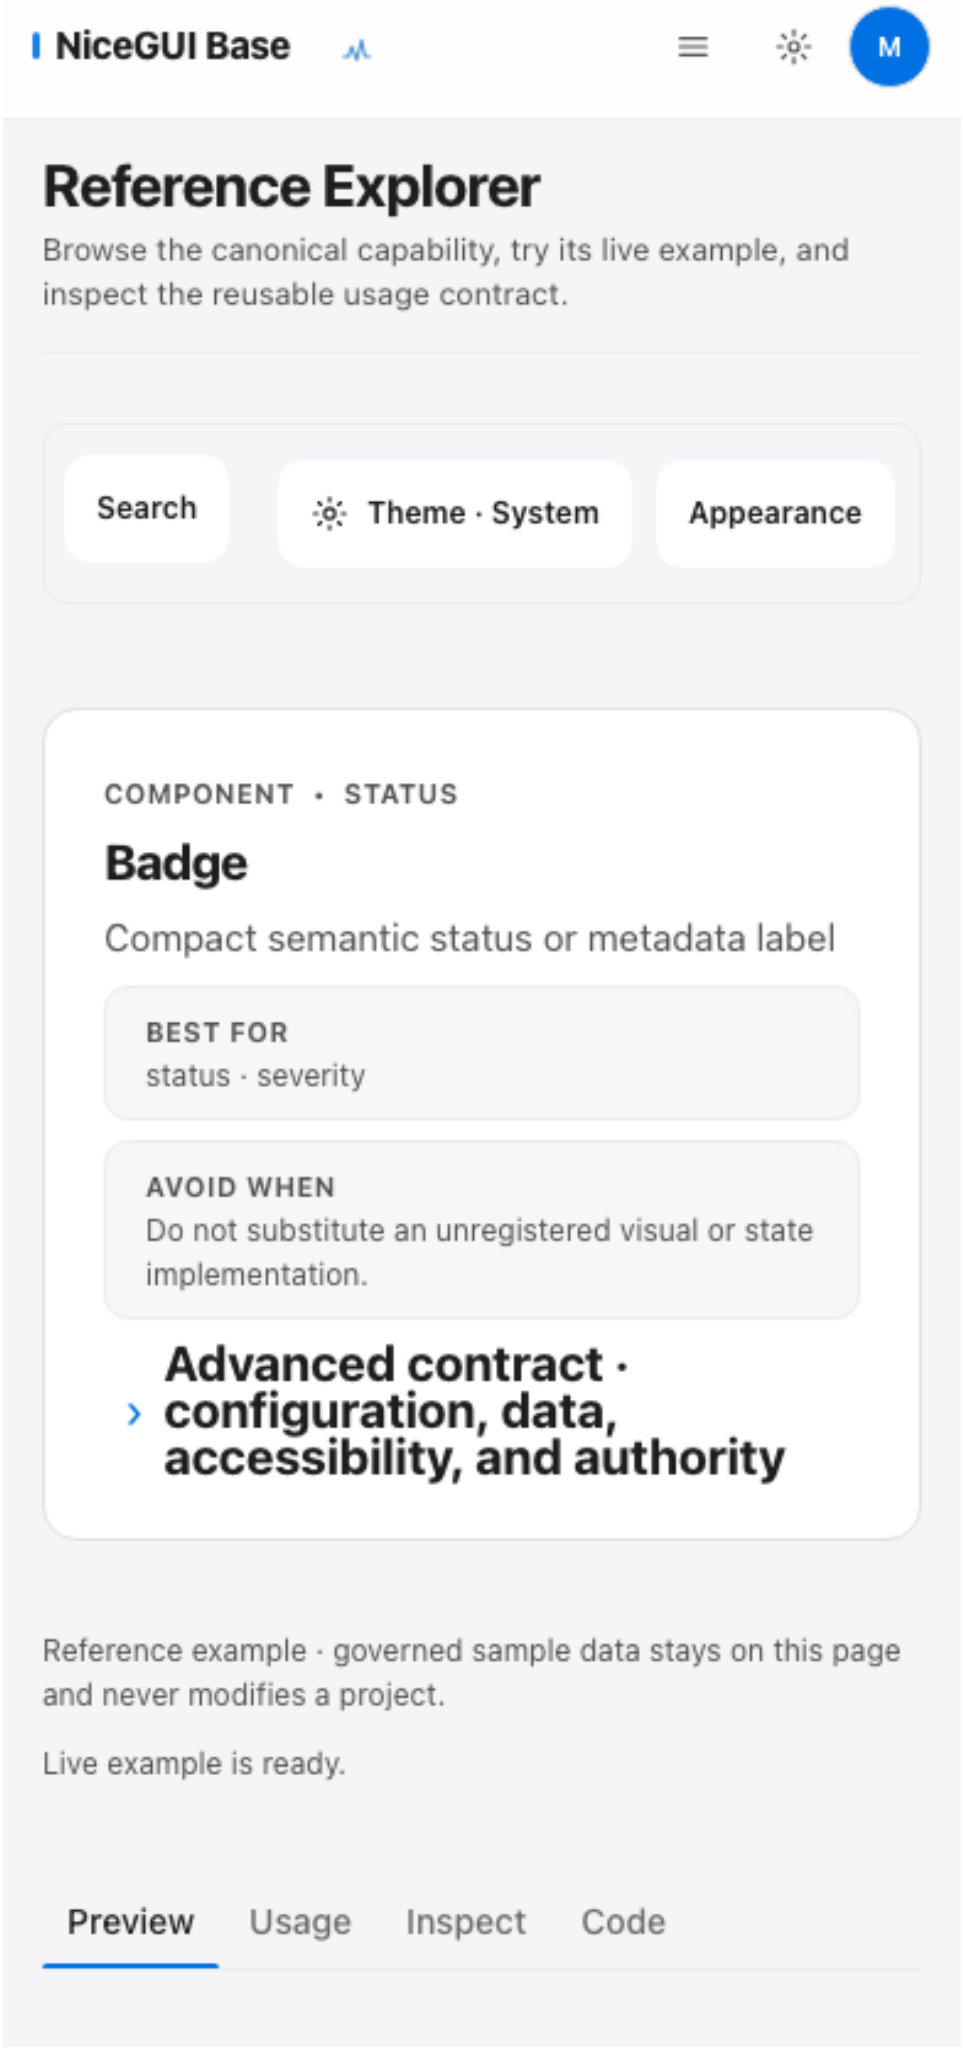
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

PNG SHA-256 959c3f37ef8877b5584c3a4c35b4c761f9e669a5569654eaeadf1a434857cf02




NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • ACTIONS
IconButton
Compact icon-only action with accessible label
BEST FOR
toolbar action · row action
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

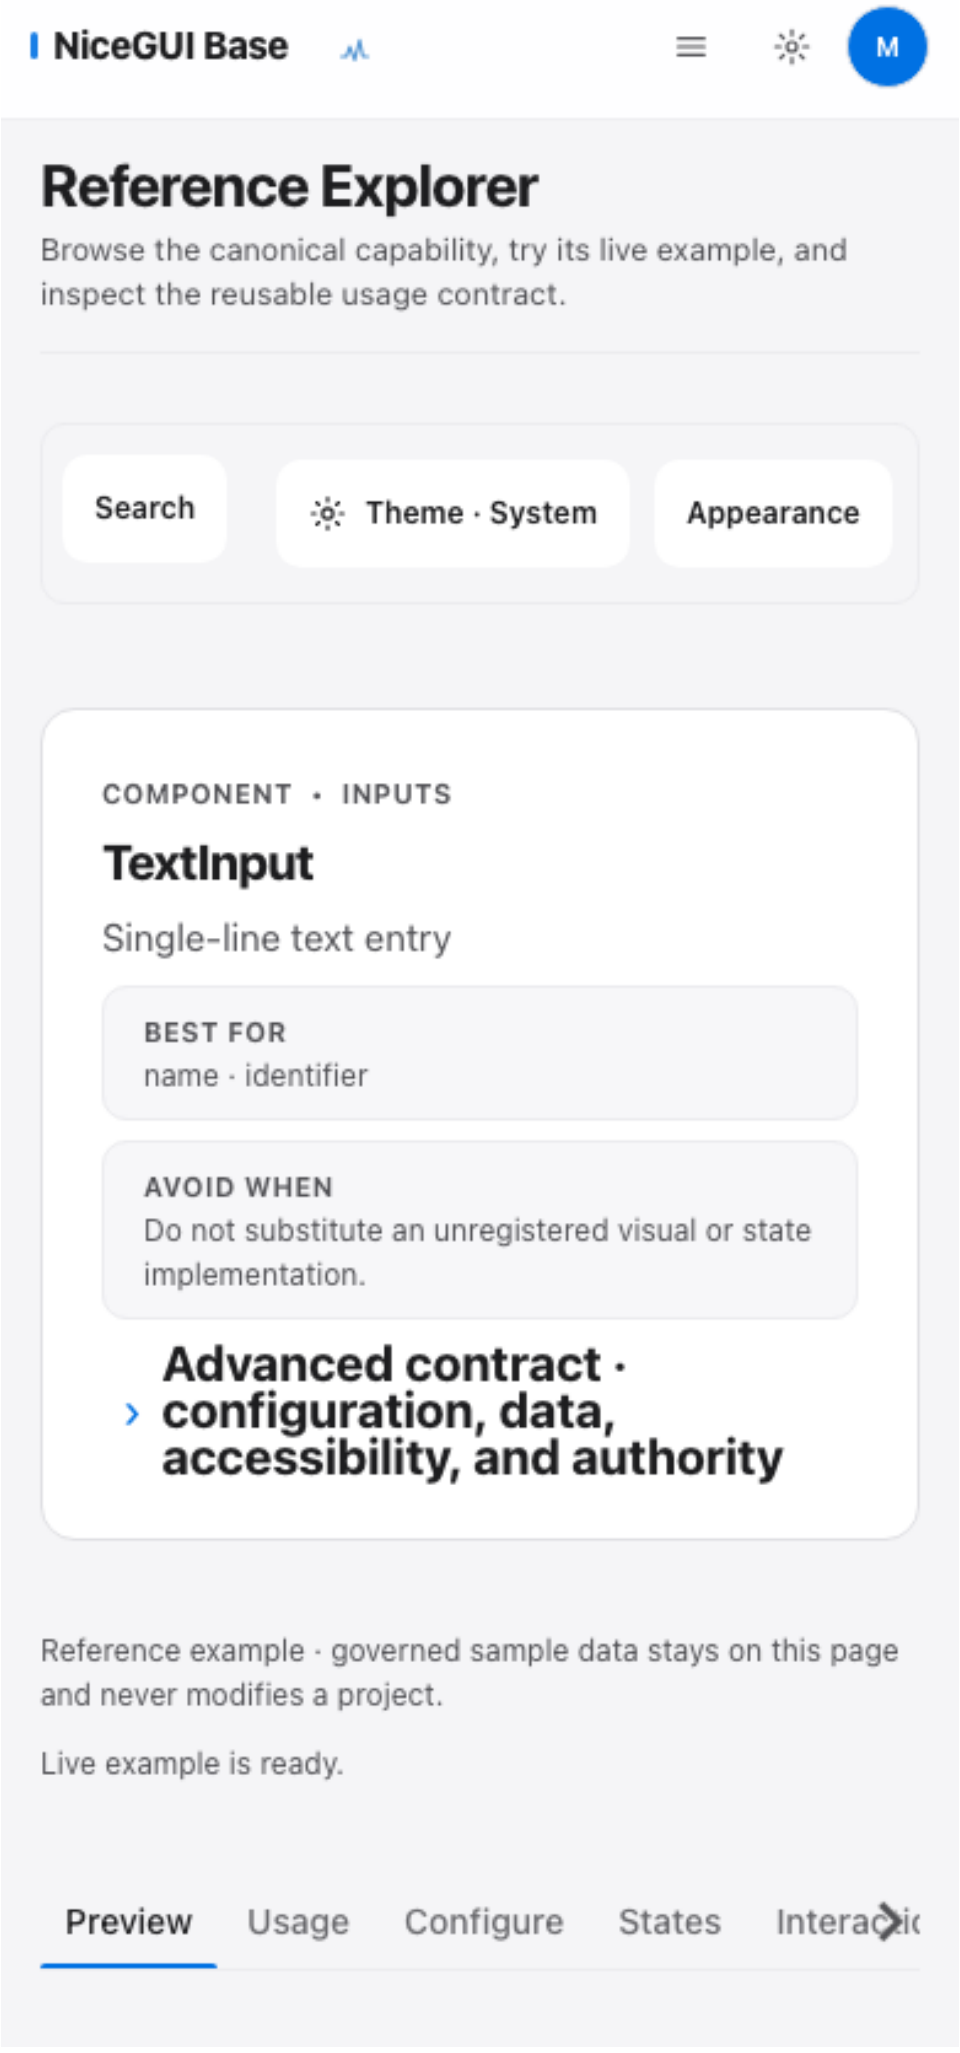

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • SURFACES
Surface
Consistent content containment and interaction surface
BEST FOR
panel · card
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • STATUS
Badge
Compact semantic status or metadata label
BEST FOR
status · severity
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code

component-text_input

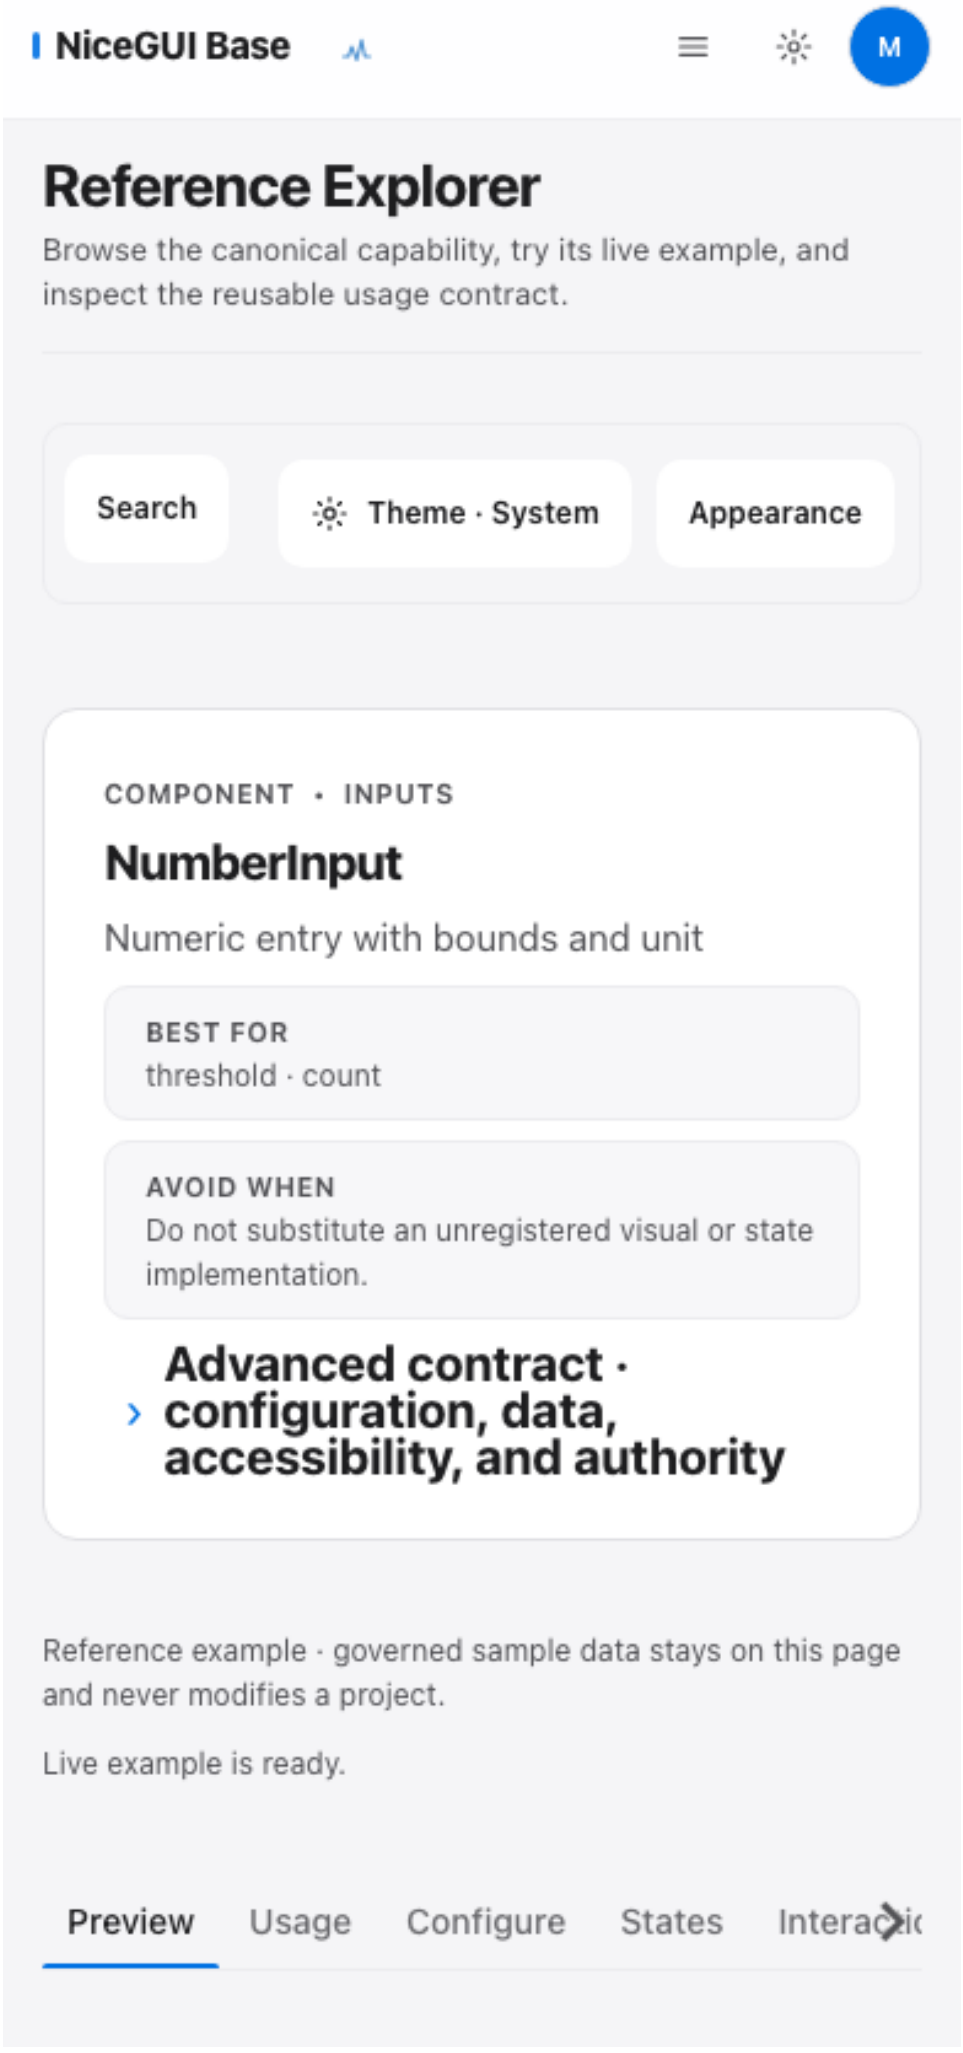
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

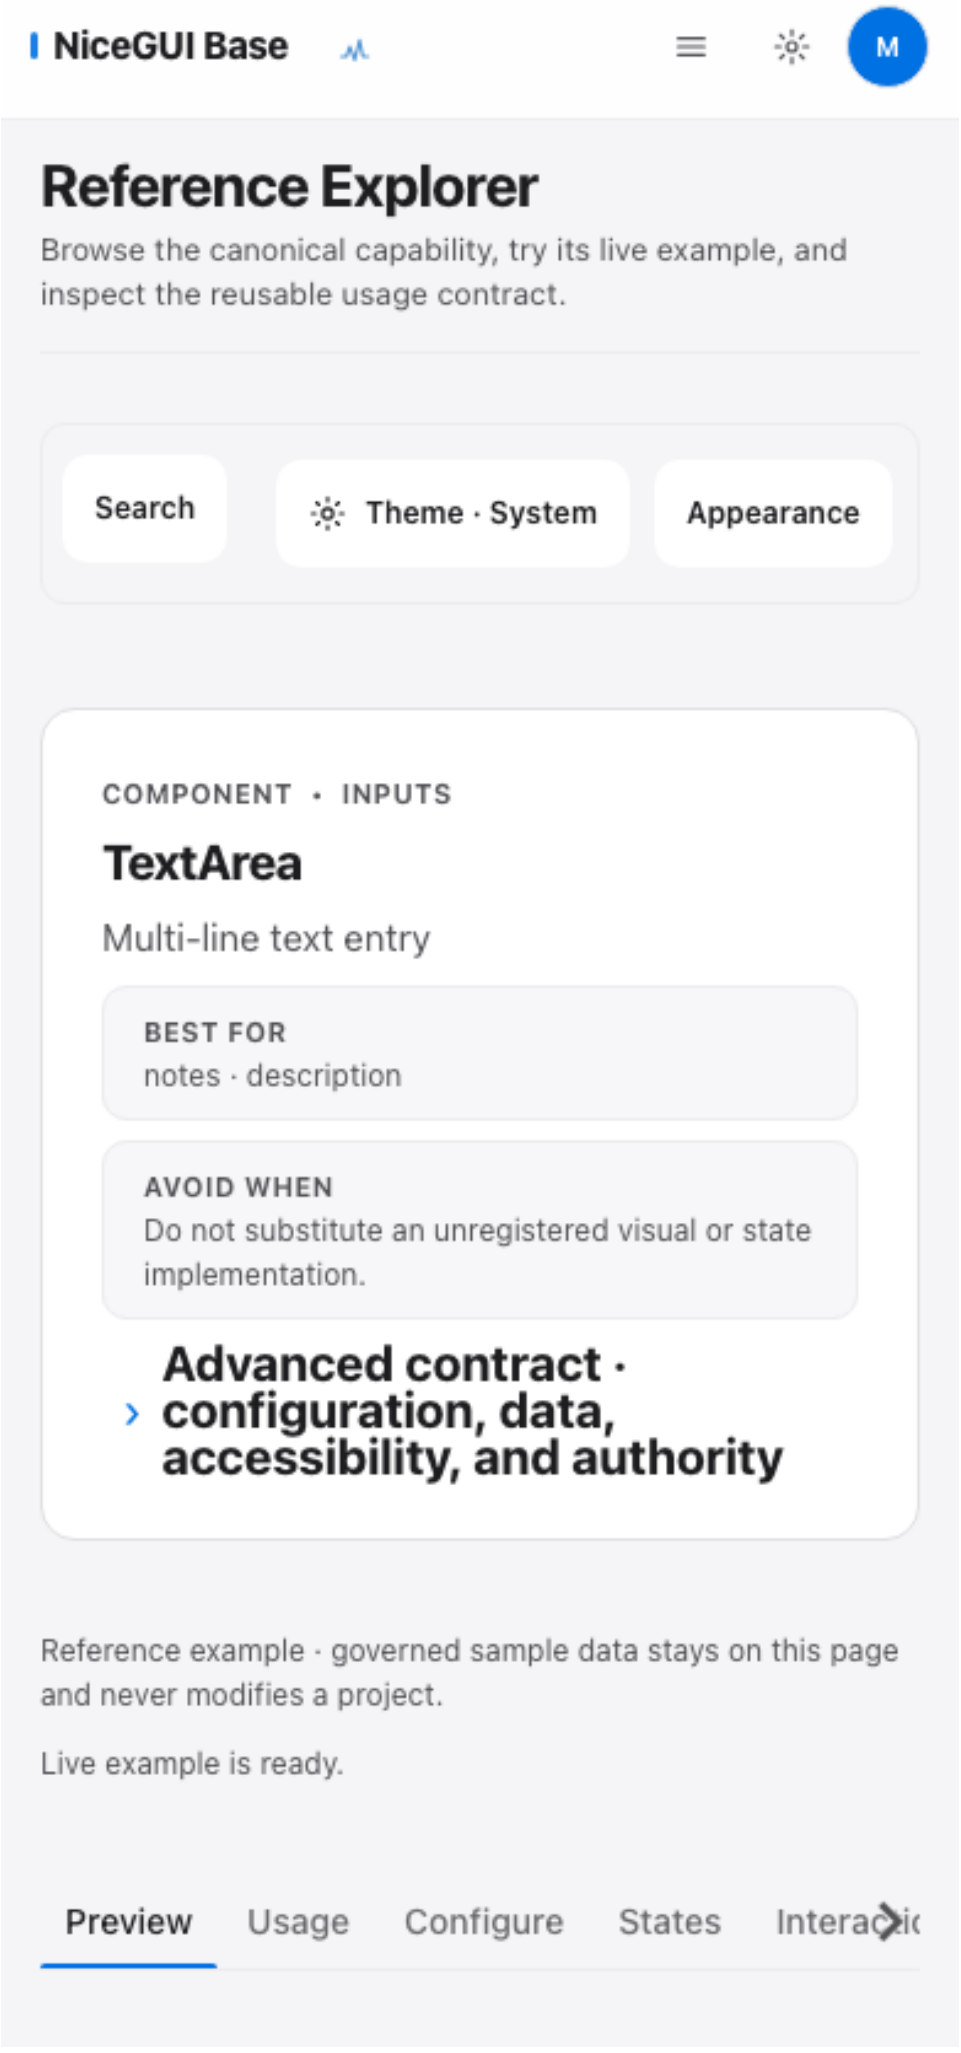
PNG SHA-256 6dd4db38dd796f886979f6e68e126b5bbb5e4e2e8242dcf4ead66c65d0e3729a



component-number_input

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 d08fa92bf22bd68a8f8e51b0a57cb82ec5c62a9e4f032f52664572a9c907b22b

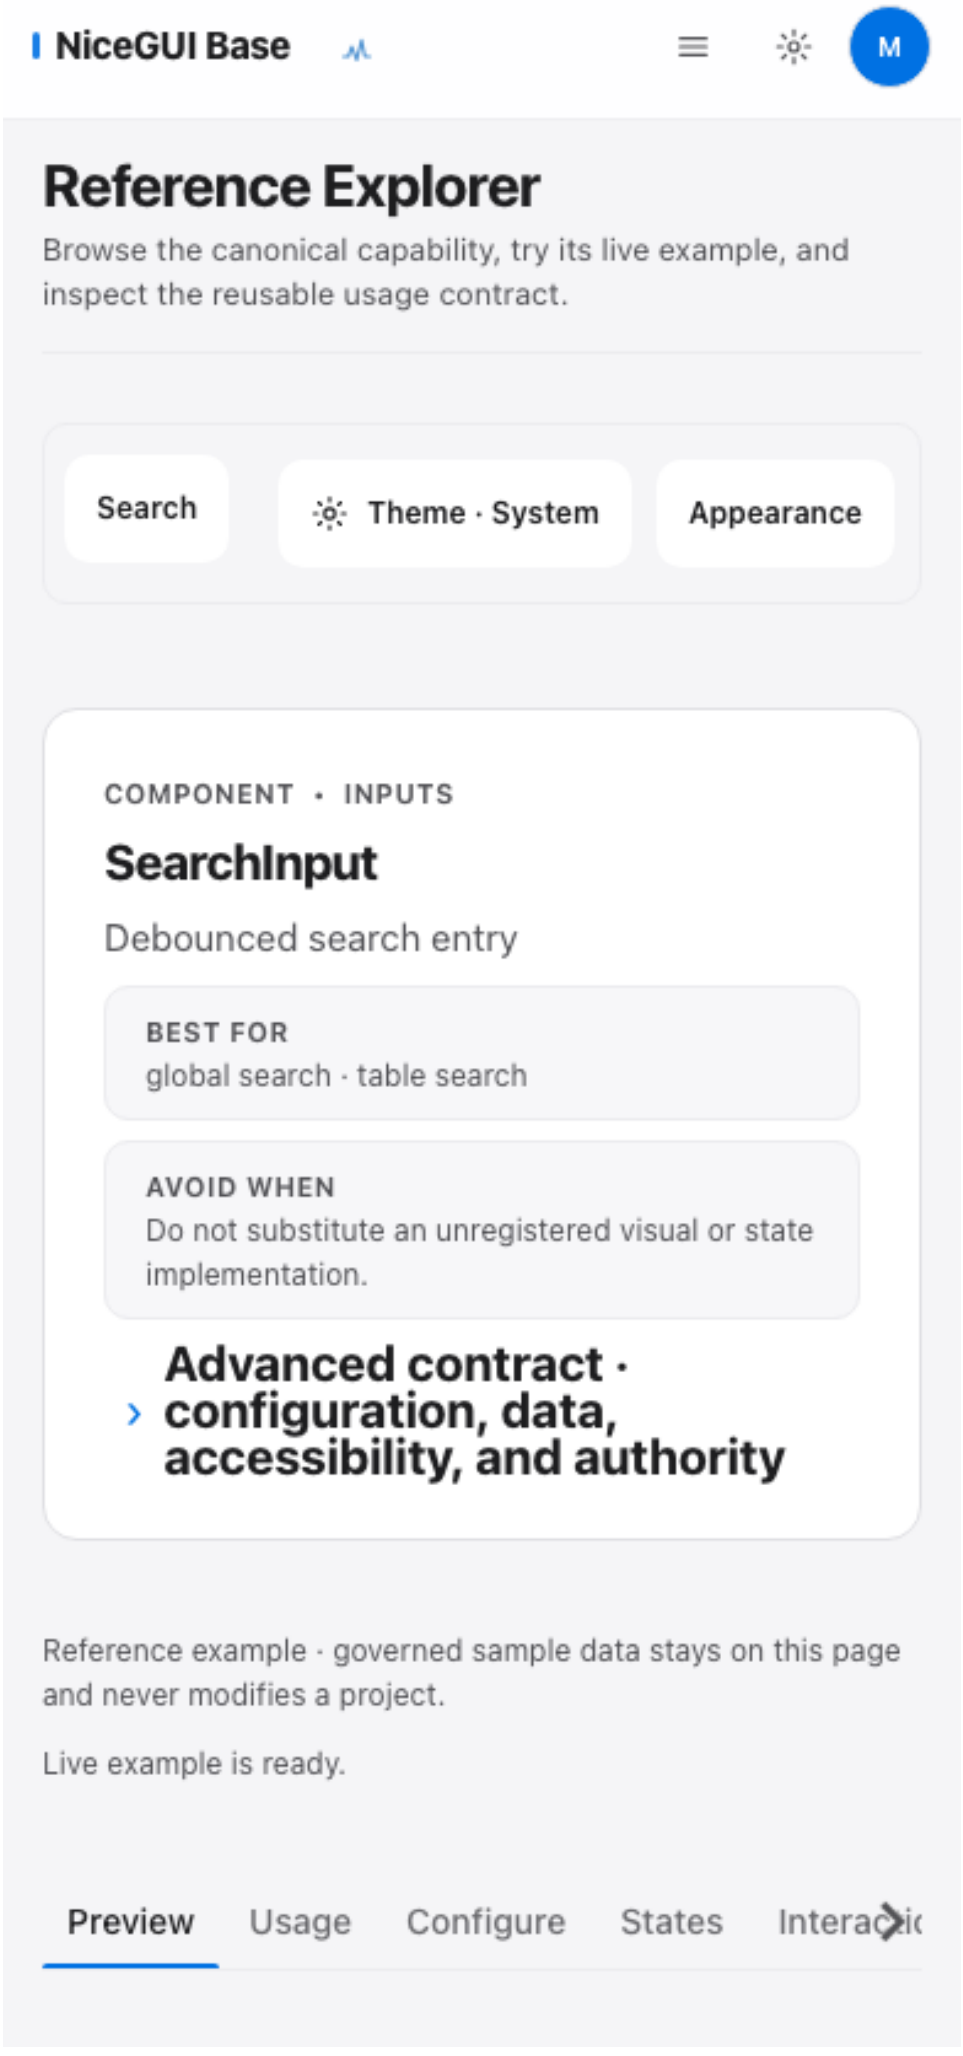



NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
TextArea
Multi-line text entry
BEST FOR
notes · description
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

component-search_input

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

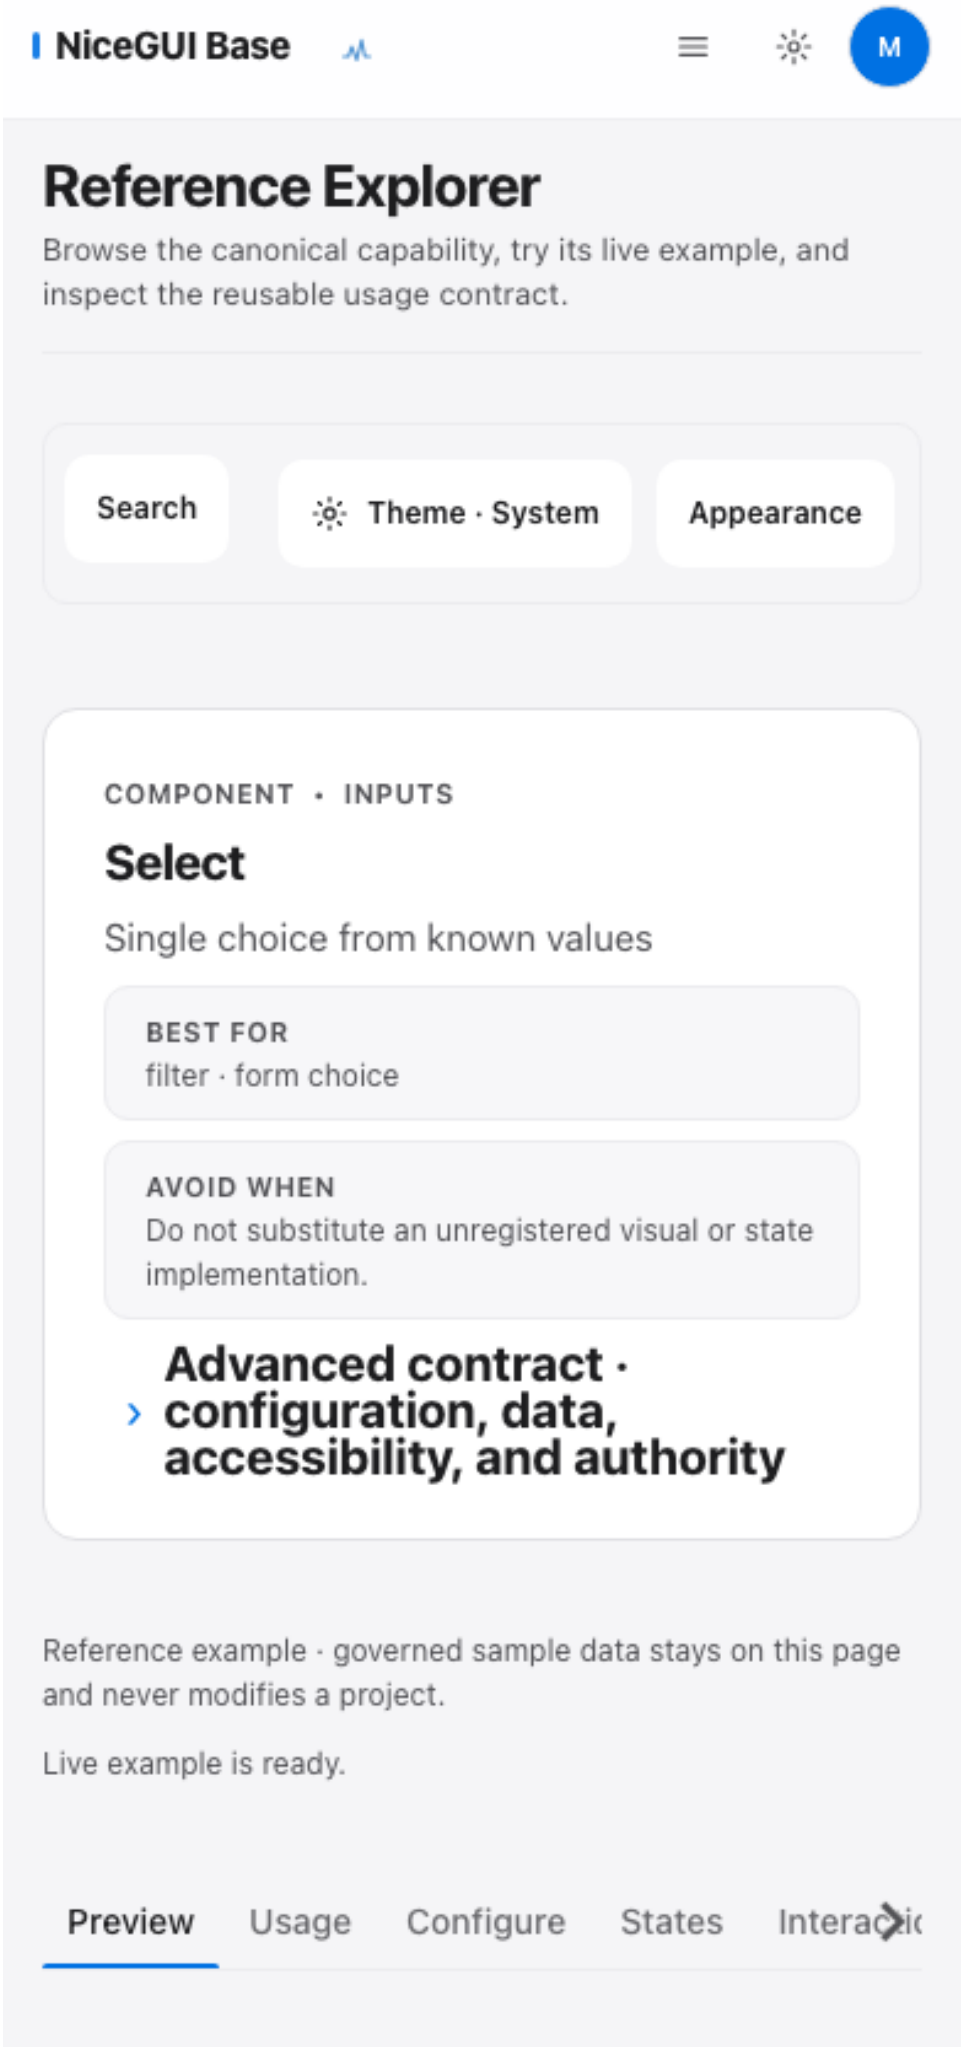
PNG SHA-256 434a1bcca9ba1134425fa309d0e83da9dc77d5a9770d0482100f520aea8aa6fc

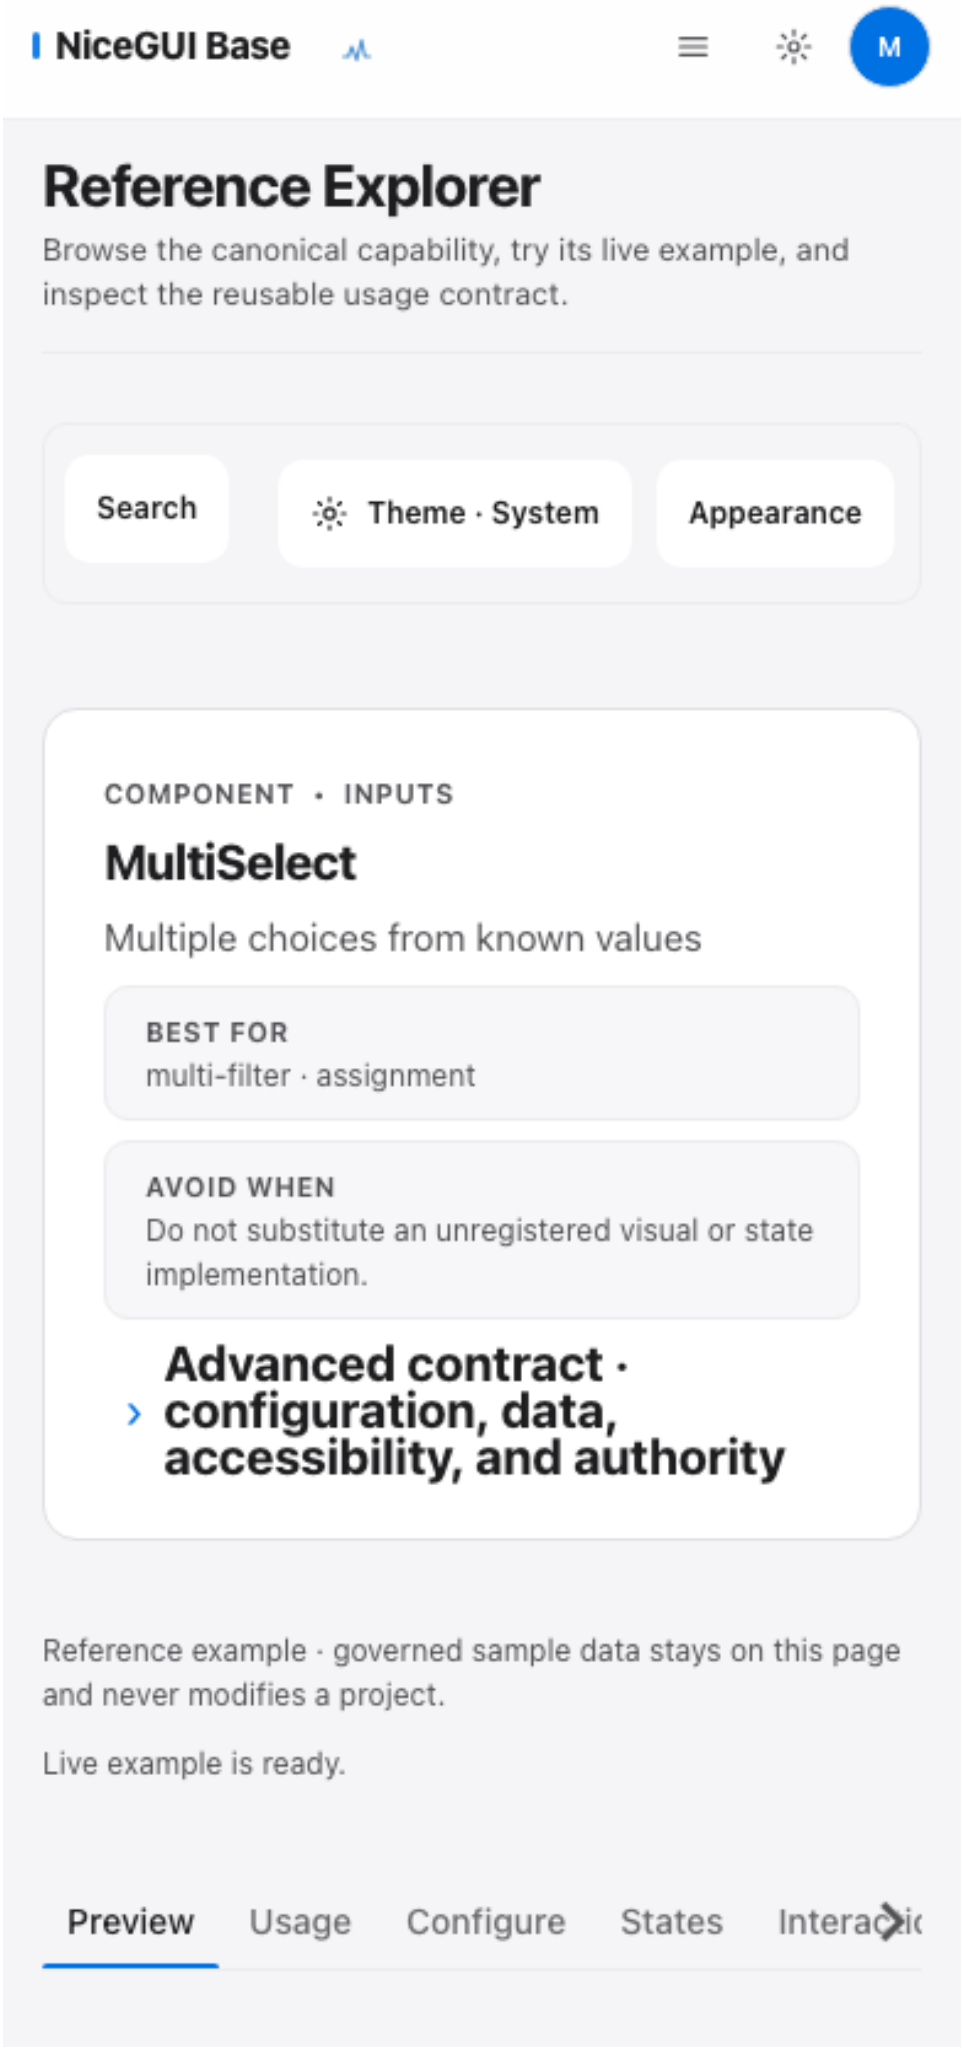


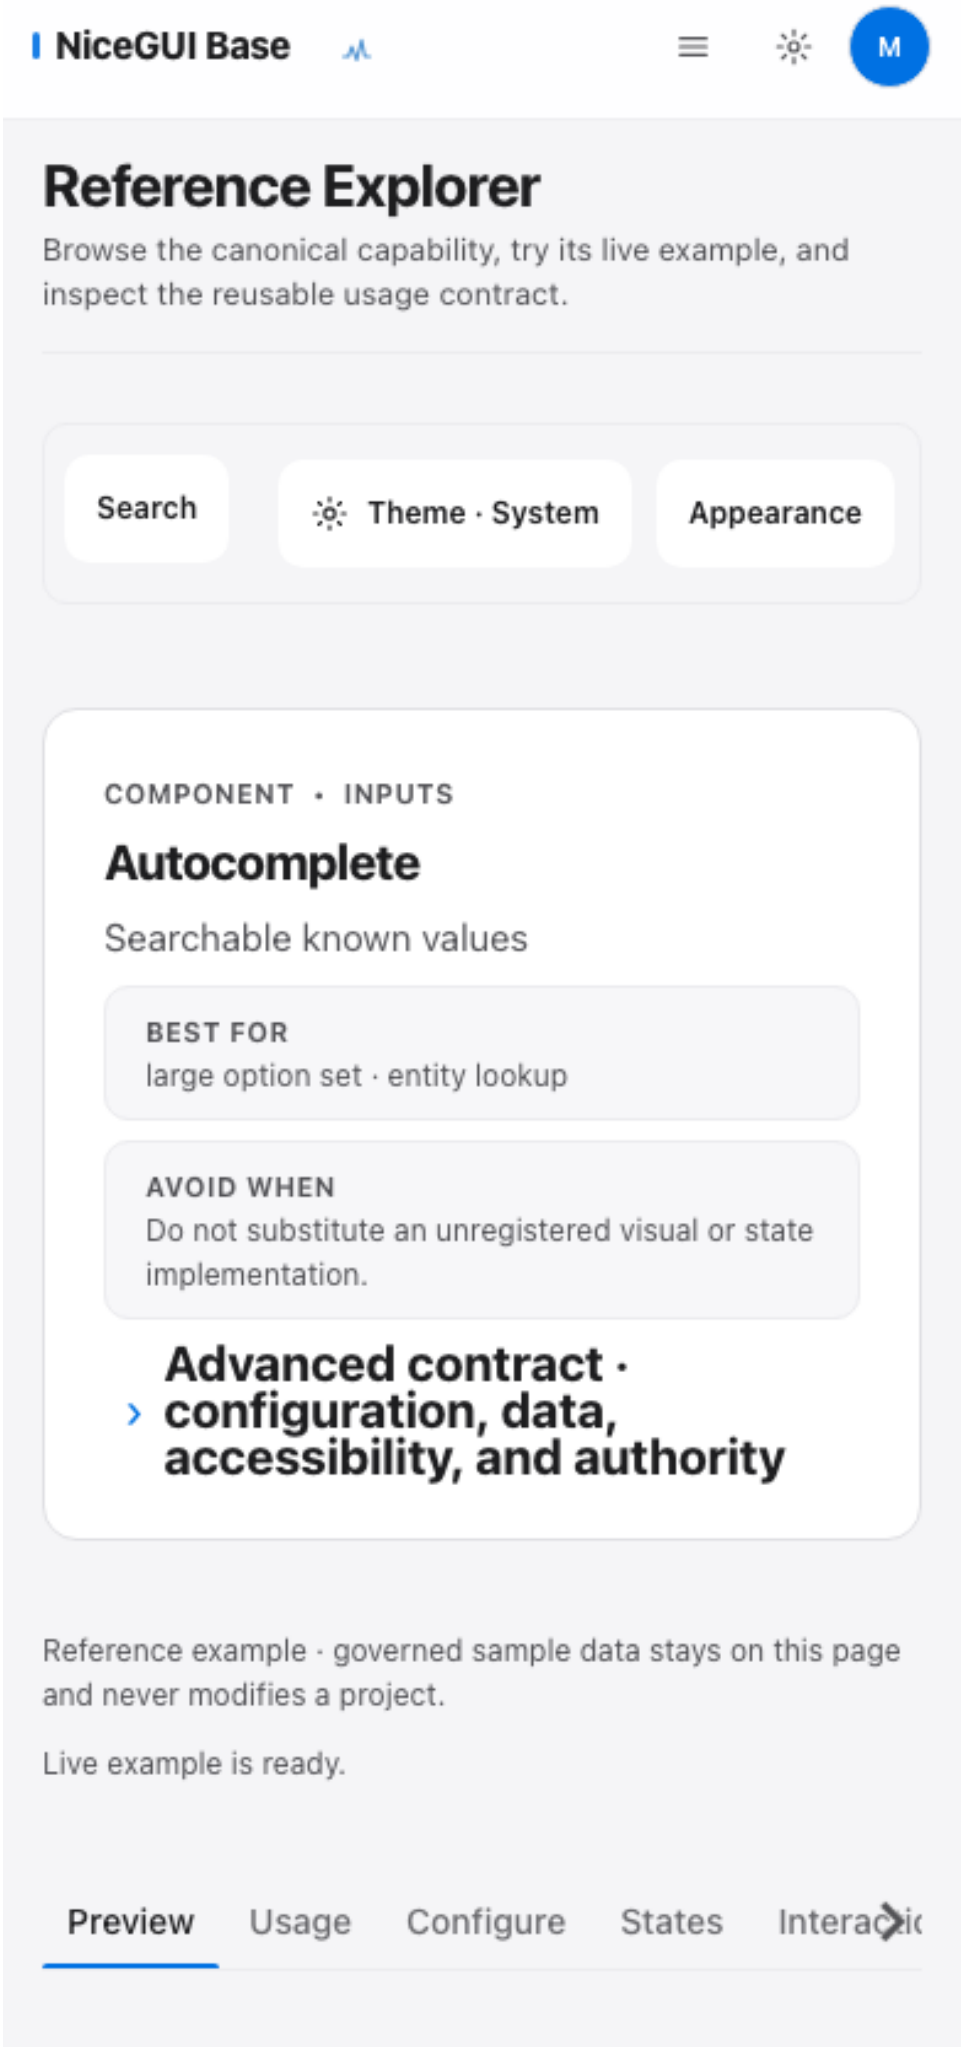
component-select

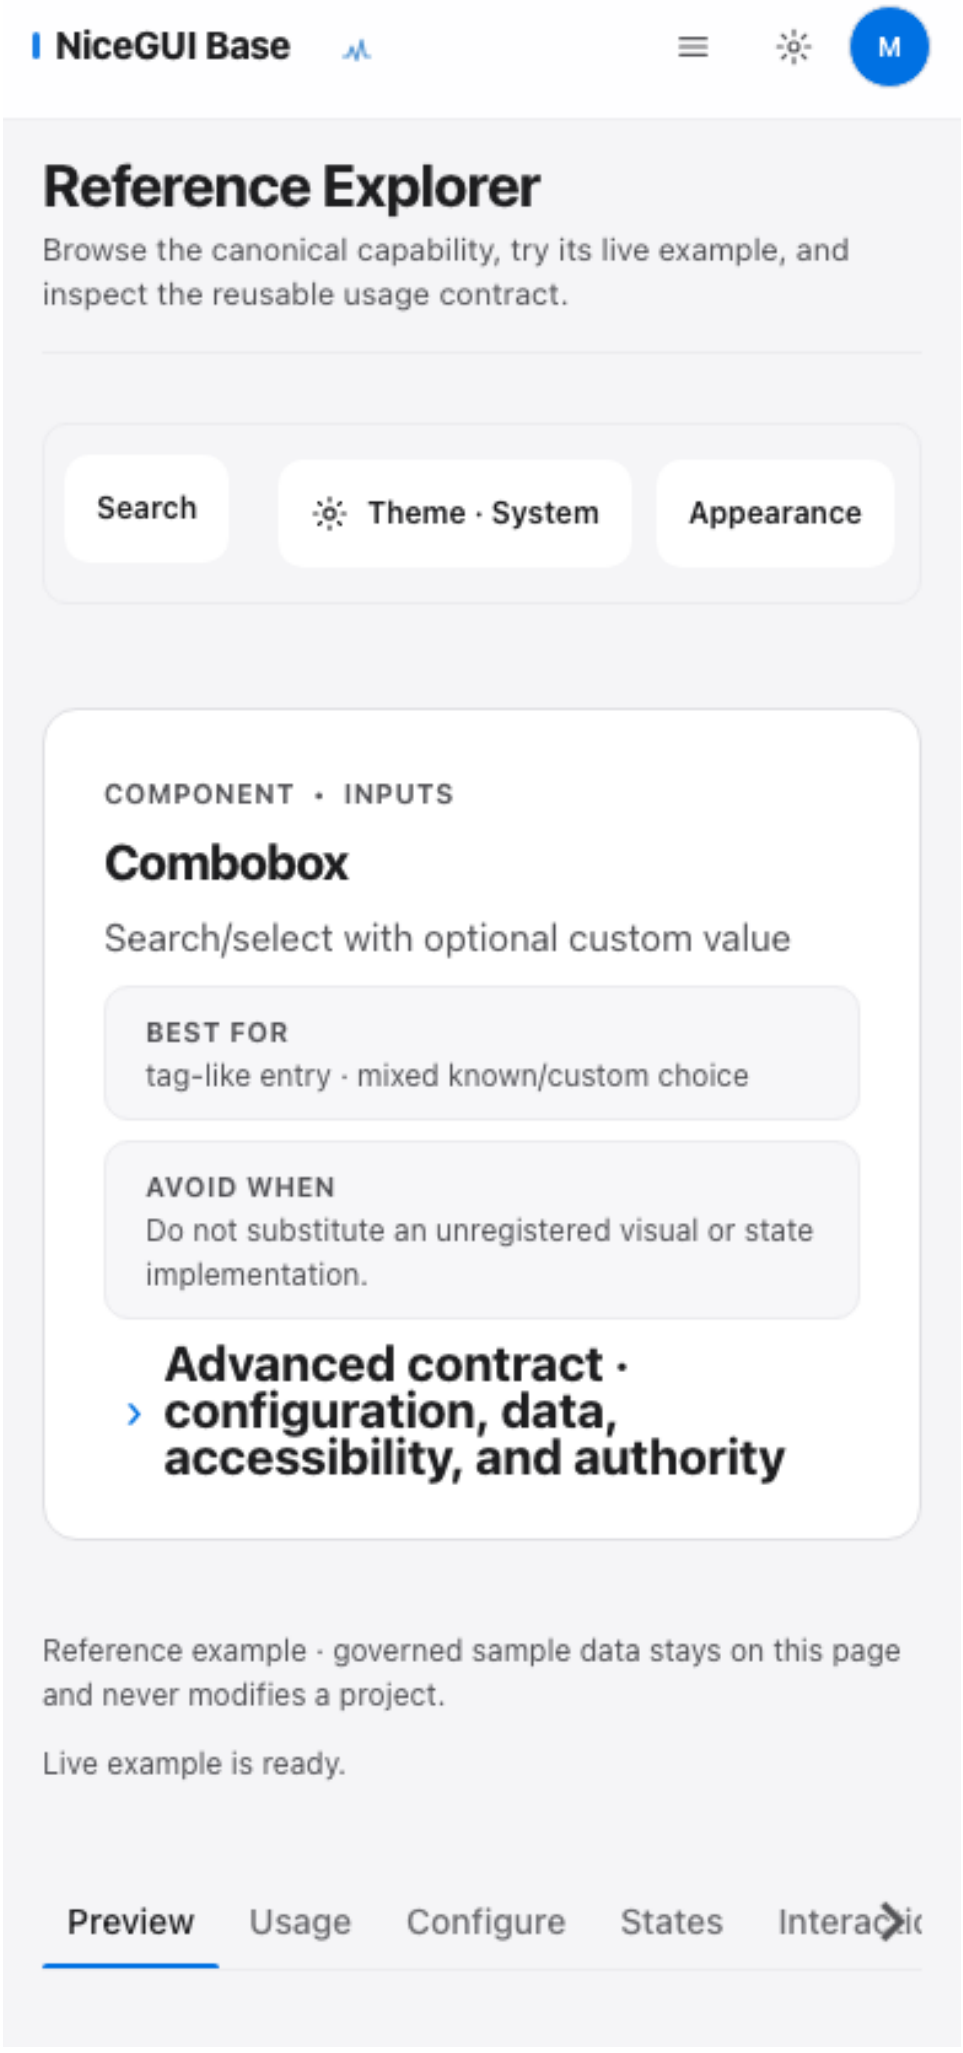
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

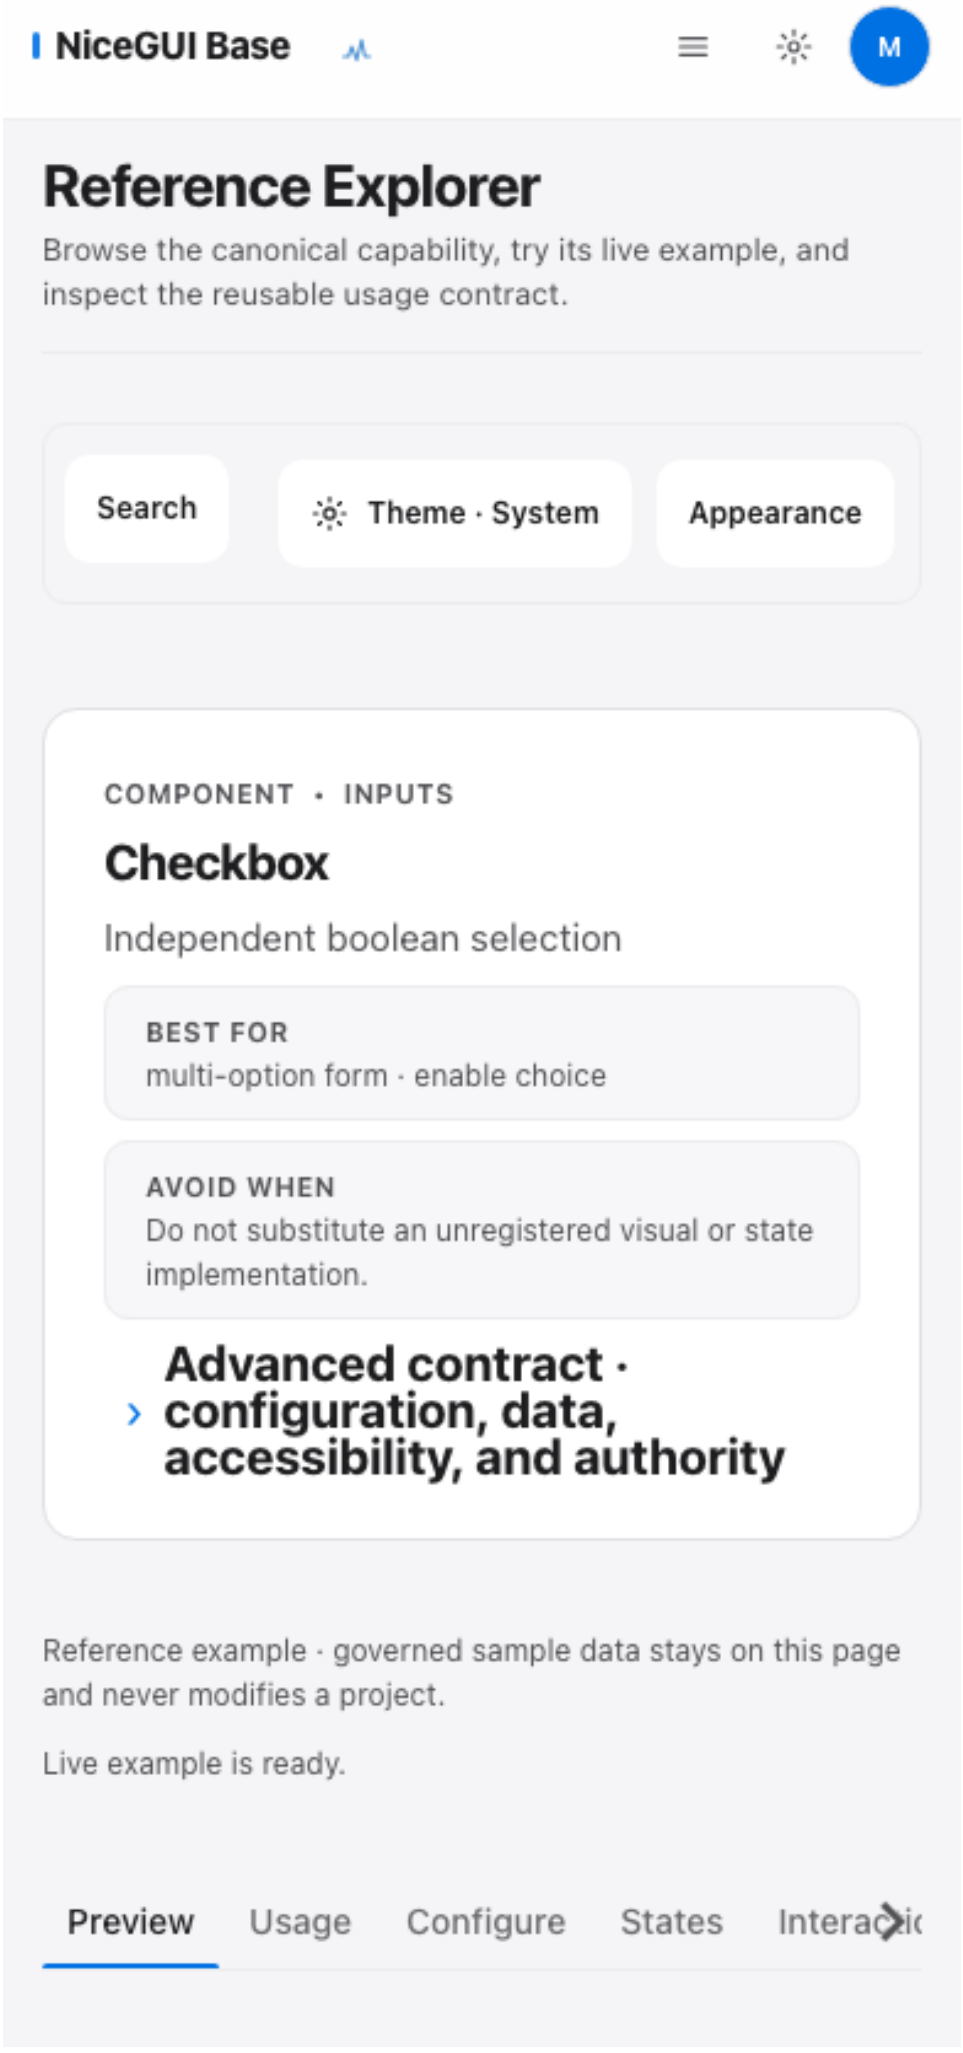
PNG SHA-256 9e790355b356910bb9db335db76c81845c3e7d3422fd8c028ab620a2dfe5f5ff




NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
MultiSelect
Multiple choices from known values
BEST FOR
multi-filter · assignment
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
Autocomplete
Searchable known values
BEST FOR
large option set · entity lookup
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

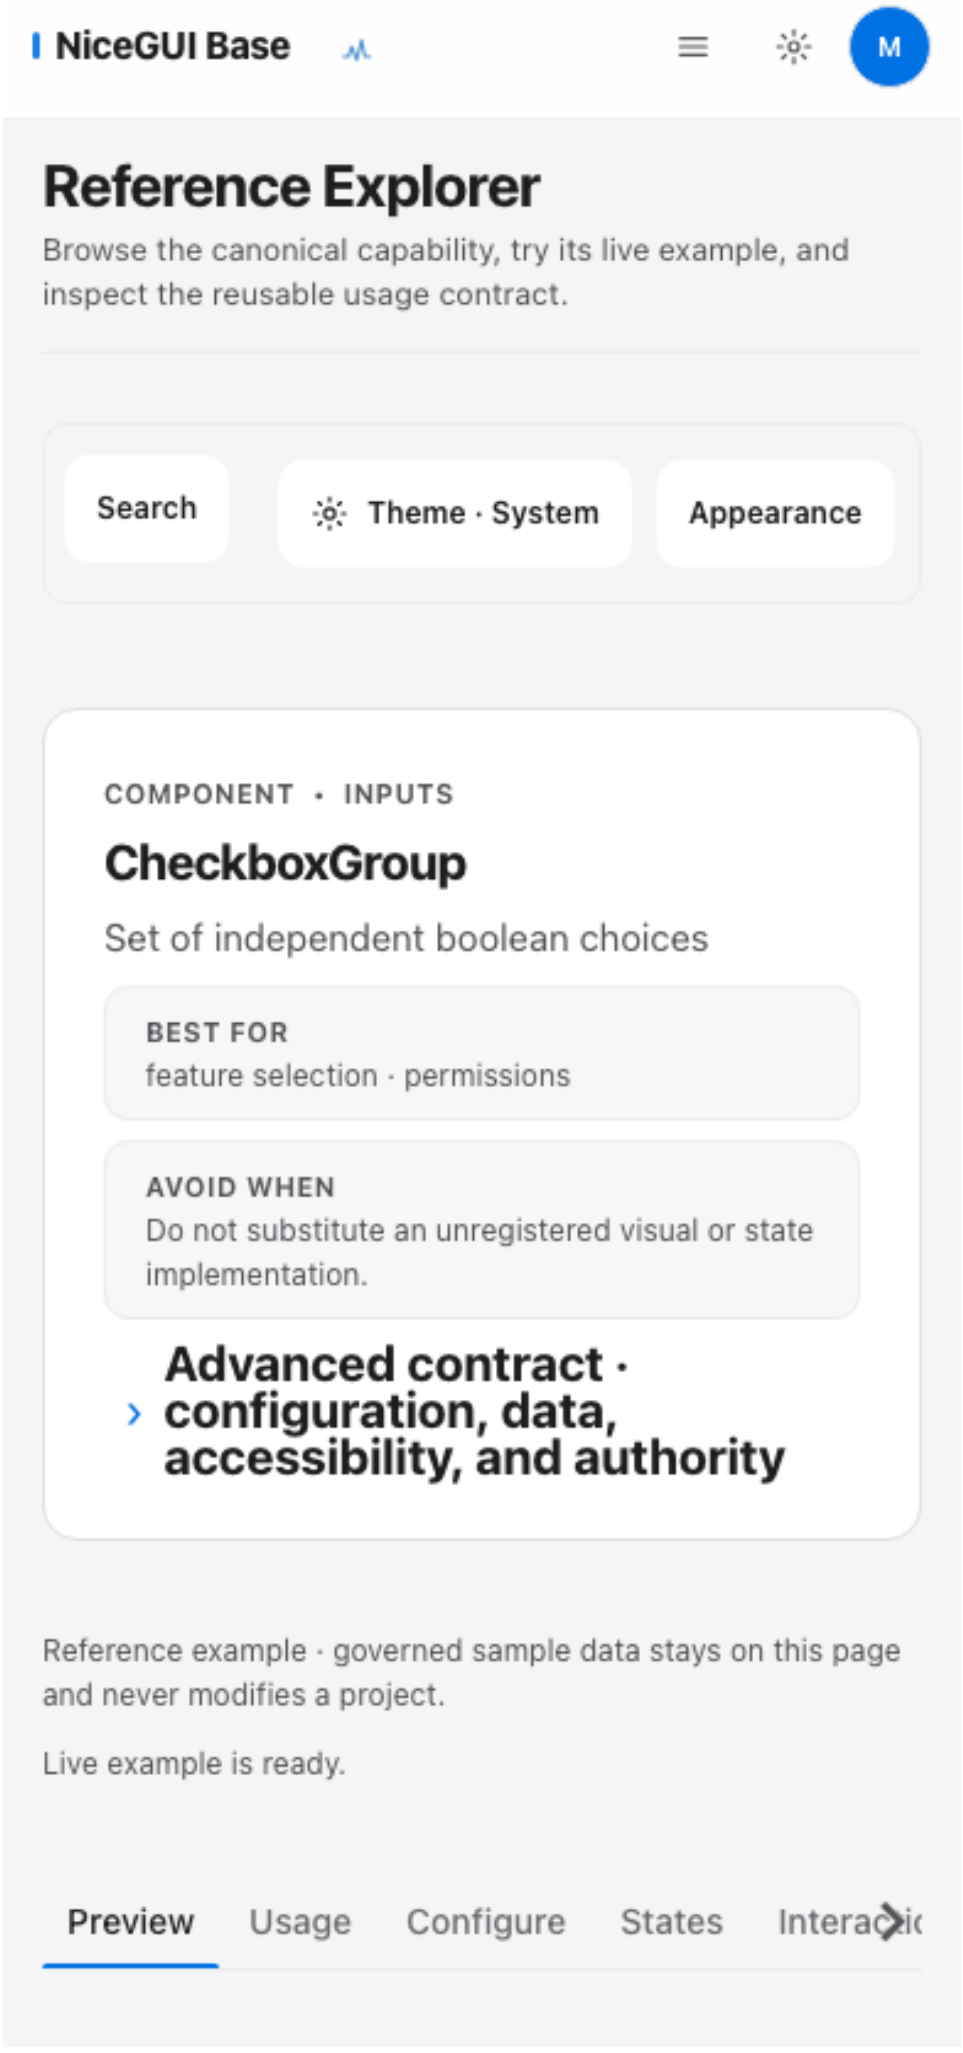

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
Combobox
Search/select with optional custom value
BEST FOR
tag-like entry · mixed known/custom choice
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

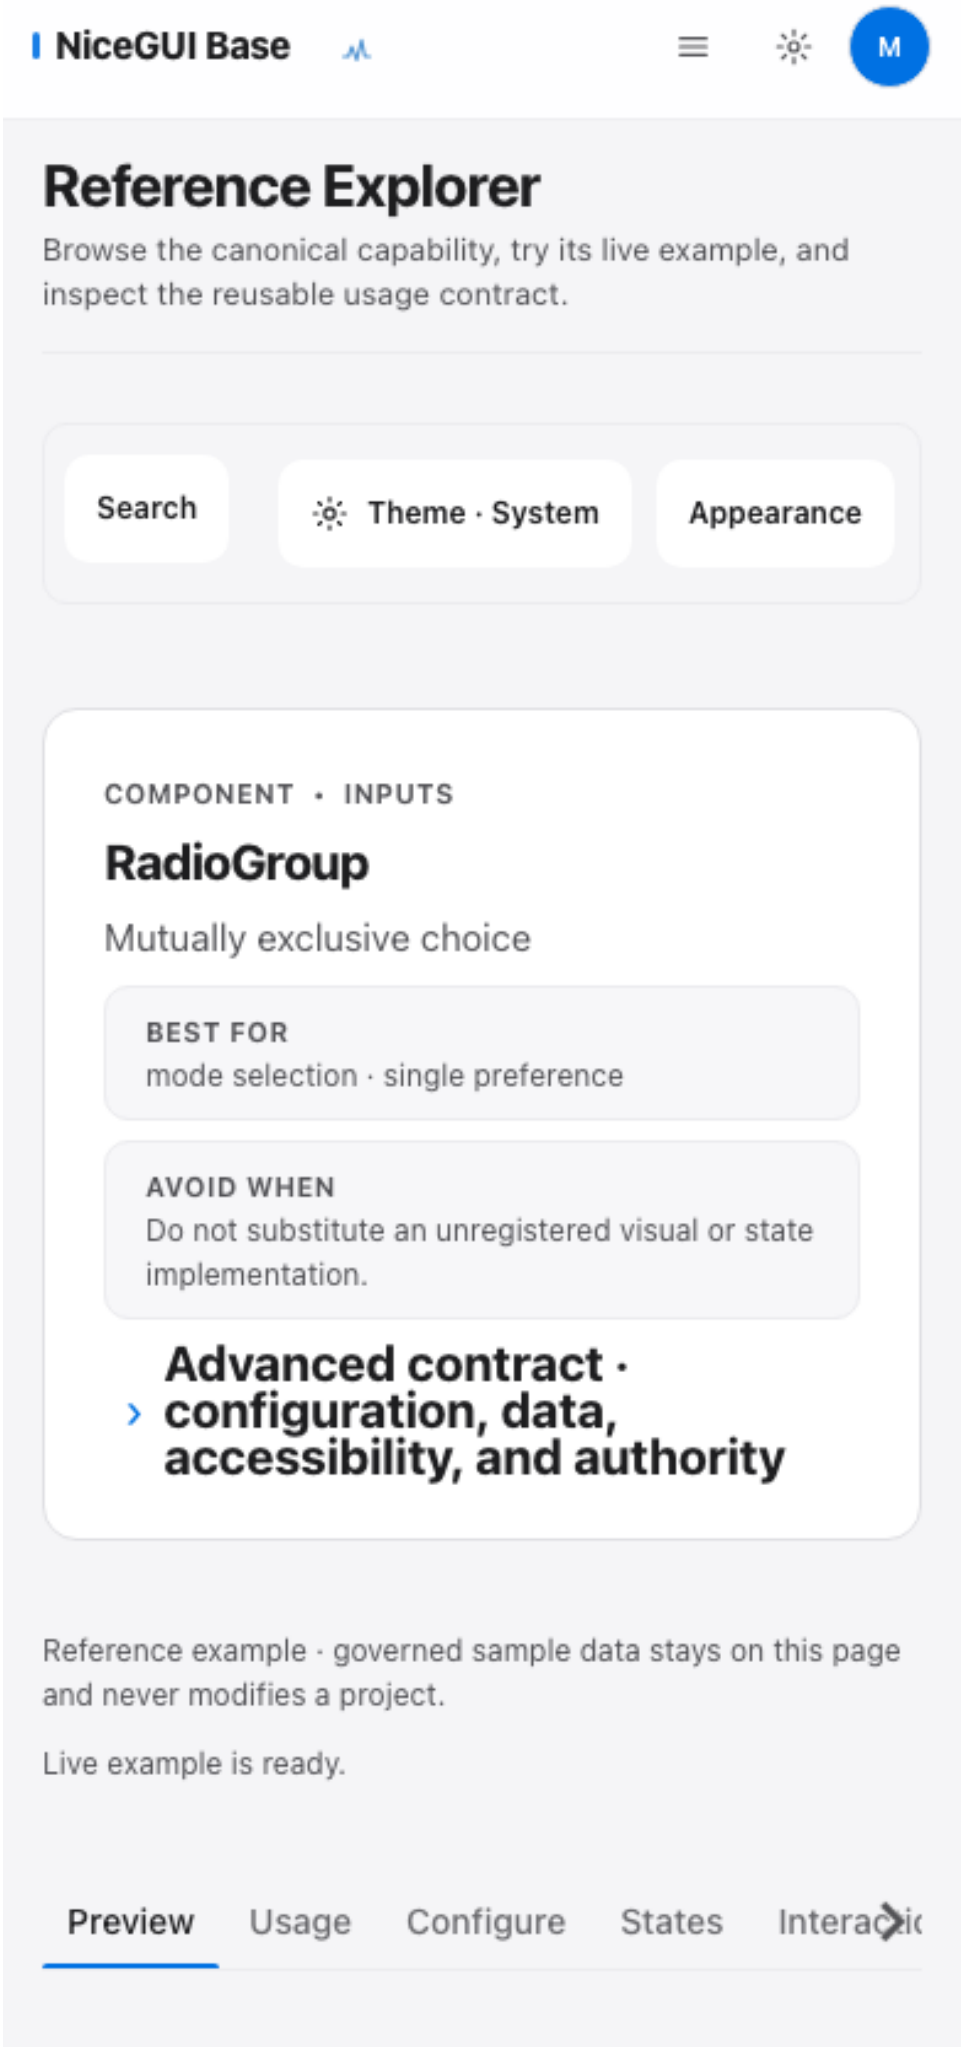

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
Checkbox
Independent boolean selection
BEST FOR
multi-option form · enable choice
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

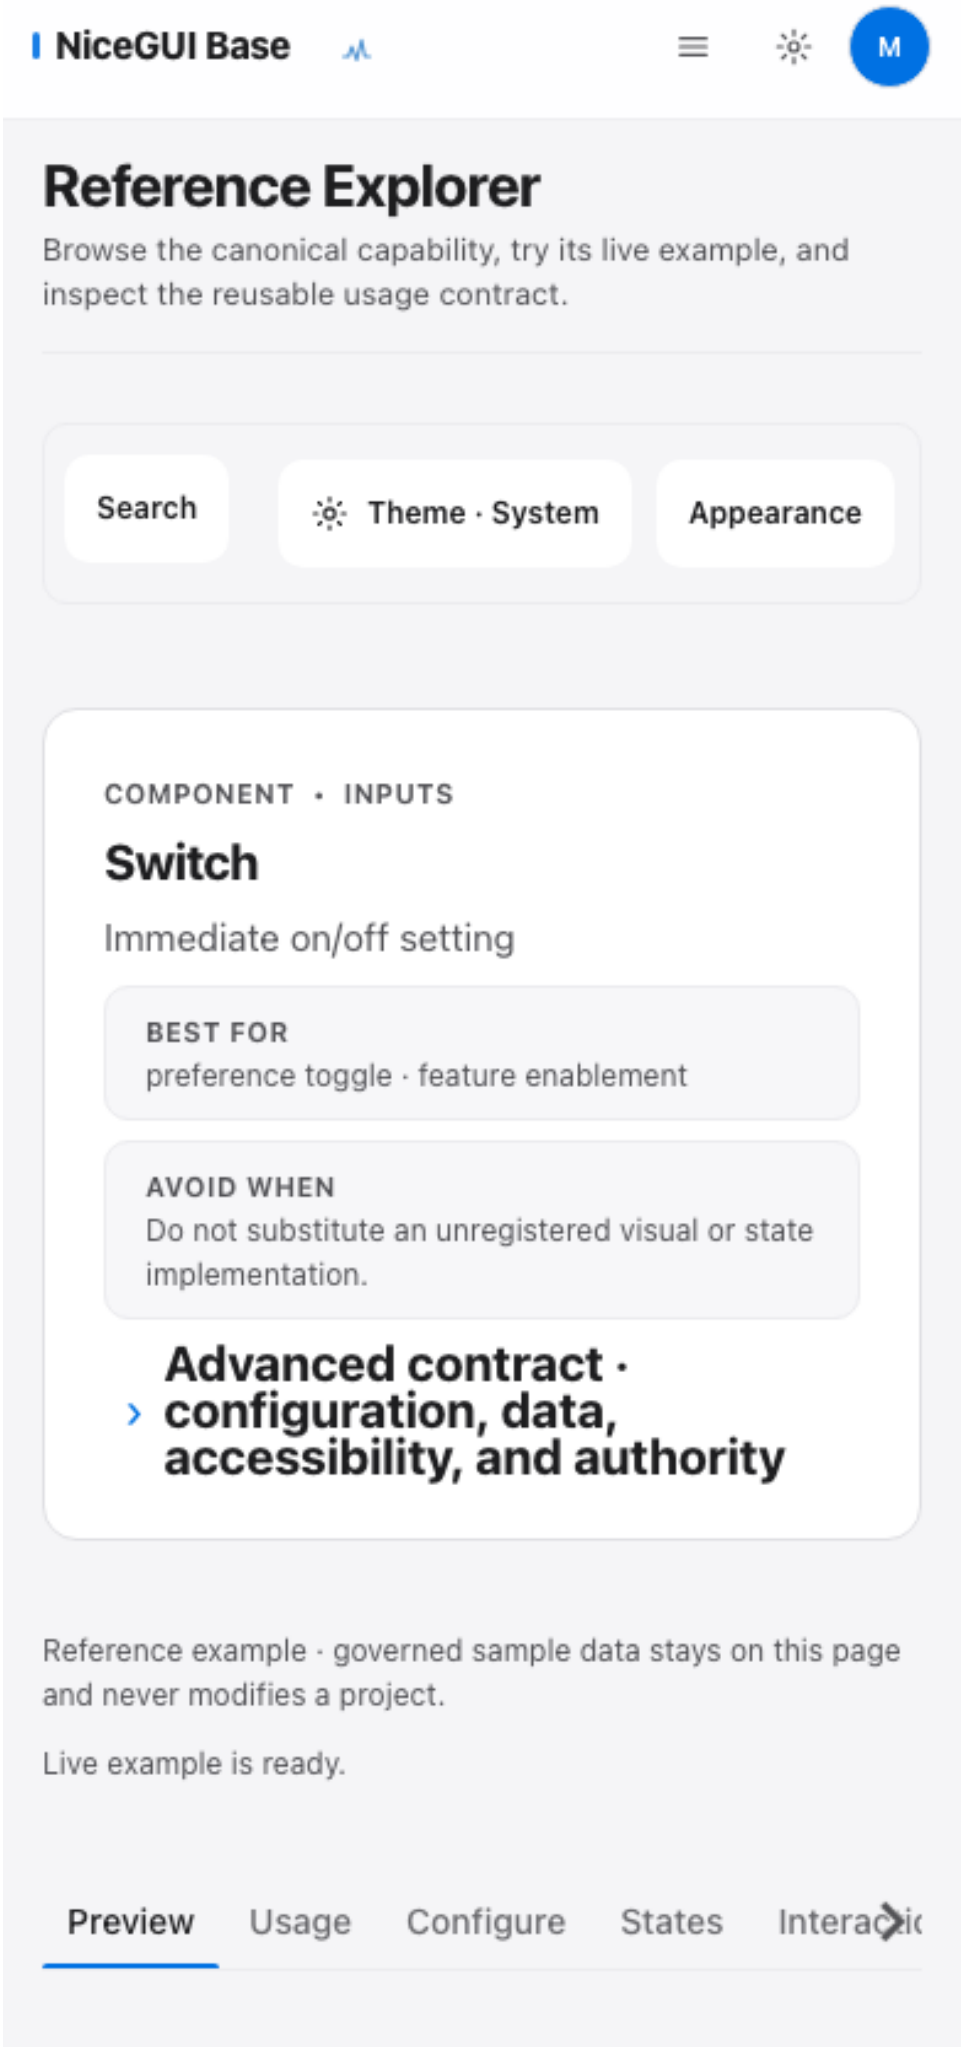
component-checkbox_group

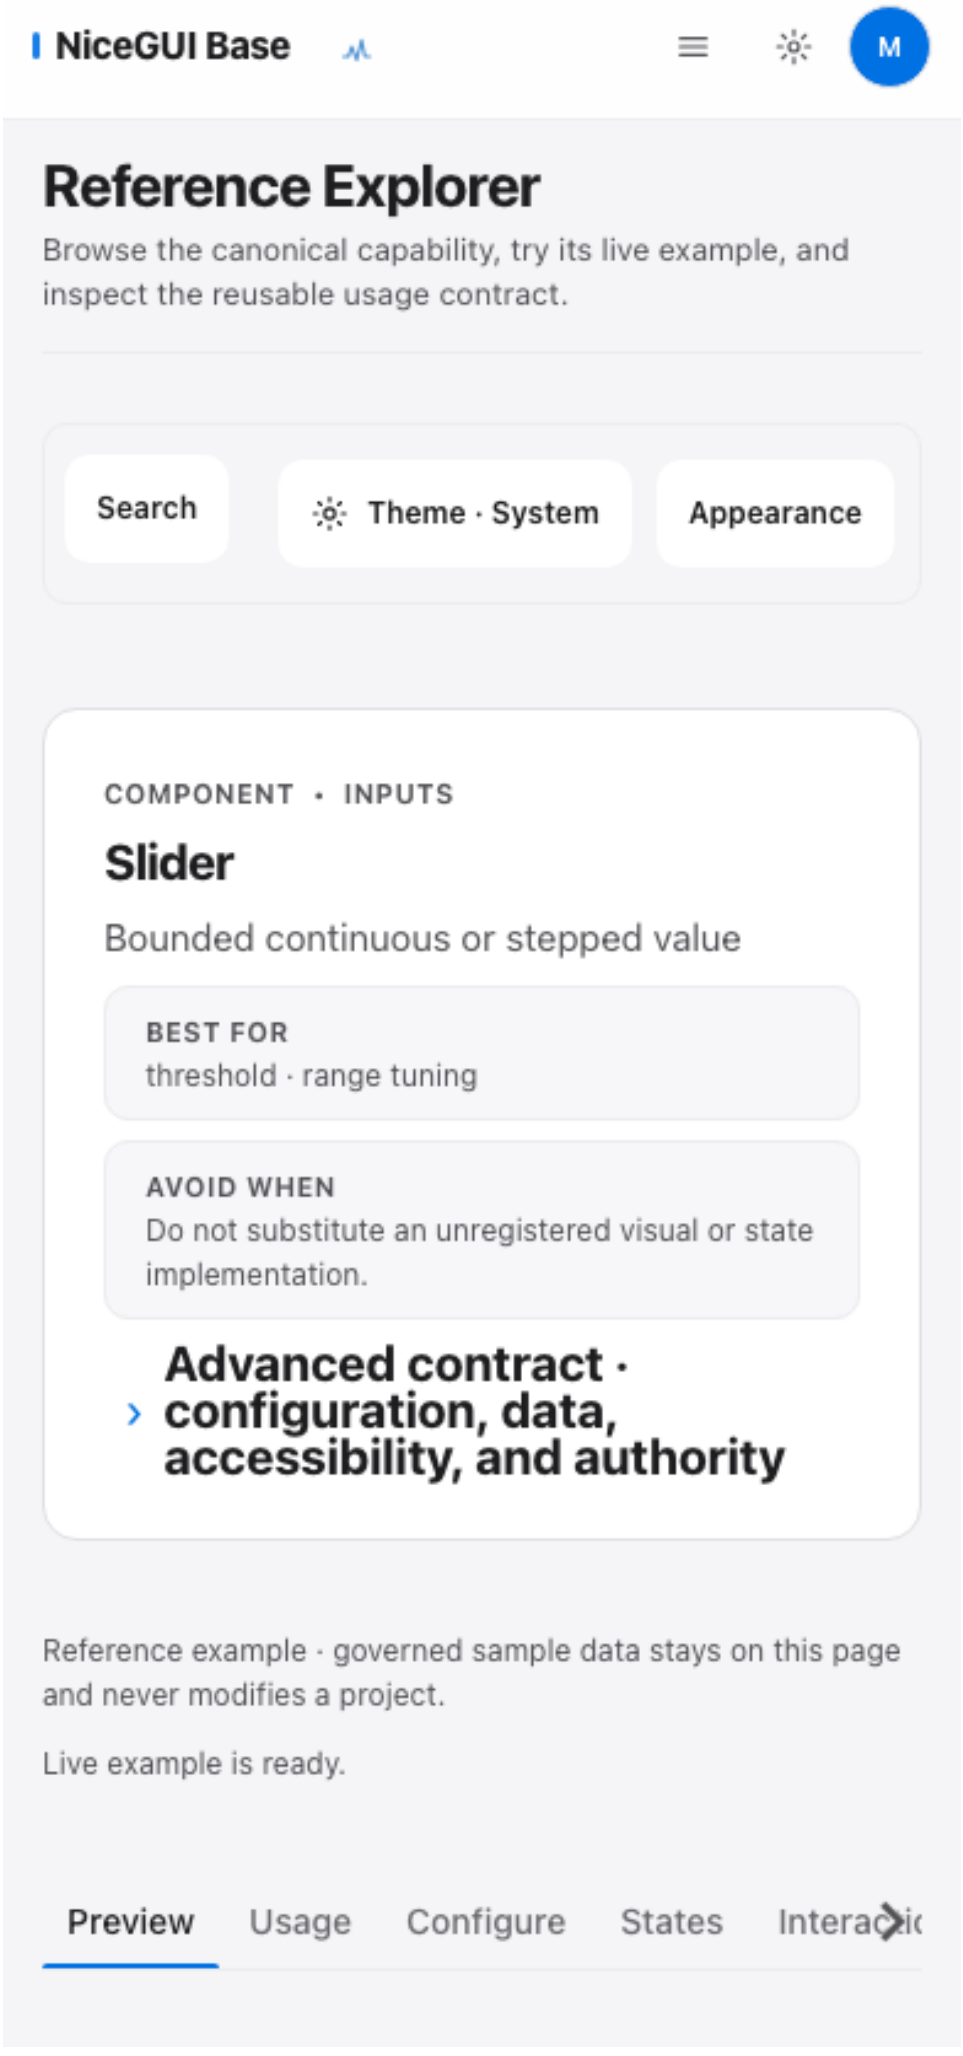
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

PNG SHA-256 951860c1ced5e58a9cc0a87e1716a5efde91727c8be554b359b575c614f13e54



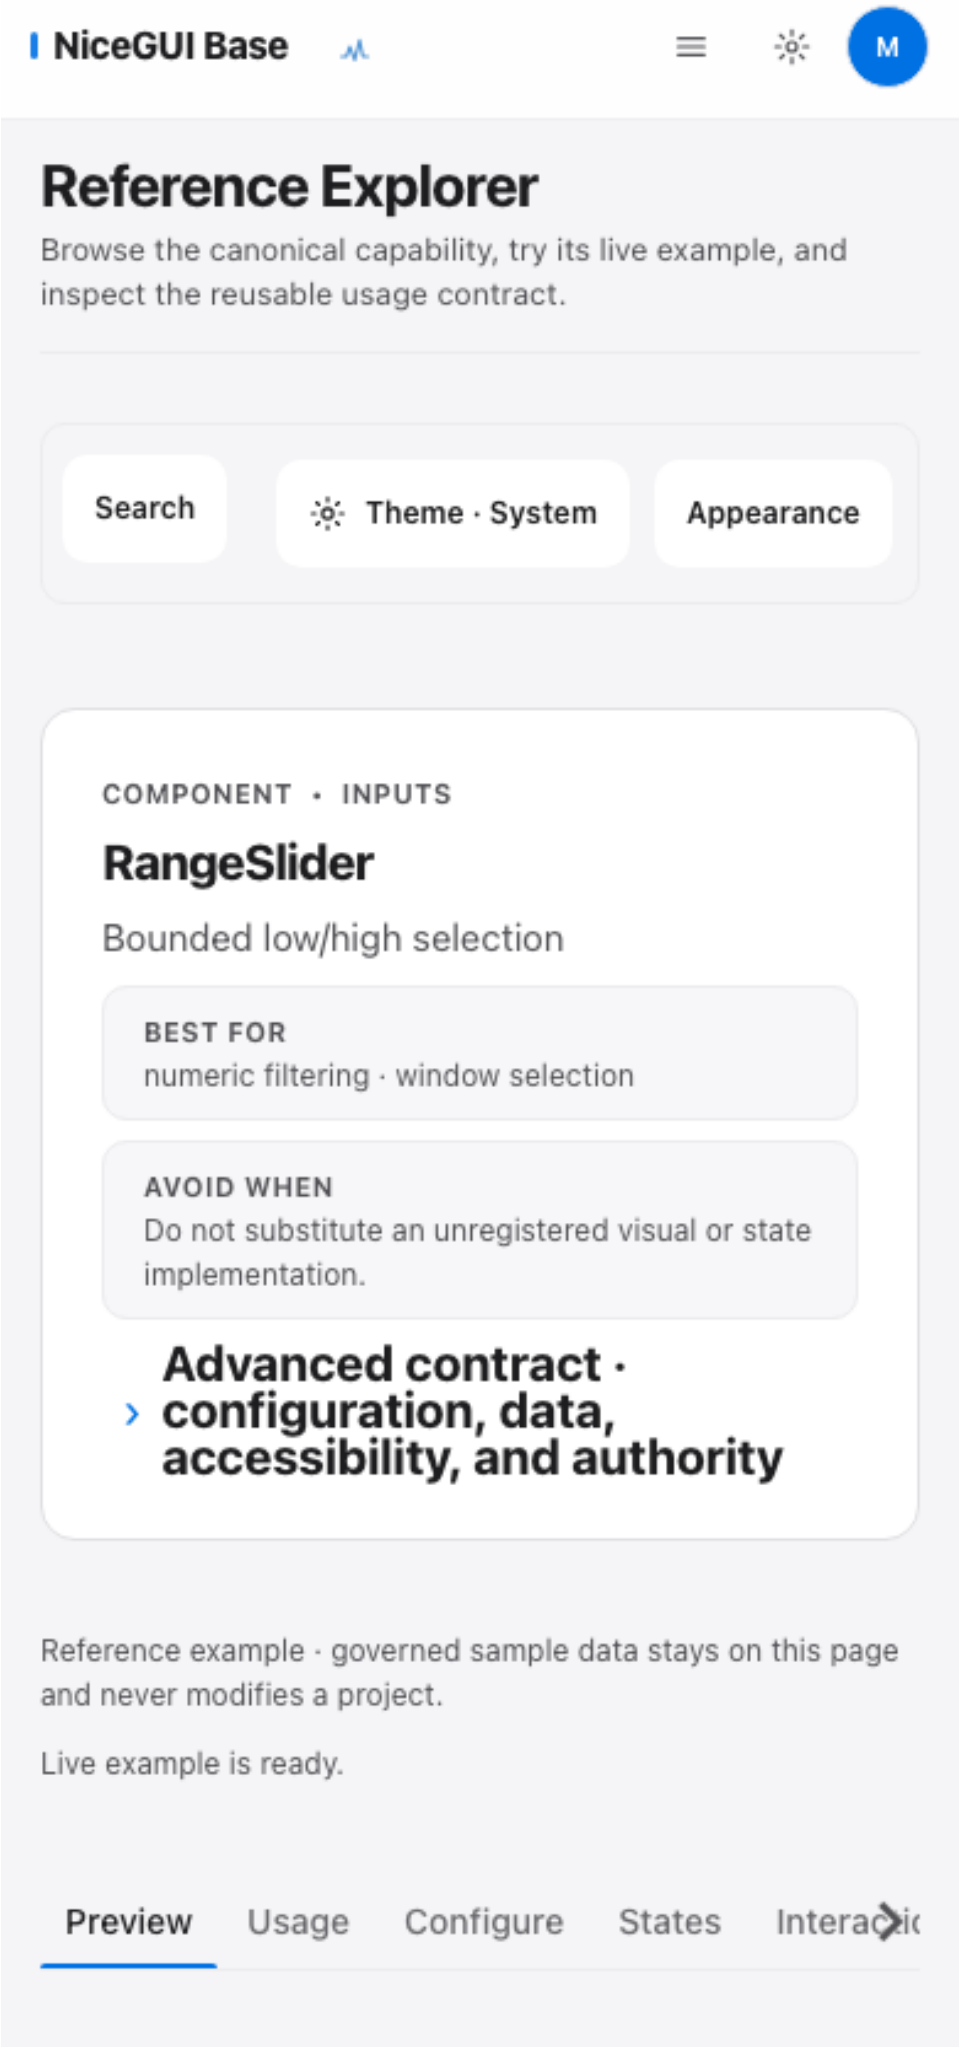

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
RadioGroup
Mutually exclusive choice
BEST FOR
mode selection · single preference
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
Switch
Immediate on/off setting
BEST FOR
preference toggle · feature enablement
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
Slider
Bounded continuous or stepped value
BEST FOR
threshold · range tuning
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

component-range_slider

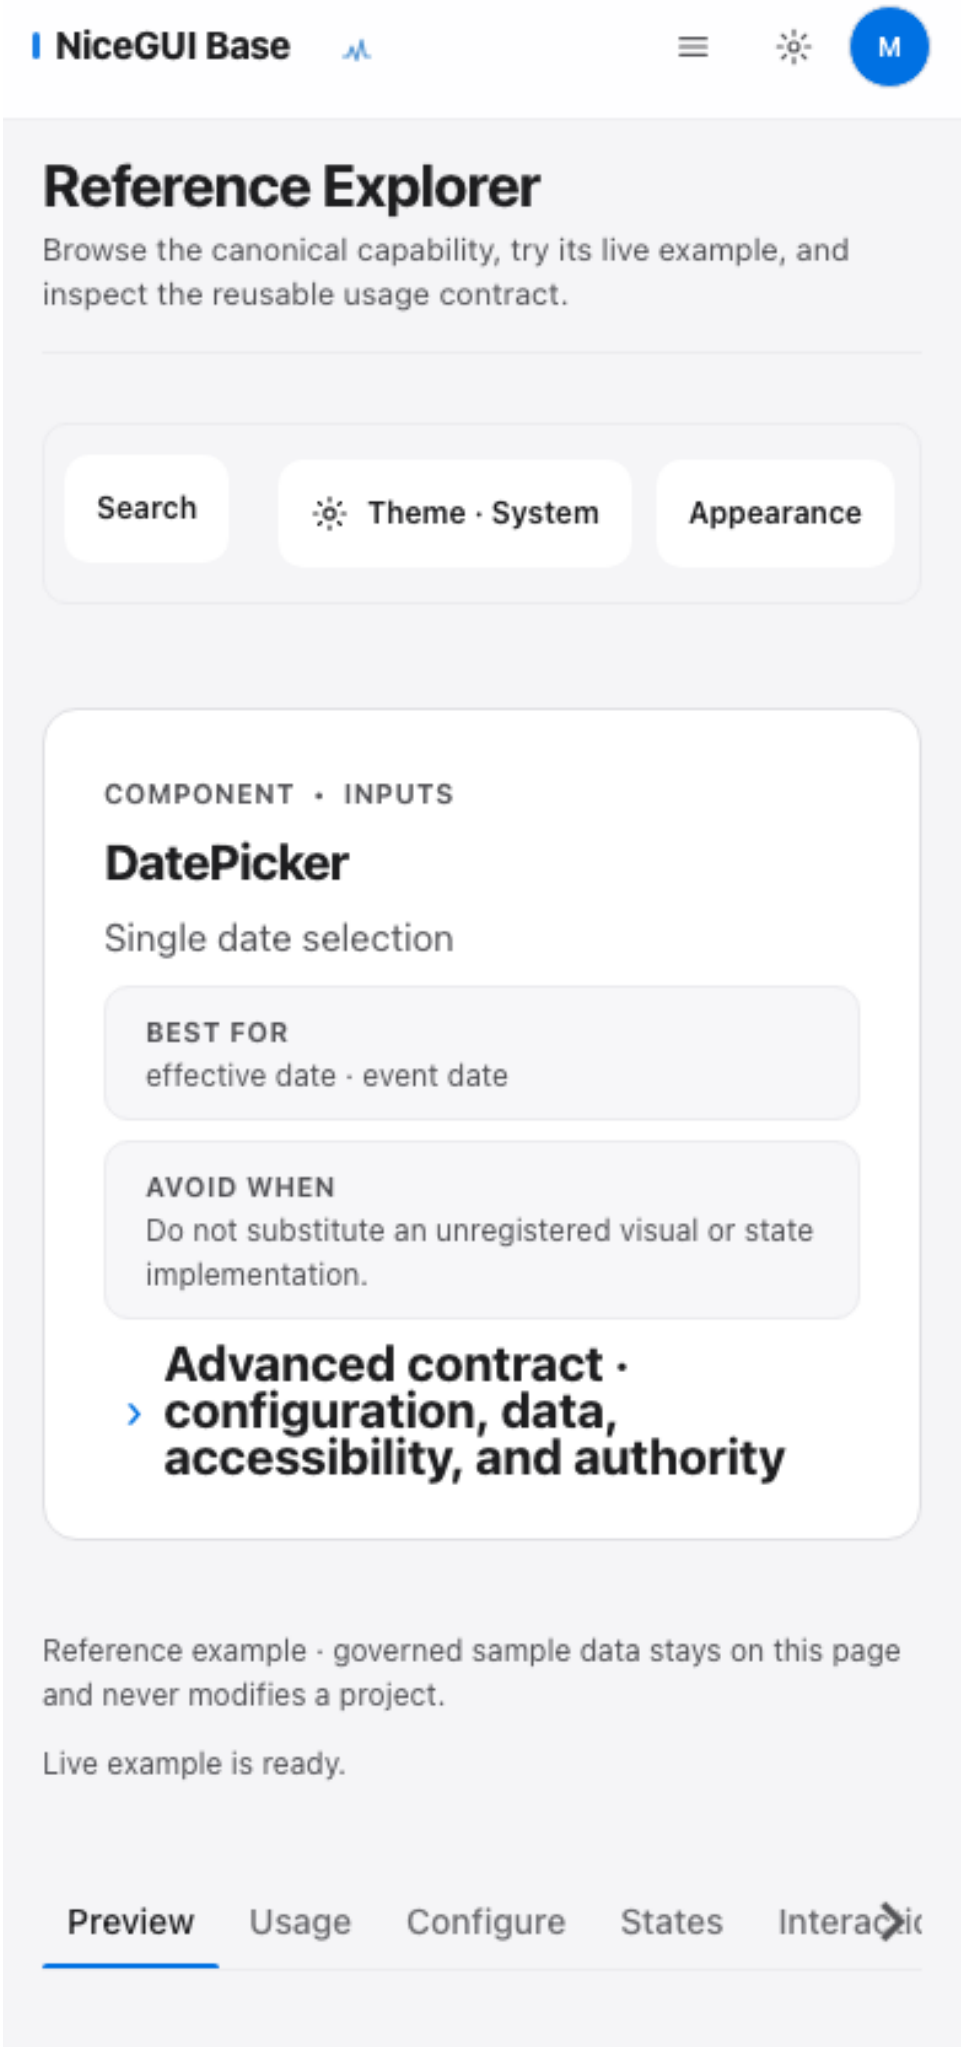
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 33ff543c562198aadf237e8773cd4c283127fa03d344f9ea126f1071e86af791

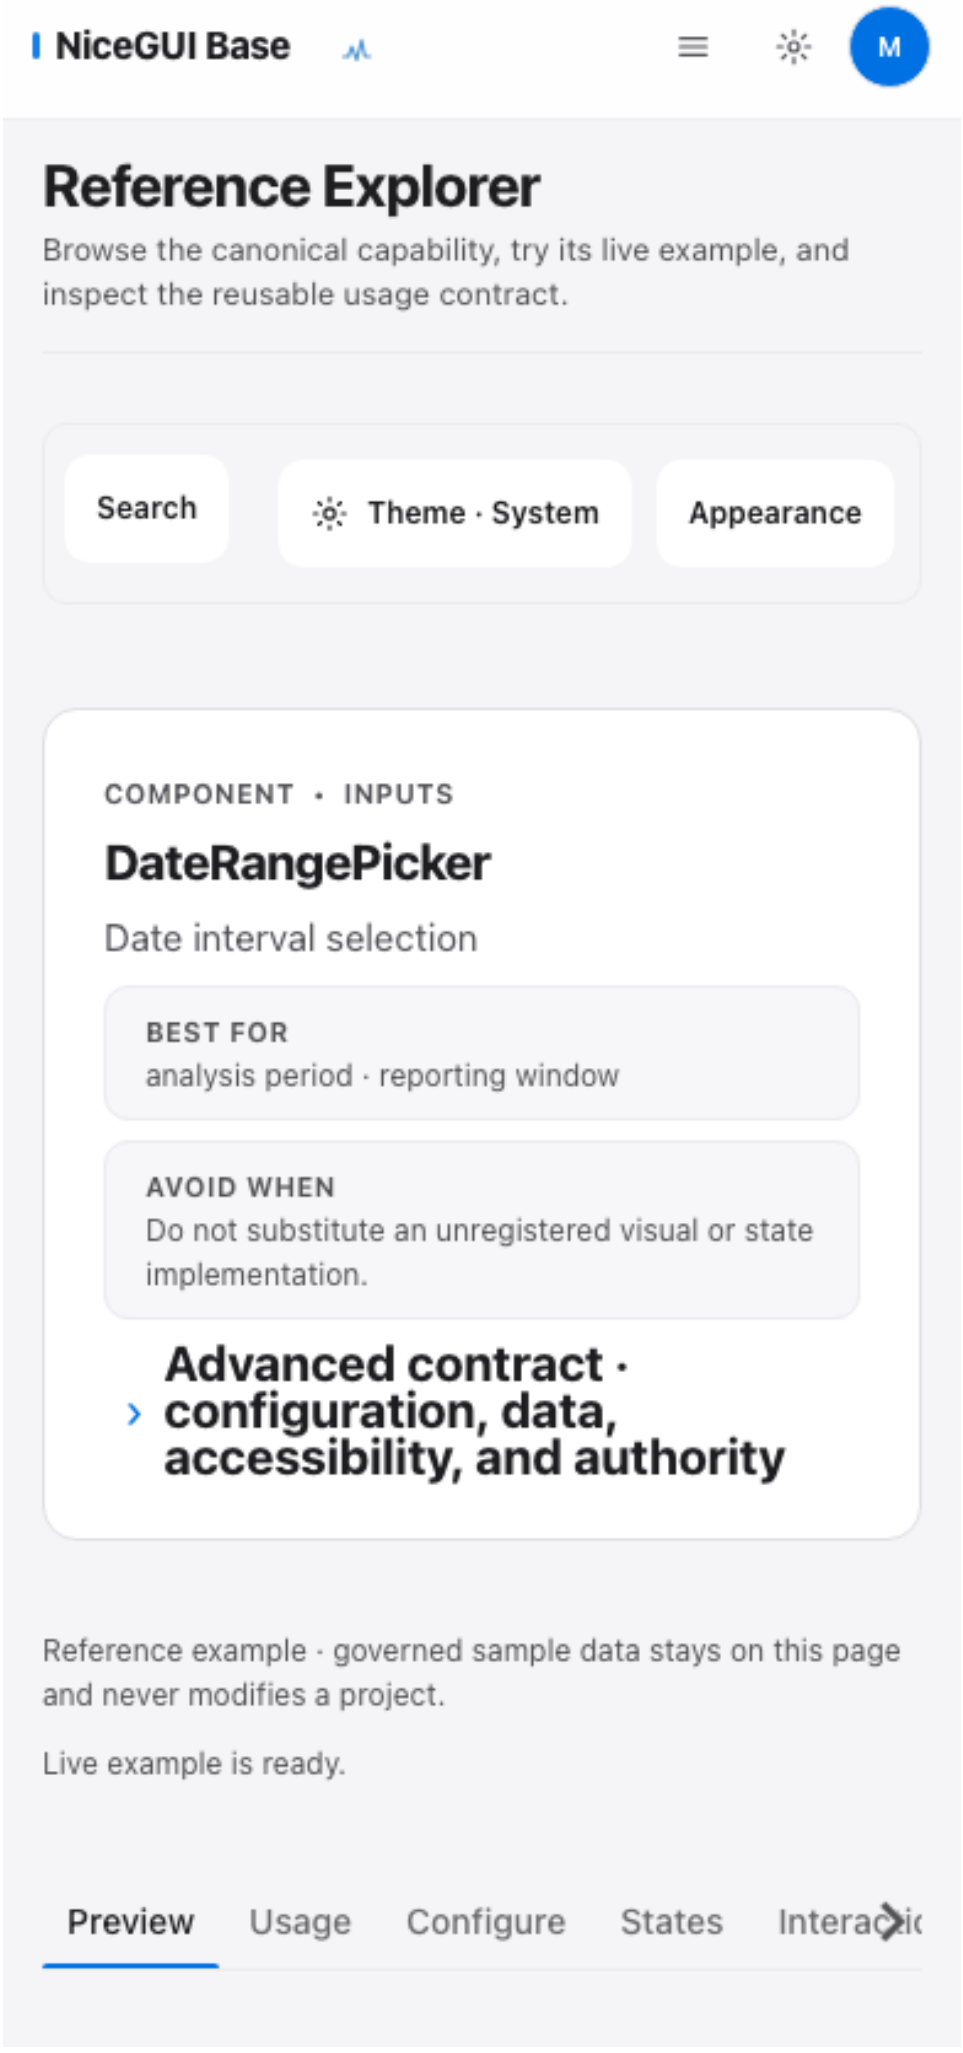


component-date_picker

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

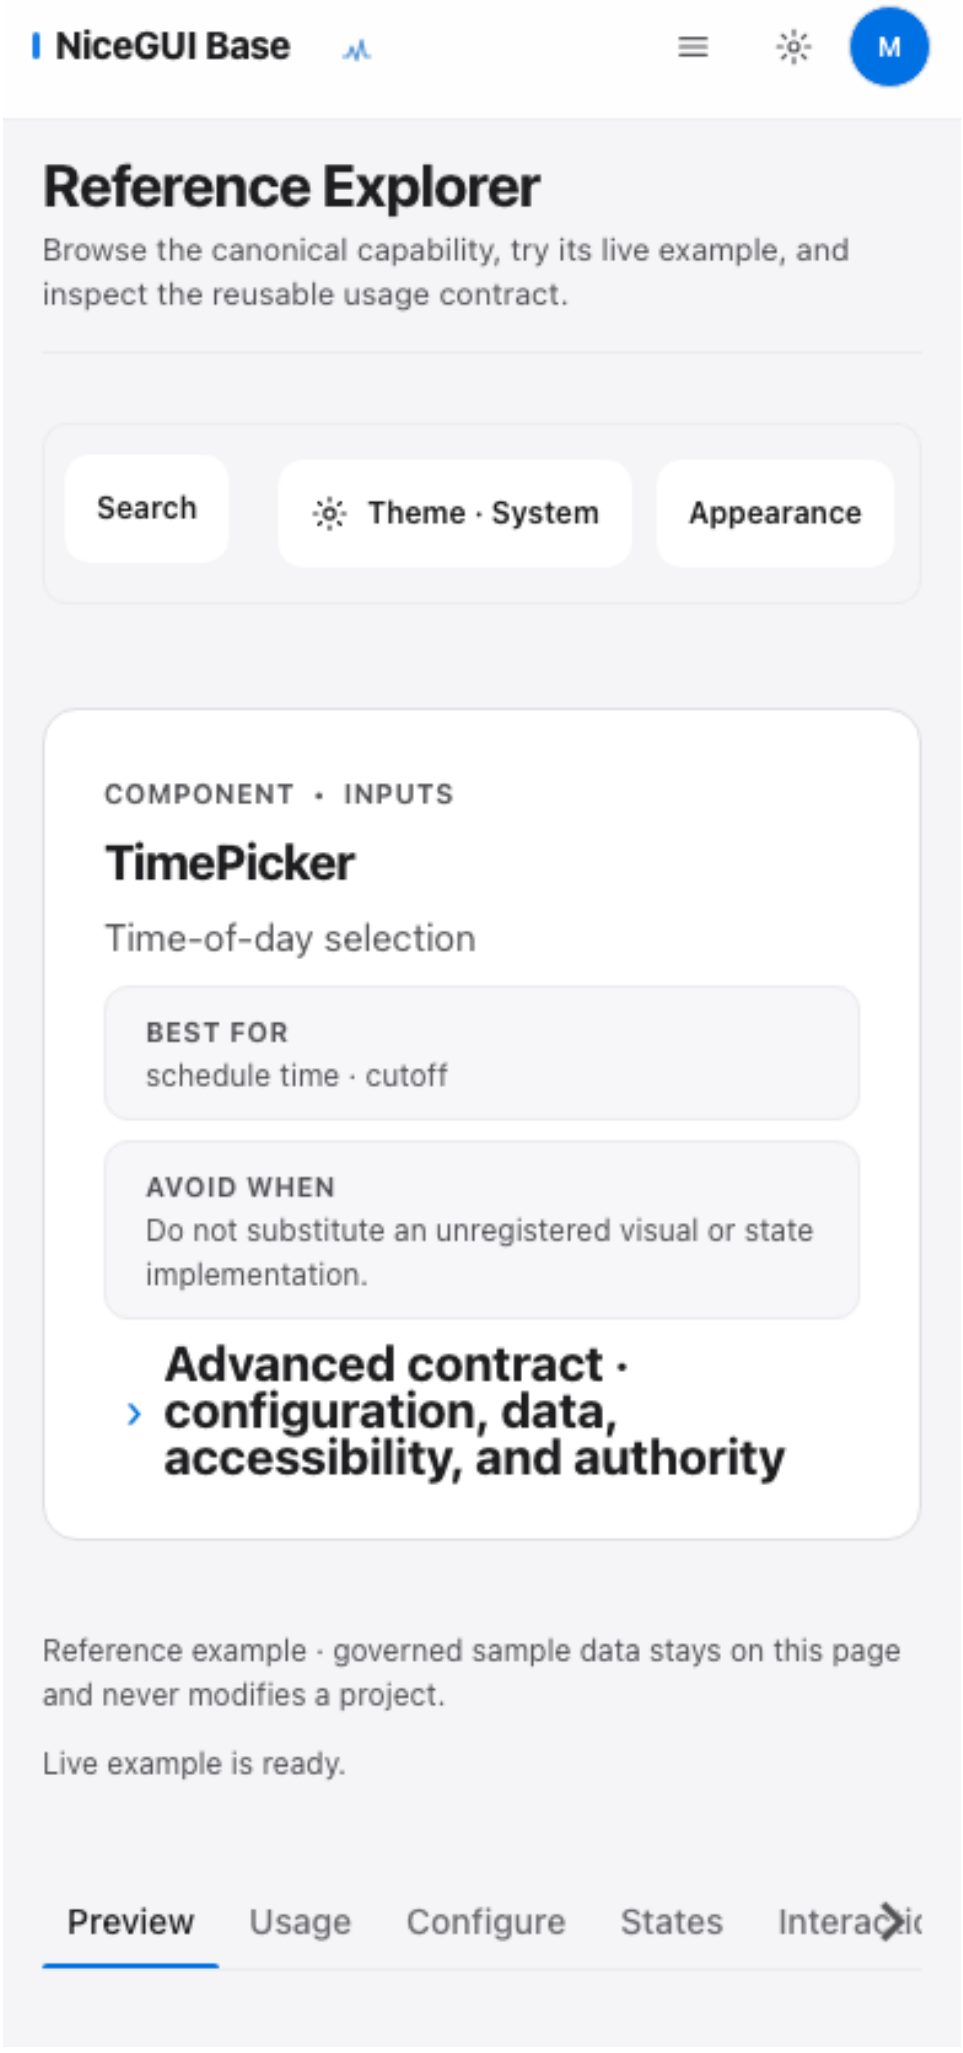
PNG SHA-256 c249d82cffd8f5ed85910df4bfd570d80a3e67b3c8b388c45e12e1f90843d03b

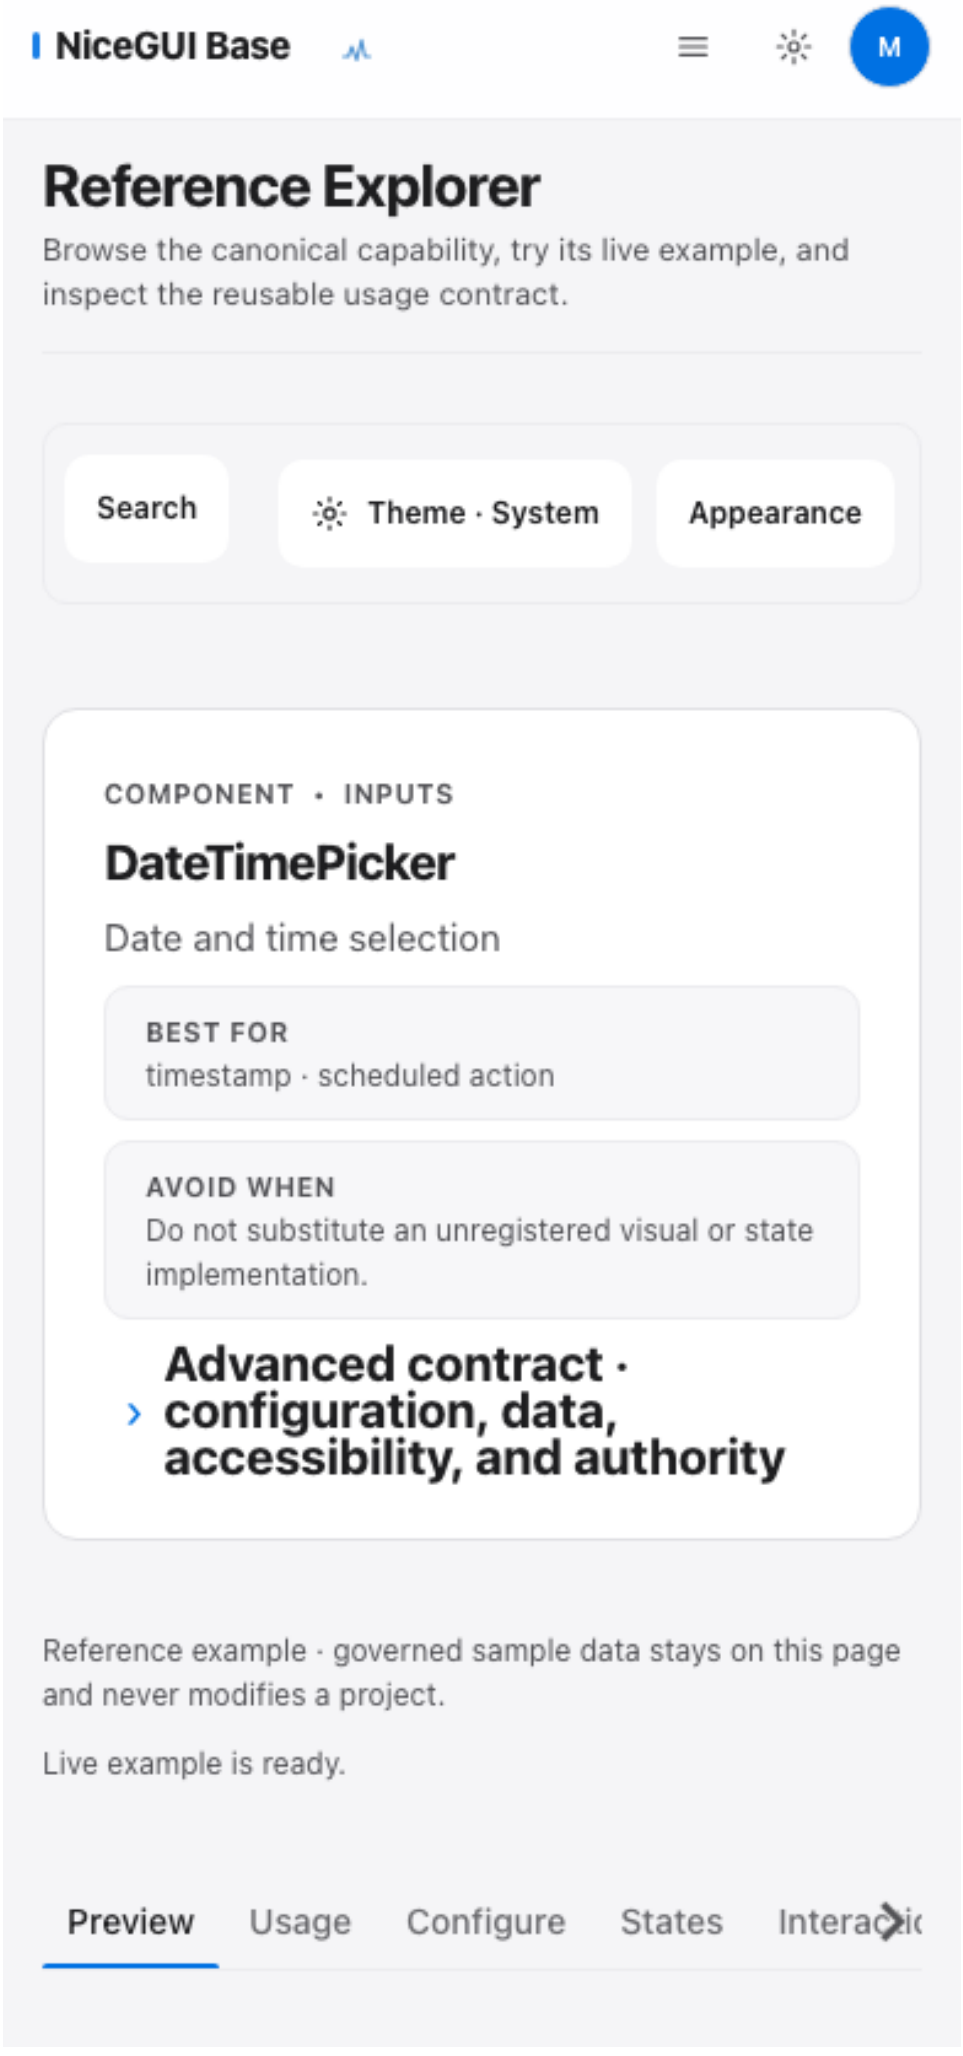



NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
DateRangePicker
Date interval selection
BEST FOR
analysis period · reporting window
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

component-time_picker

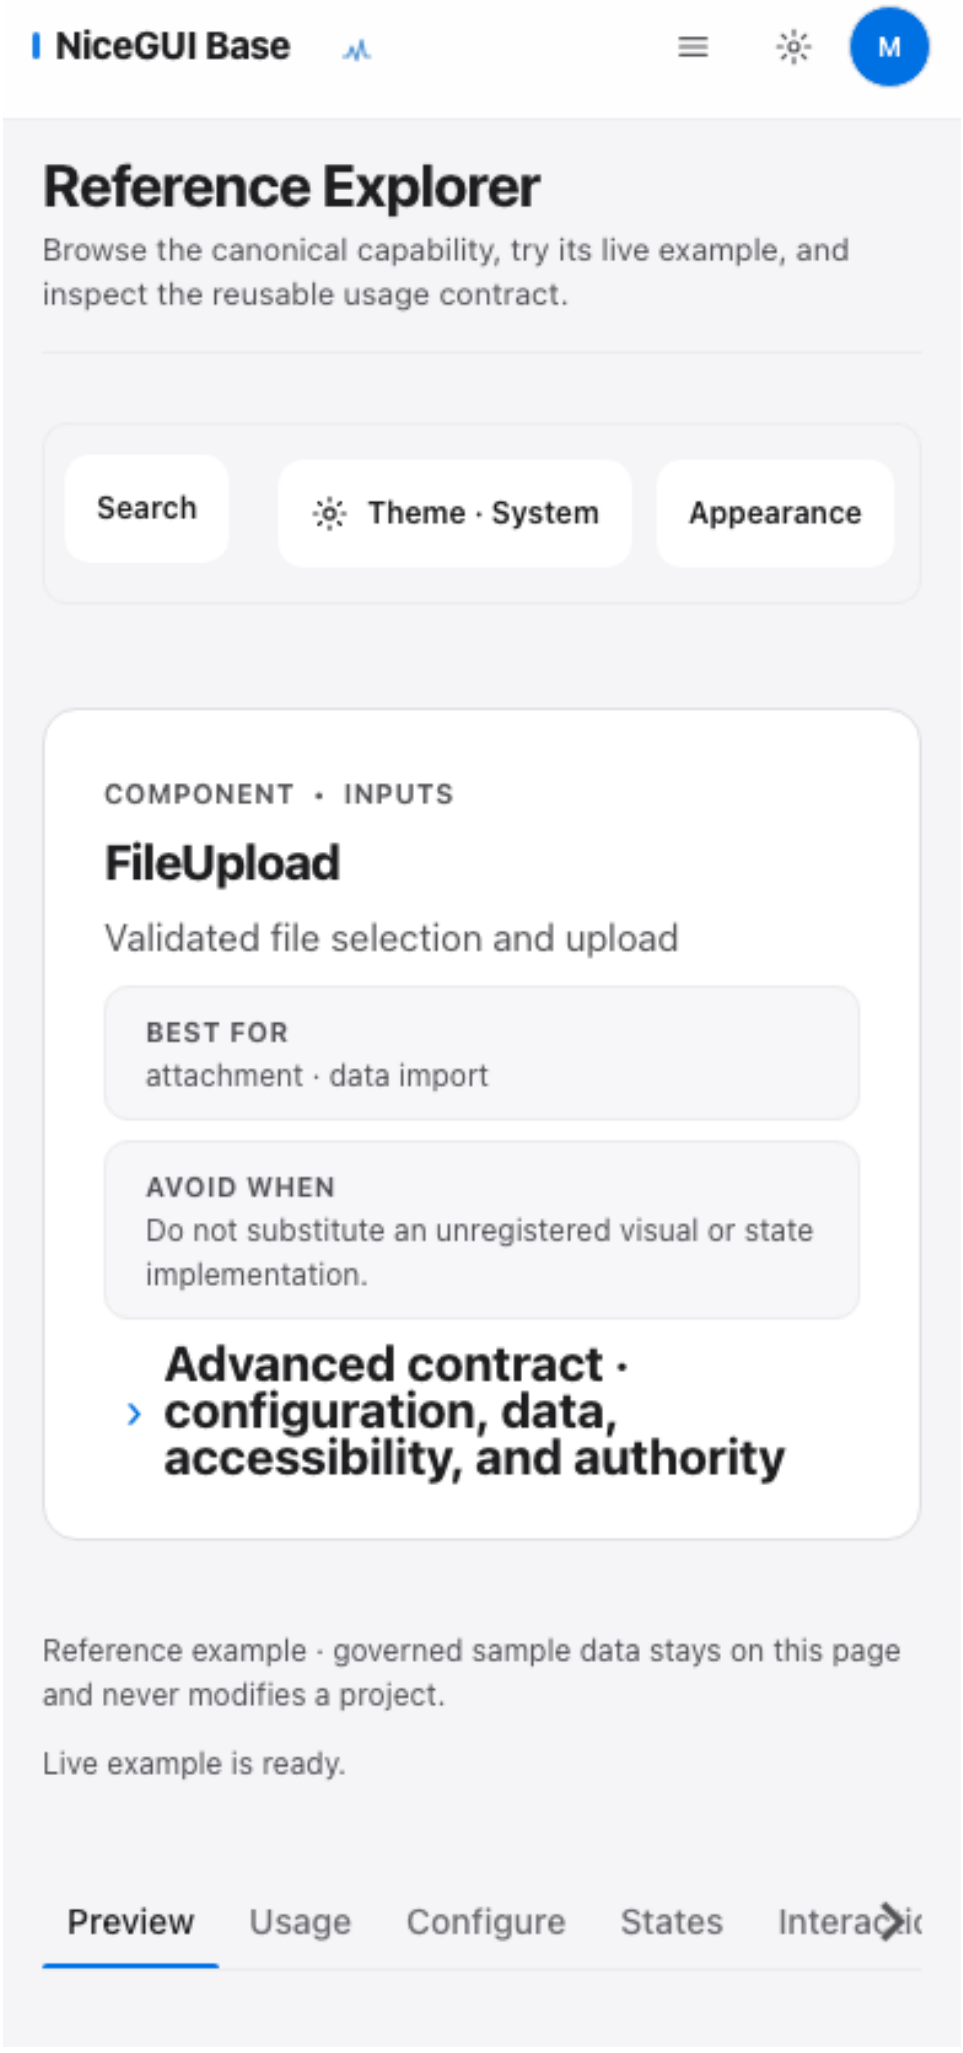
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 83a1821ef2da23e3cb5d32ac18c531ce01af4aa639224228d54a72ea5131dae4

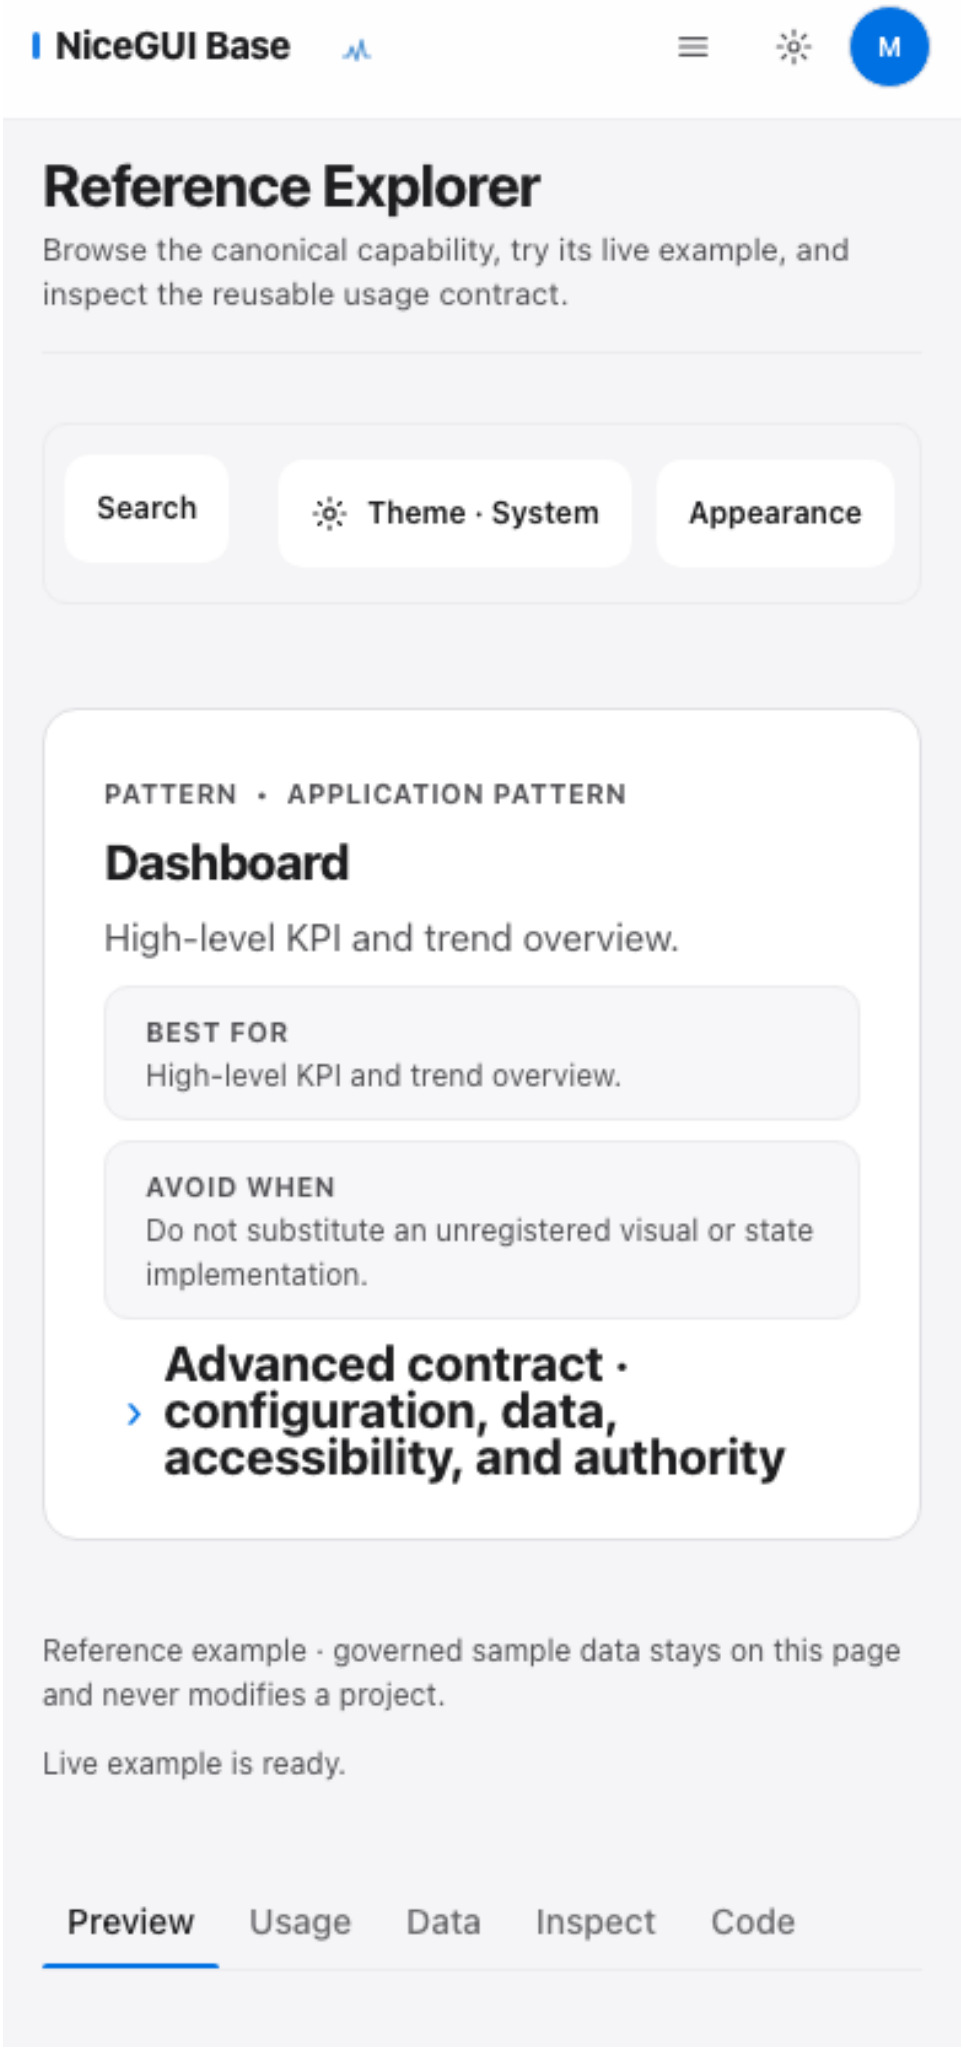


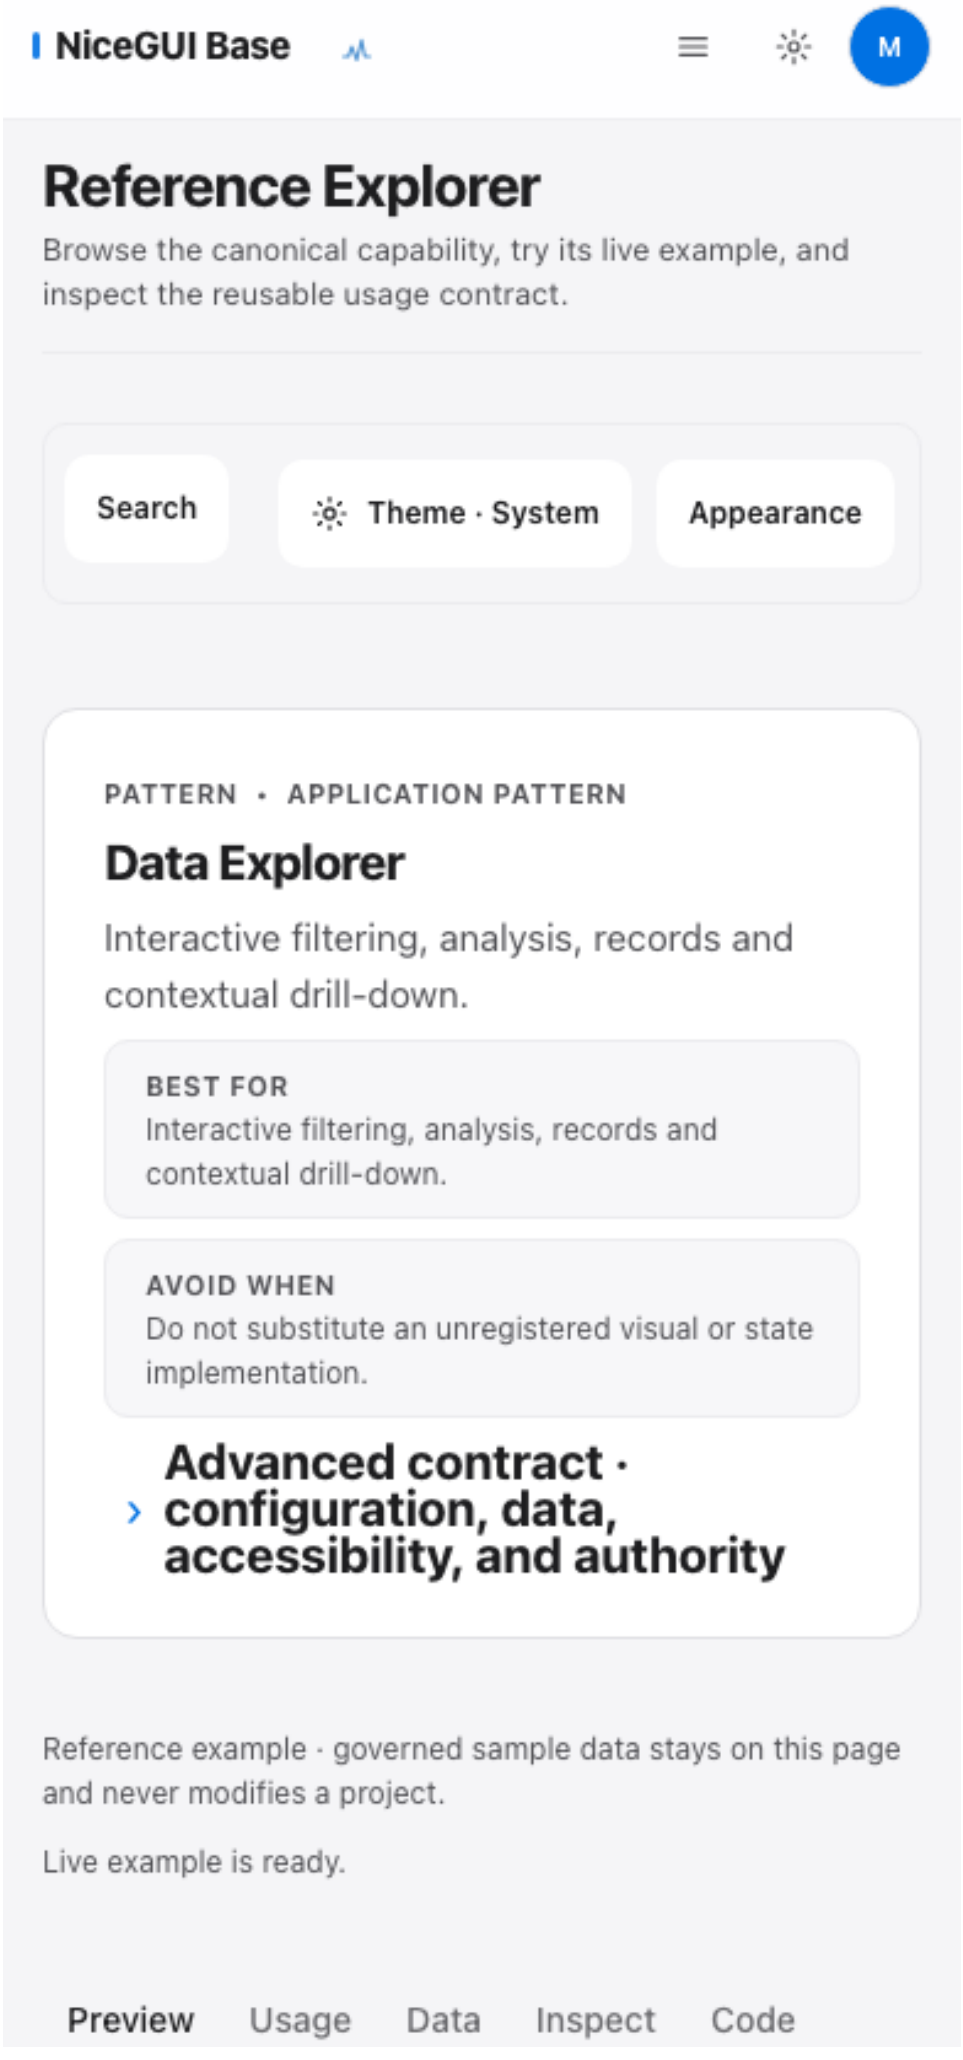

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
COMPONENT • INPUTS
DateTimePicker
Date and time selection
BEST FOR
timestamp · scheduled action
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Configure
States

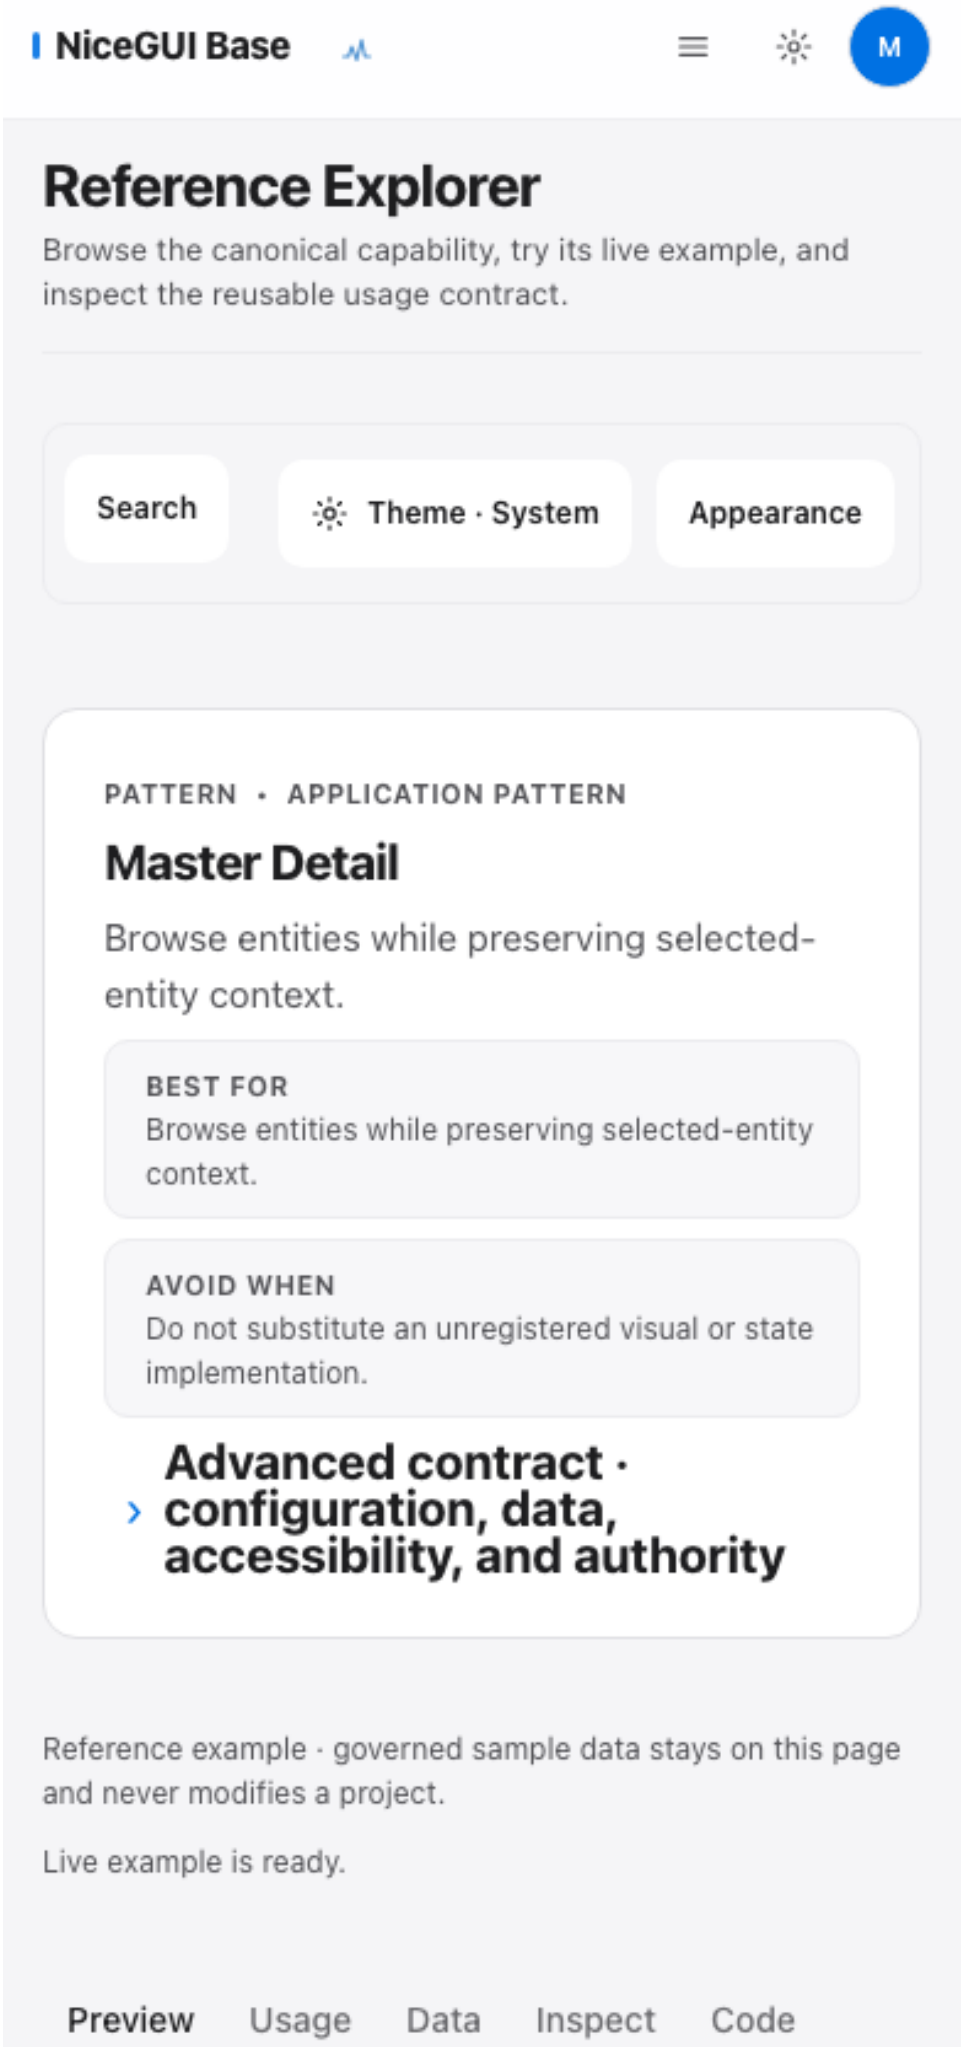
component-file_upload

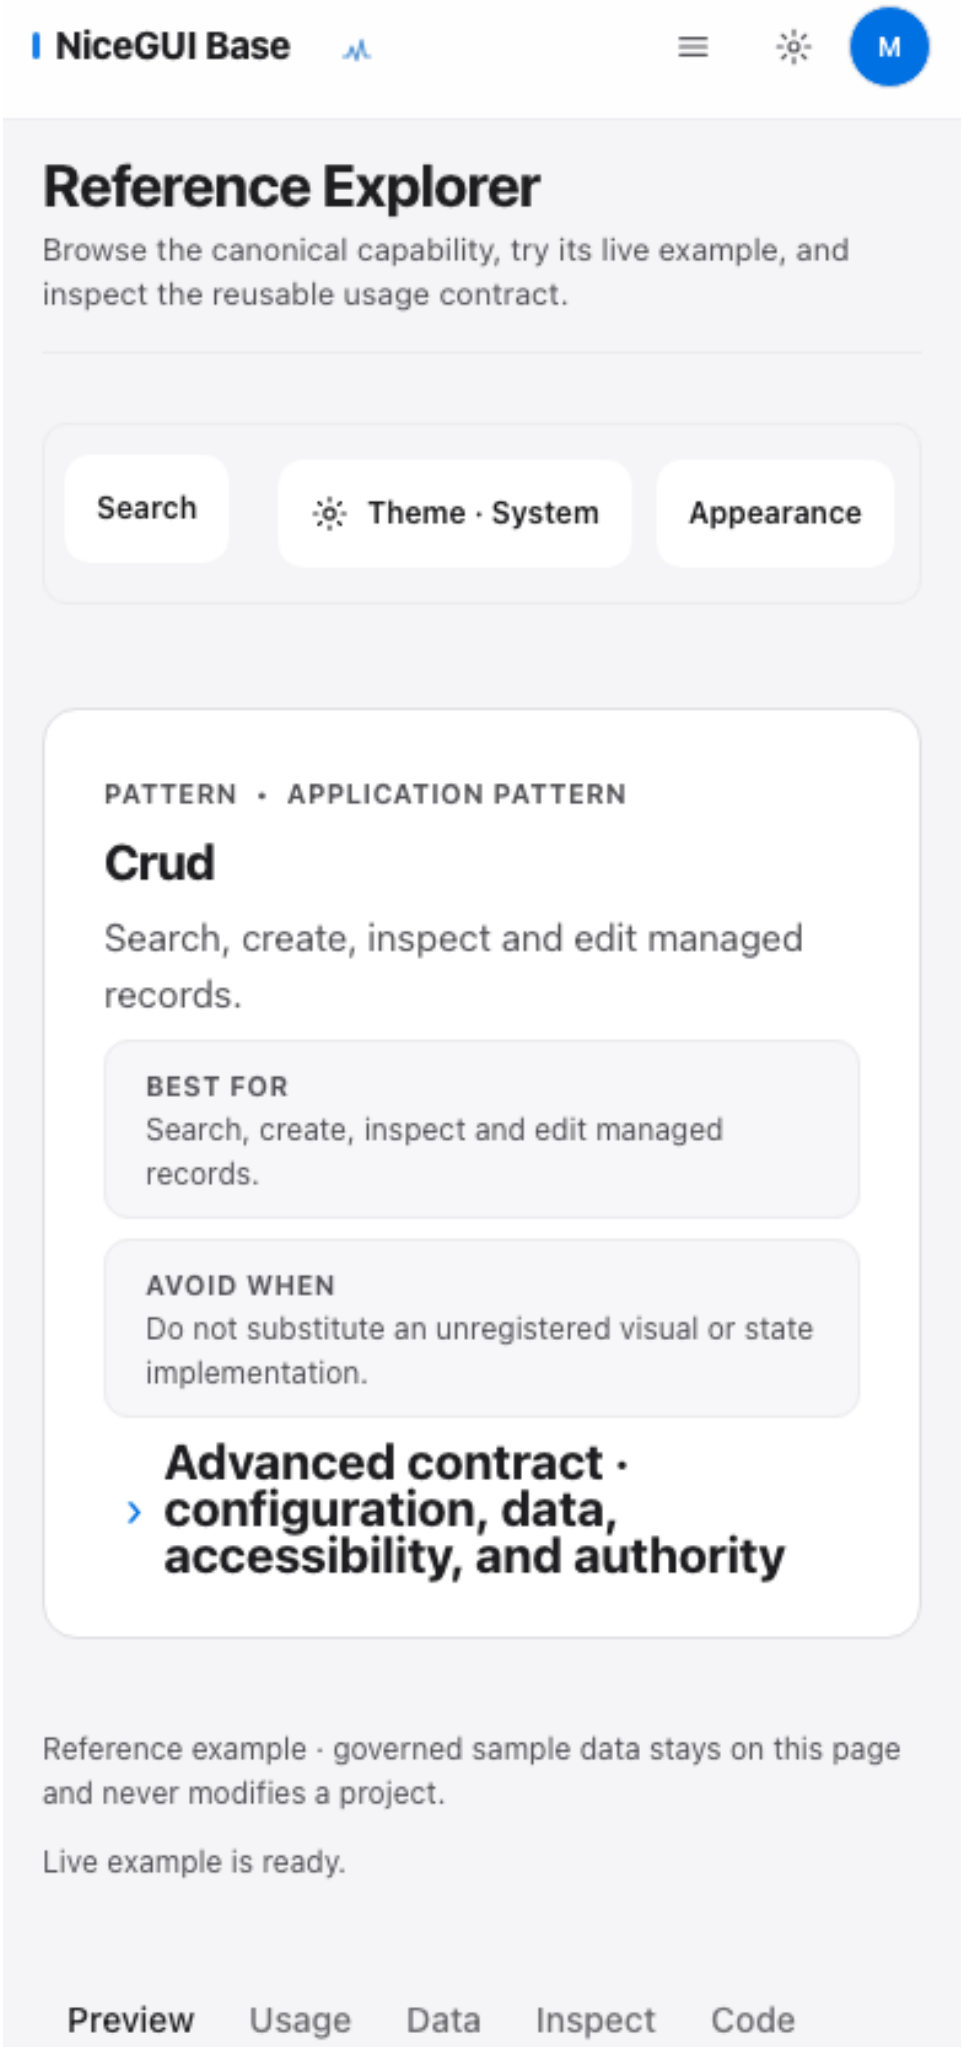
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 2e62a25faf483f457e378c8f9854a6d2eaddfe8b30c48f2c49beb3ab4f418af9

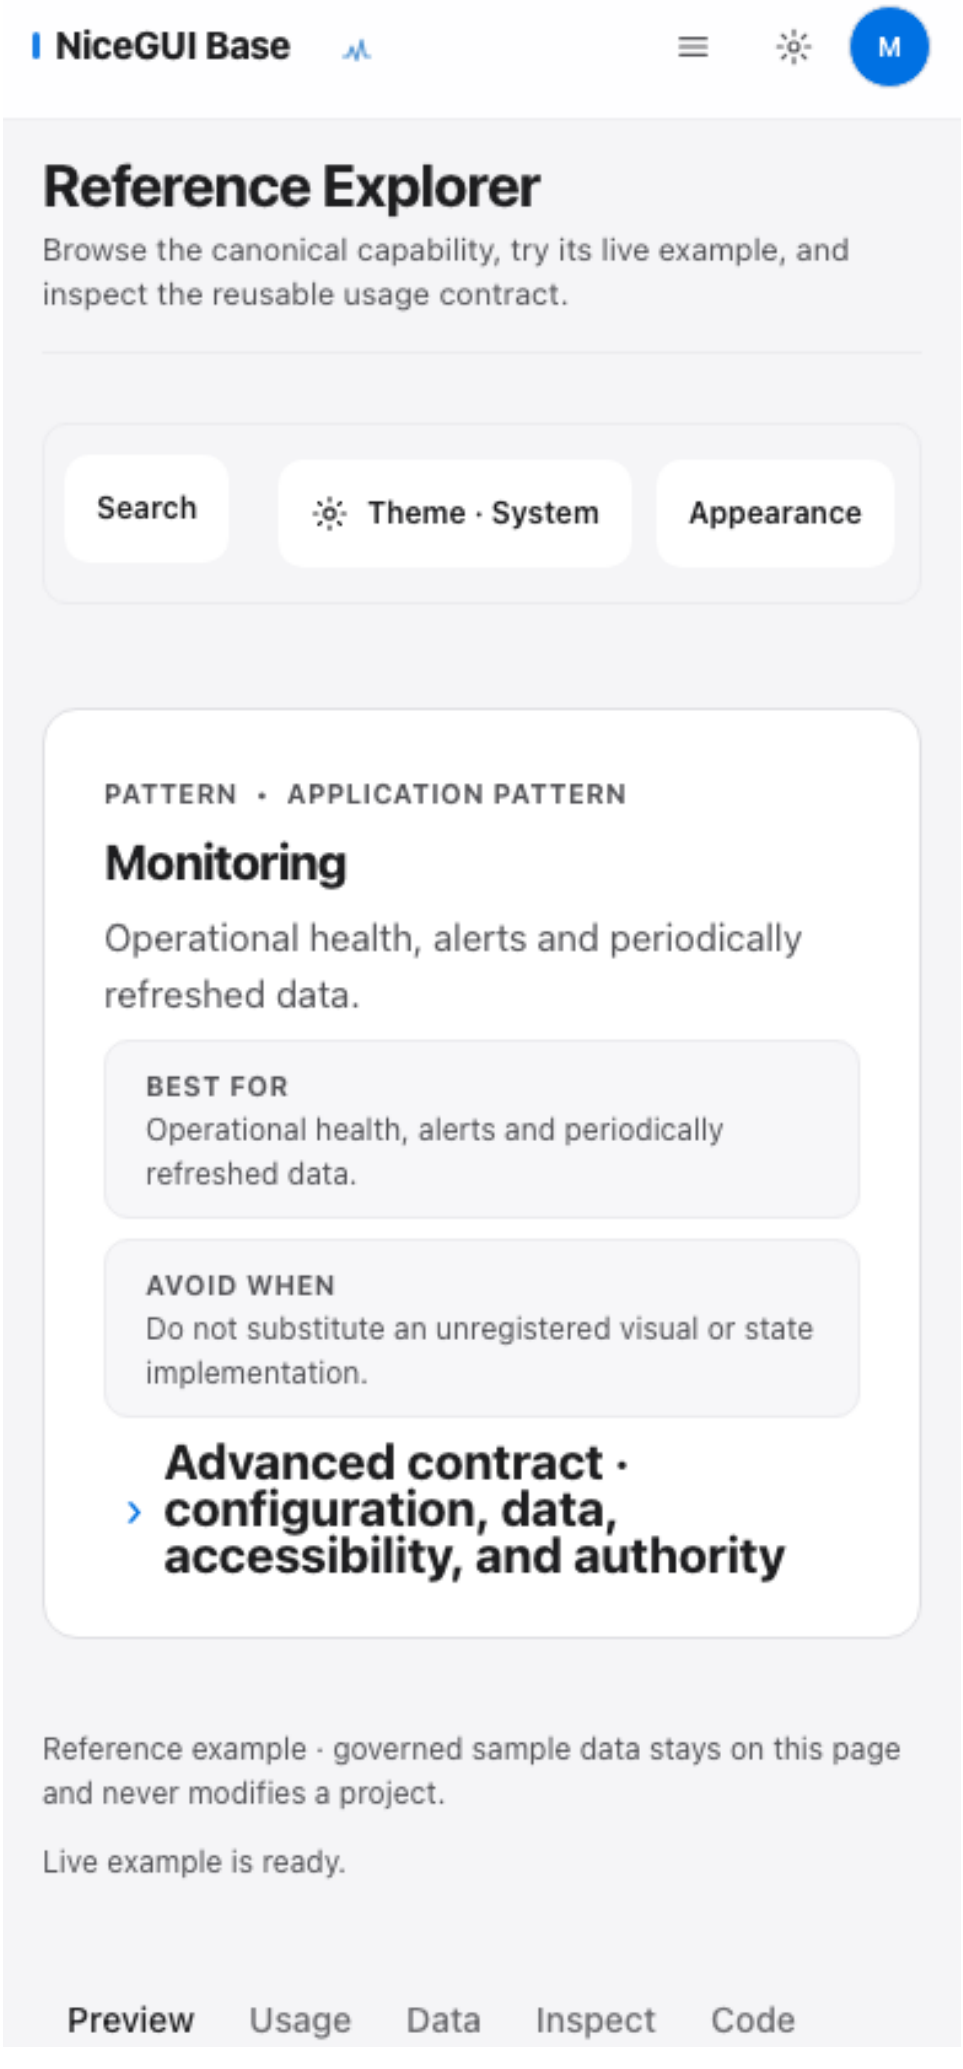


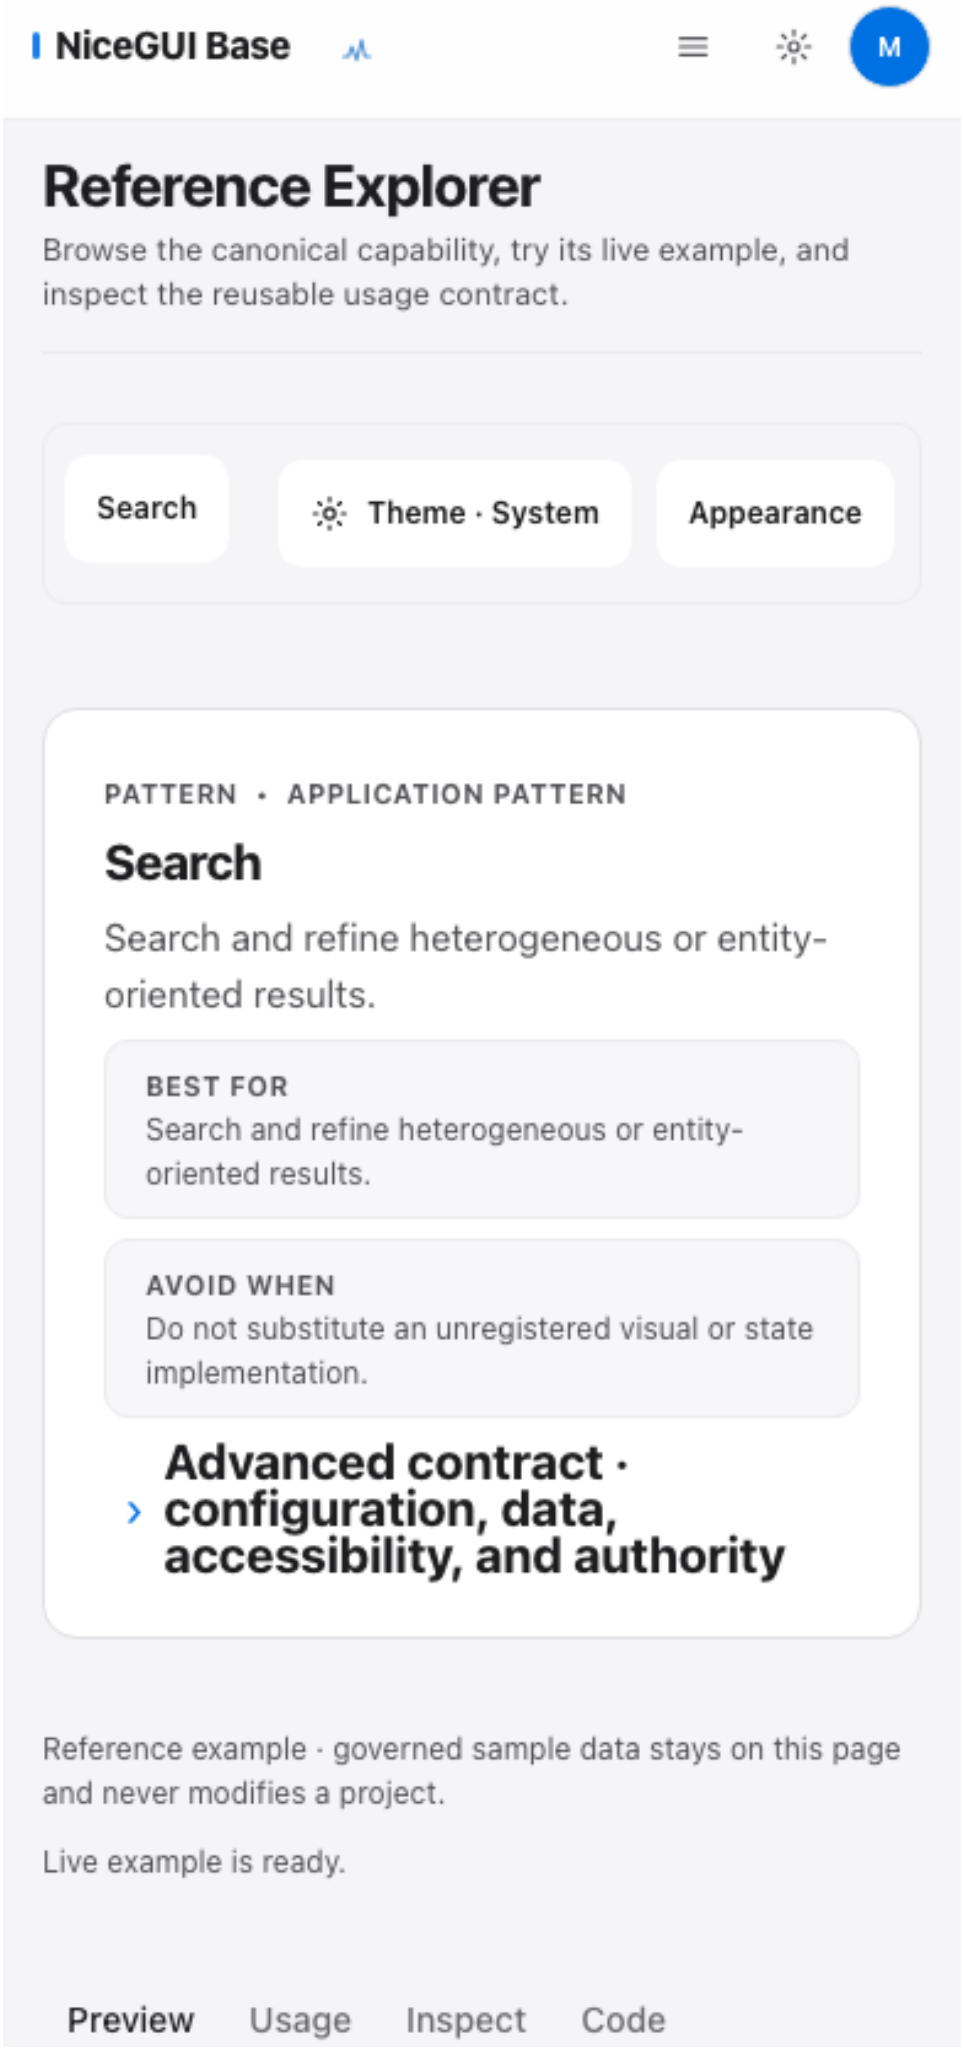

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Dashboard
High-level KPI and trend overview.
BEST FOR
High-level KPI and trend overview.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Data Explorer
Interactive filtering, analysis, records and contextual drill-down.
BEST FOR
Interactive filtering, analysis, records and contextual drill-down.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Master Detail
Browse entities while preserving selected-entity context.
BEST FOR
Browse entities while preserving selected-entity context.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Crud
Search, create, inspect and edit managed records.
BEST FOR
Search, create, inspect and edit managed records.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

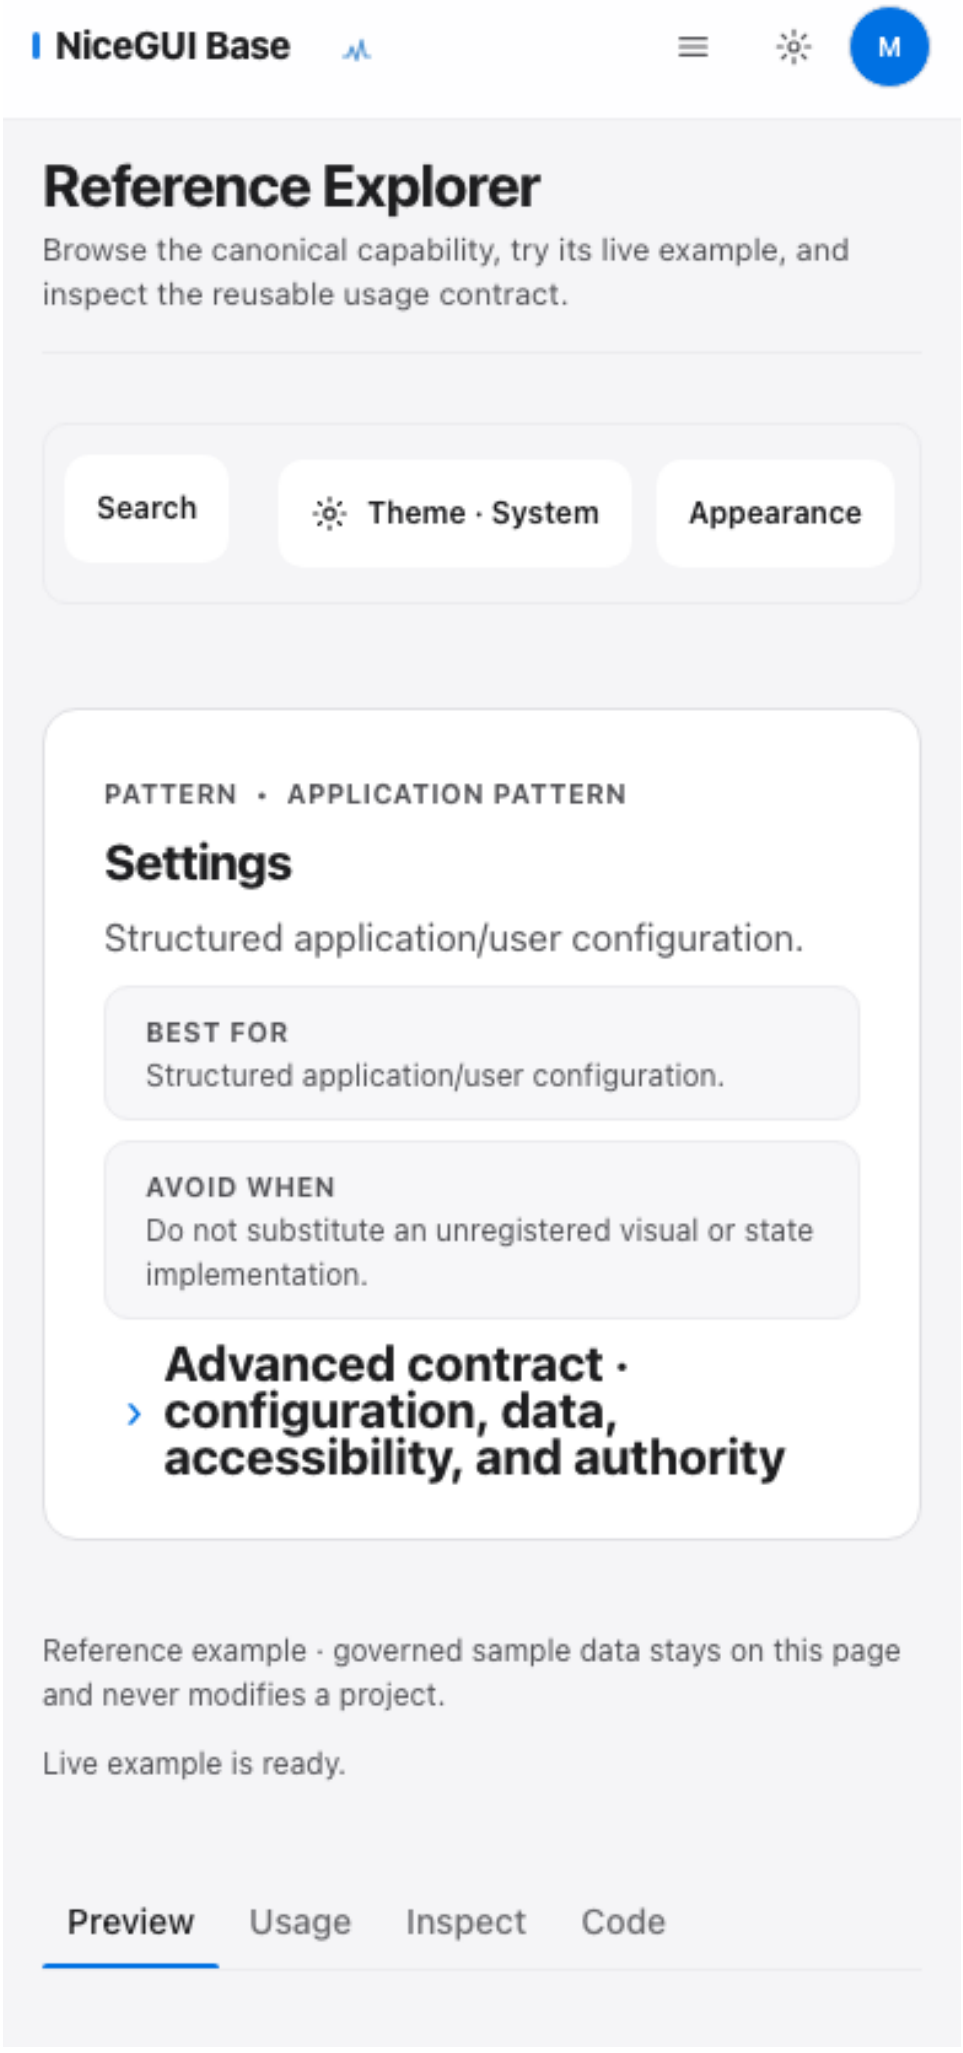

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Monitoring
Operational health, alerts and periodically refreshed data.
BEST FOR
Operational health, alerts and periodically refreshed data.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

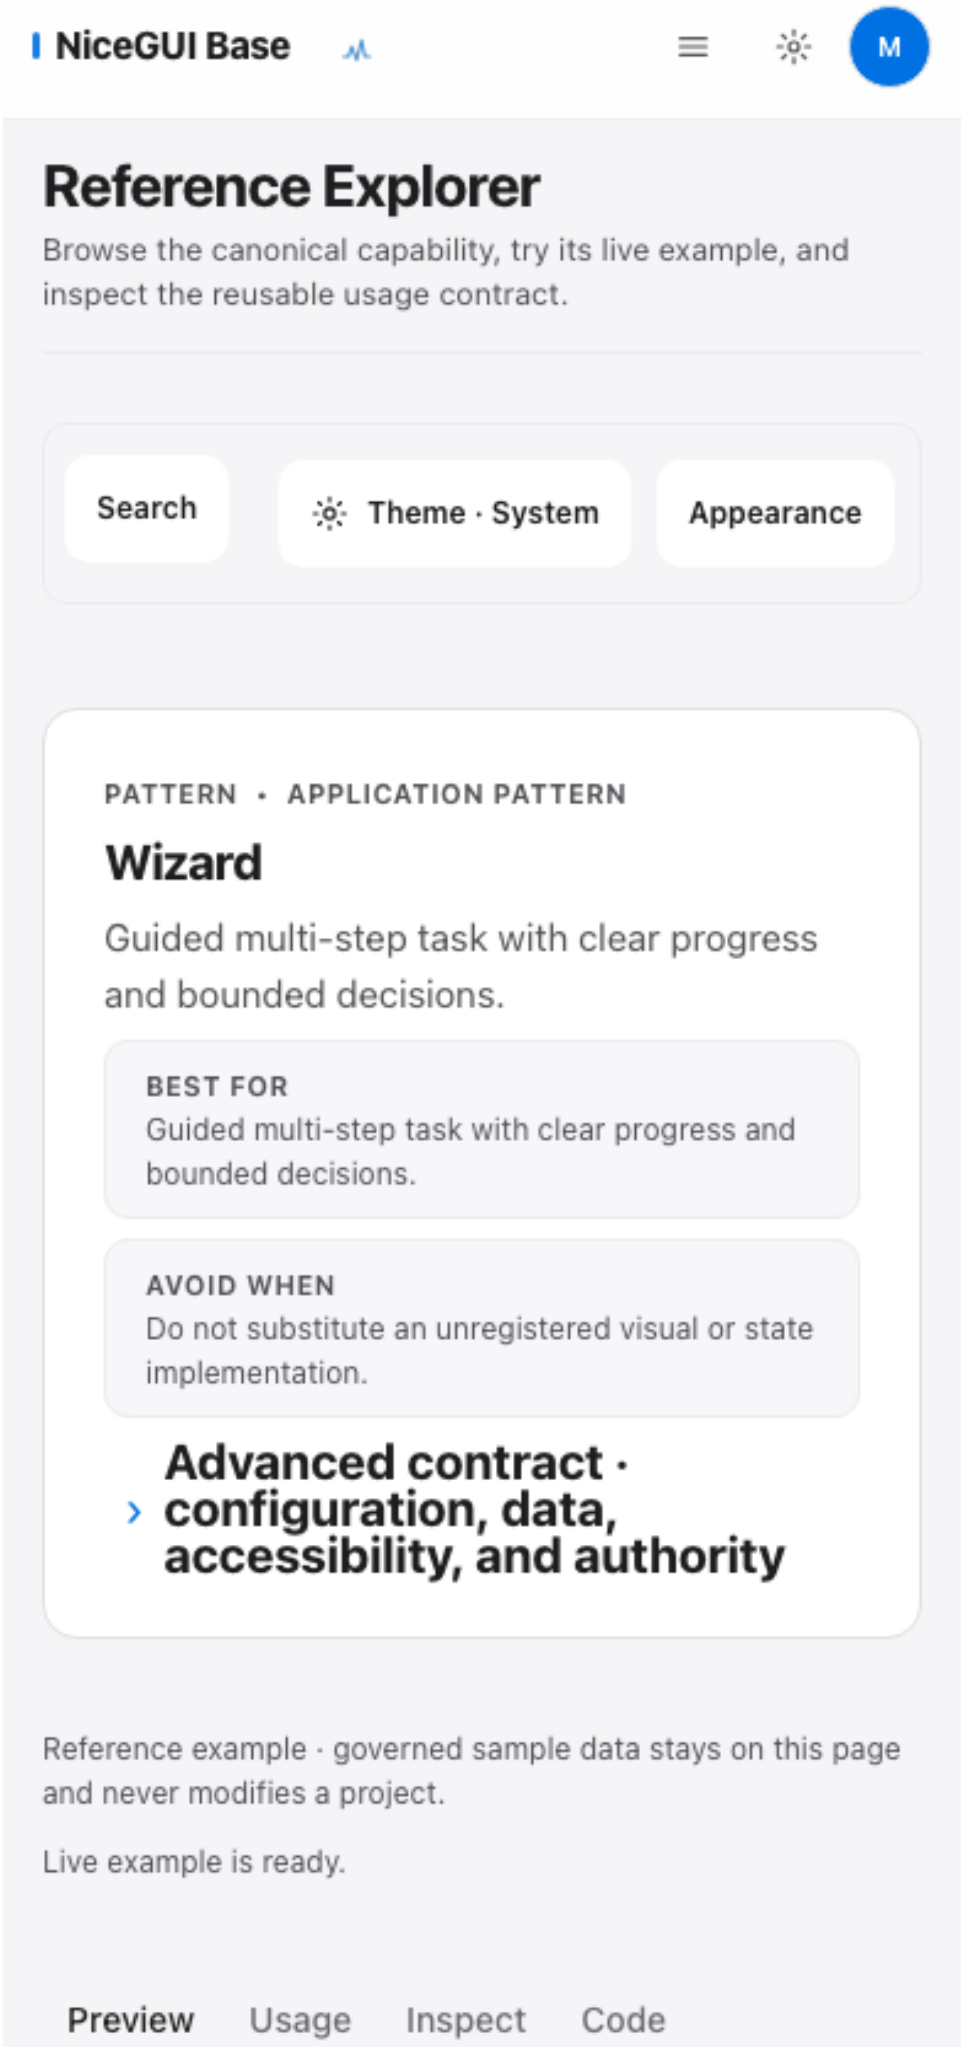

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Search
Search and refine heterogeneous or entity-oriented results.
BEST FOR
Search and refine heterogeneous or entity-oriented results.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code

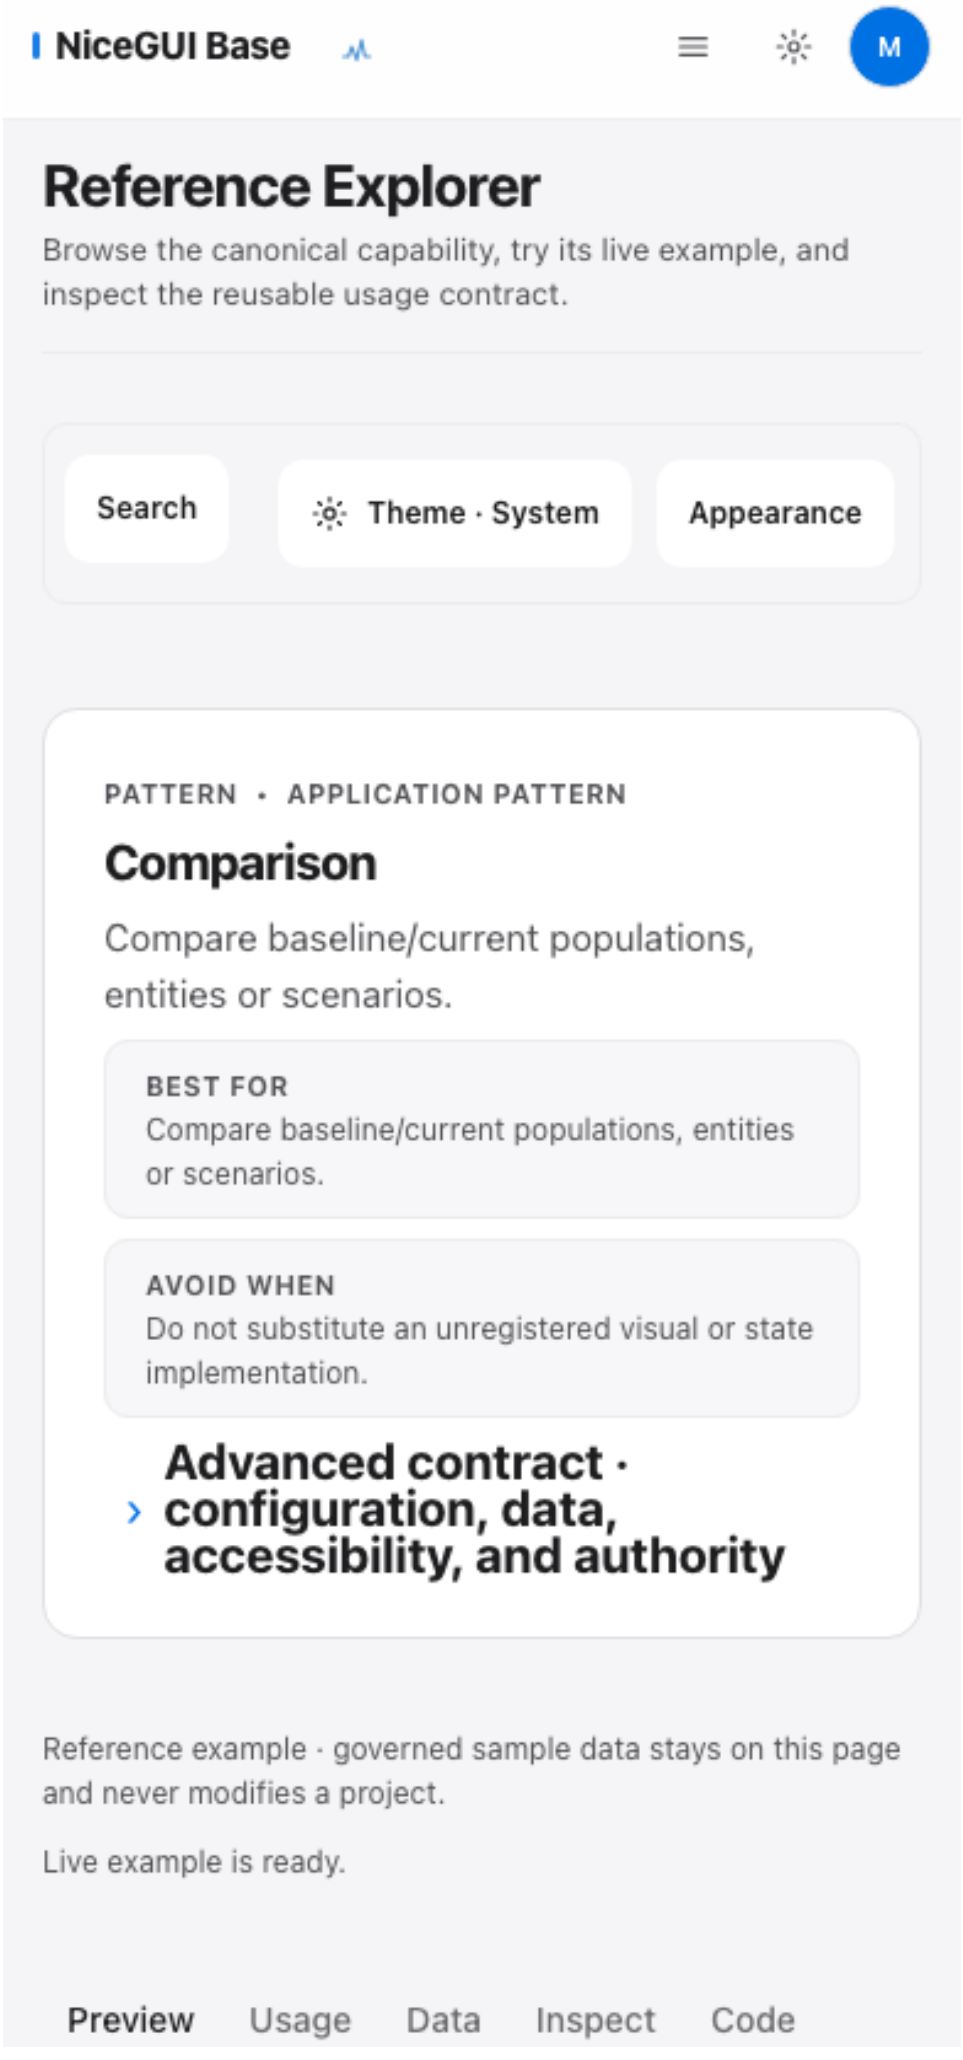
pattern-studio-settings

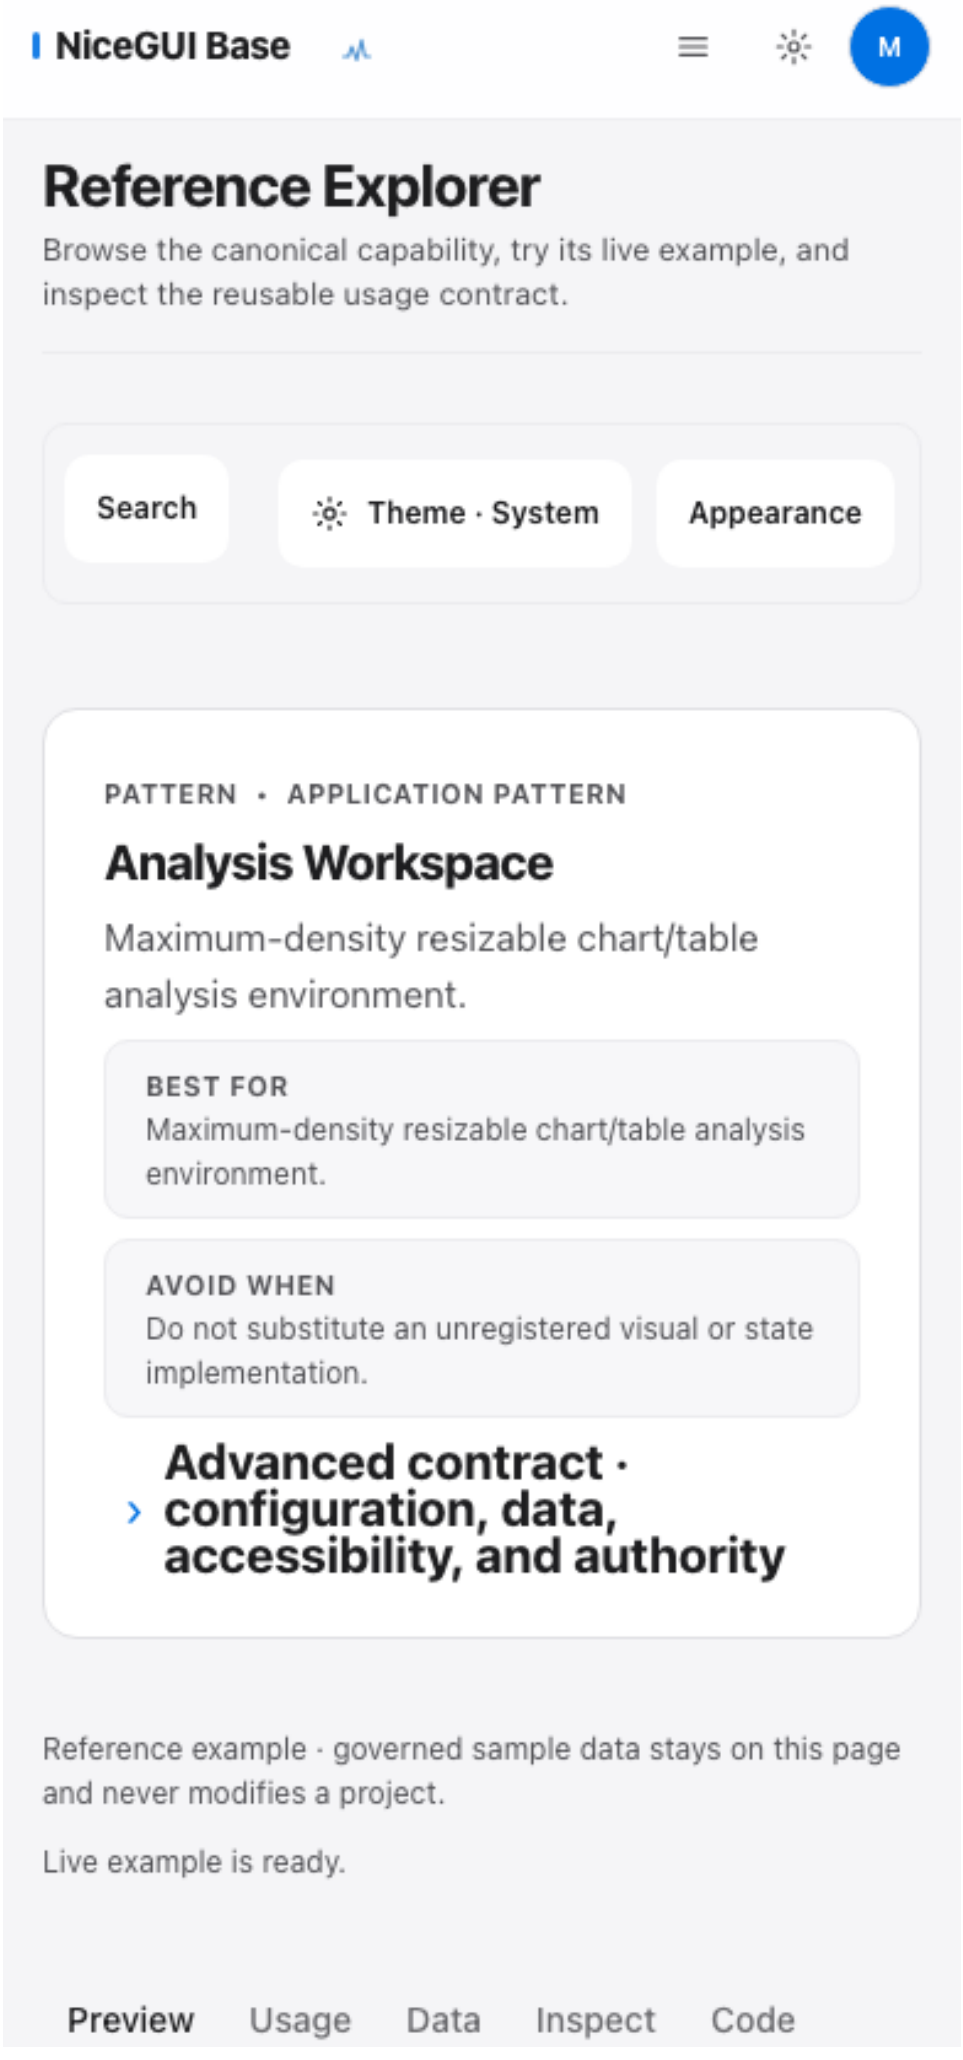
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

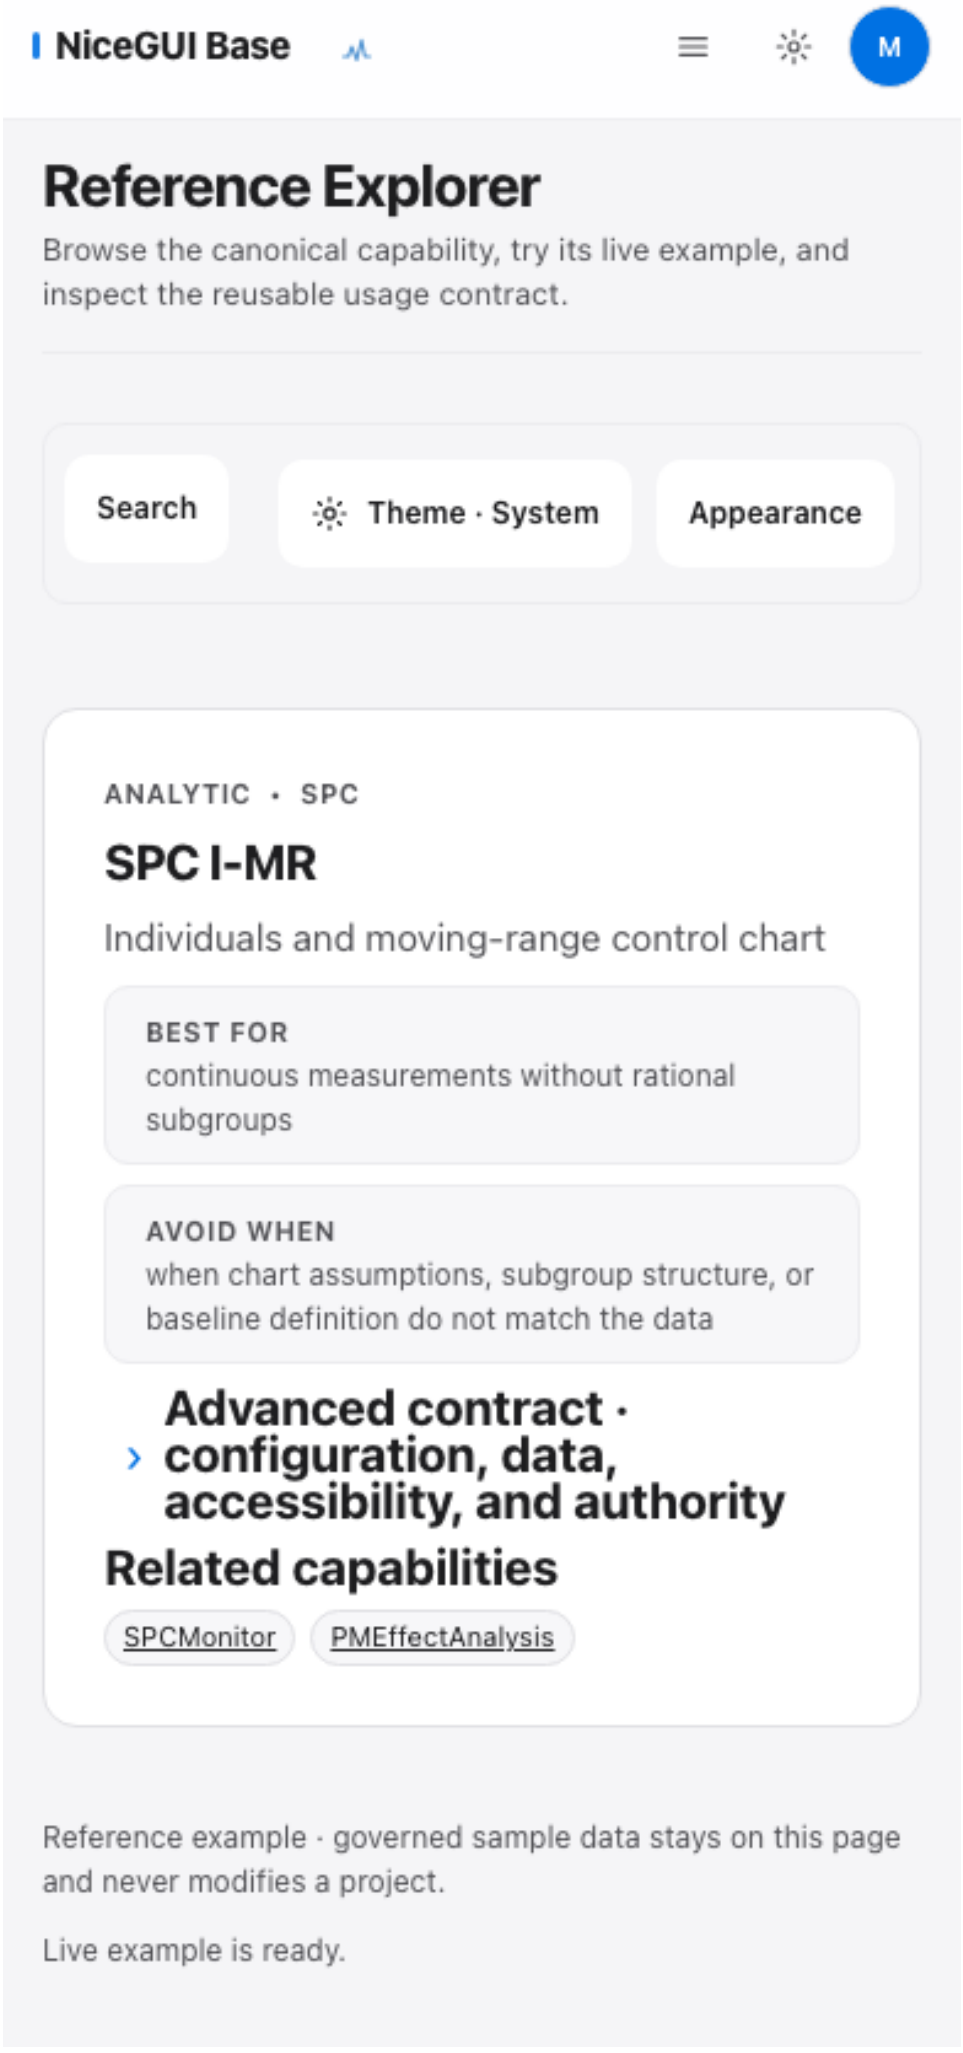
PNG SHA-256 a3c166c3c1ac2c5657e49767c9eb9de847f4562f803e7528f449d32dd1a760e3

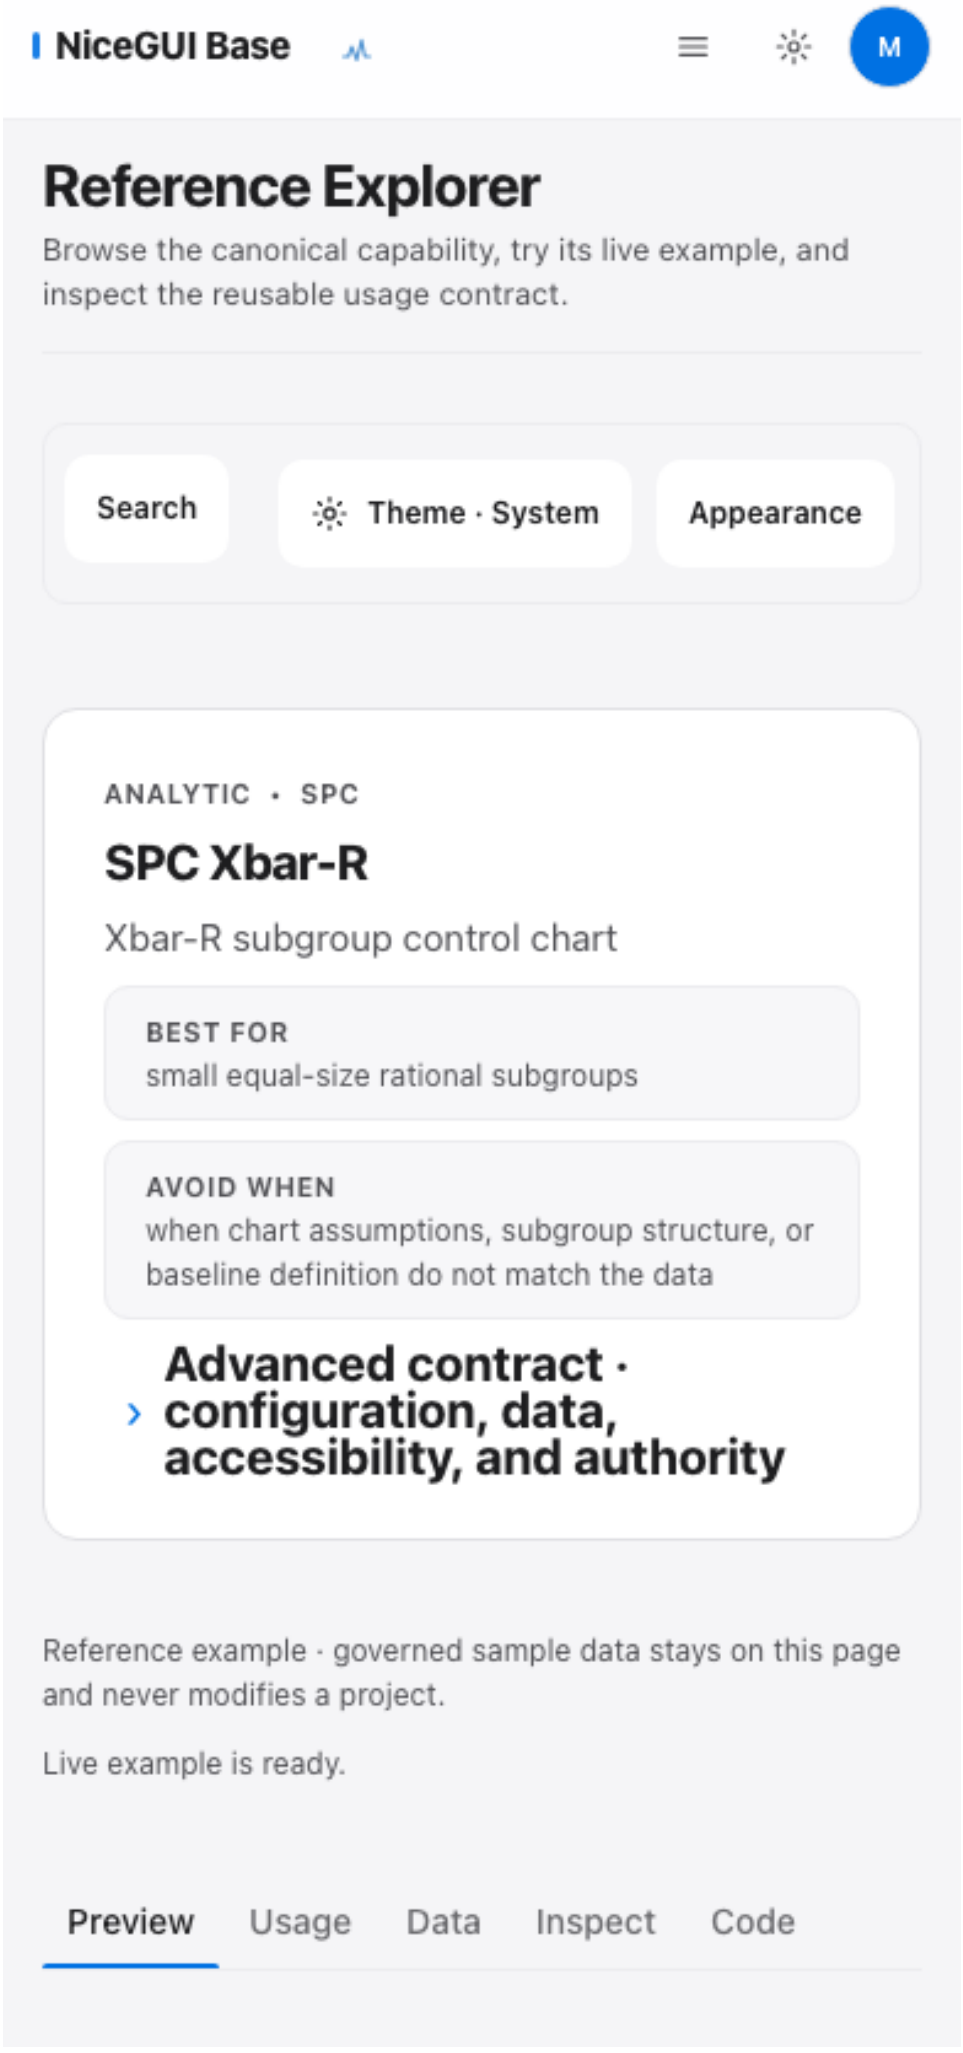


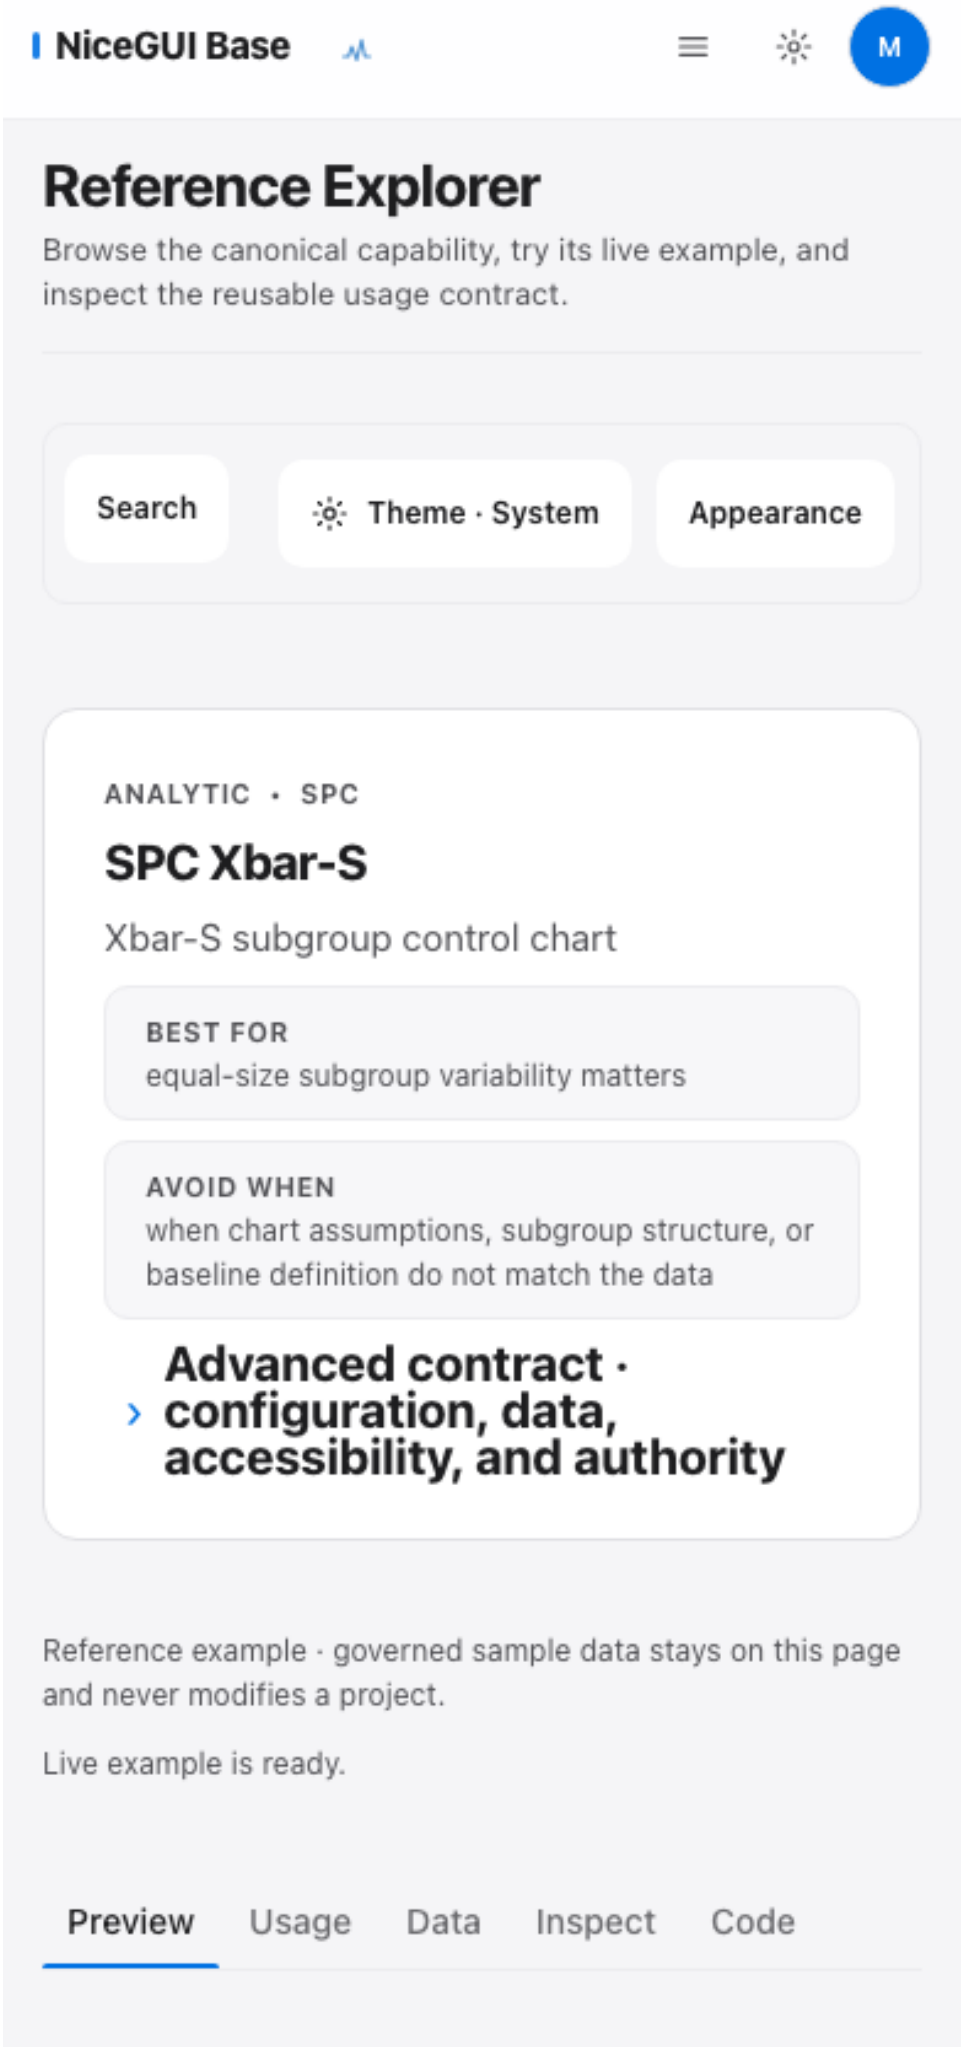

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Wizard
Guided multi-step task with clear progress and bounded decisions.
BEST FOR
Guided multi-step task with clear progress and bounded decisions.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Inspect
Code

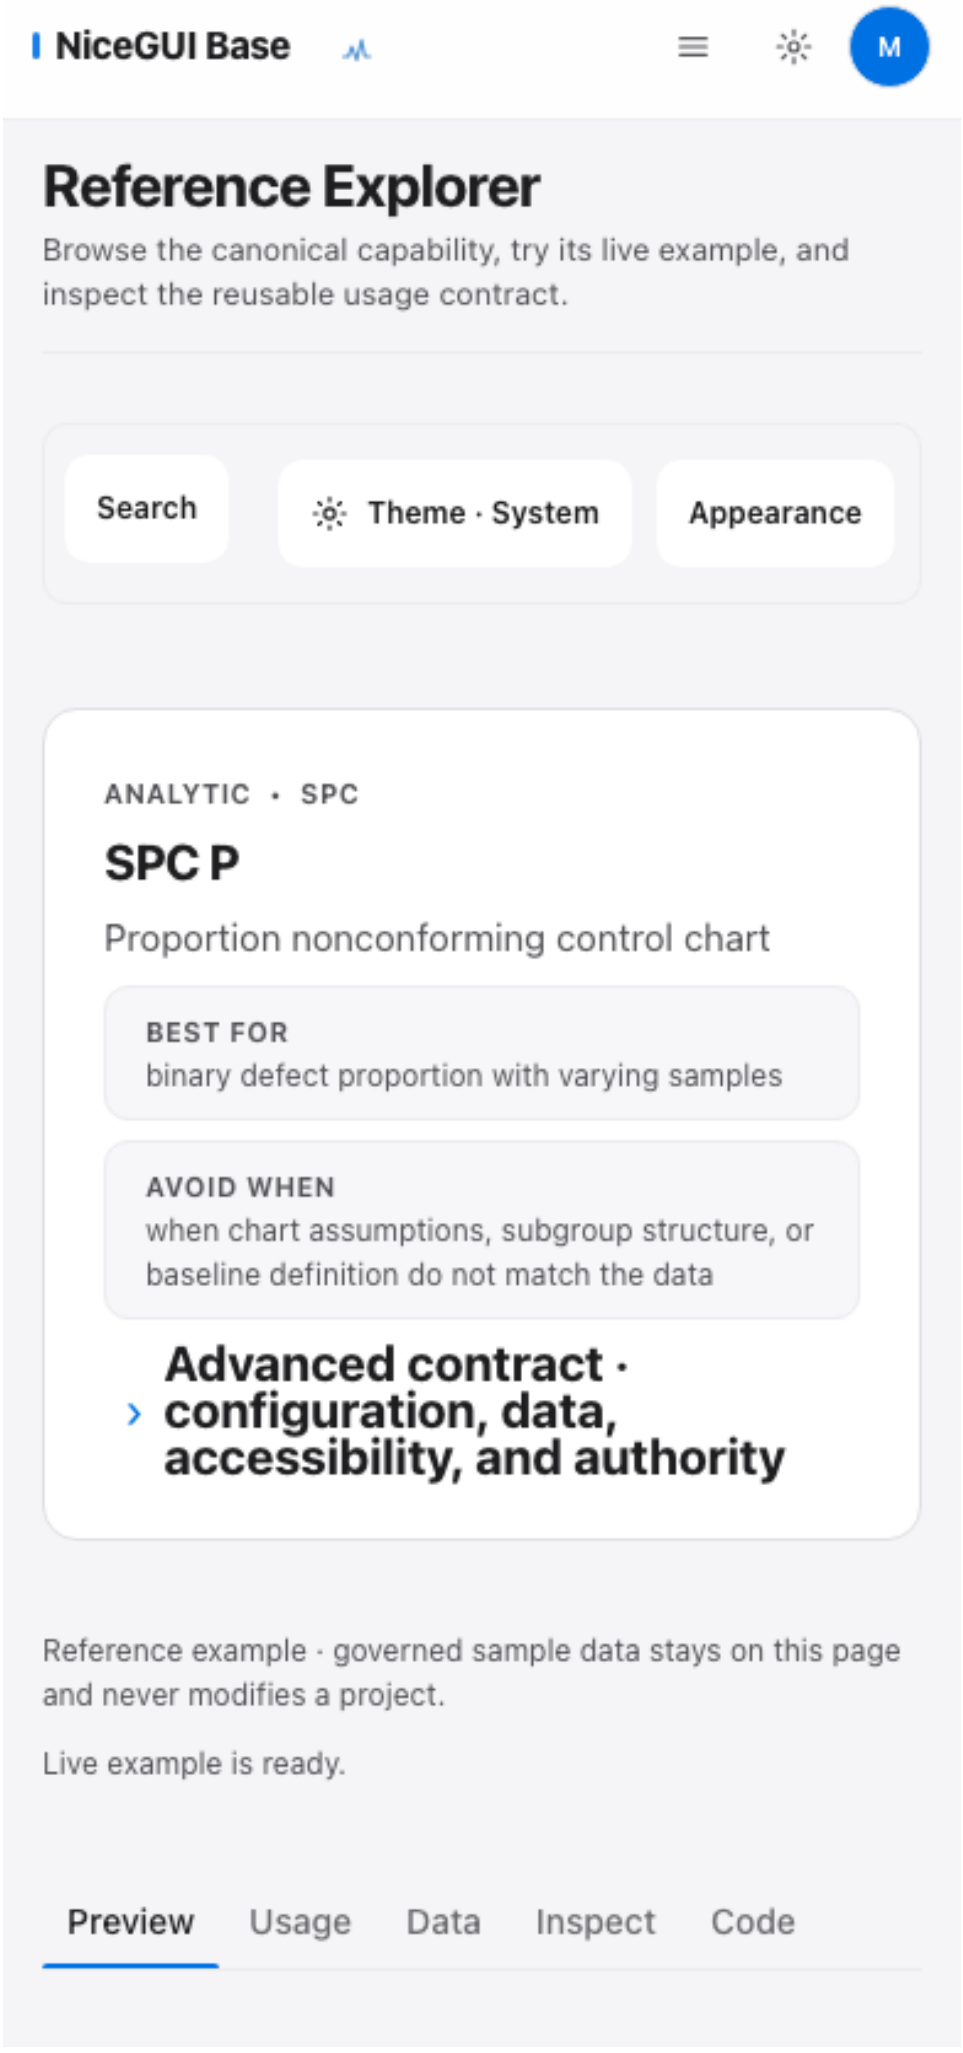

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Comparison
Compare baseline/current populations, entities or scenarios.
BEST FOR
Compare baseline/current populations, entities or scenarios.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

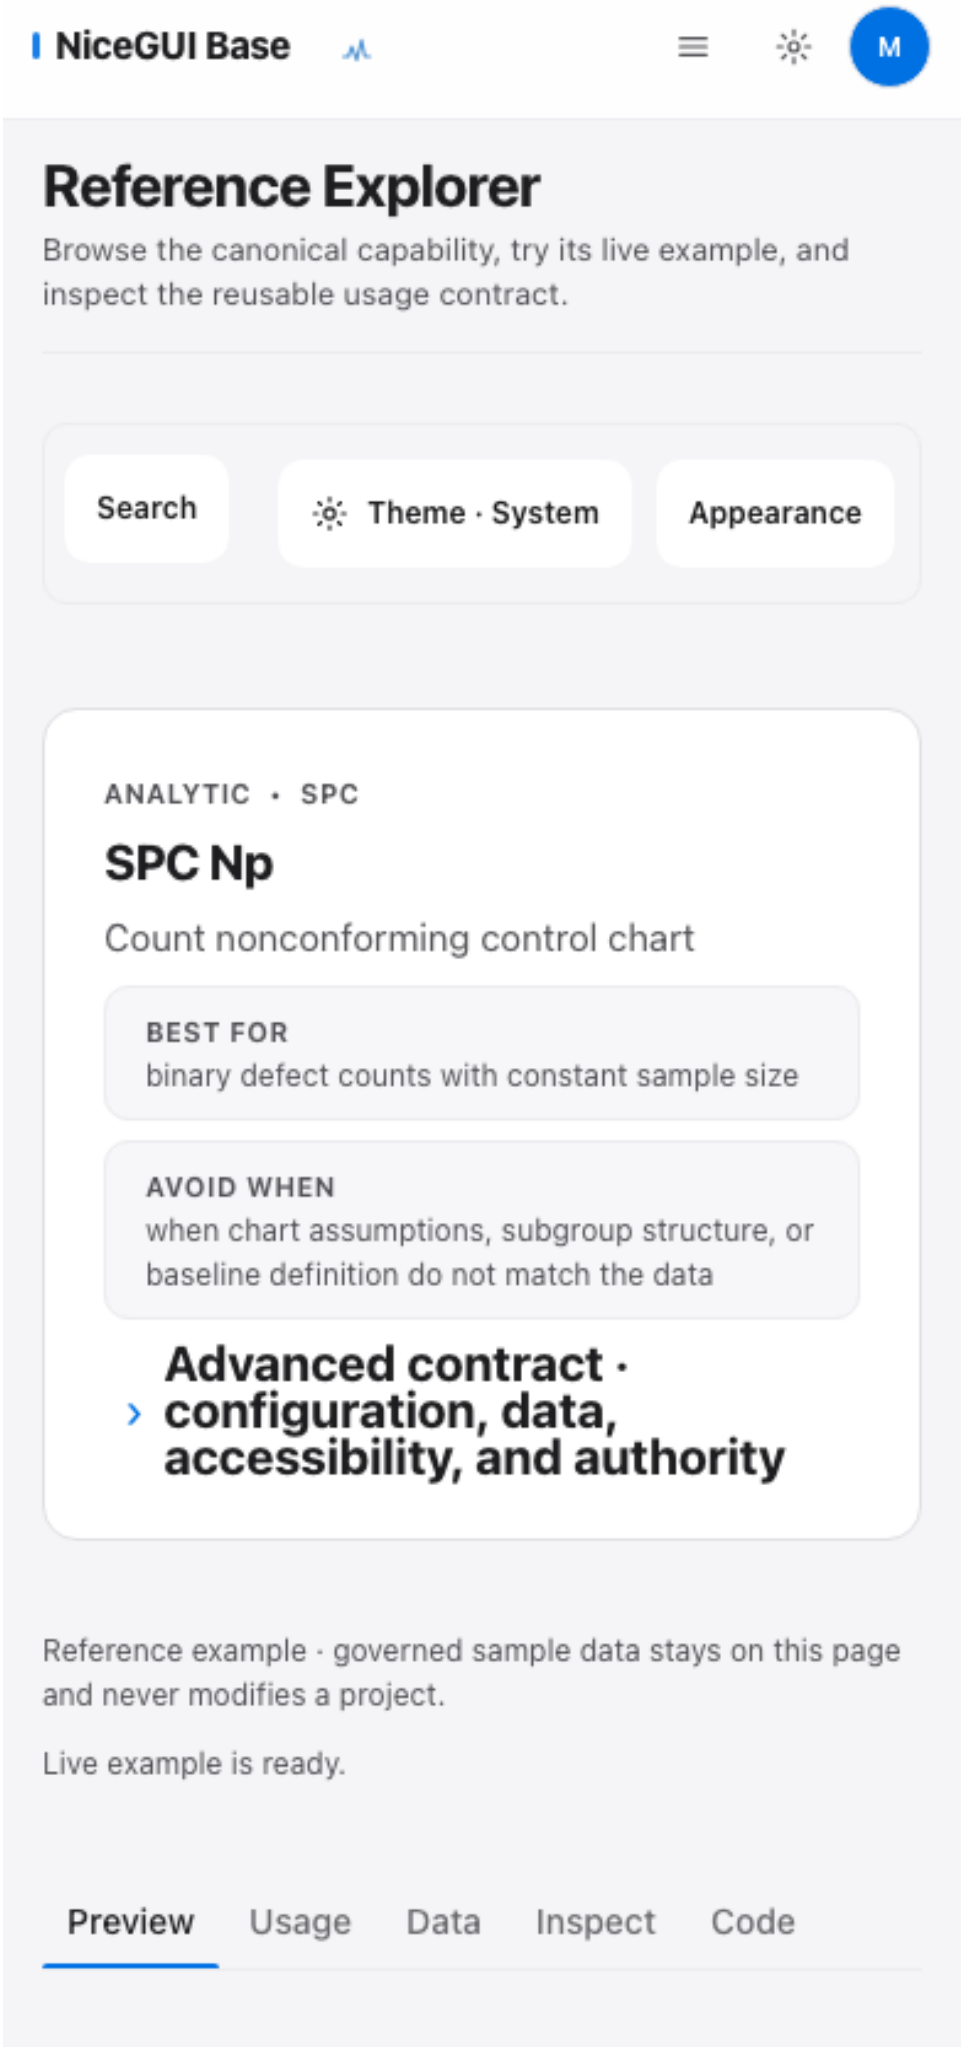

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
PATTERN • APPLICATION PATTERN
Analysis Workspace
Maximum-density resizable chart/table analysis environment.
BEST FOR
Maximum-density resizable chart/table analysis environment.
AVOID WHEN
Do not substitute an unregistered visual or state implementation.
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

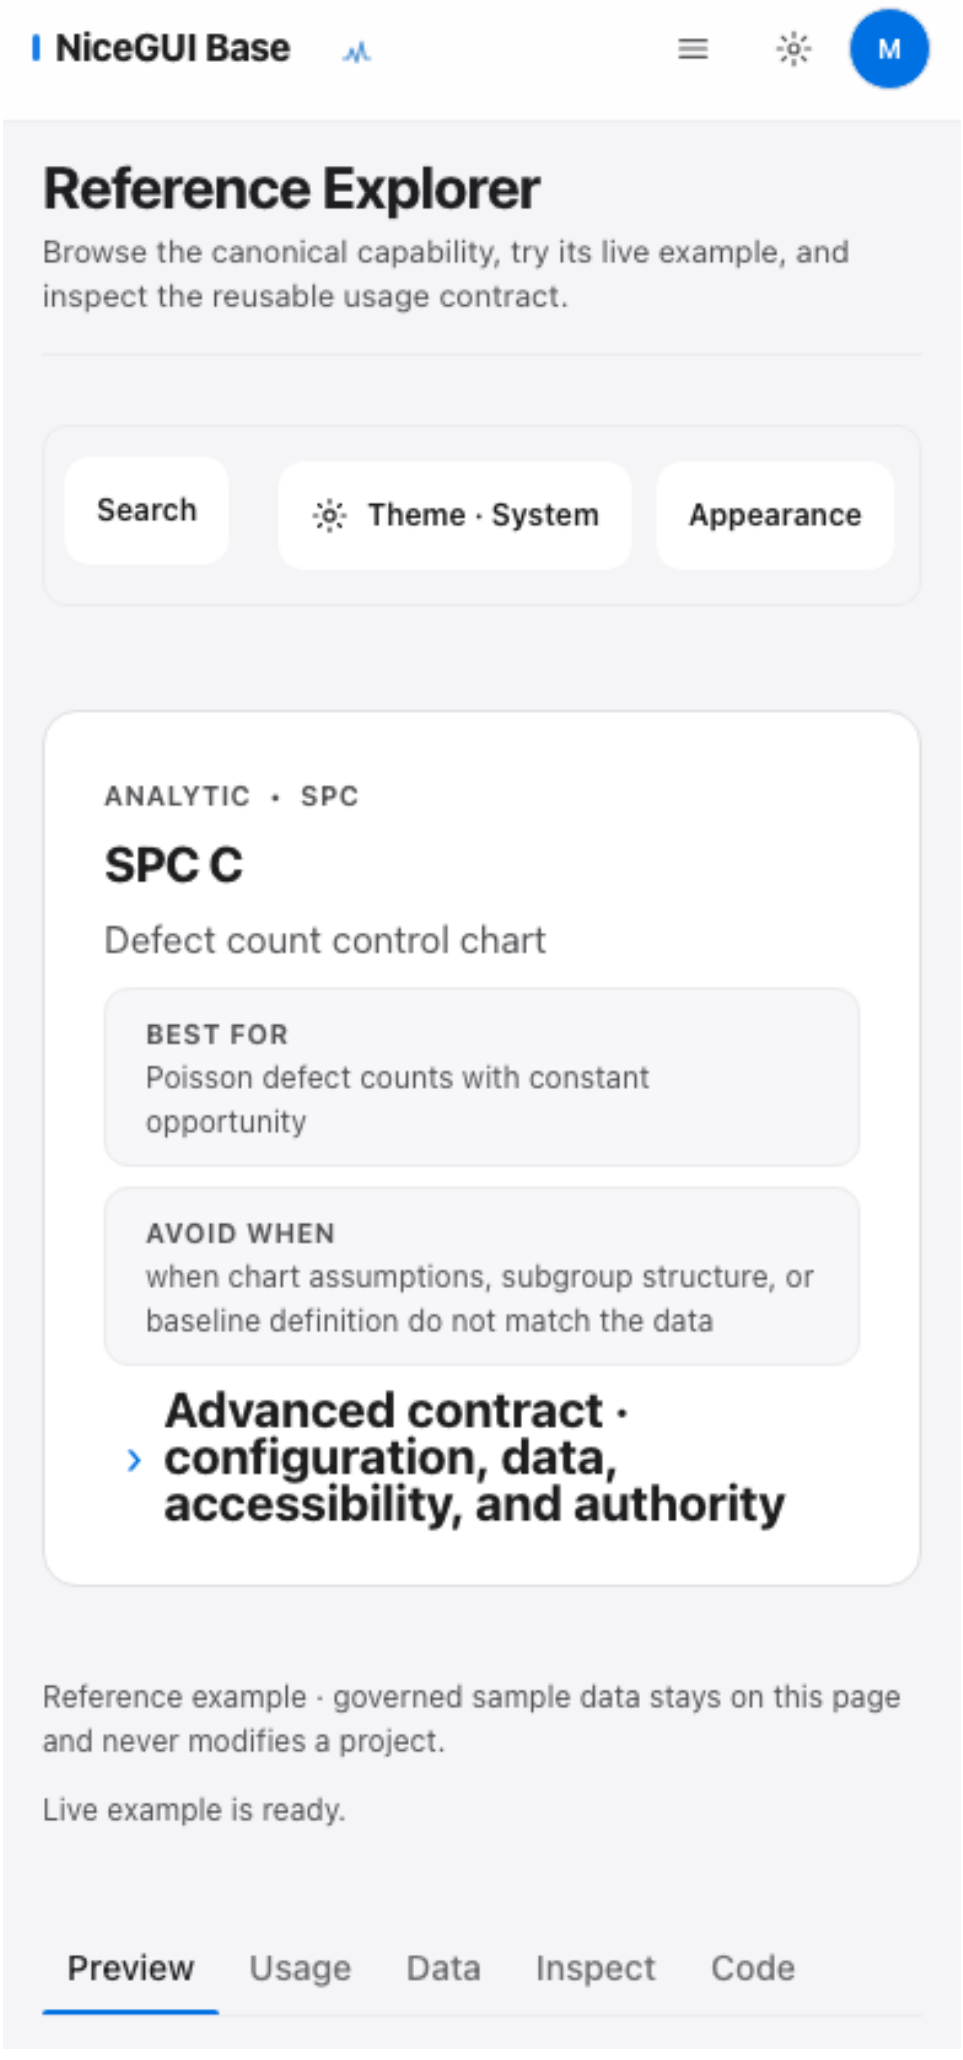

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC I-MR
Individuals and moving-range control chart
BEST FOR
continuous measurements without rational subgroups
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
SPCMonitor
PMEffectAnalysis
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

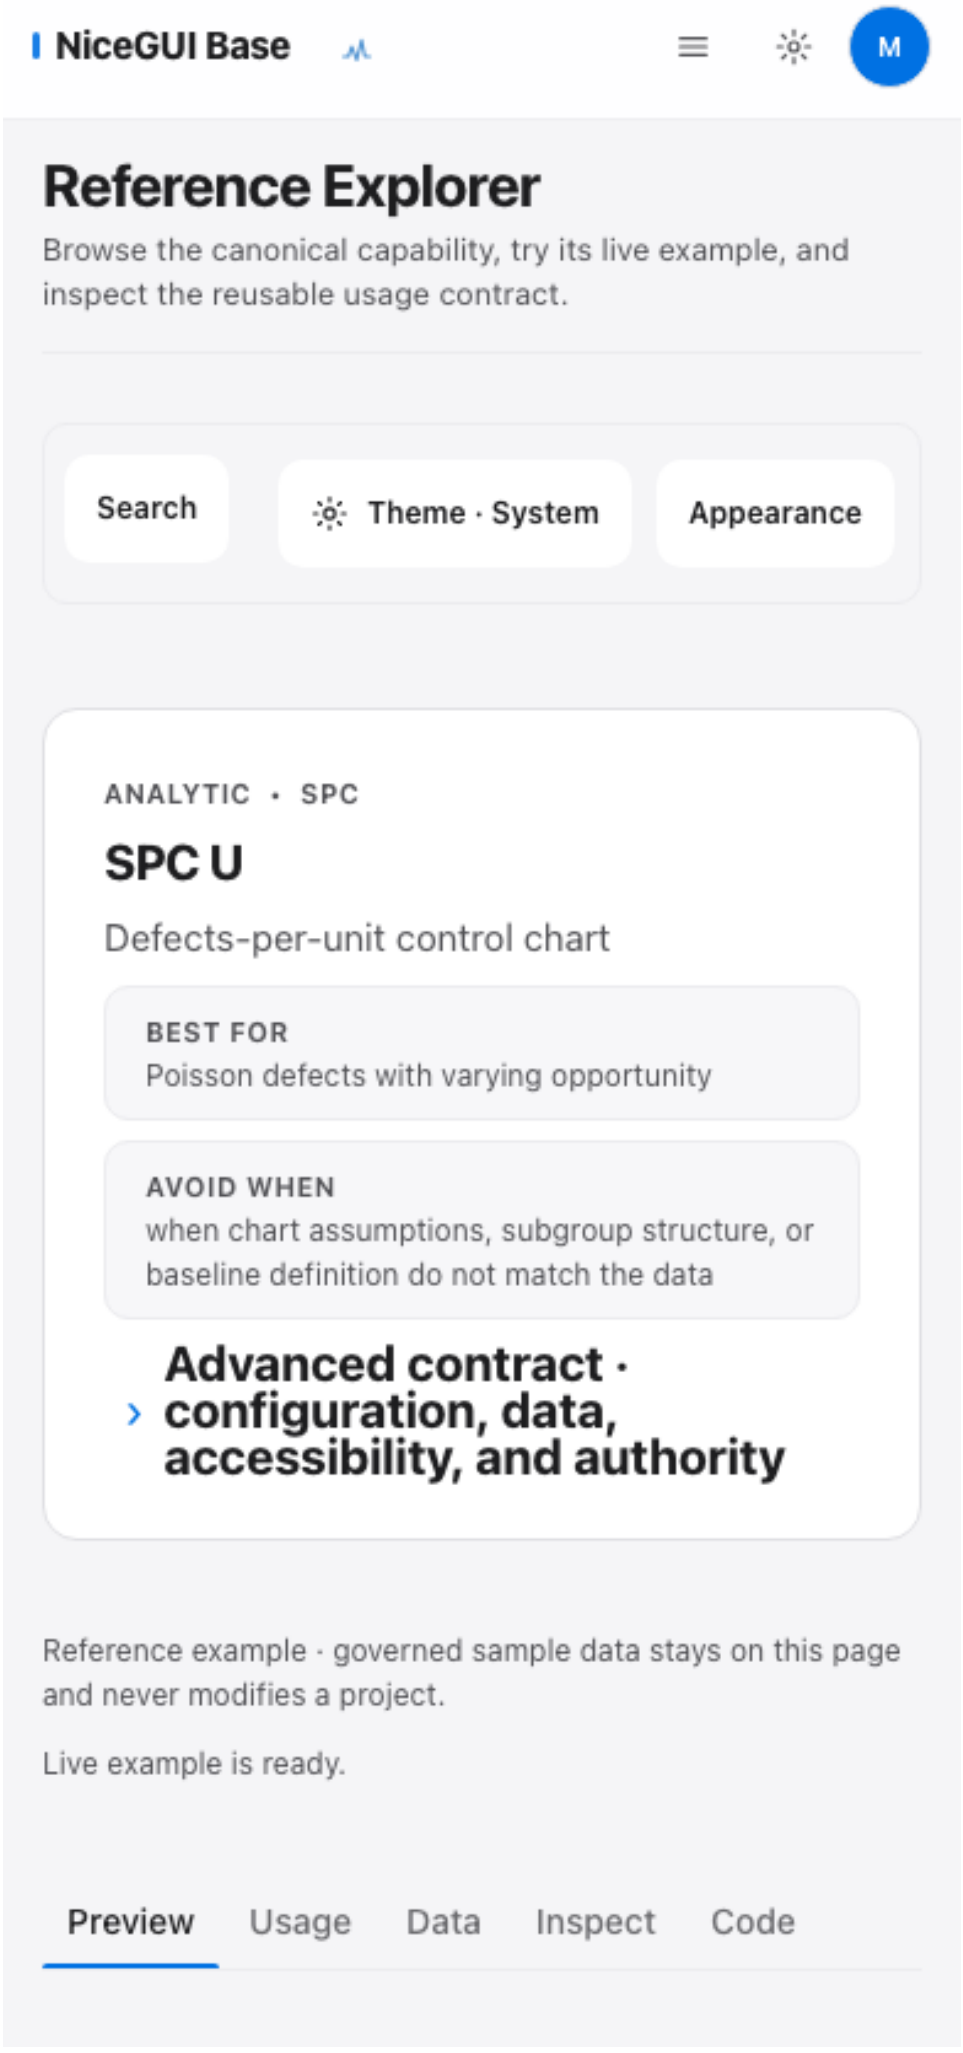

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC Xbar-R
Xbar-R subgroup control chart
BEST FOR
small equal-size rational subgroups
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC Xbar-S
Xbar-S subgroup control chart
BEST FOR
equal-size subgroup variability matters
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC P
Proportion nonconforming control chart
BEST FOR
binary defect proportion with varying samples
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC Np
Count nonconforming control chart
BEST FOR
binary defect counts with constant sample size
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

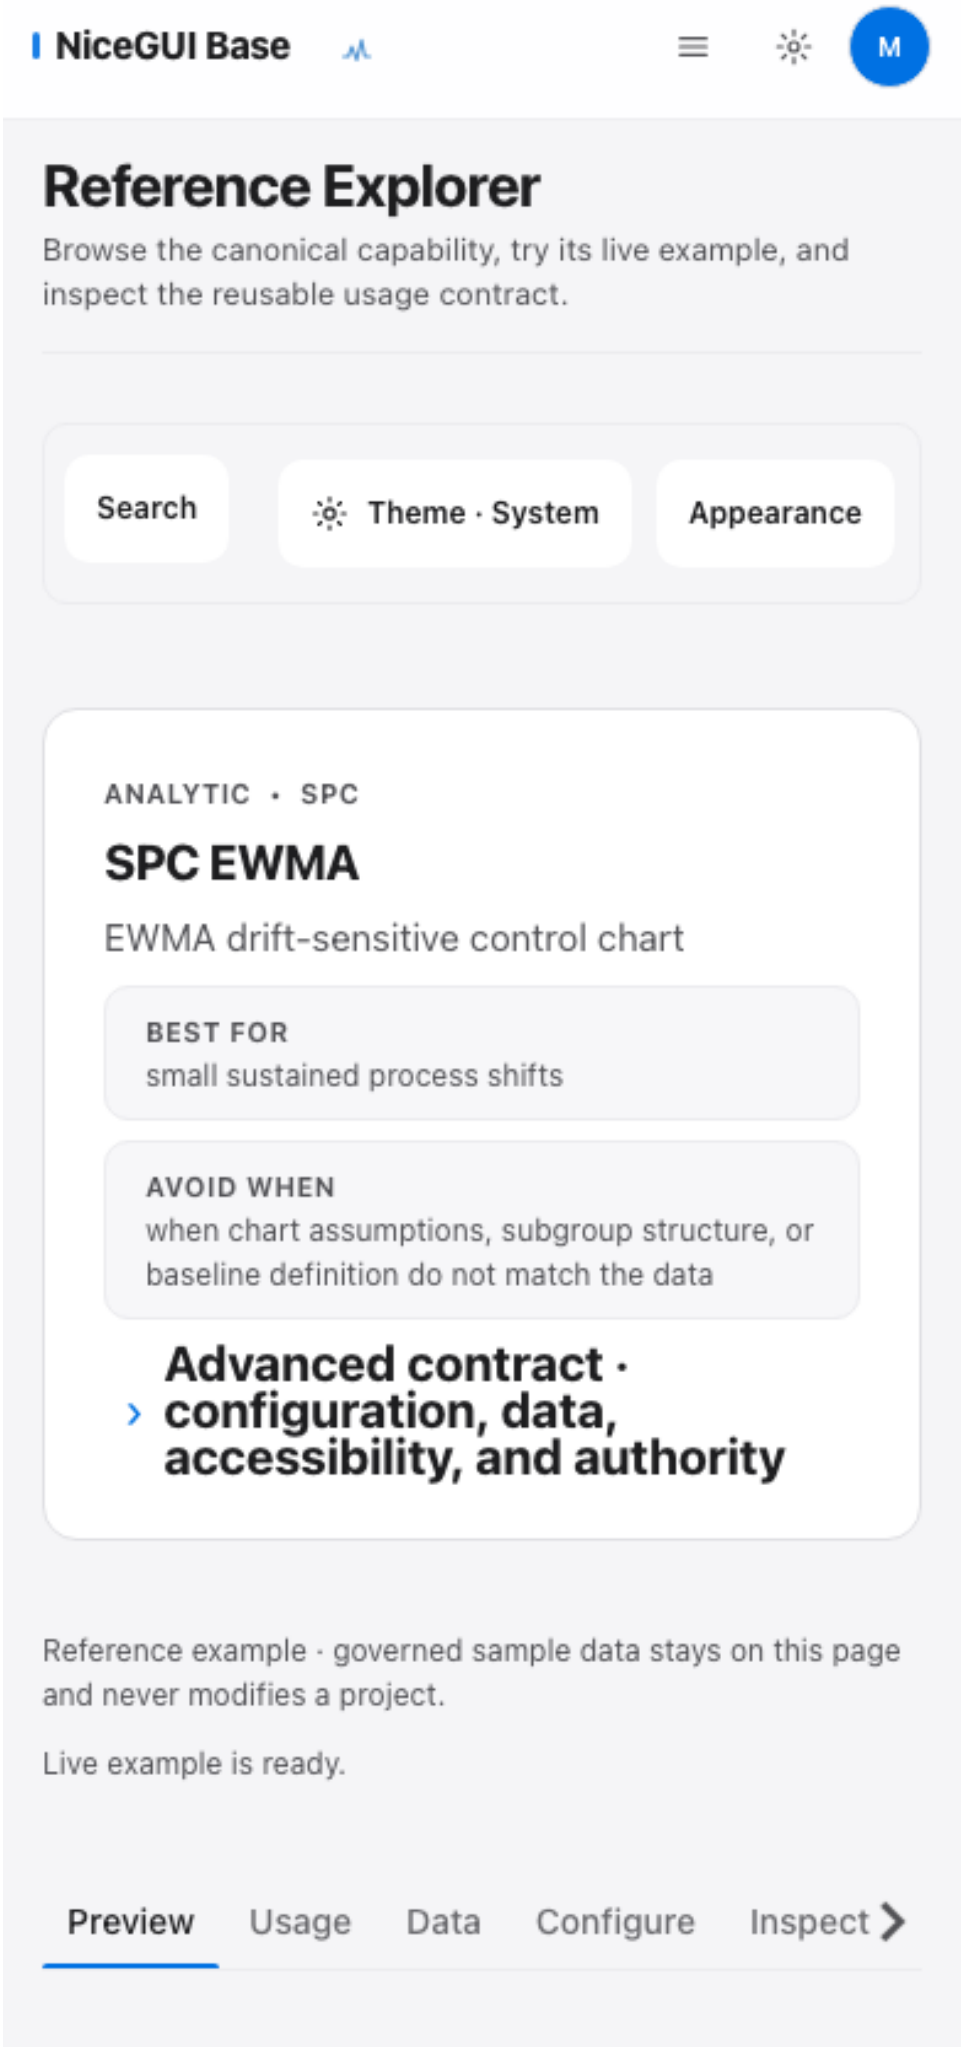

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC C
Defect count control chart
BEST FOR
Poisson defect counts with constant opportunity
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

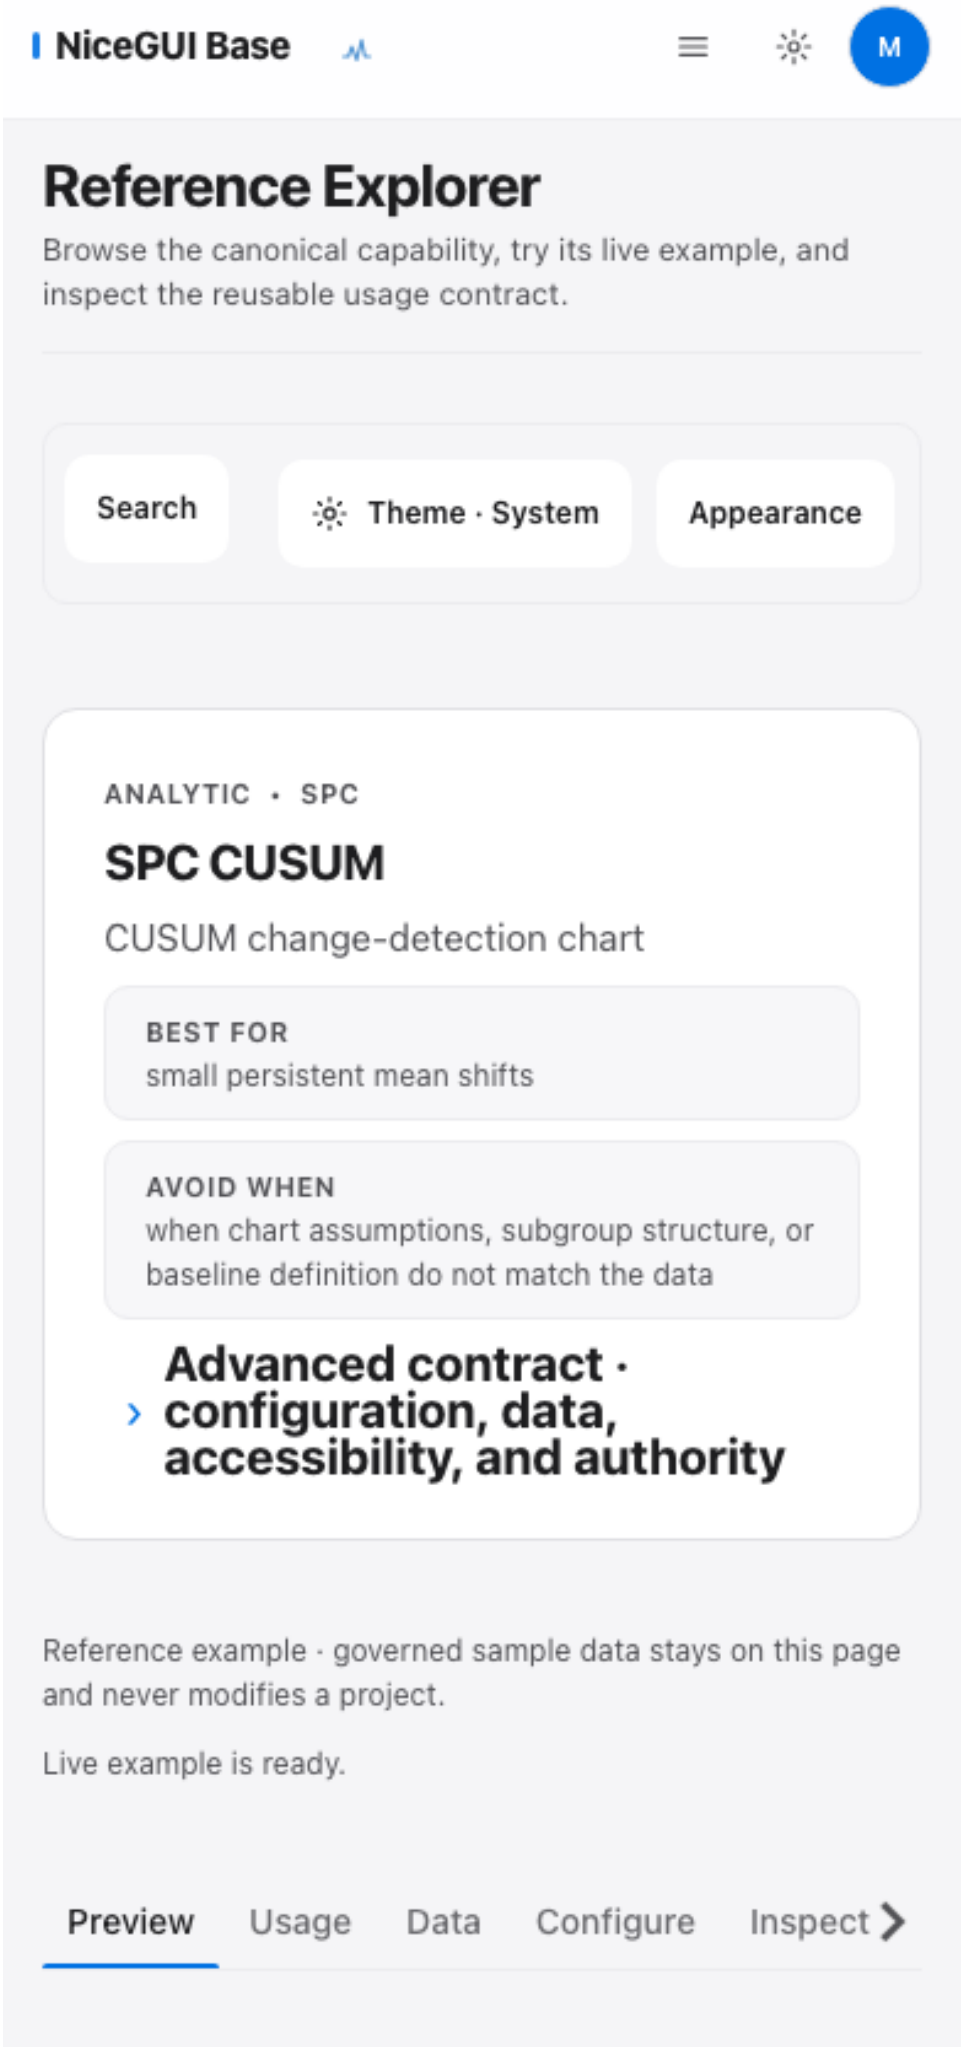

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC U
Defects-per-unit control chart
BEST FOR
Poisson defects with varying opportunity
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

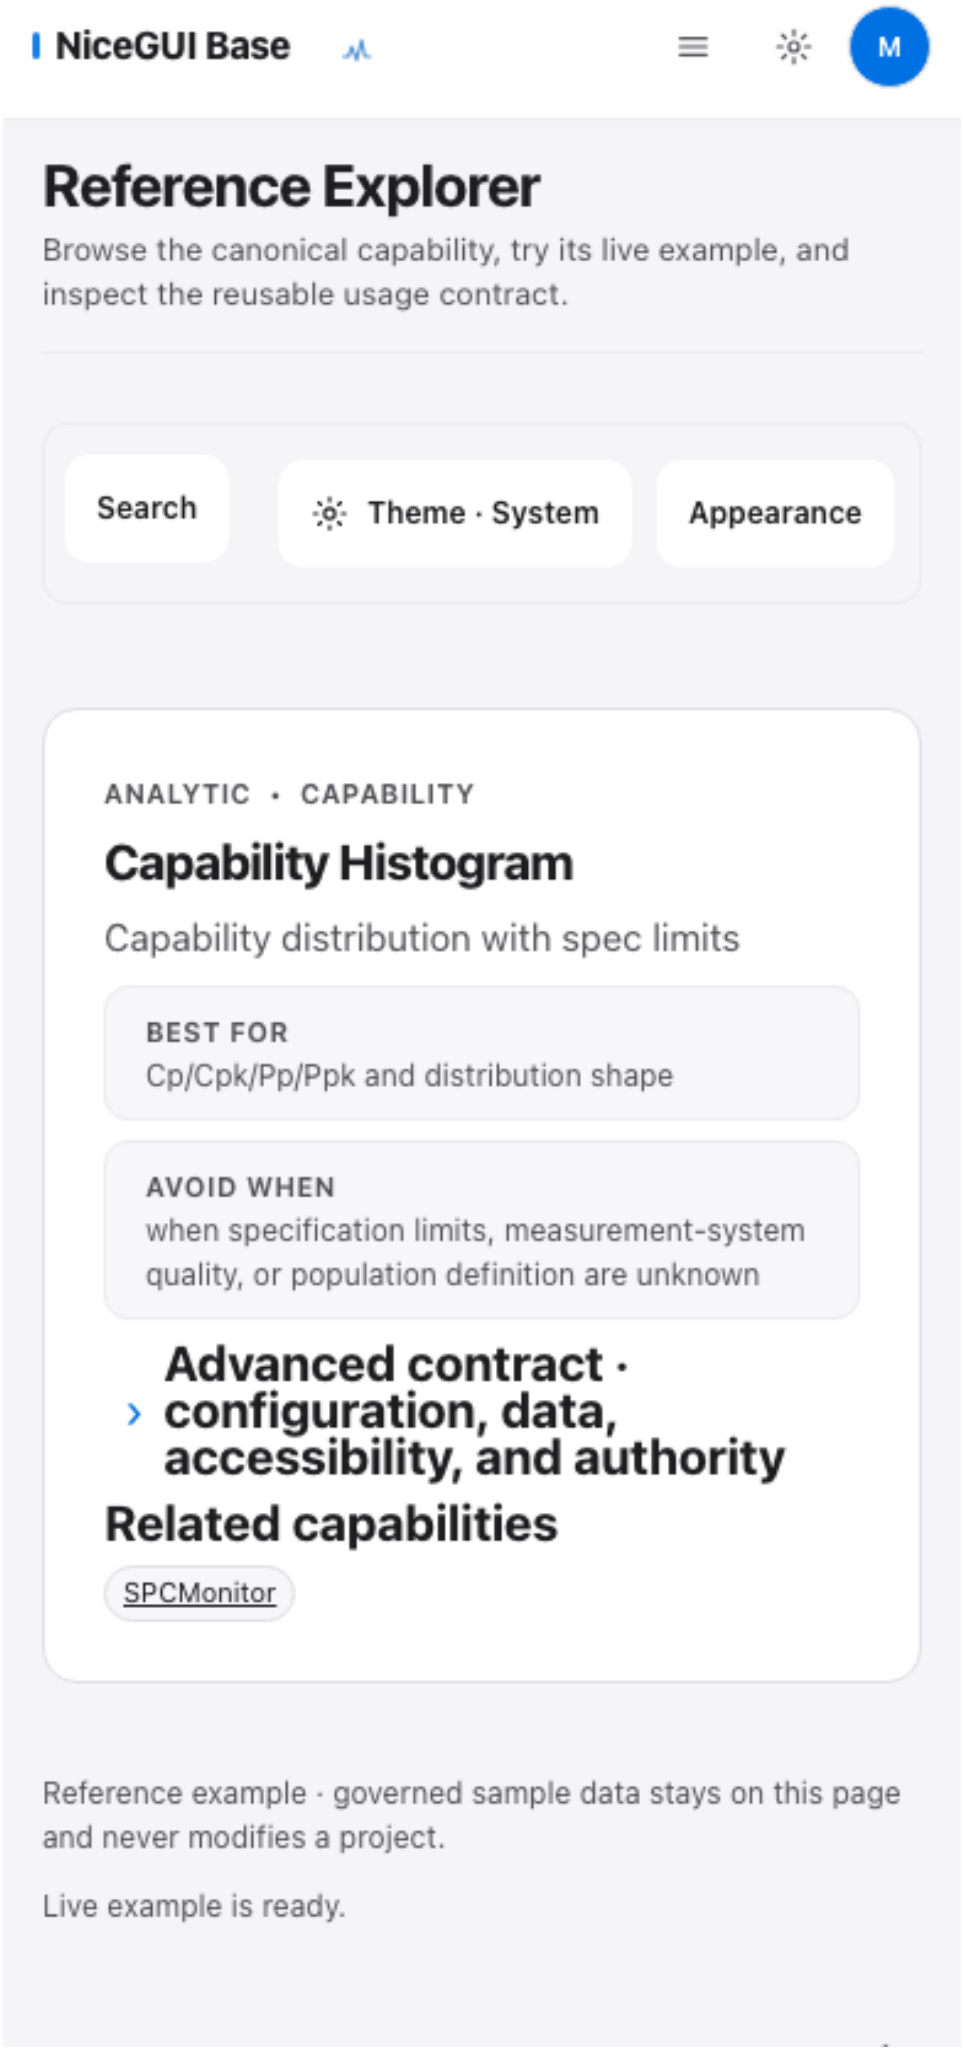
analytics-spc_ewma

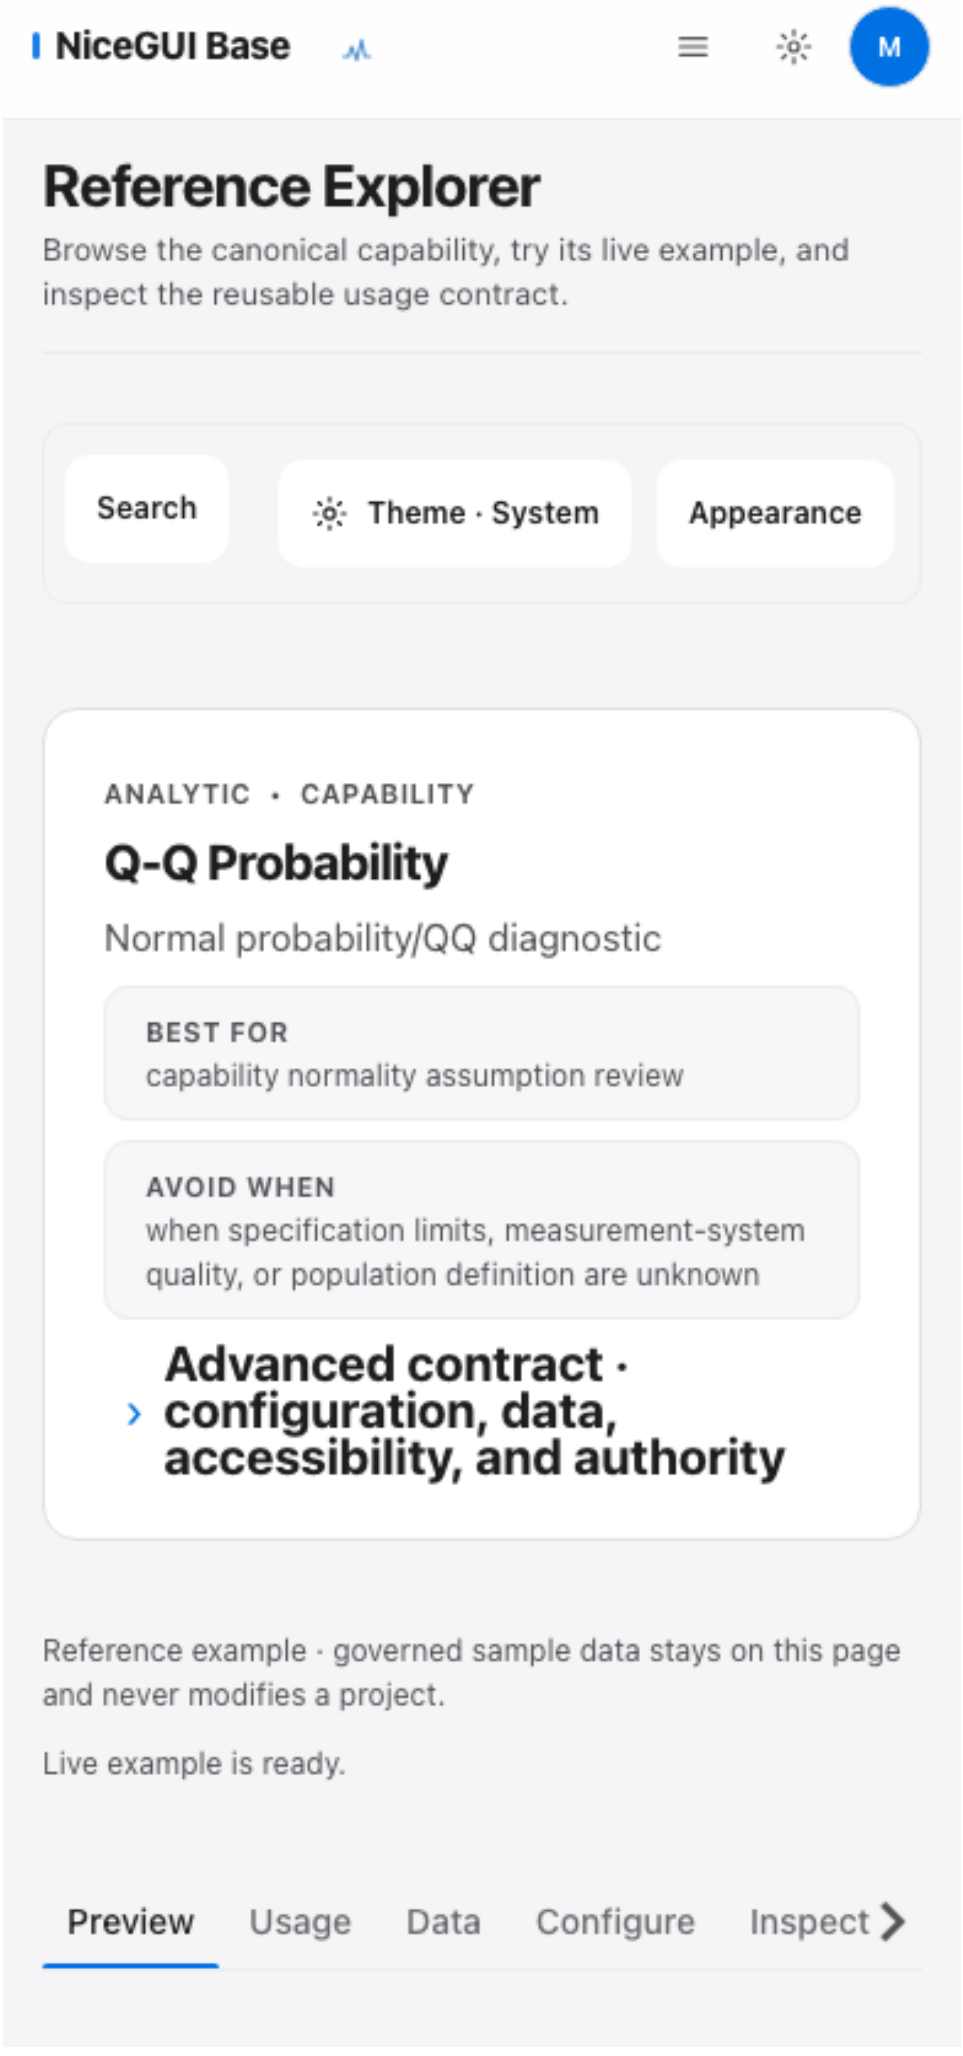
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

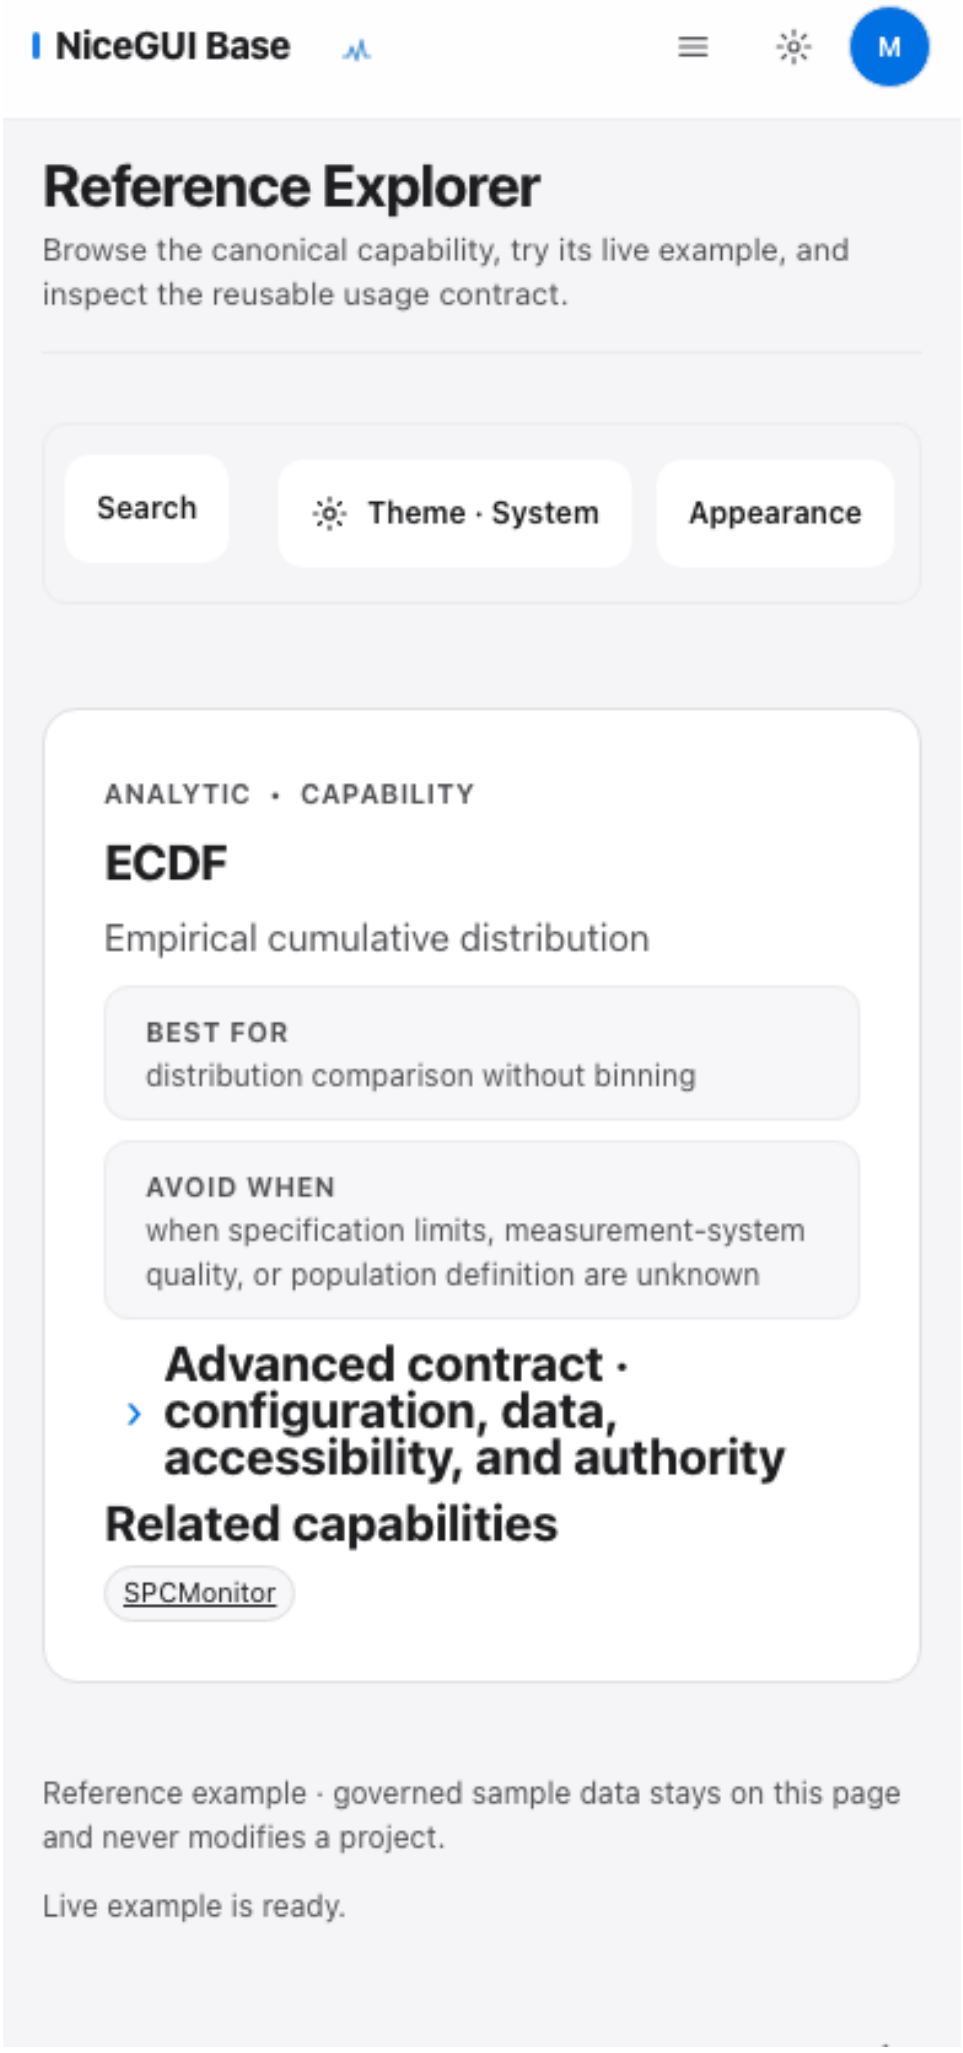
PNG SHA-256 116249ba033237e20f39ba46727486cbbd030b0c68405a51cf909c4777017000




NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • SPC
SPC CUSUM
CUSUM change-detection chart
BEST FOR
small persistent mean shifts
AVOID WHEN
when chart assumptions, subgroup structure, or baseline definition do not match the data
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Configure
Inspect


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • CAPABILITY
Capability Histogram
Capability distribution with spec limits
BEST FOR
Cp/Cpk/Pp/Ppk and distribution shape
AVOID WHEN
when specification limits, measurement-system quality, or population definition are unknown
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
SPCMonitor
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

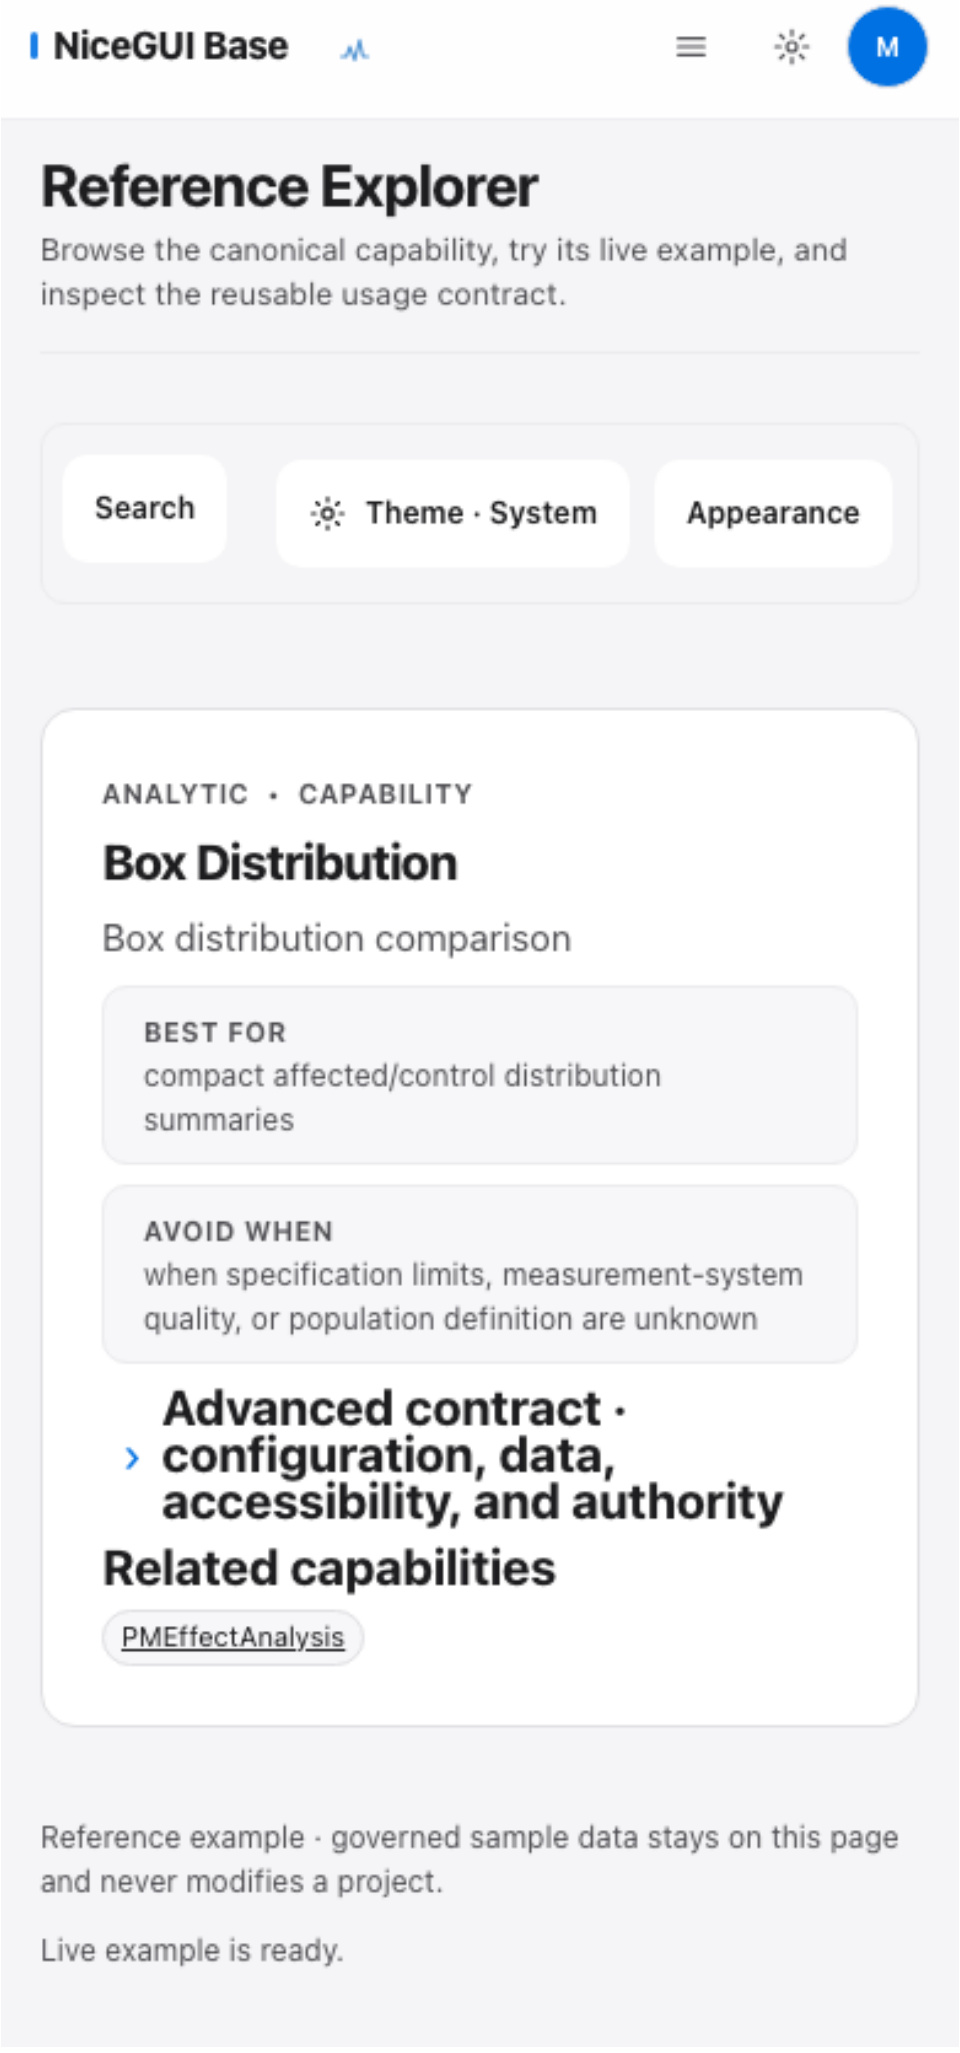

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • CAPABILITY
Q-Q Probability
Normal probability/QQ diagnostic
BEST FOR
capability normality assumption review
AVOID WHEN
when specification limits, measurement-system quality, or population definition are unknown
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Configure
Inspect

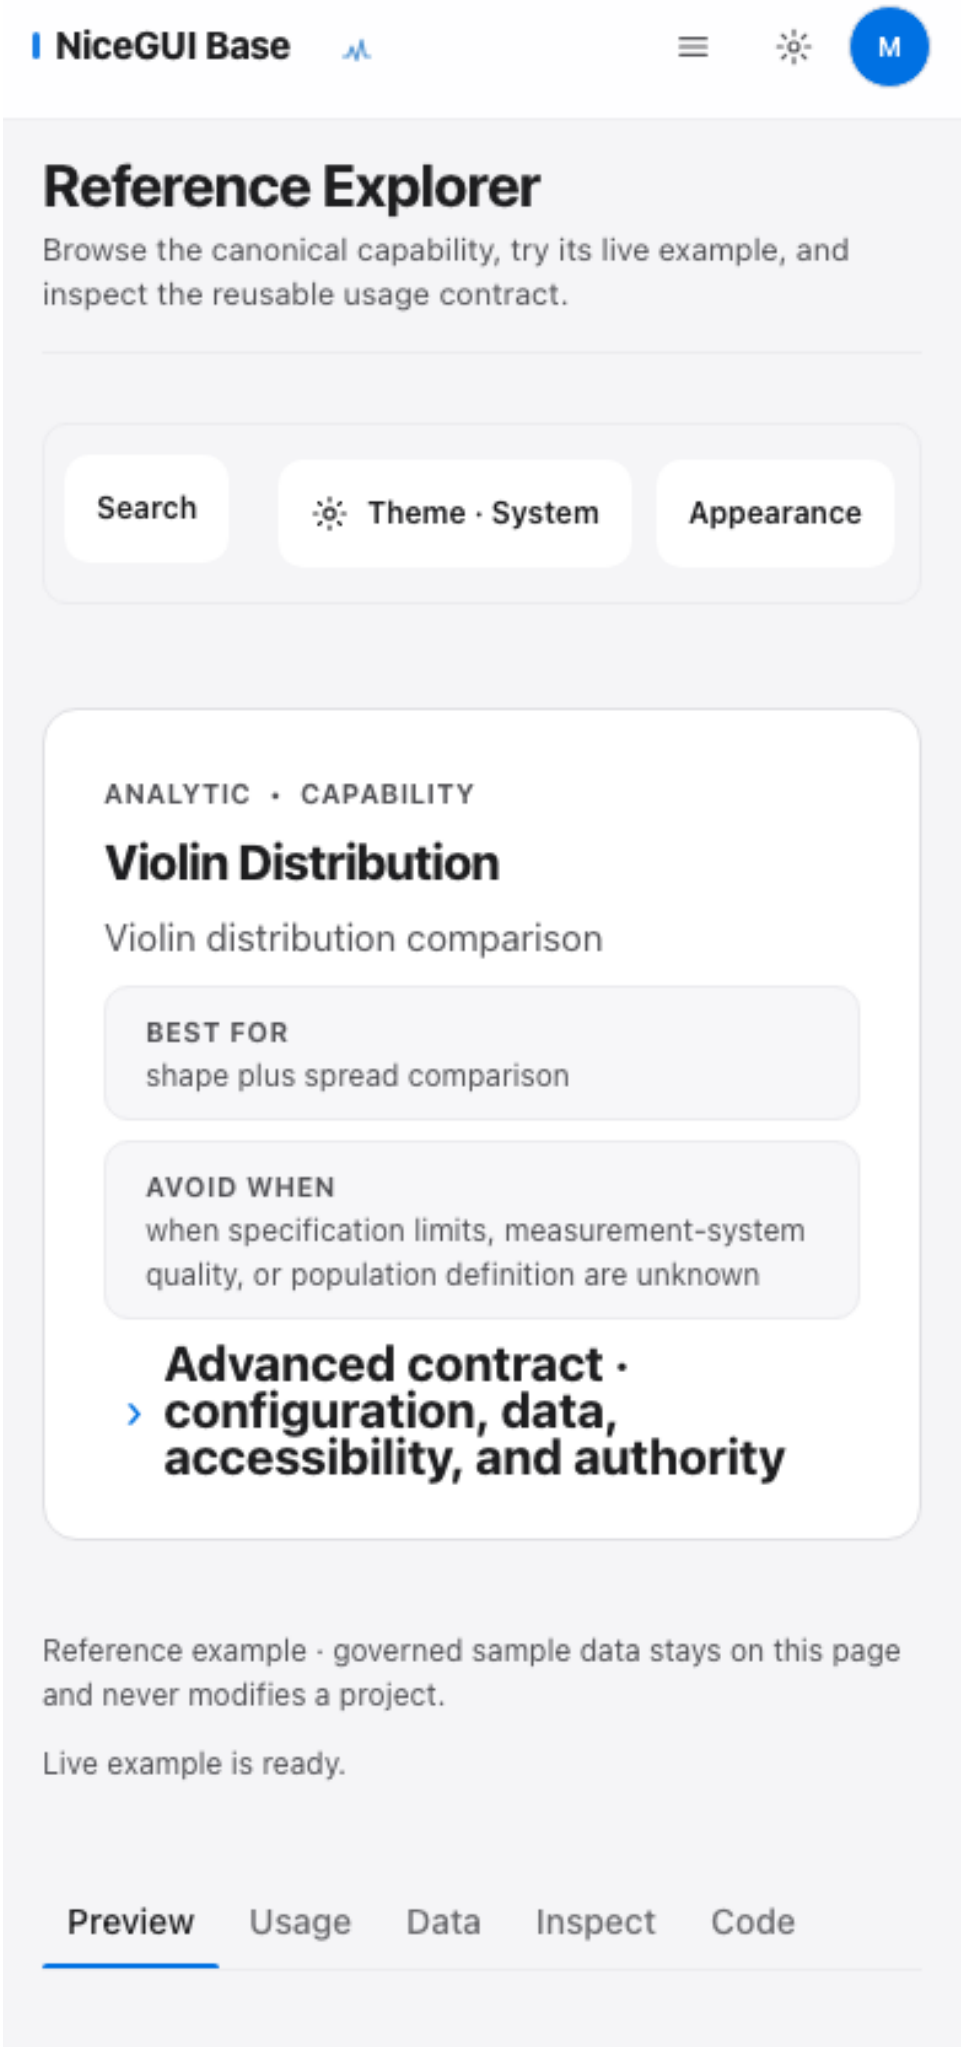

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • CAPABILITY
ECDF
Empirical cumulative distribution
BEST FOR
distribution comparison without binning
AVOID WHEN
when specification limits, measurement-system quality, or population definition are unknown
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
SPCMonitor
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

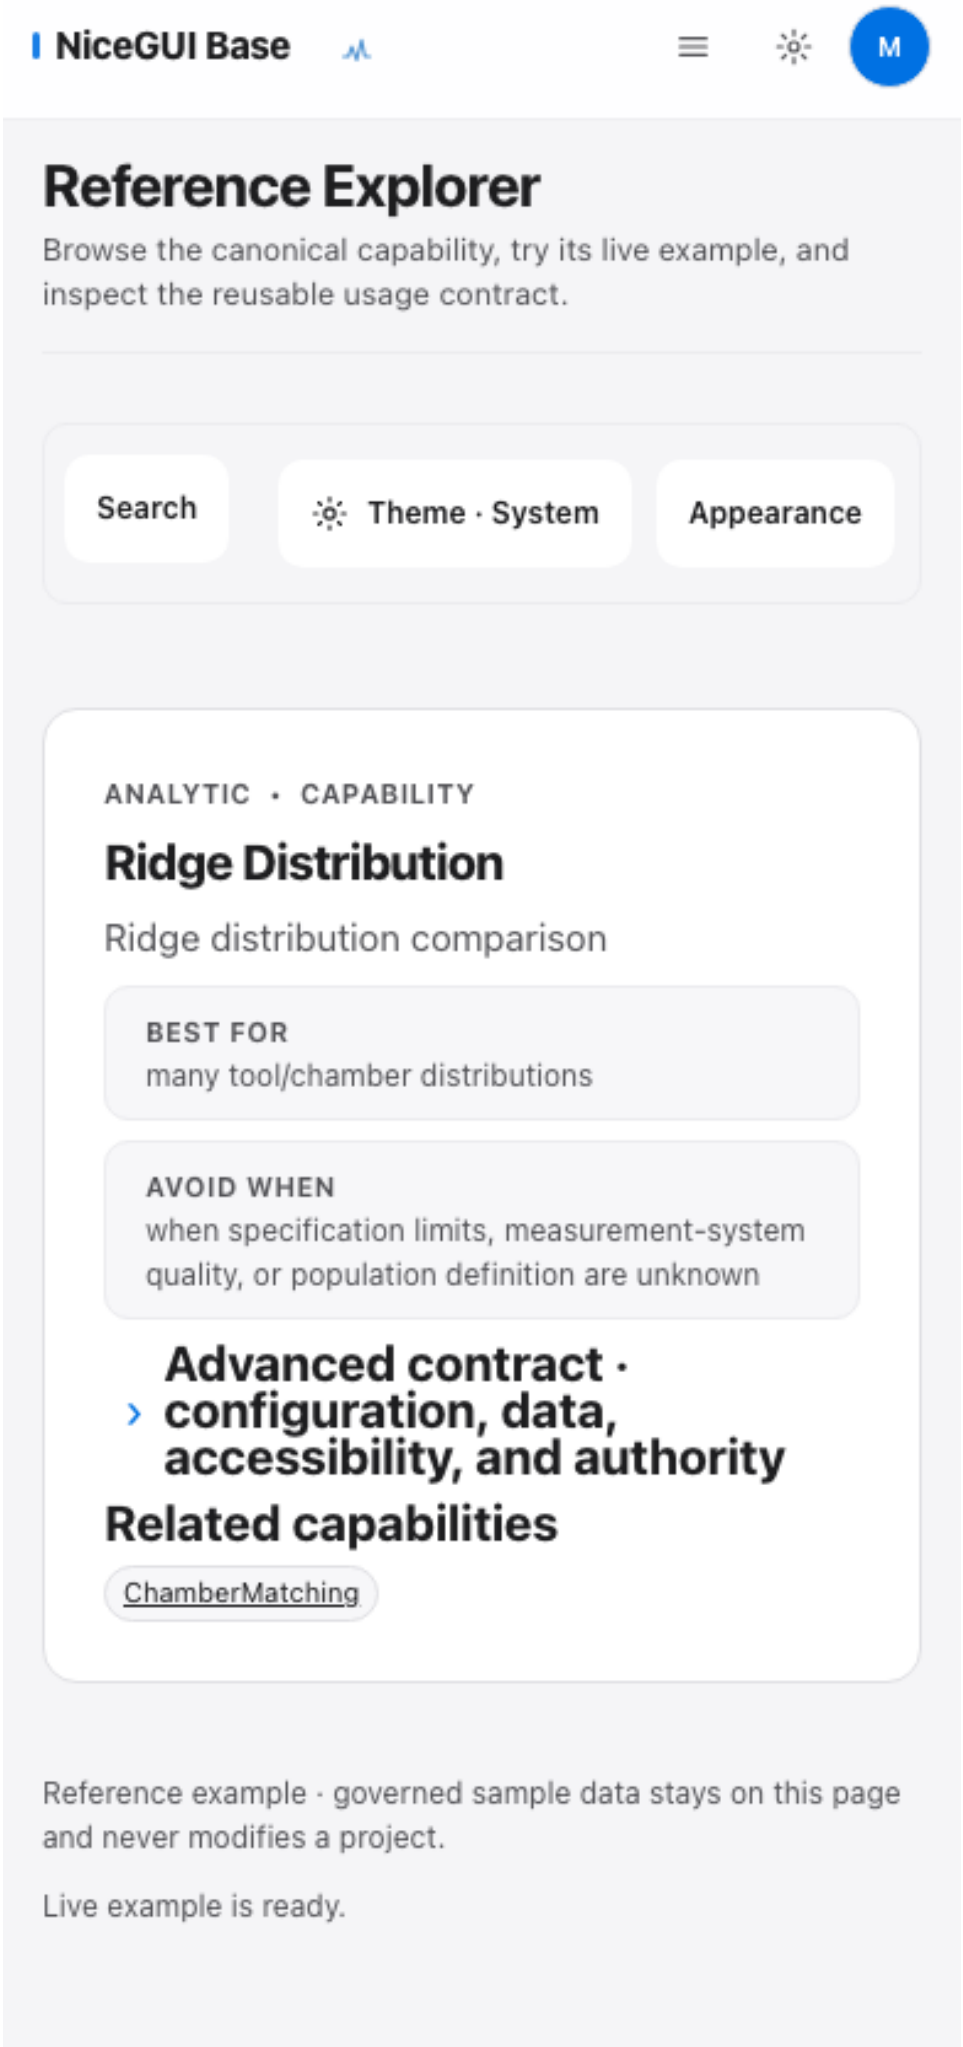
analytics-box_distribution

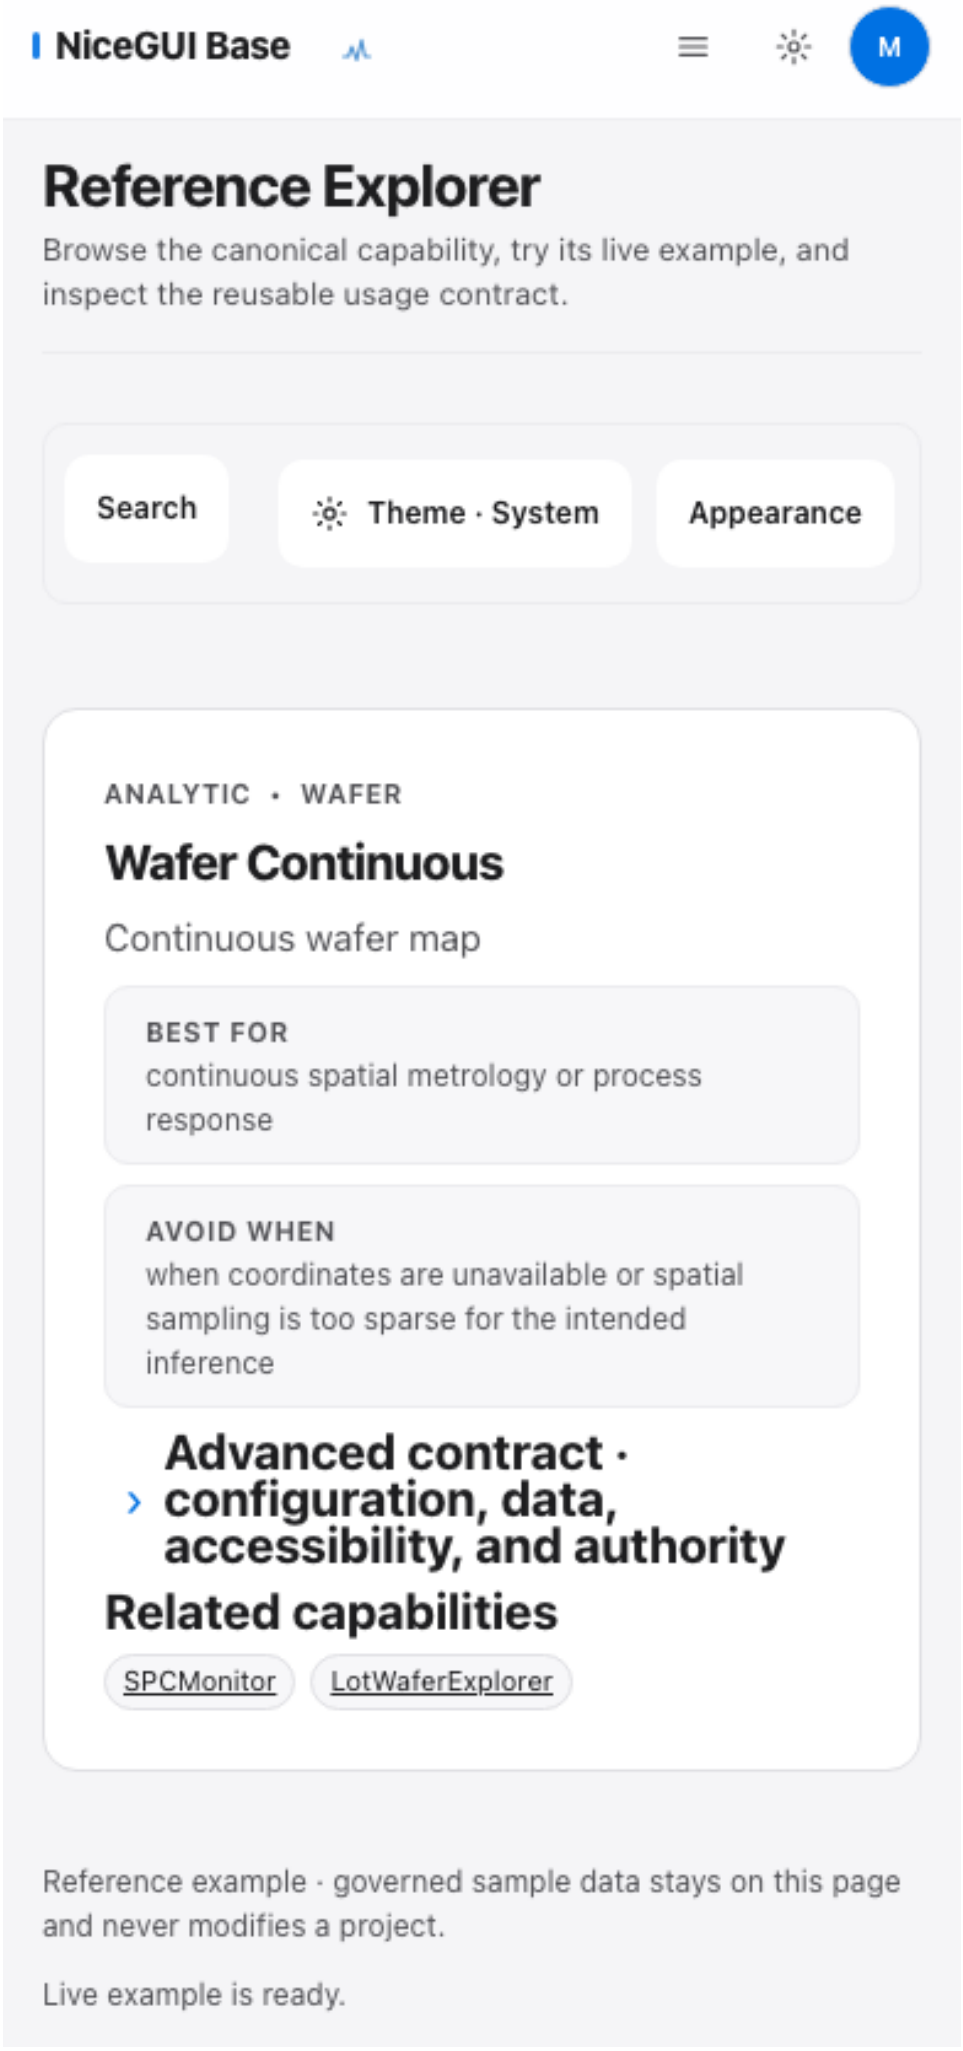
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

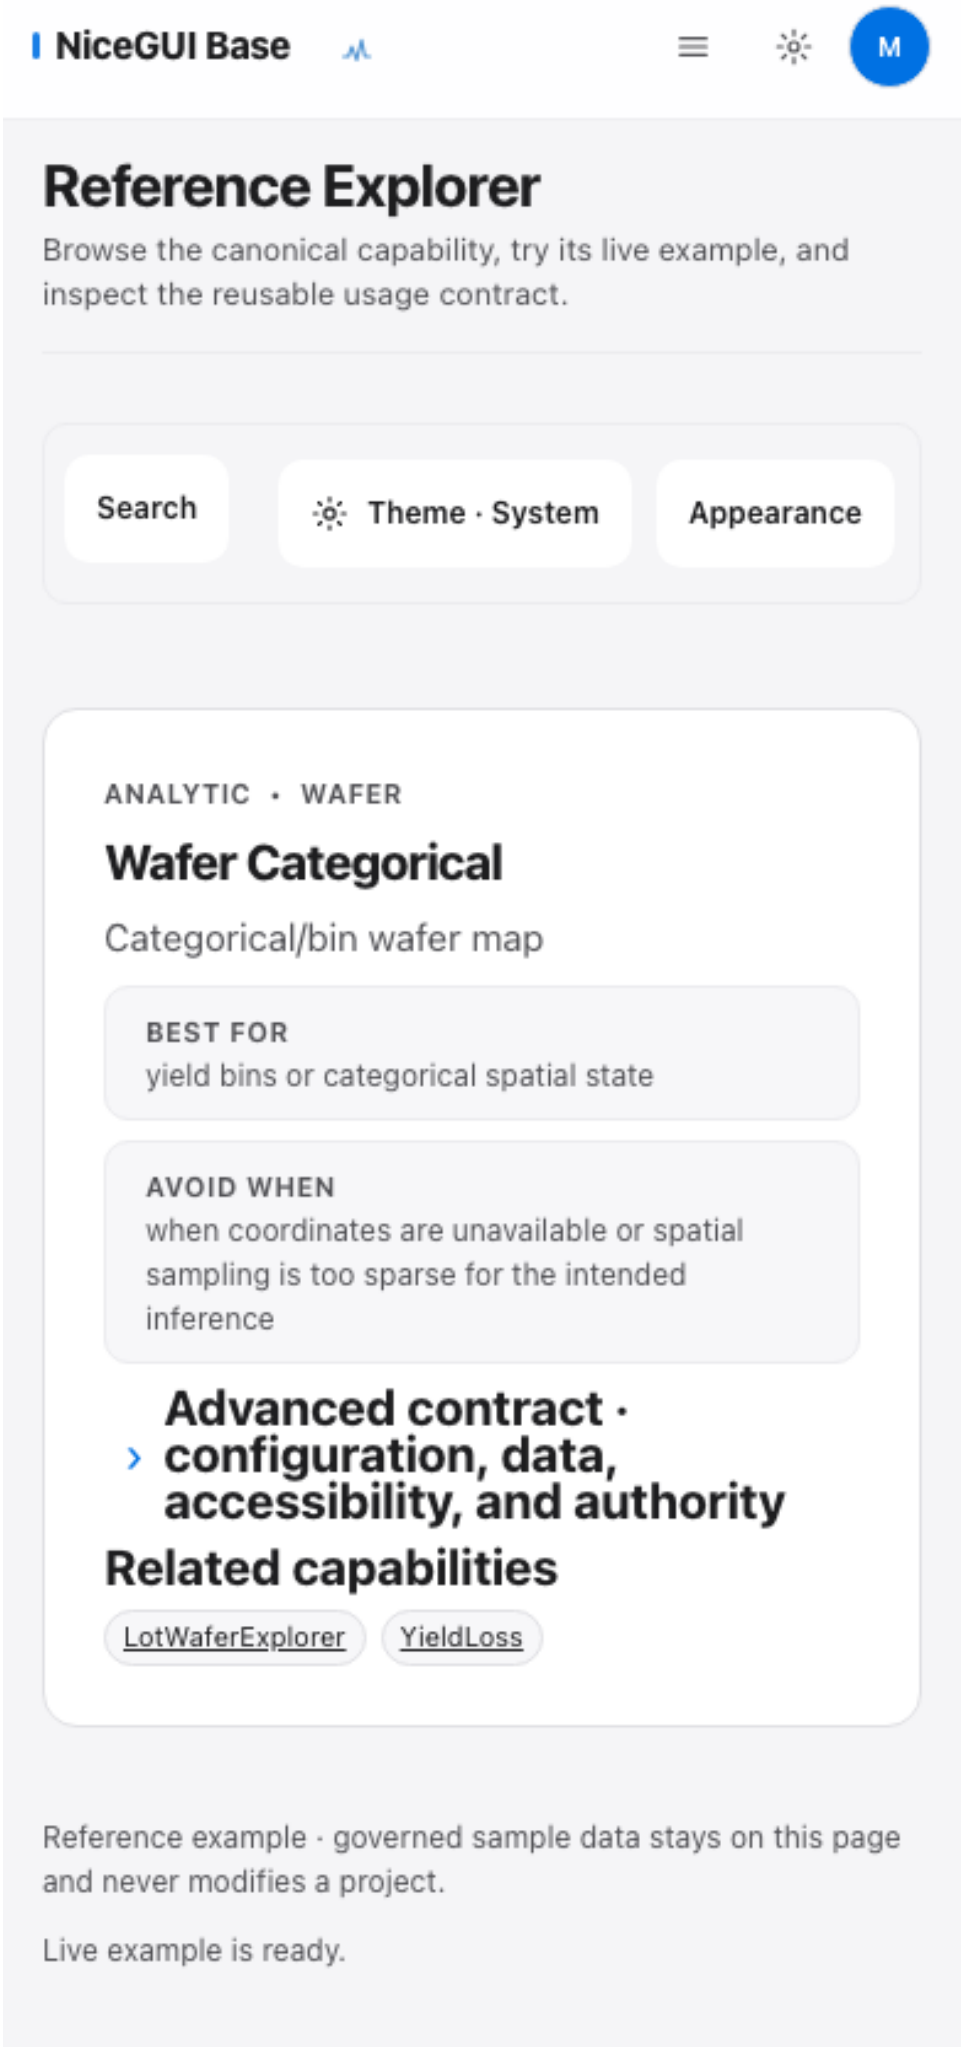
PNG SHA-256 1bbf0a3a9002e7bc170d1c54d112533e6090642bf8f3f04b1aa697106104f6e8

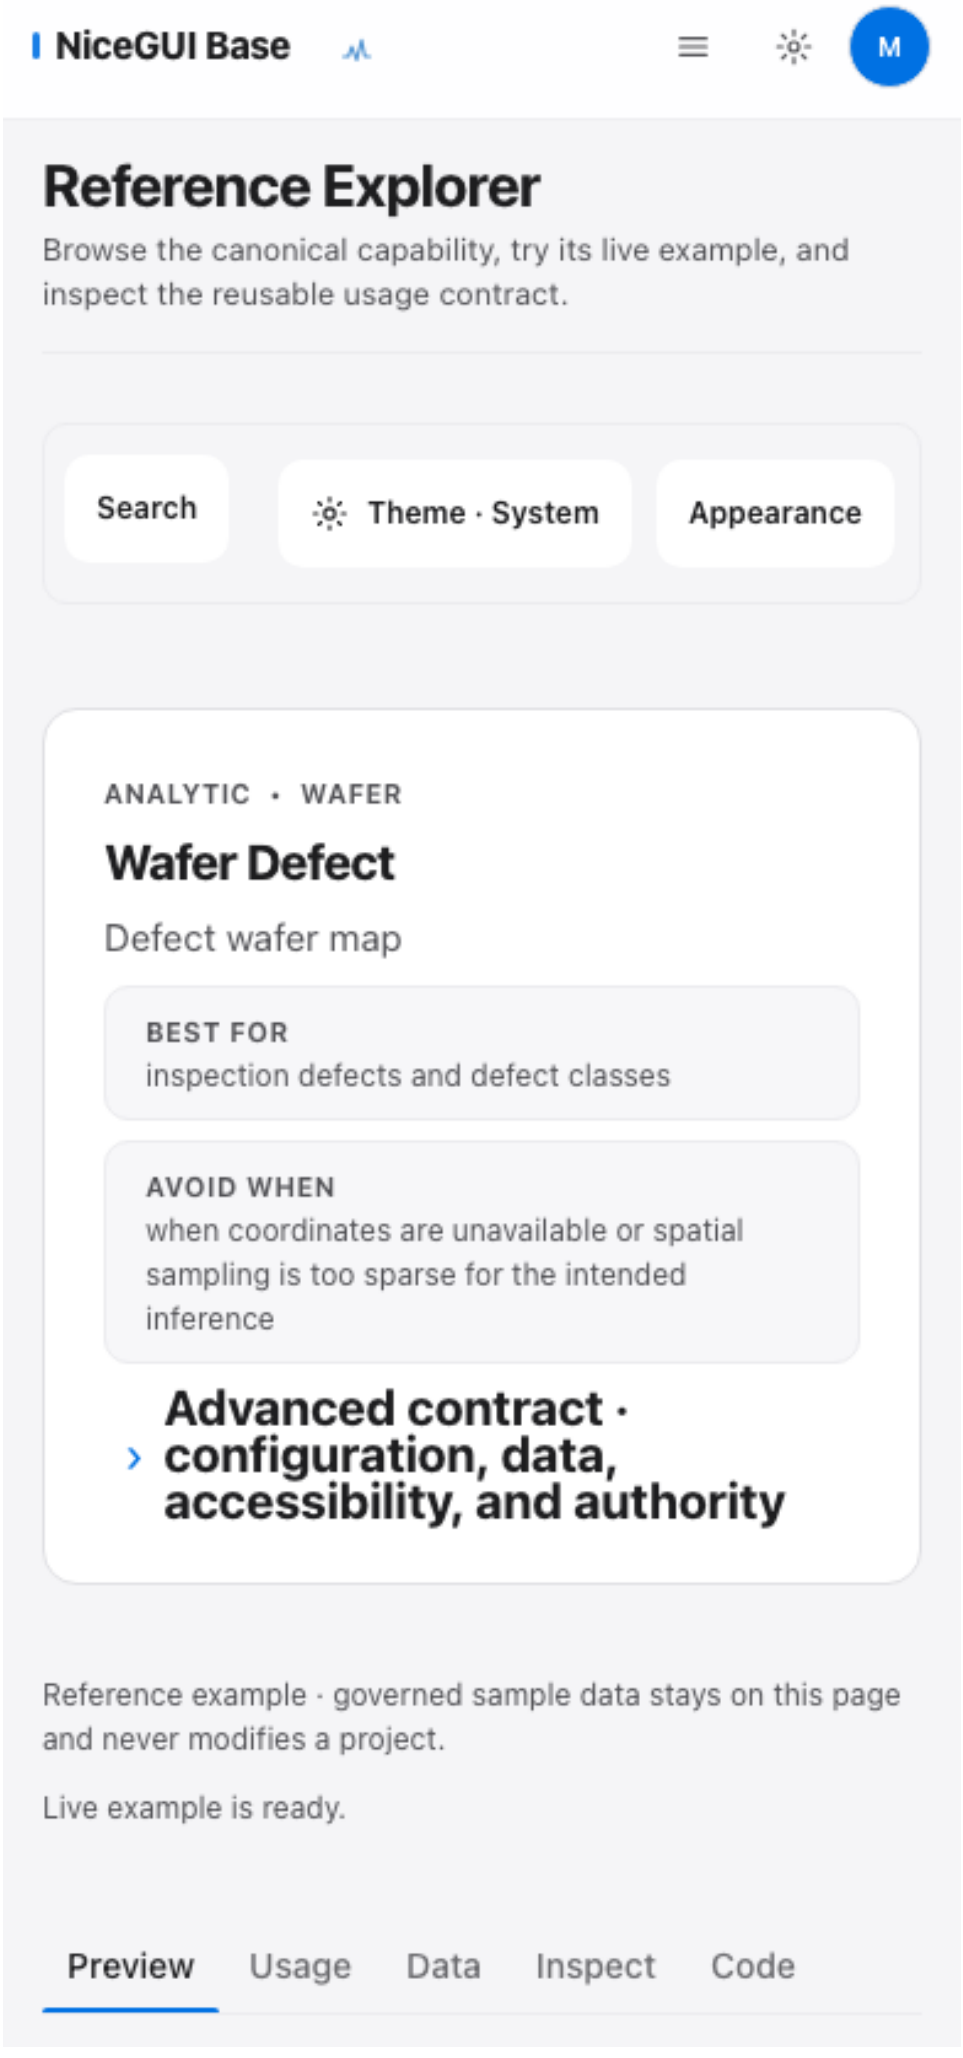


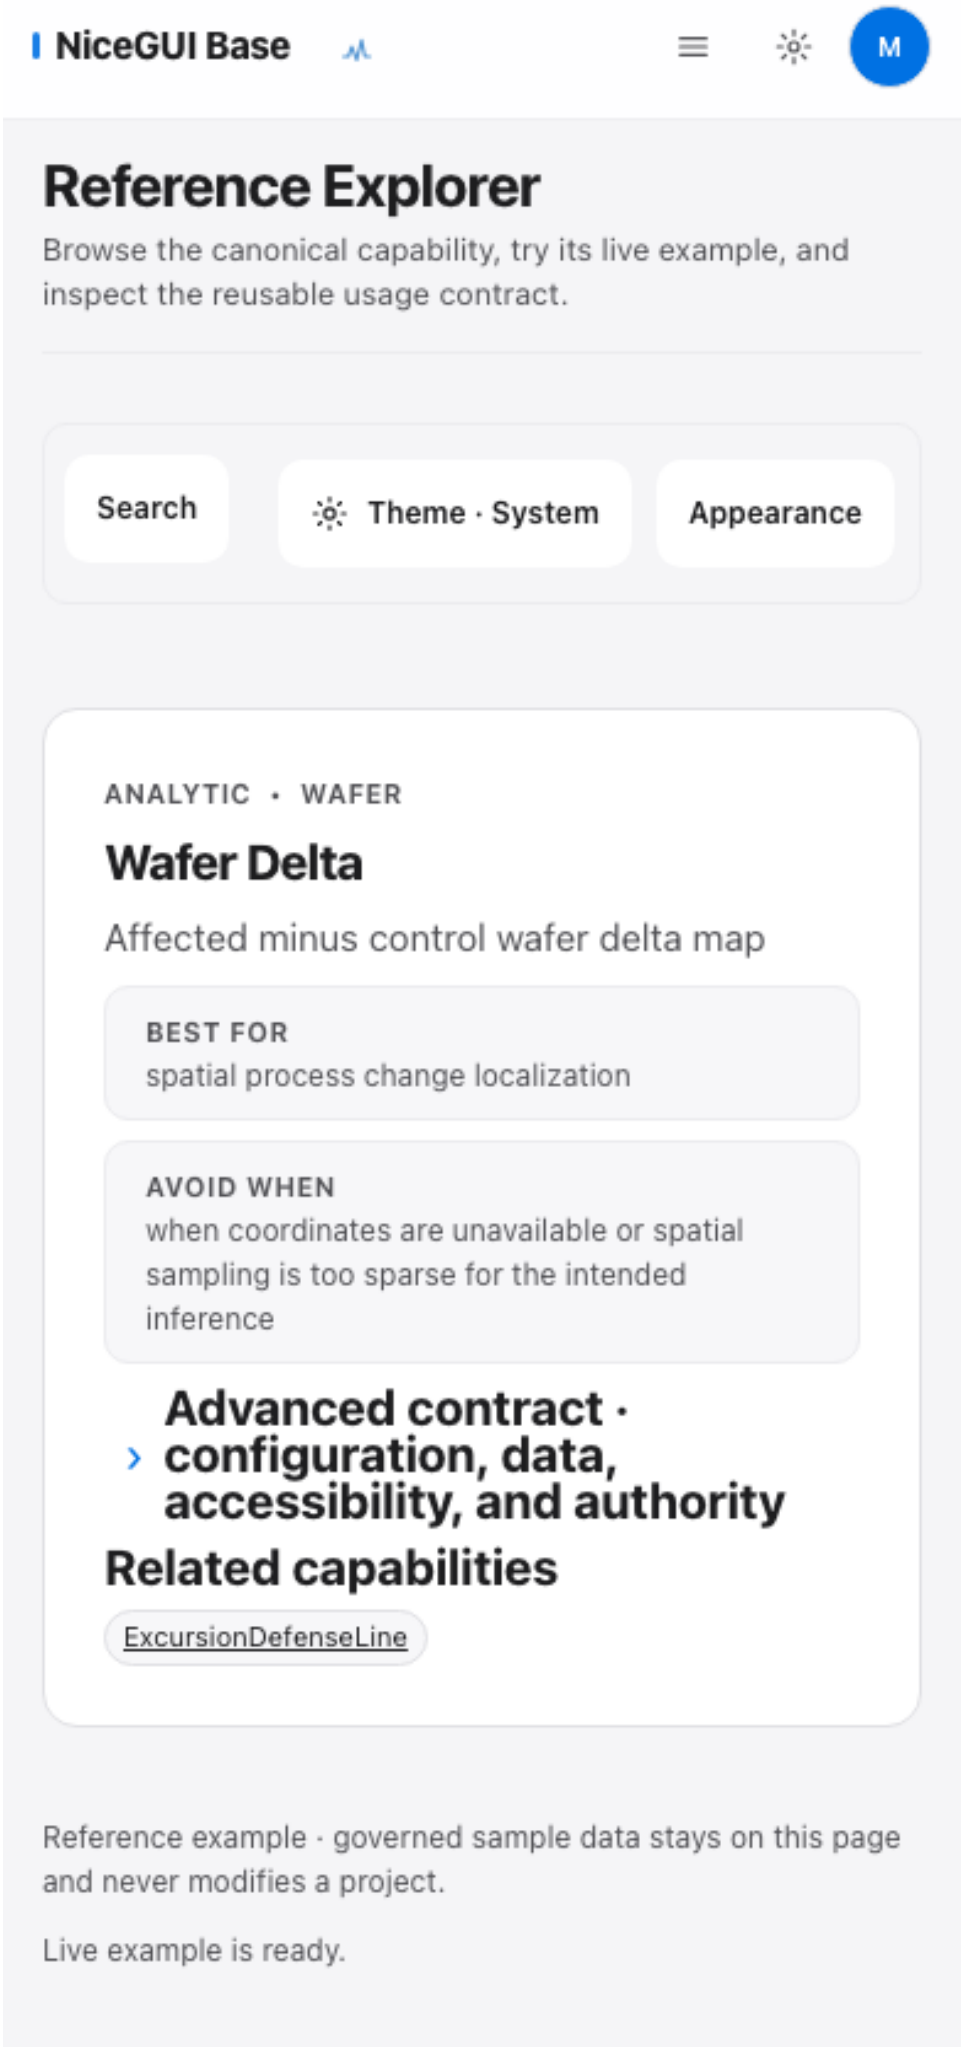

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • CAPABILITY
Violin Distribution
Violin distribution comparison
BEST FOR
shape plus spread comparison
AVOID WHEN
when specification limits, measurement-system quality, or population definition are unknown
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

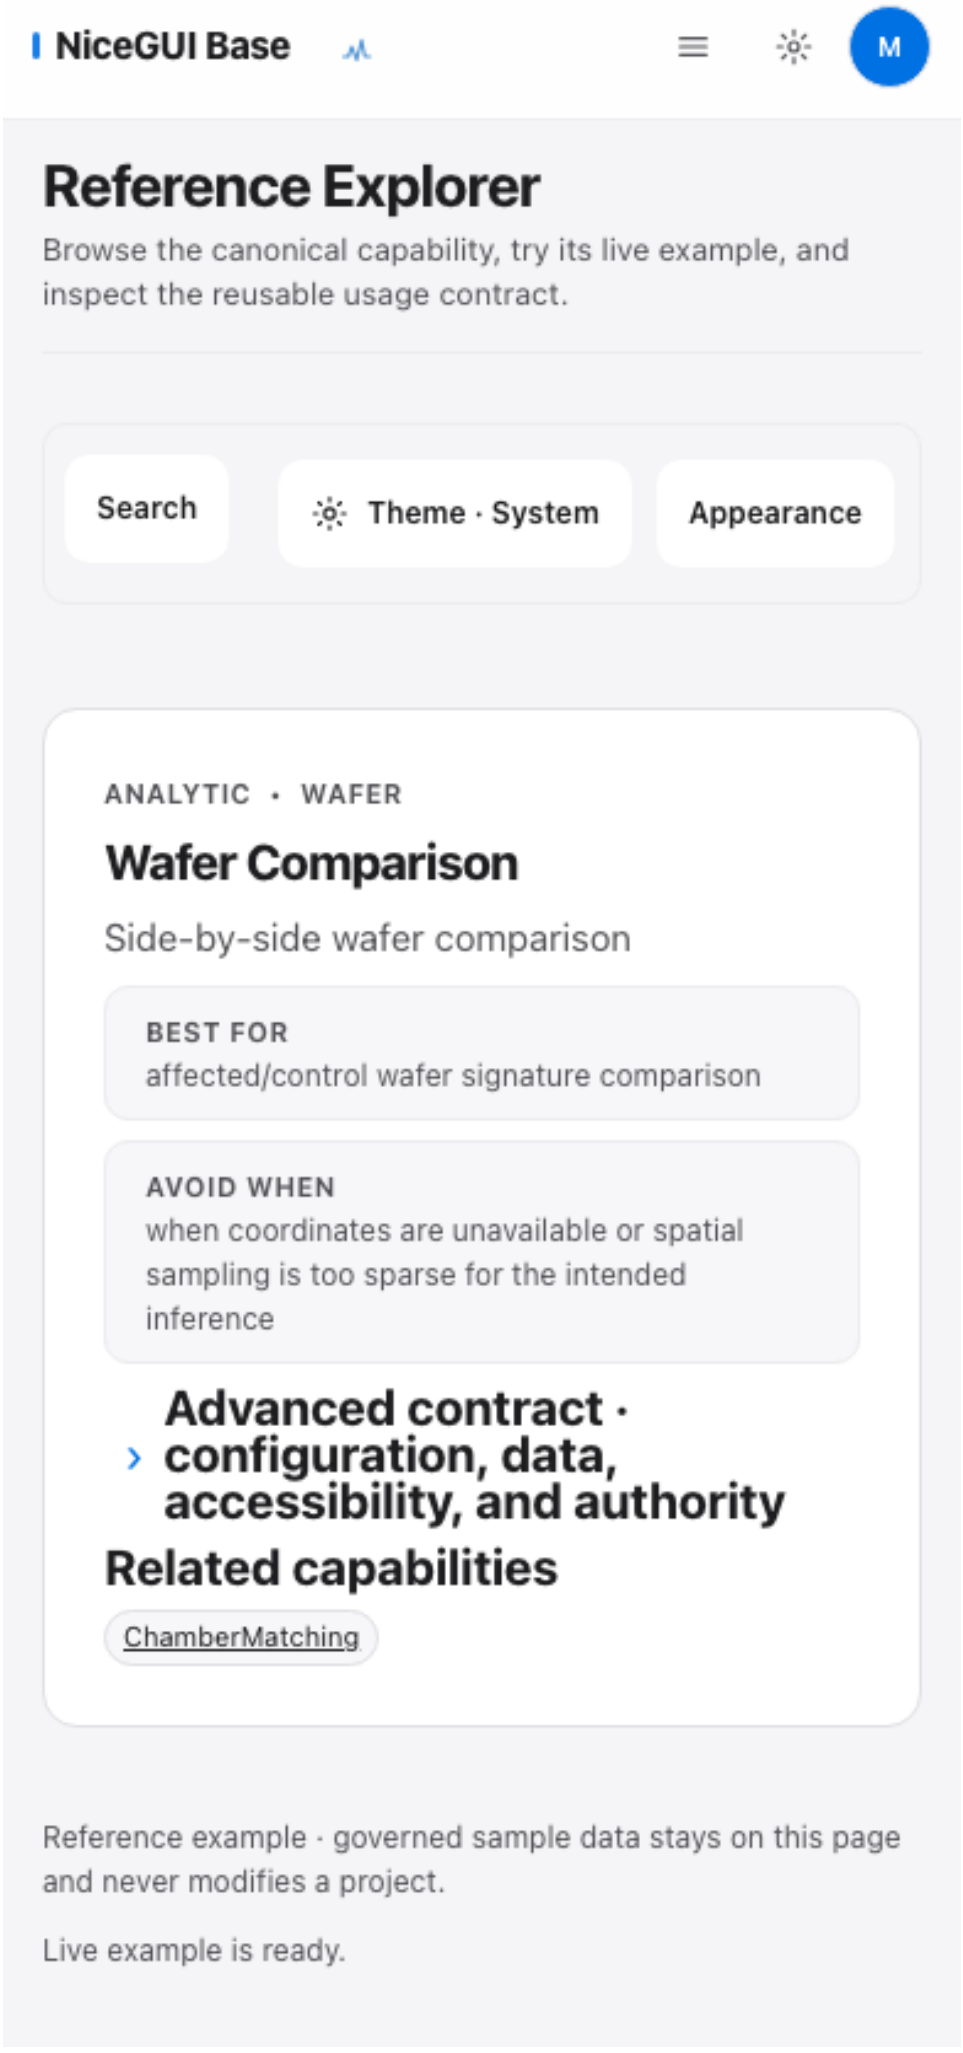

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • CAPABILITY
Ridge Distribution
Ridge distribution comparison
BEST FOR
many tool/chamber distributions
AVOID WHEN
when specification limits, measurement-system quality, or population definition are unknown
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ChamberMatching
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

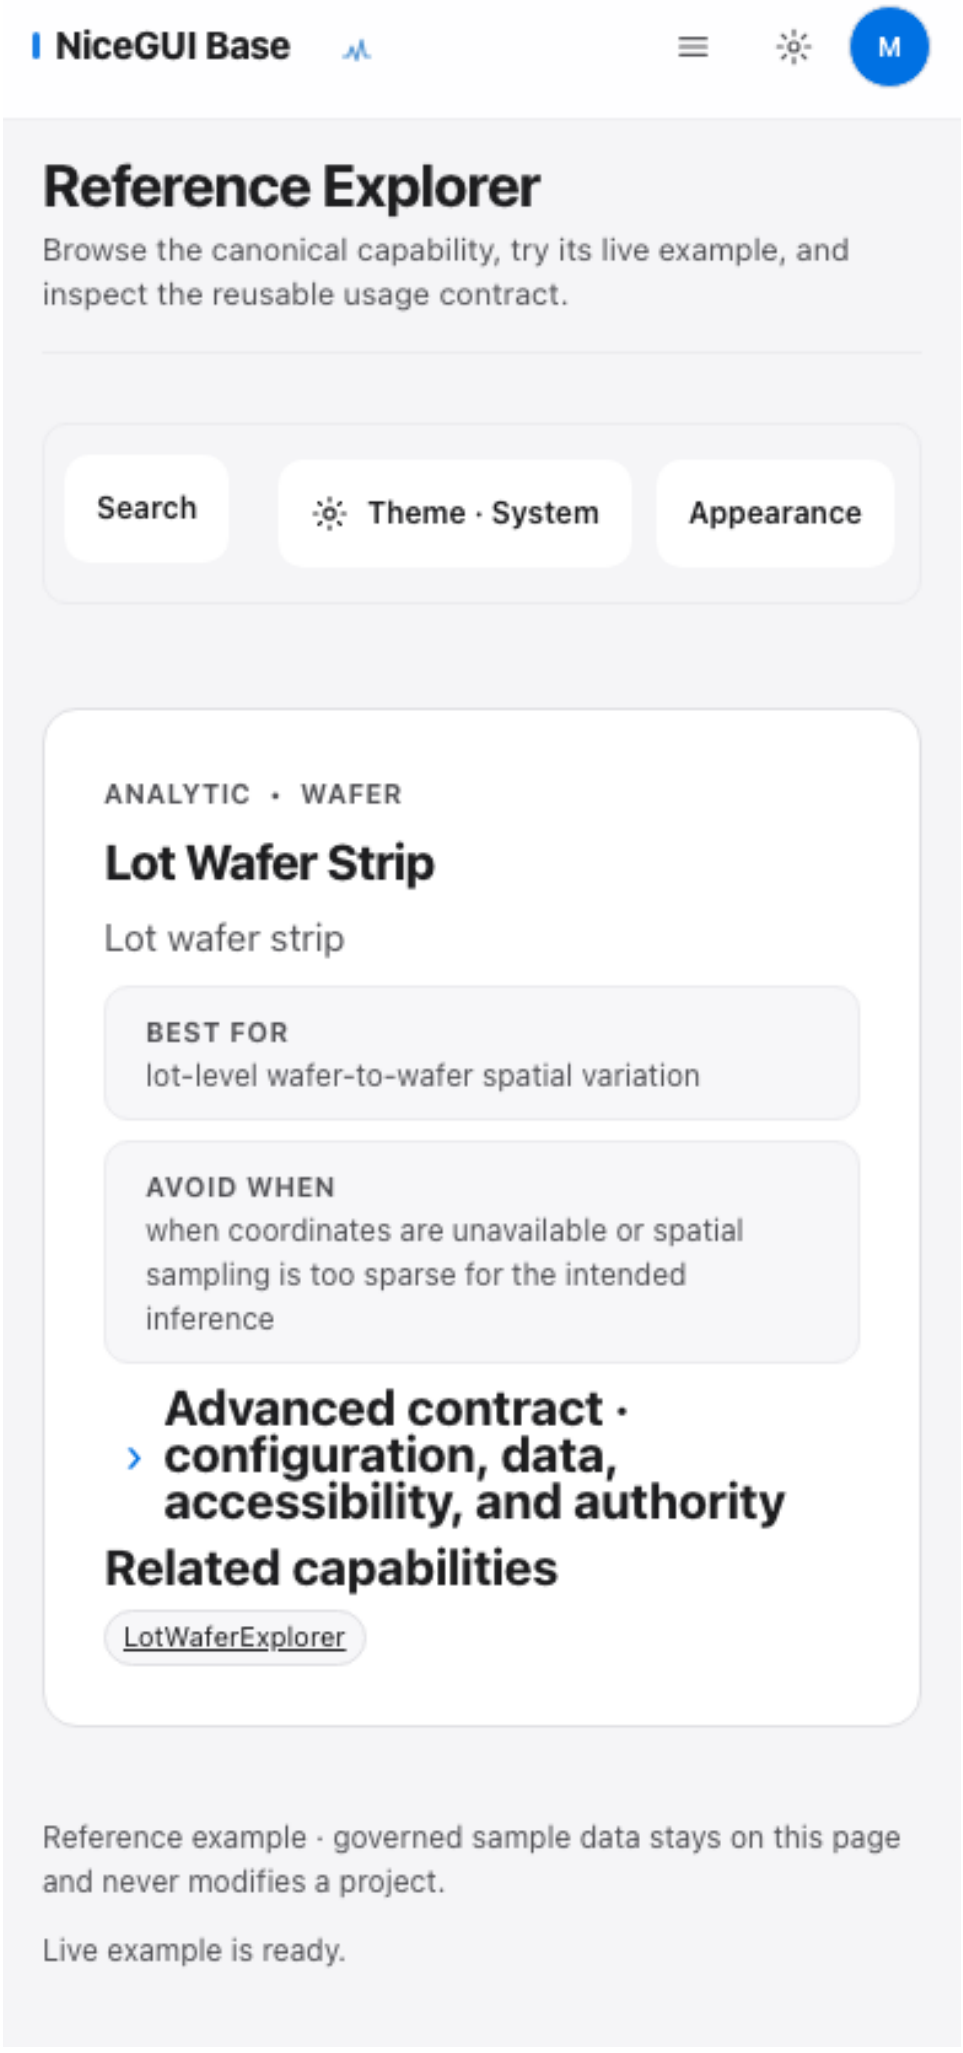

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Continuous
Continuous wafer map
BEST FOR
continuous spatial metrology or process response
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
SPCMonitor
LotWaferExplorer
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

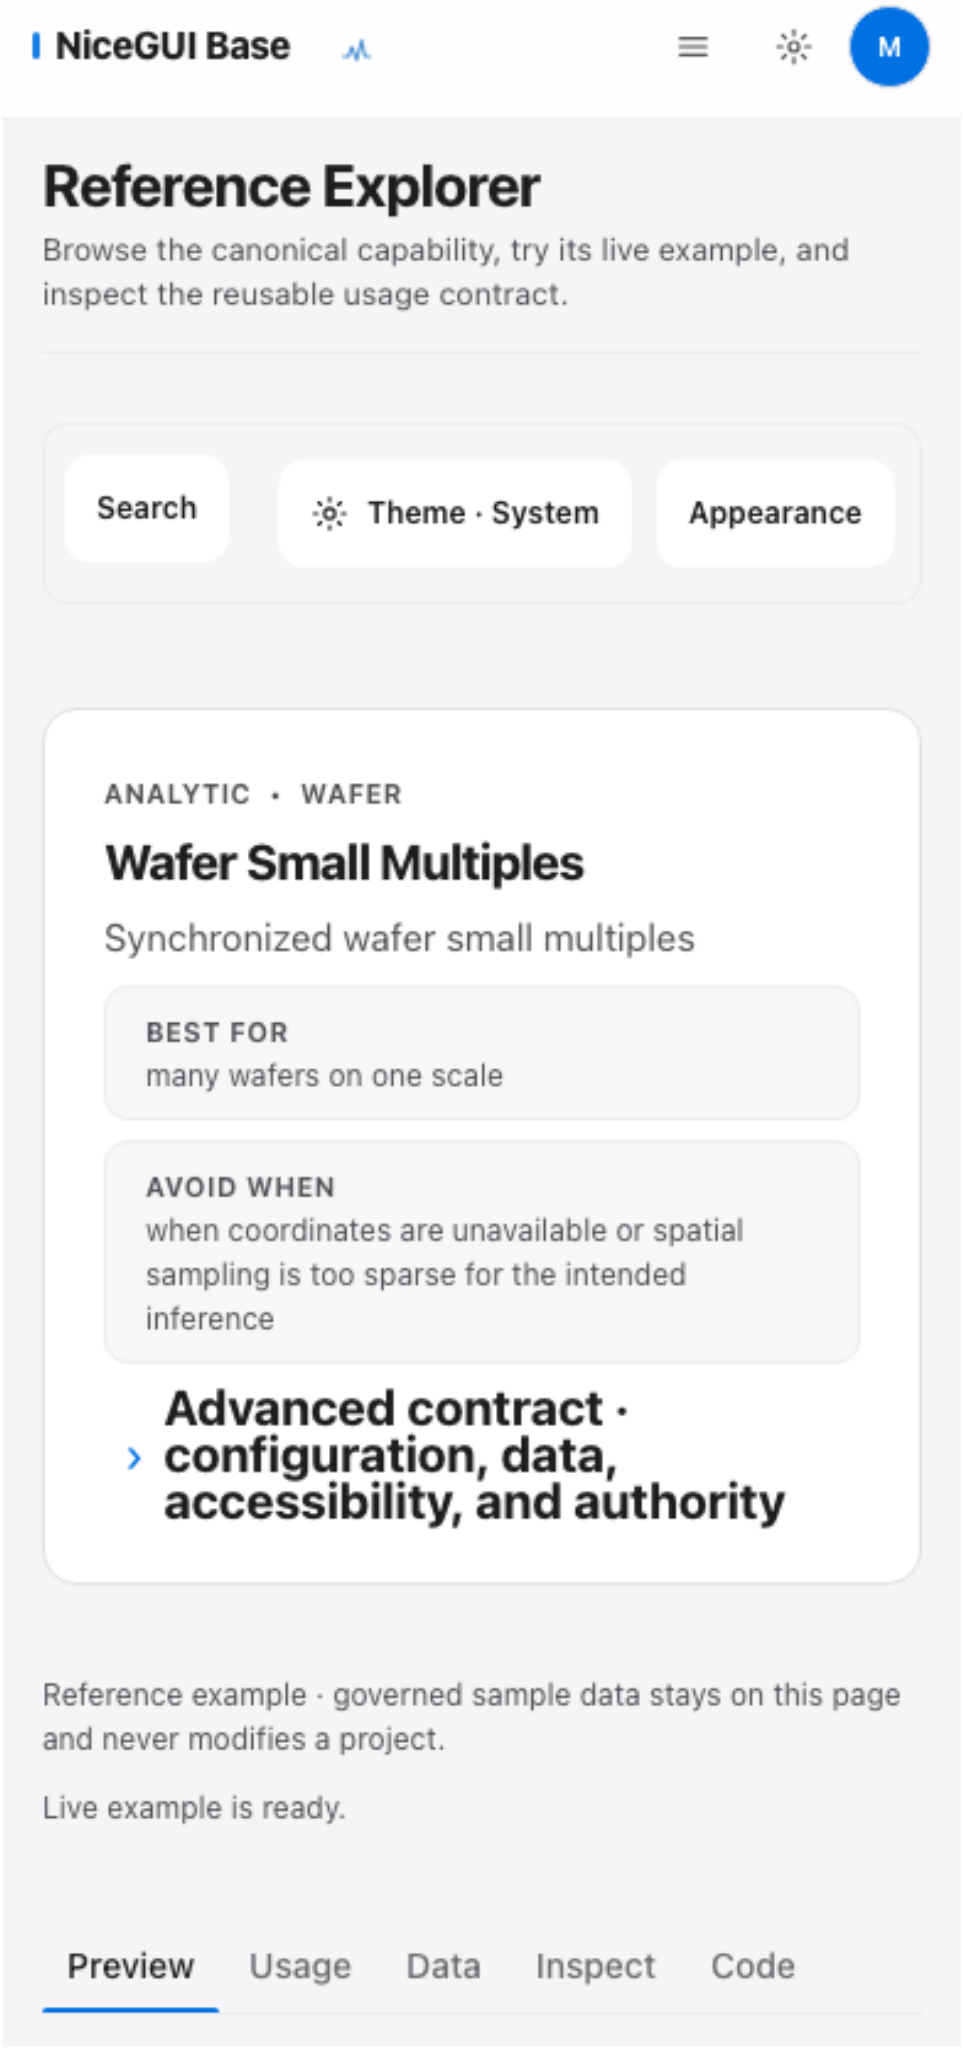

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Categorical
Categorical/bin wafer map
BEST FOR
yield bins or categorical spatial state
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
LotWaferExplorer
YieldLoss
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Defect
Defect wafer map
BEST FOR
inspection defects and defect classes
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Delta
Affected minus control wafer delta map
BEST FOR
spatial process change localization
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ExcursionDefenseLine
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

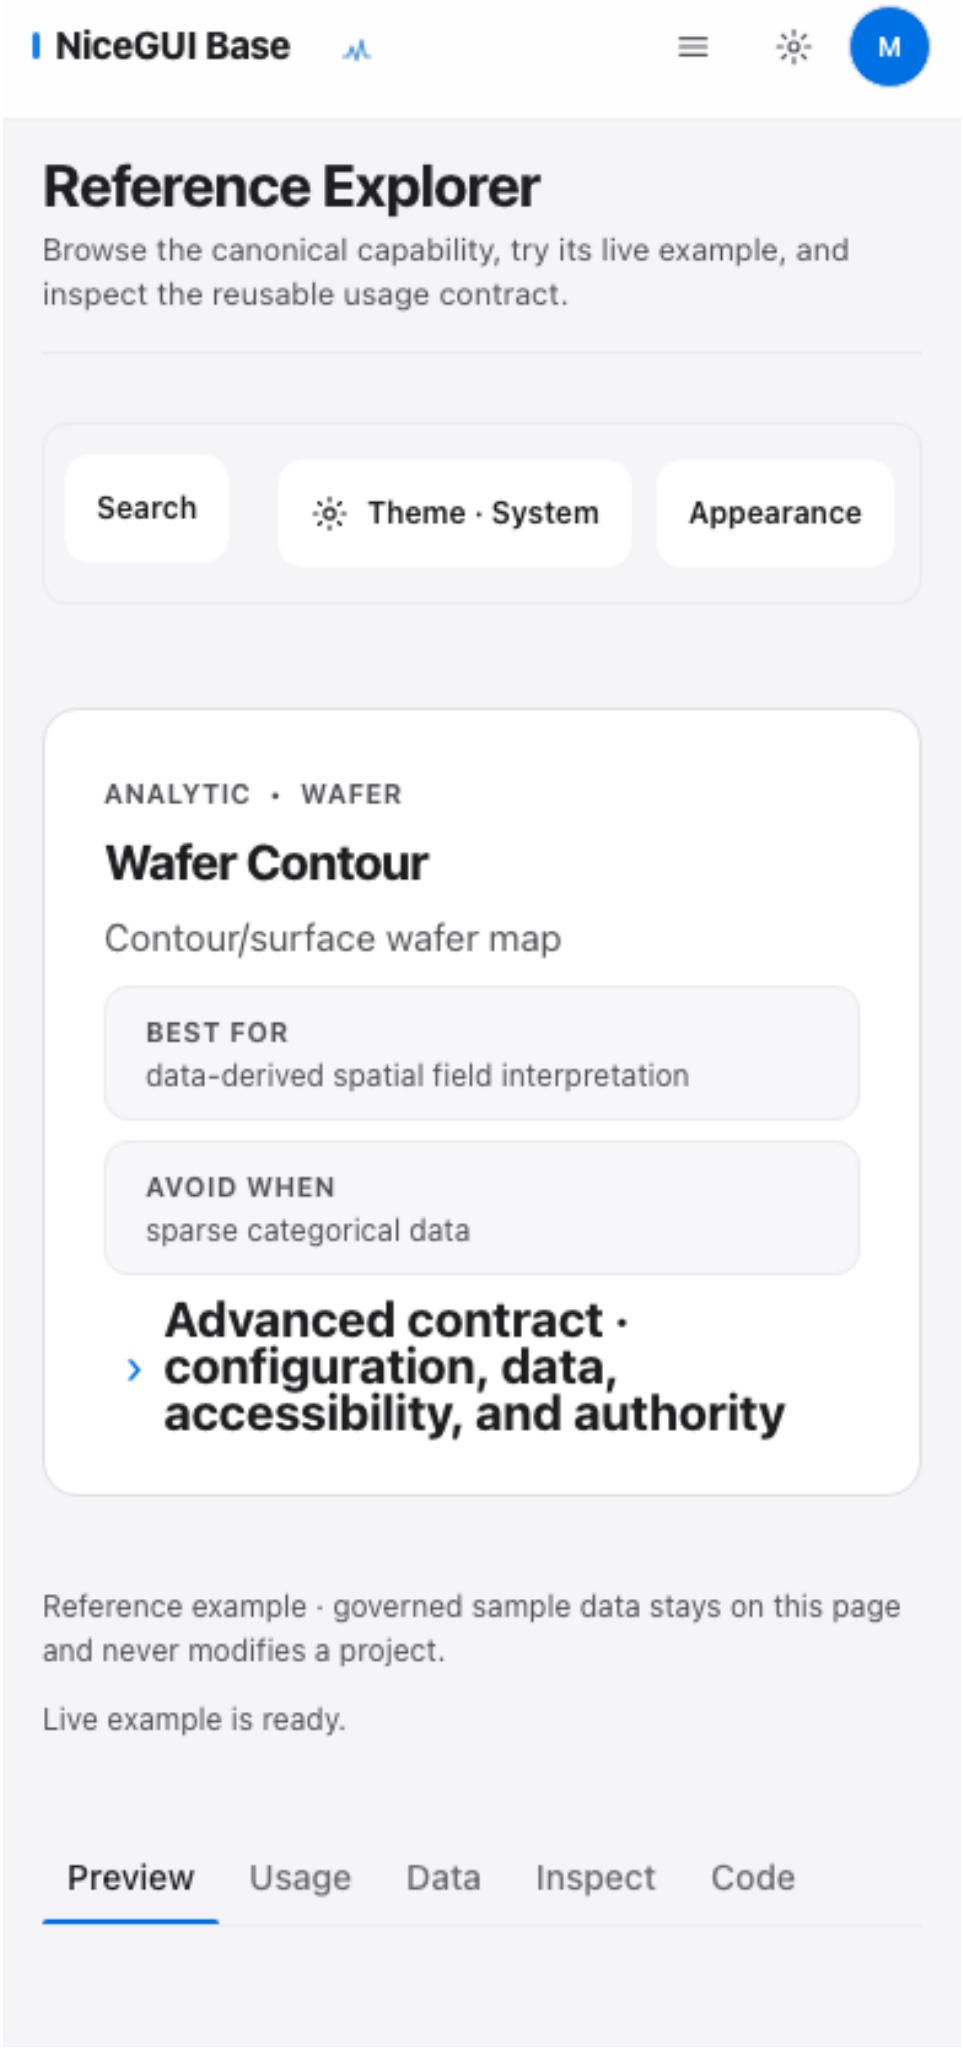

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Comparison
Side-by-side wafer comparison
BEST FOR
affected/control wafer signature comparison
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ChamberMatching
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

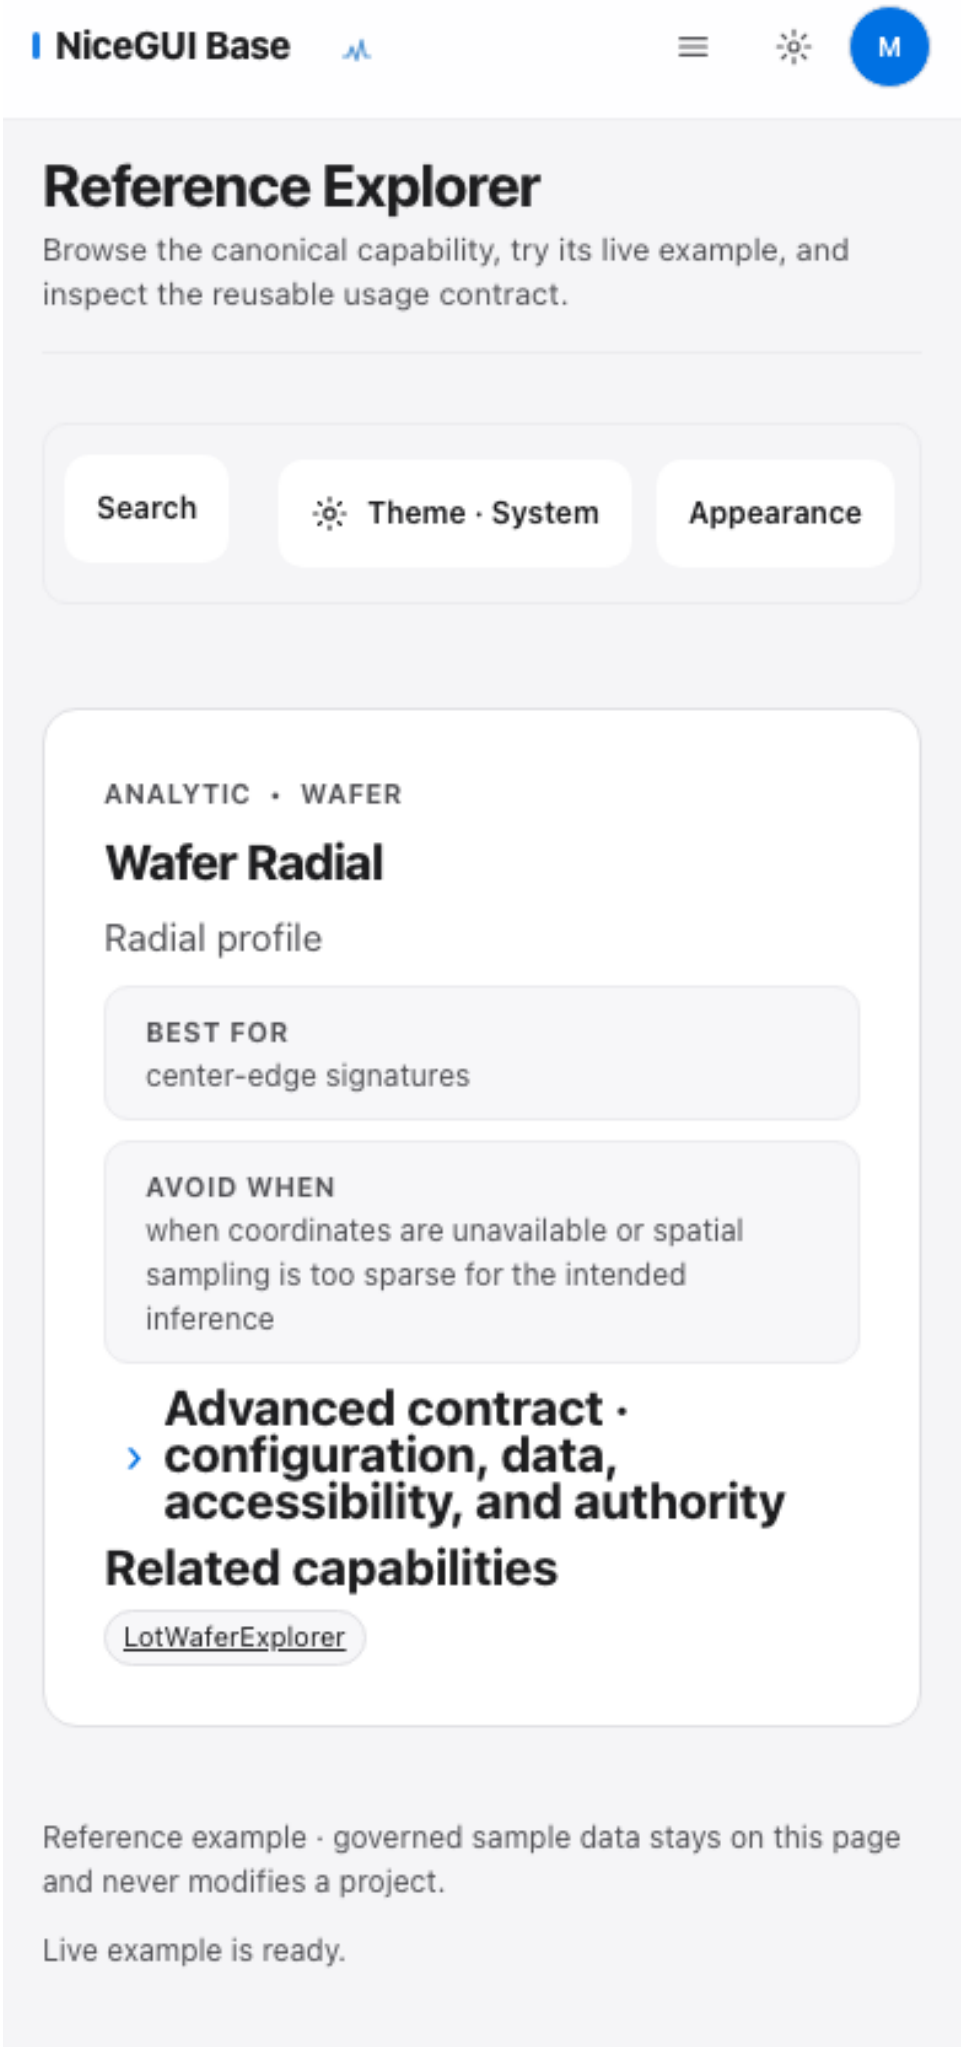

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Lot Wafer Strip
Lot wafer strip
BEST FOR
lot-level wafer-to-wafer spatial variation
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
LotWaferExplorer
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

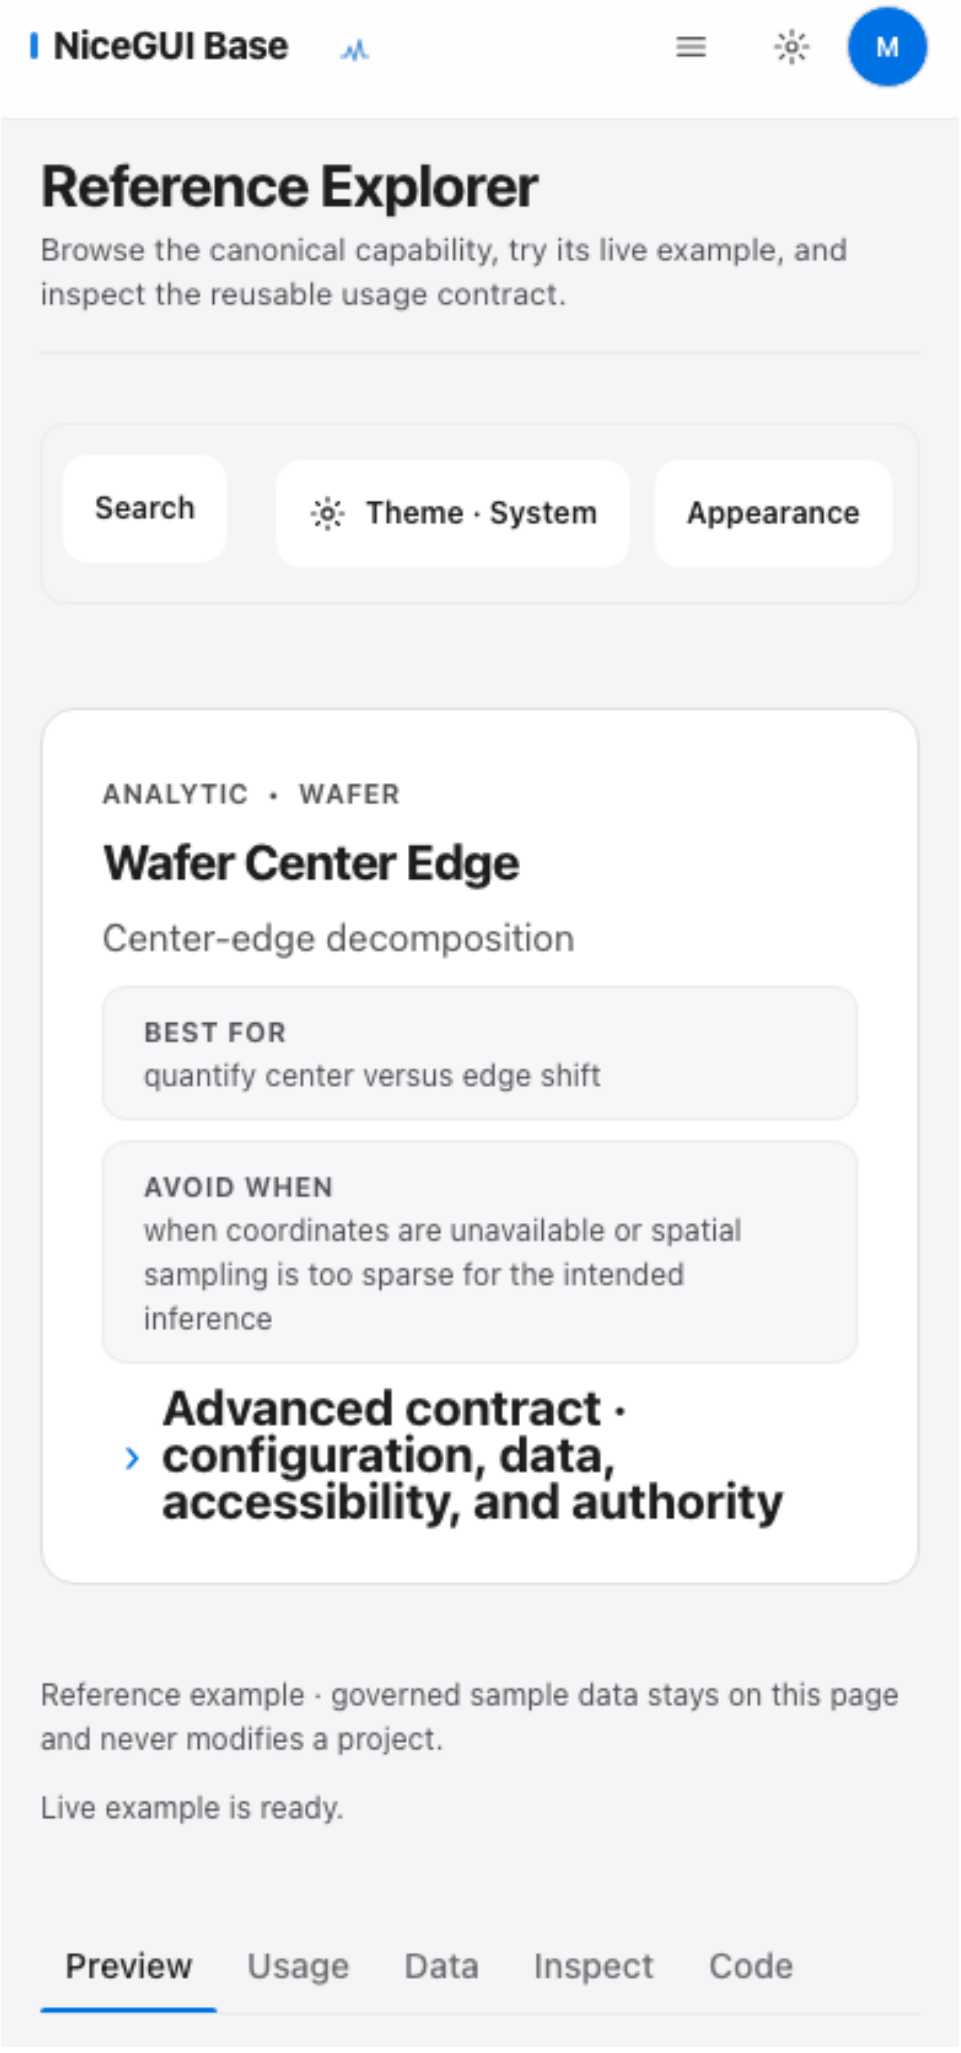

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Small Multiples
Synchronized wafer small multiples
BEST FOR
many wafers on one scale
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

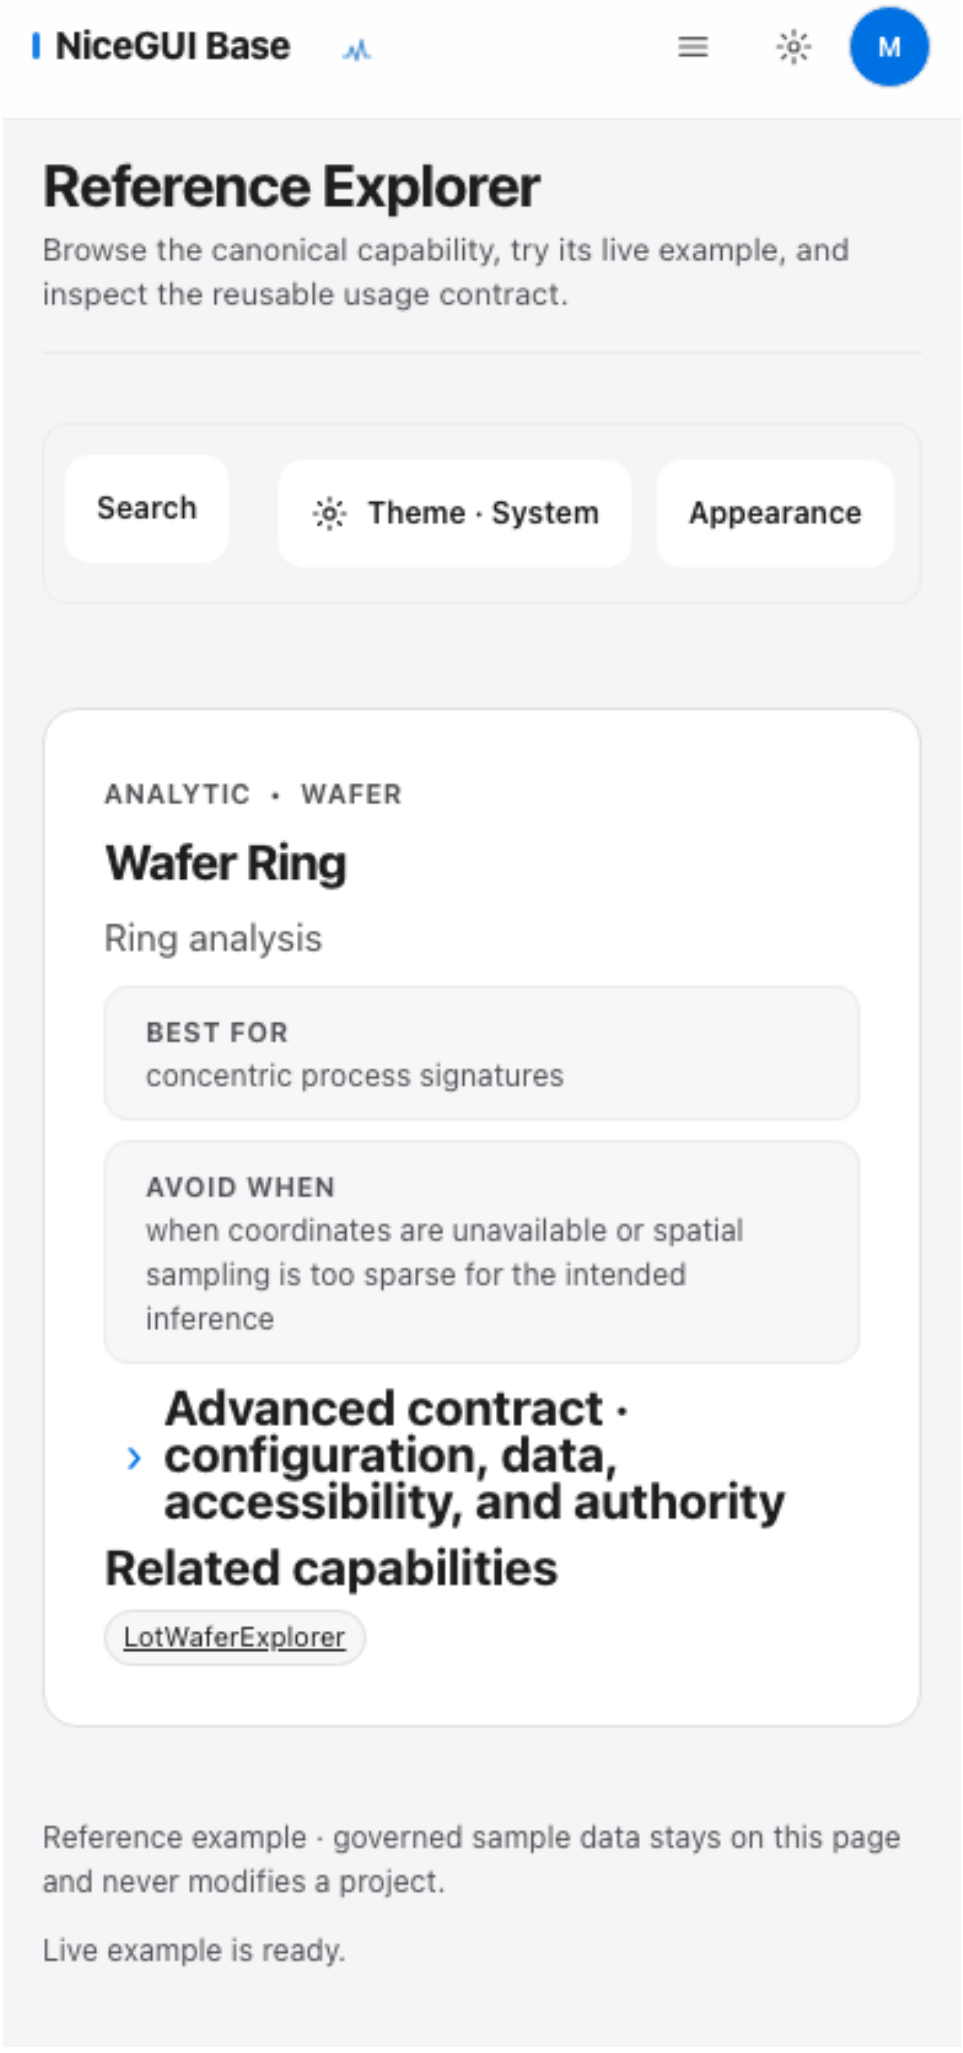
analytics-wafer_contour

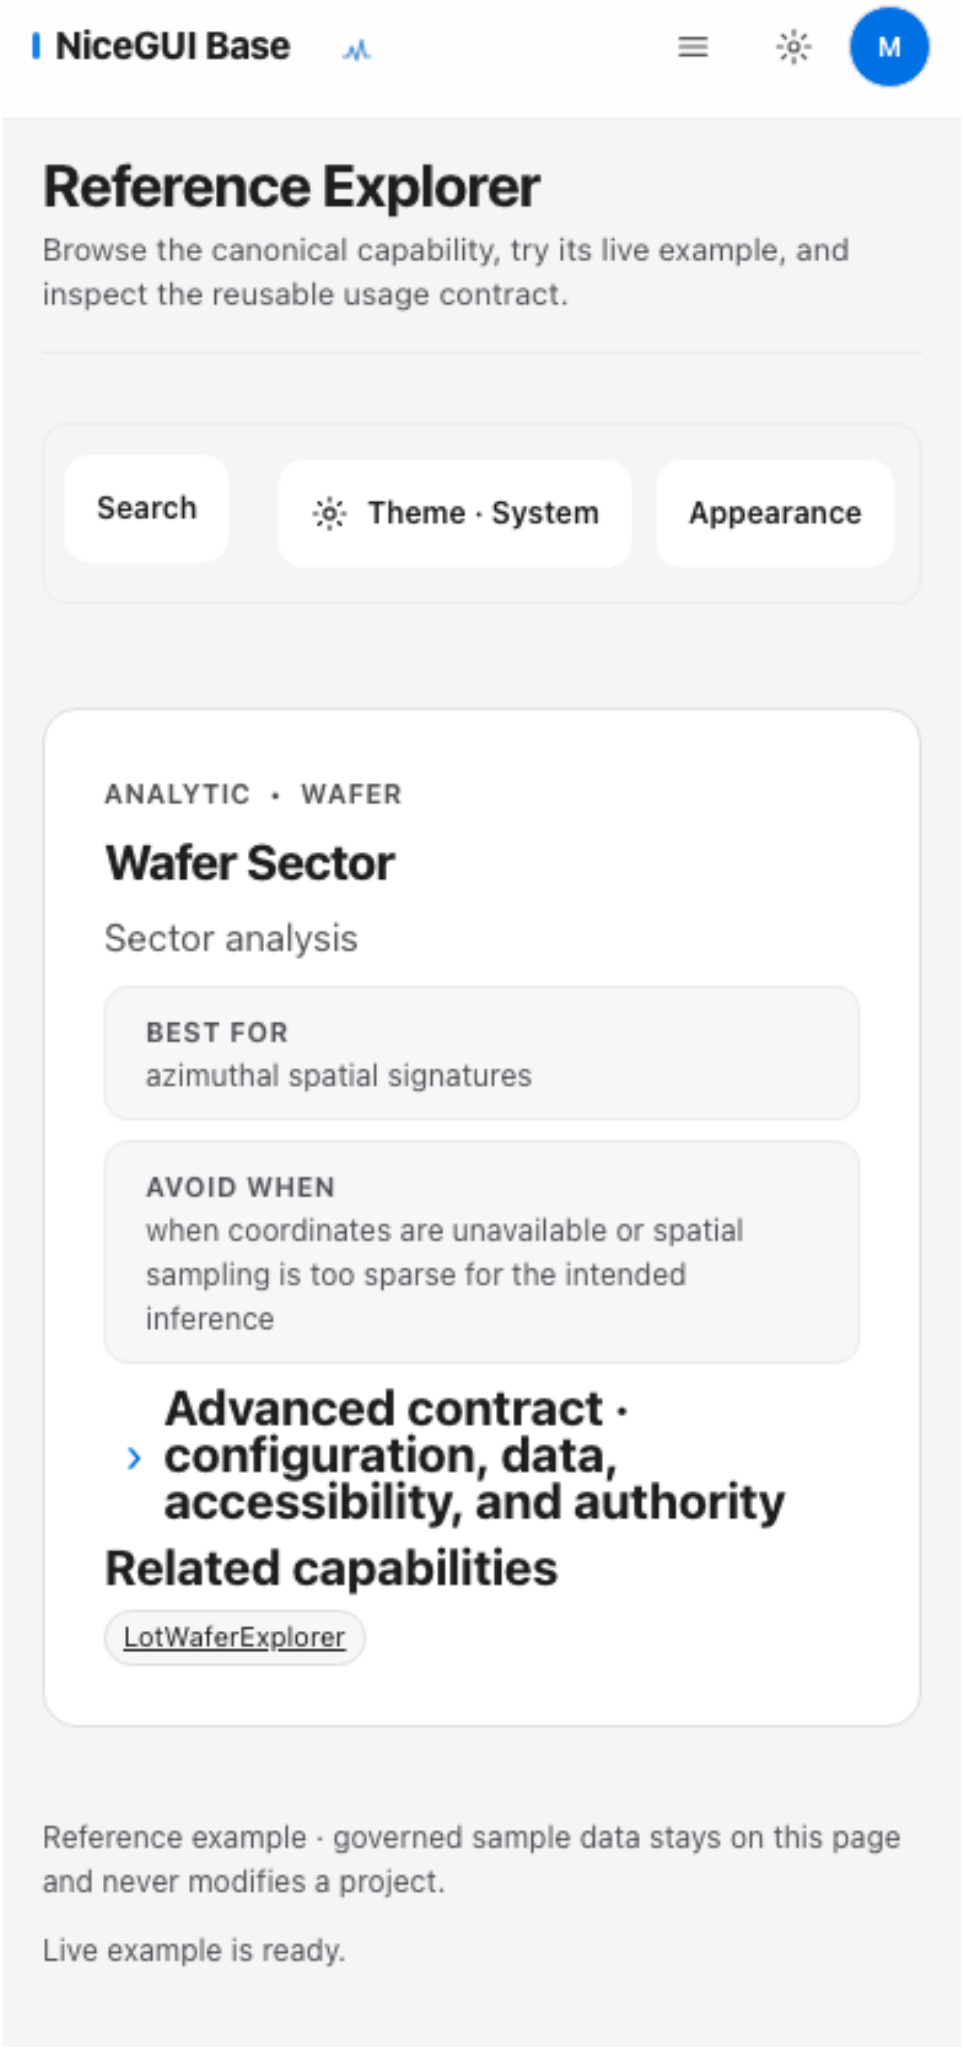
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5
PNG SHA-256 5284d6a48fdf5c65f38b9993324314dde592fd6631977c999aea5735ac585119

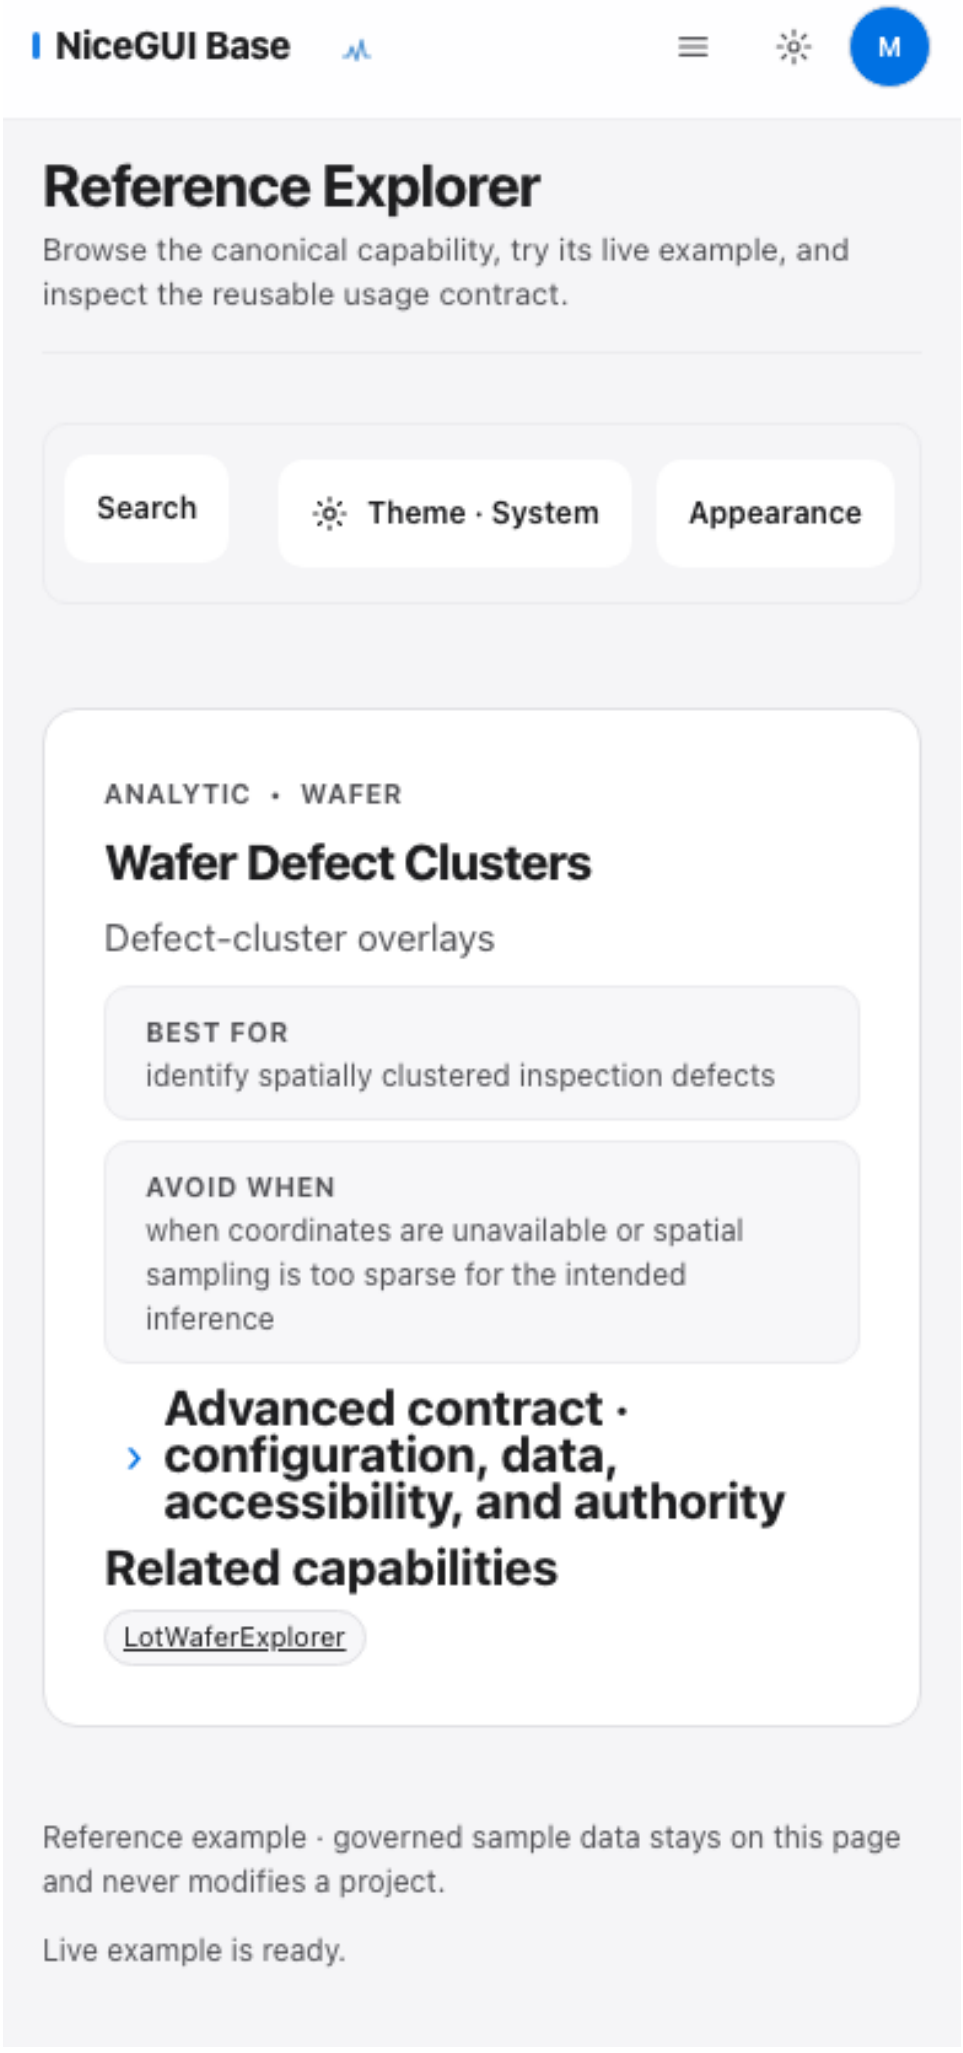


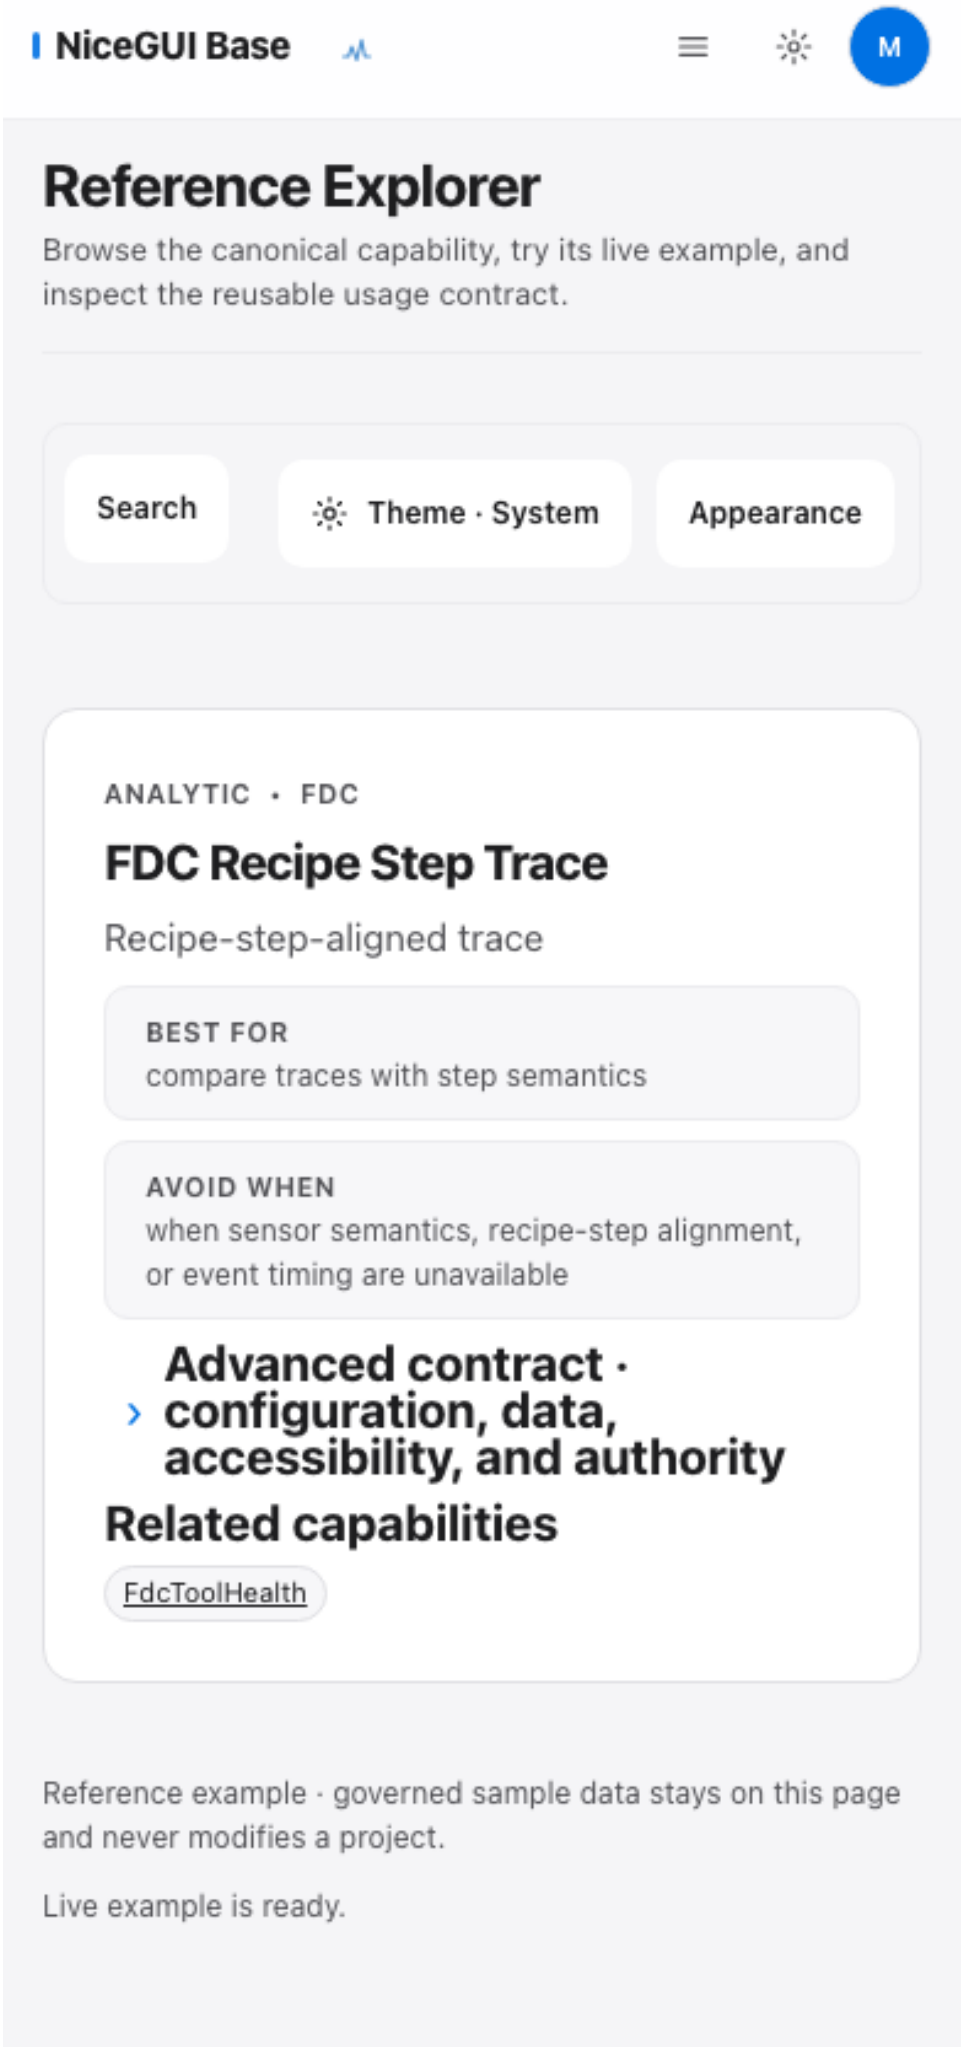

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Radial
Radial profile
BEST FOR
center-edge signatures
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
LotWaferExplorer
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

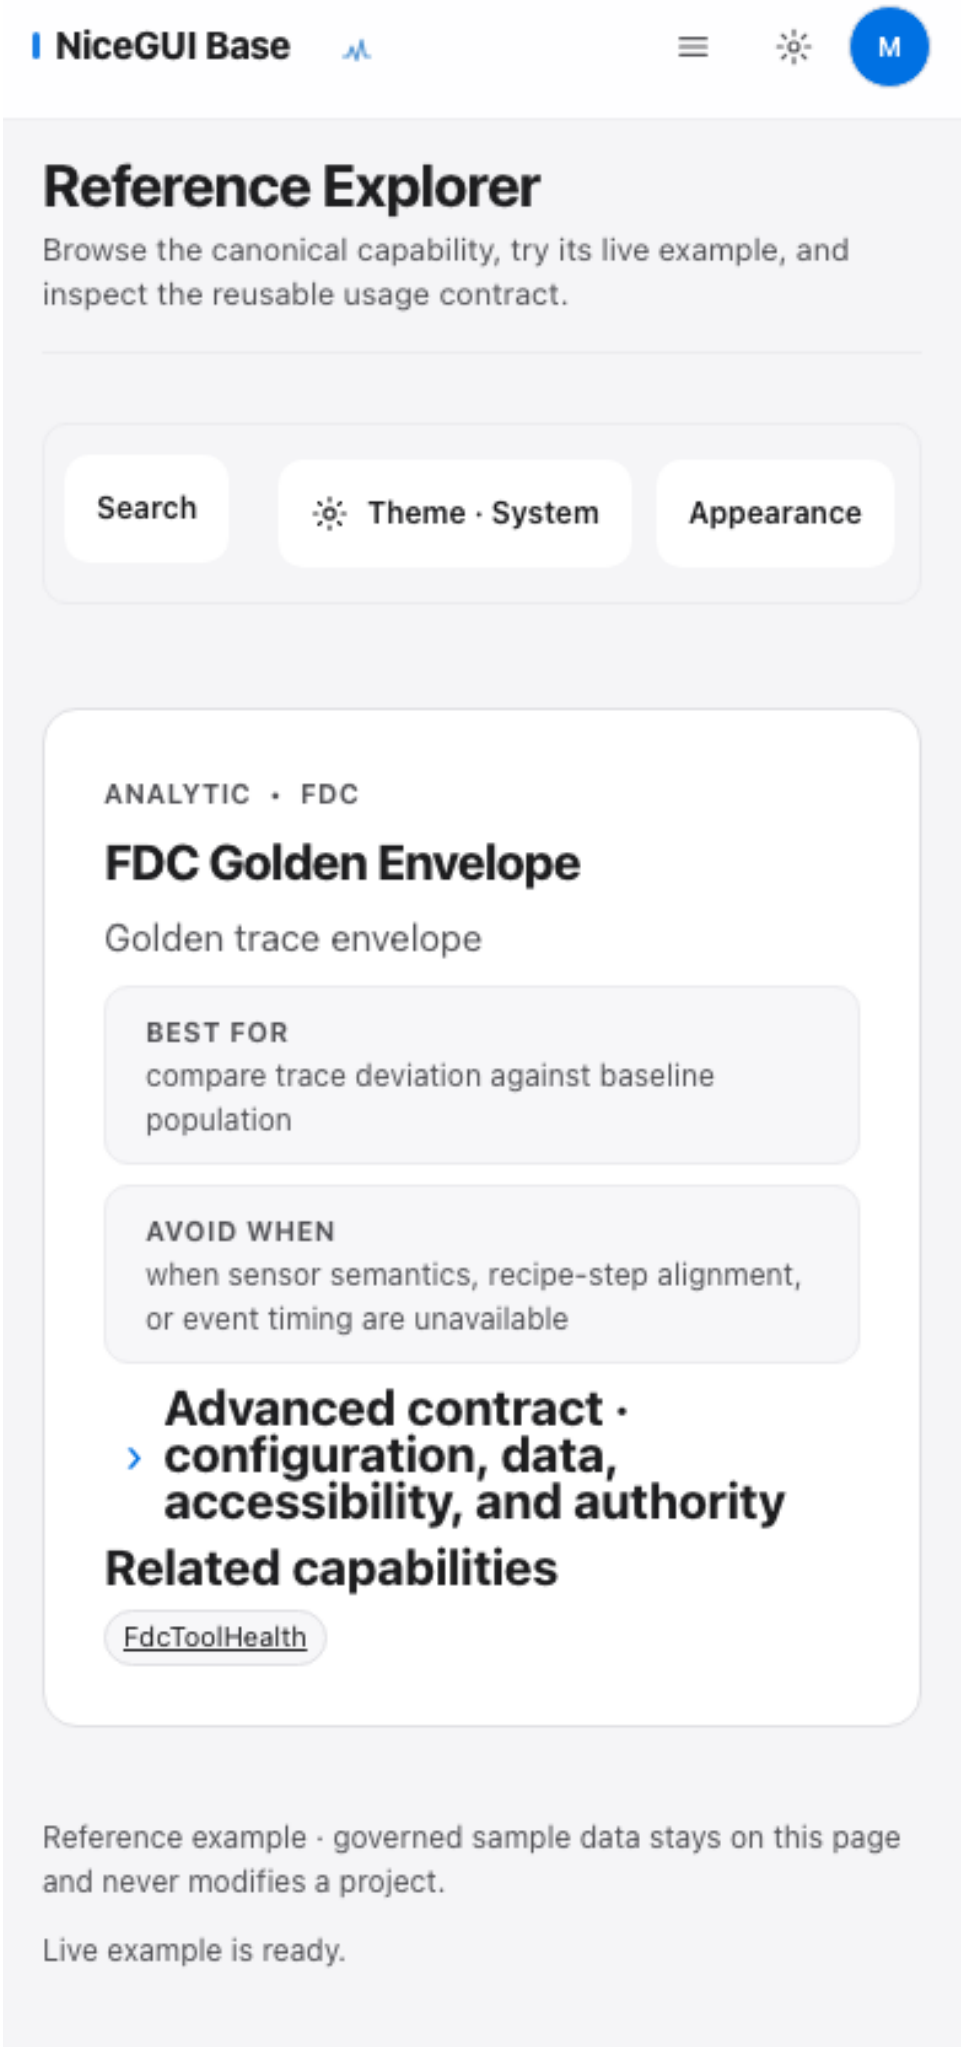

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Center Edge
Center-edge decomposition
BEST FOR
quantify center versus edge shift
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

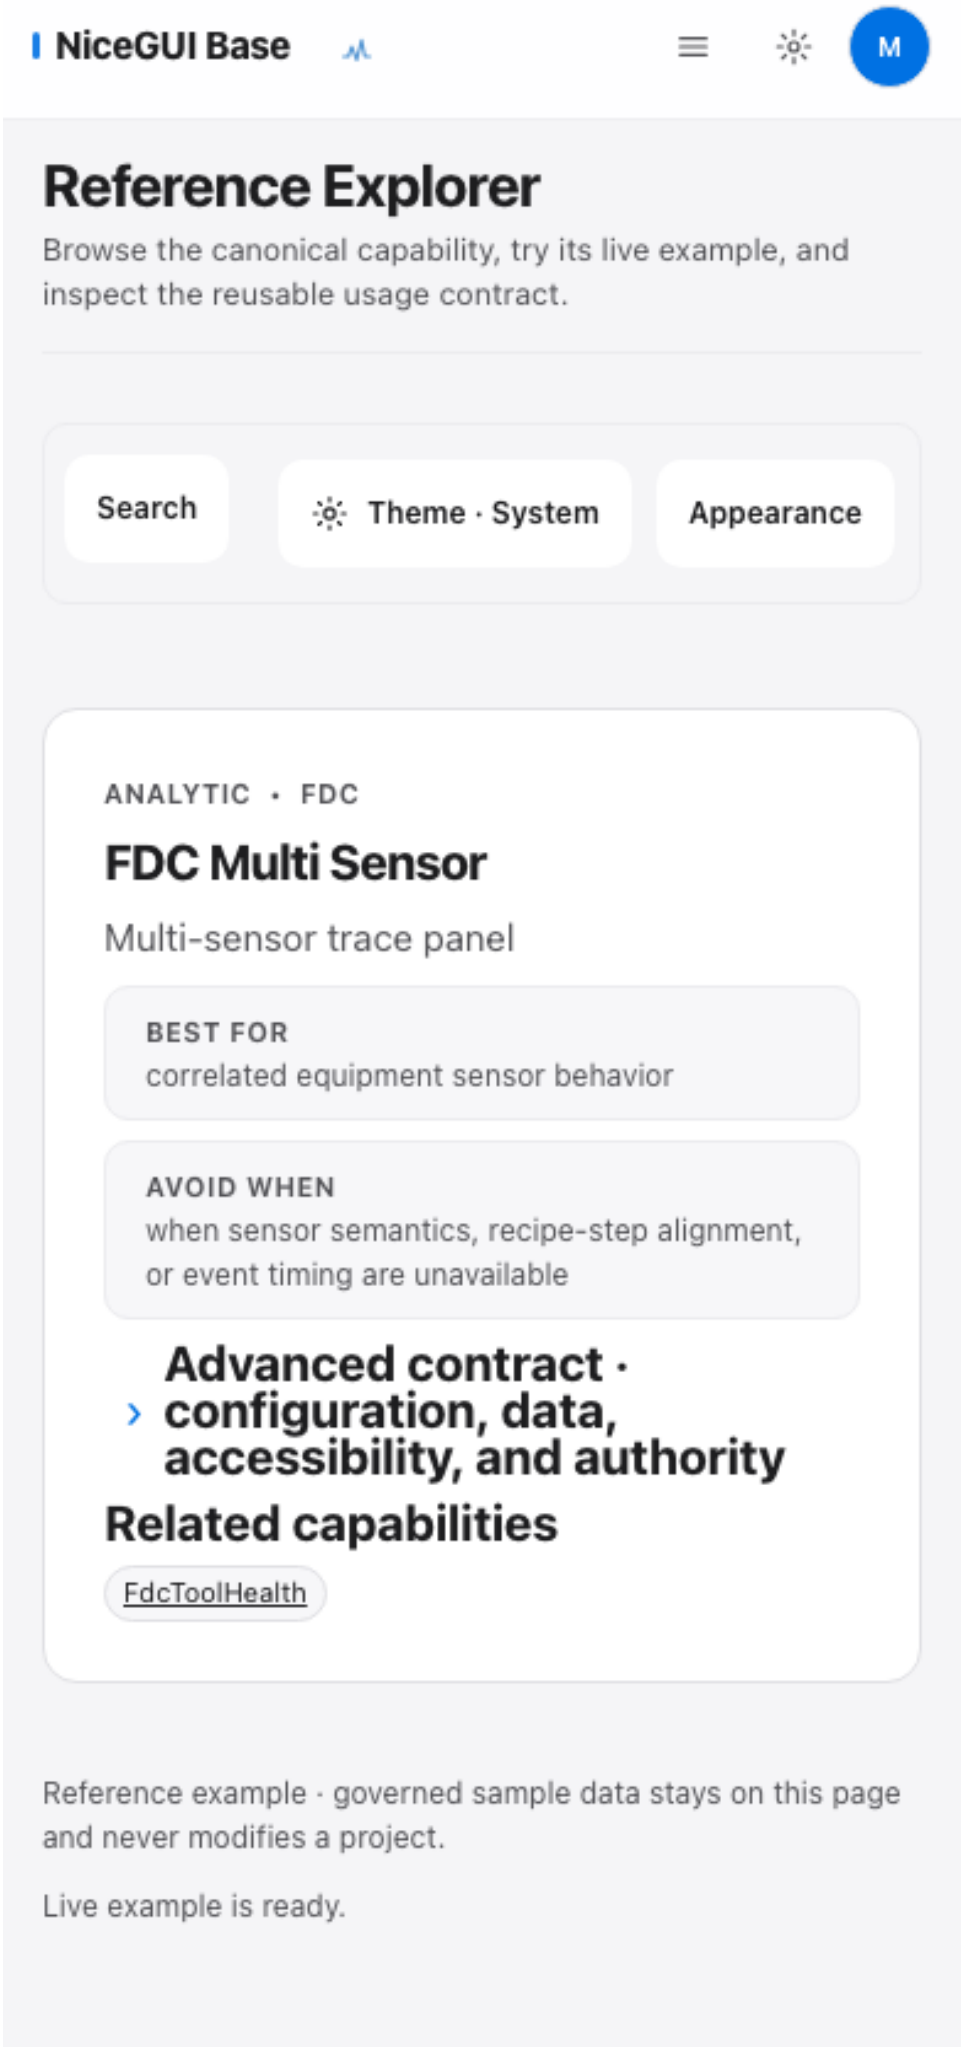

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Ring
Ring analysis
BEST FOR
concentric process signatures
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
LotWaferExplorer
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

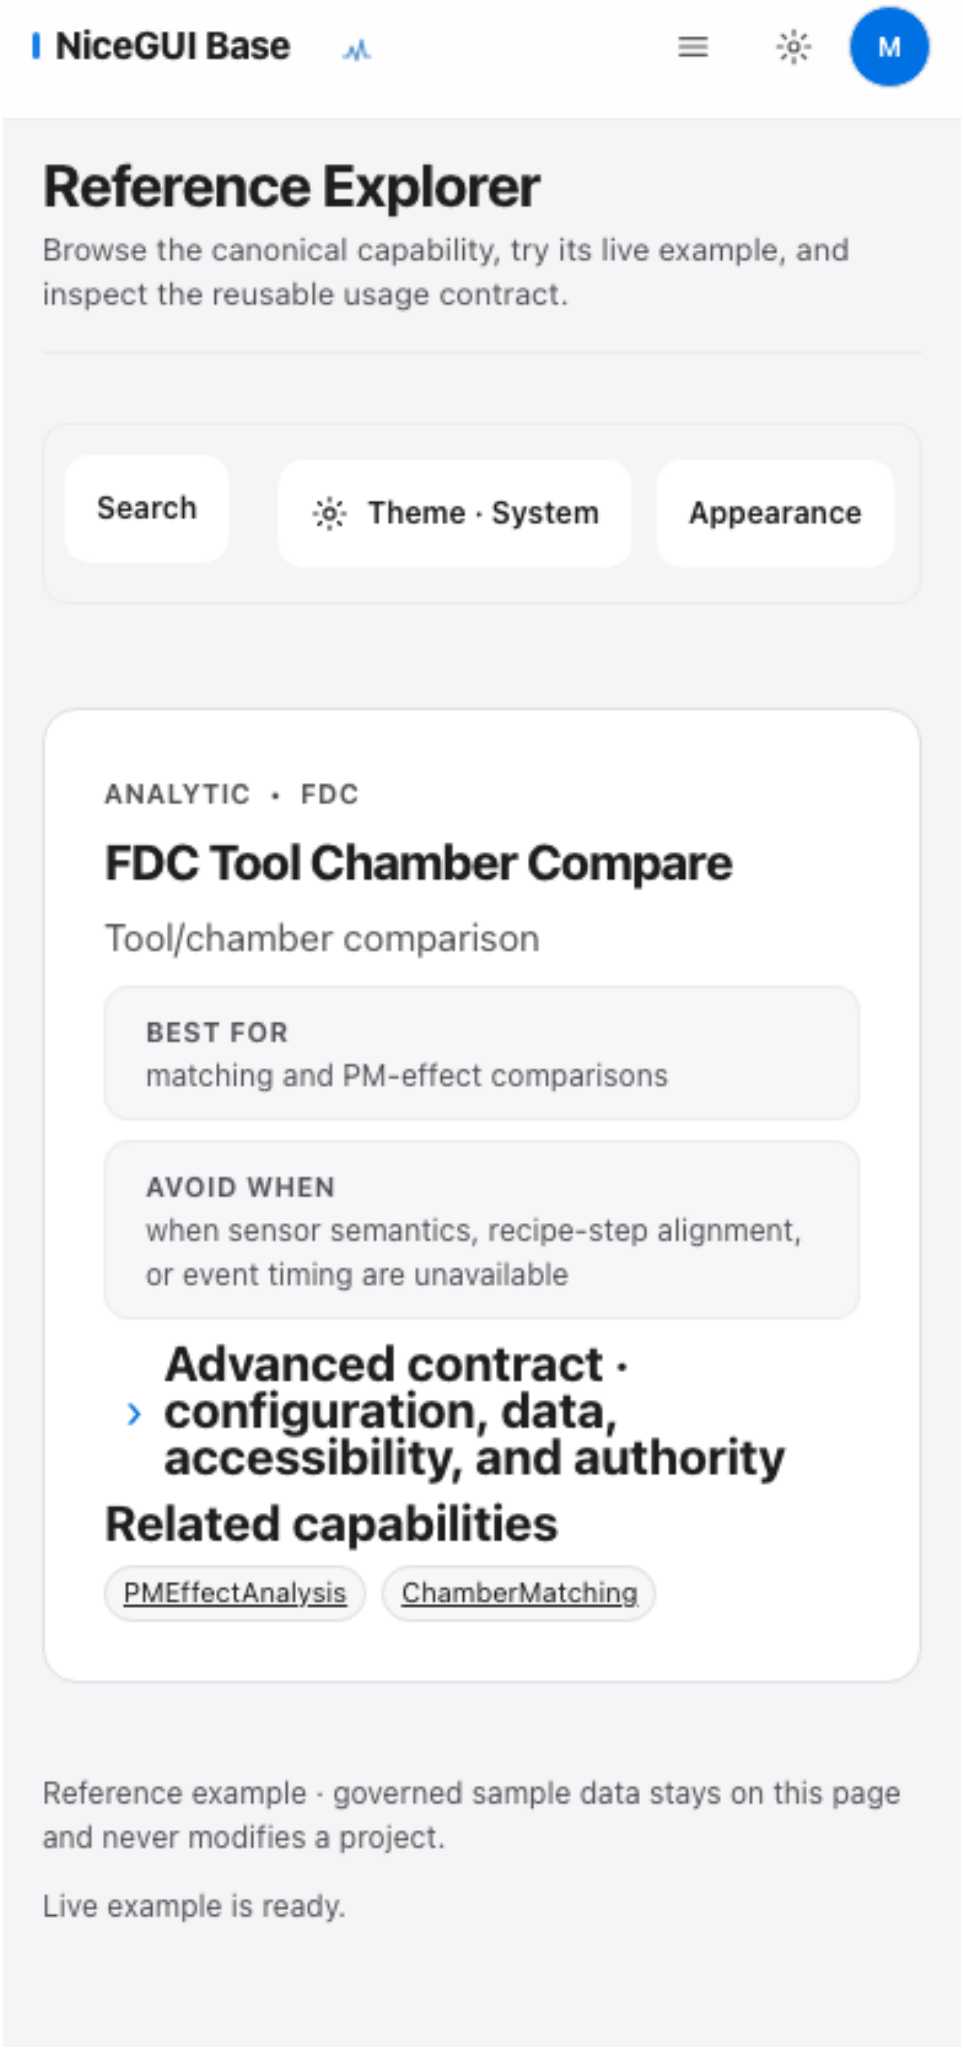

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Sector
Sector analysis
BEST FOR
azimuthal spatial signatures
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
LotWaferExplorer
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

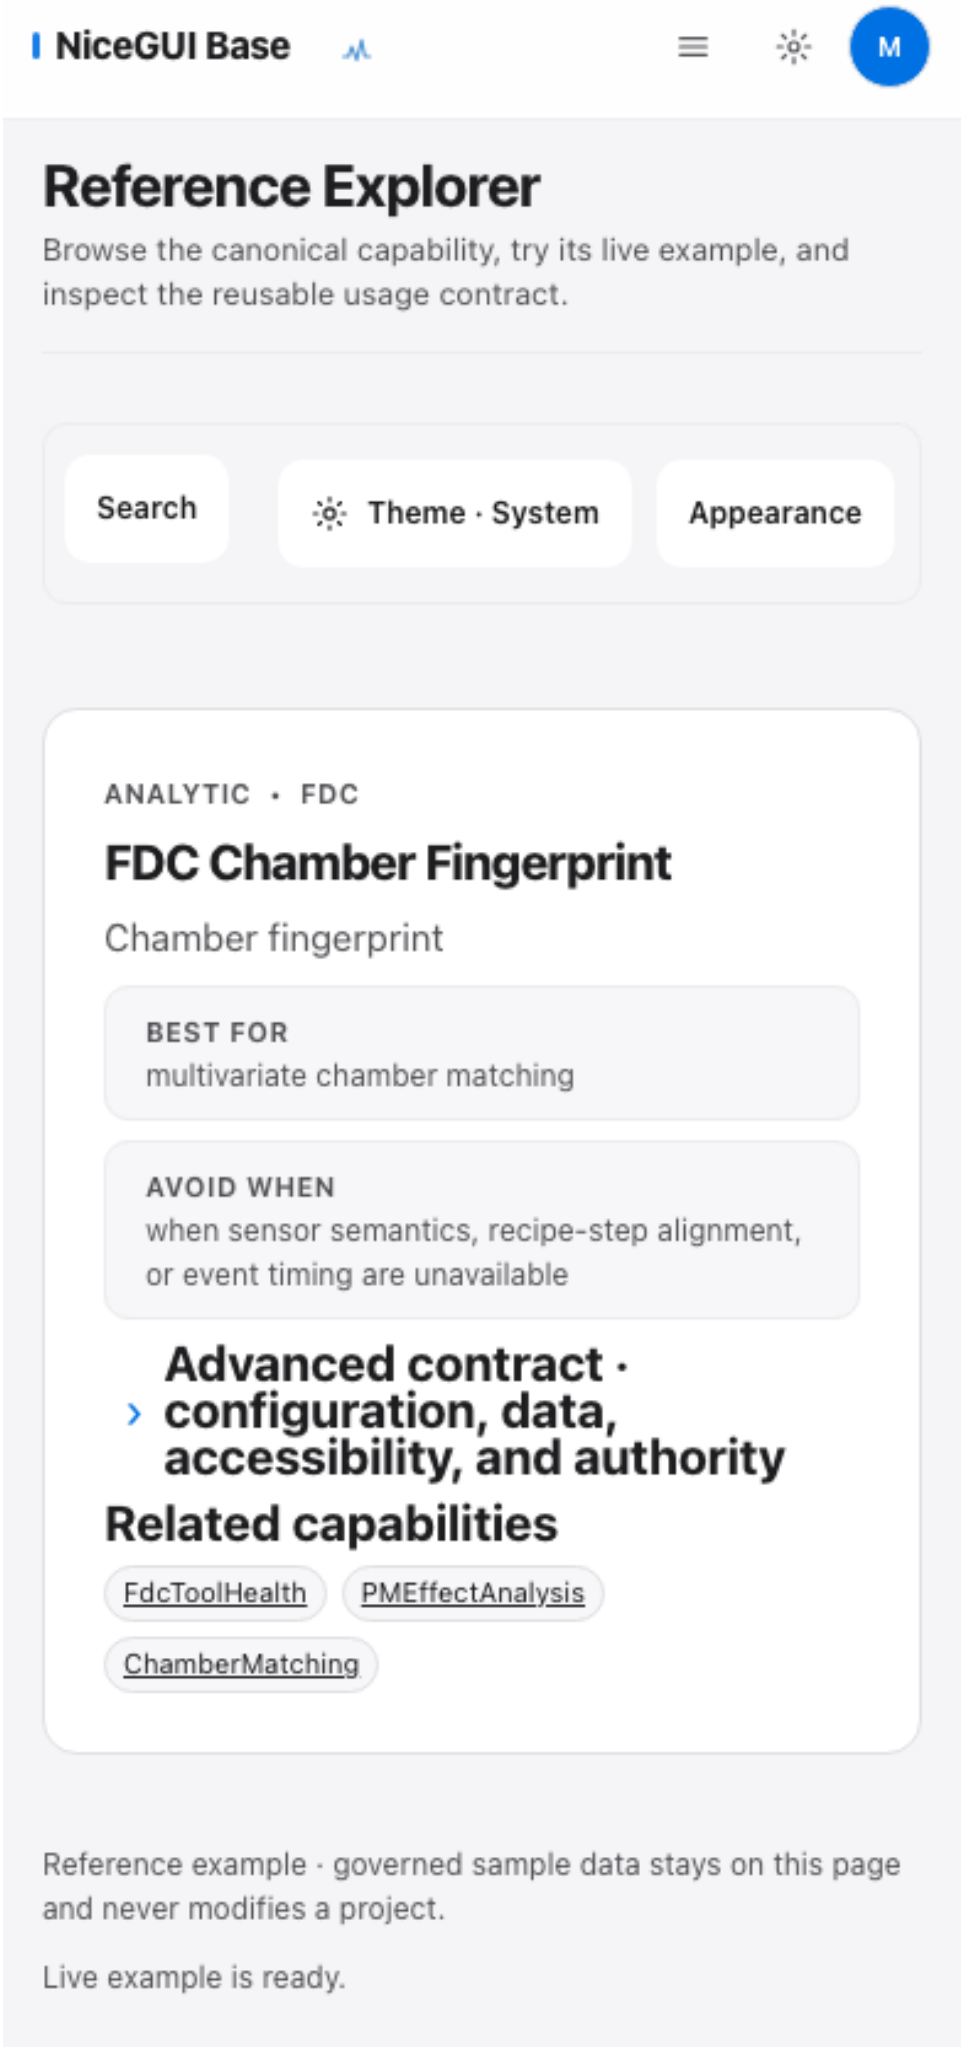

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • WAFER
Wafer Defect Clusters
Defect-cluster overlays
BEST FOR
identify spatially clustered inspection defects
AVOID WHEN
when coordinates are unavailable or spatial sampling is too sparse for the intended inference
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
LotWaferExplorer
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Recipe Step Trace
Recipe-step-aligned trace
BEST FOR
compare traces with step semantics
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FdcToolHealth
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Golden Envelope
Golden trace envelope
BEST FOR
compare trace deviation against baseline population
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FdcToolHealth
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Multi Sensor
Multi-sensor trace panel
BEST FOR
correlated equipment sensor behavior
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FdcToolHealth
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

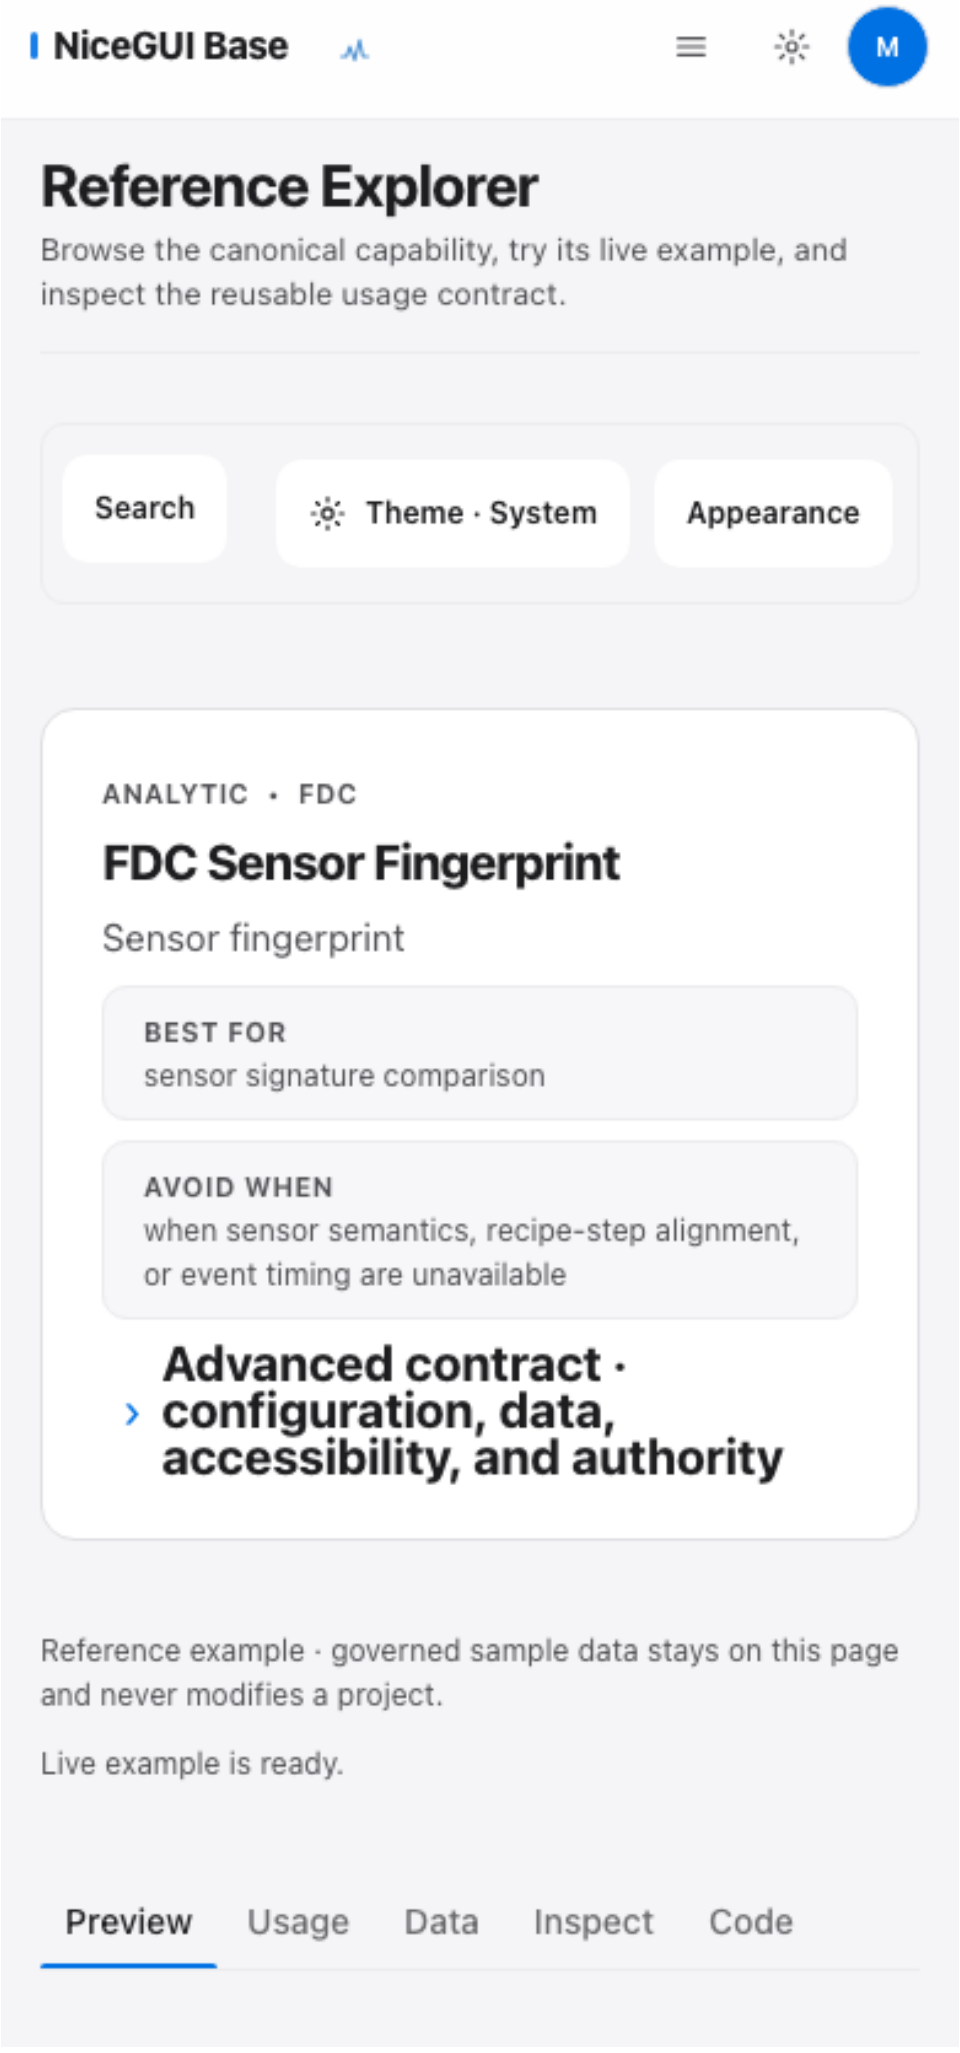

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Tool Chamber Compare
Tool/chamber comparison
BEST FOR
matching and PM-effect comparisons
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
PMEffectAnalysis
ChamberMatching
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

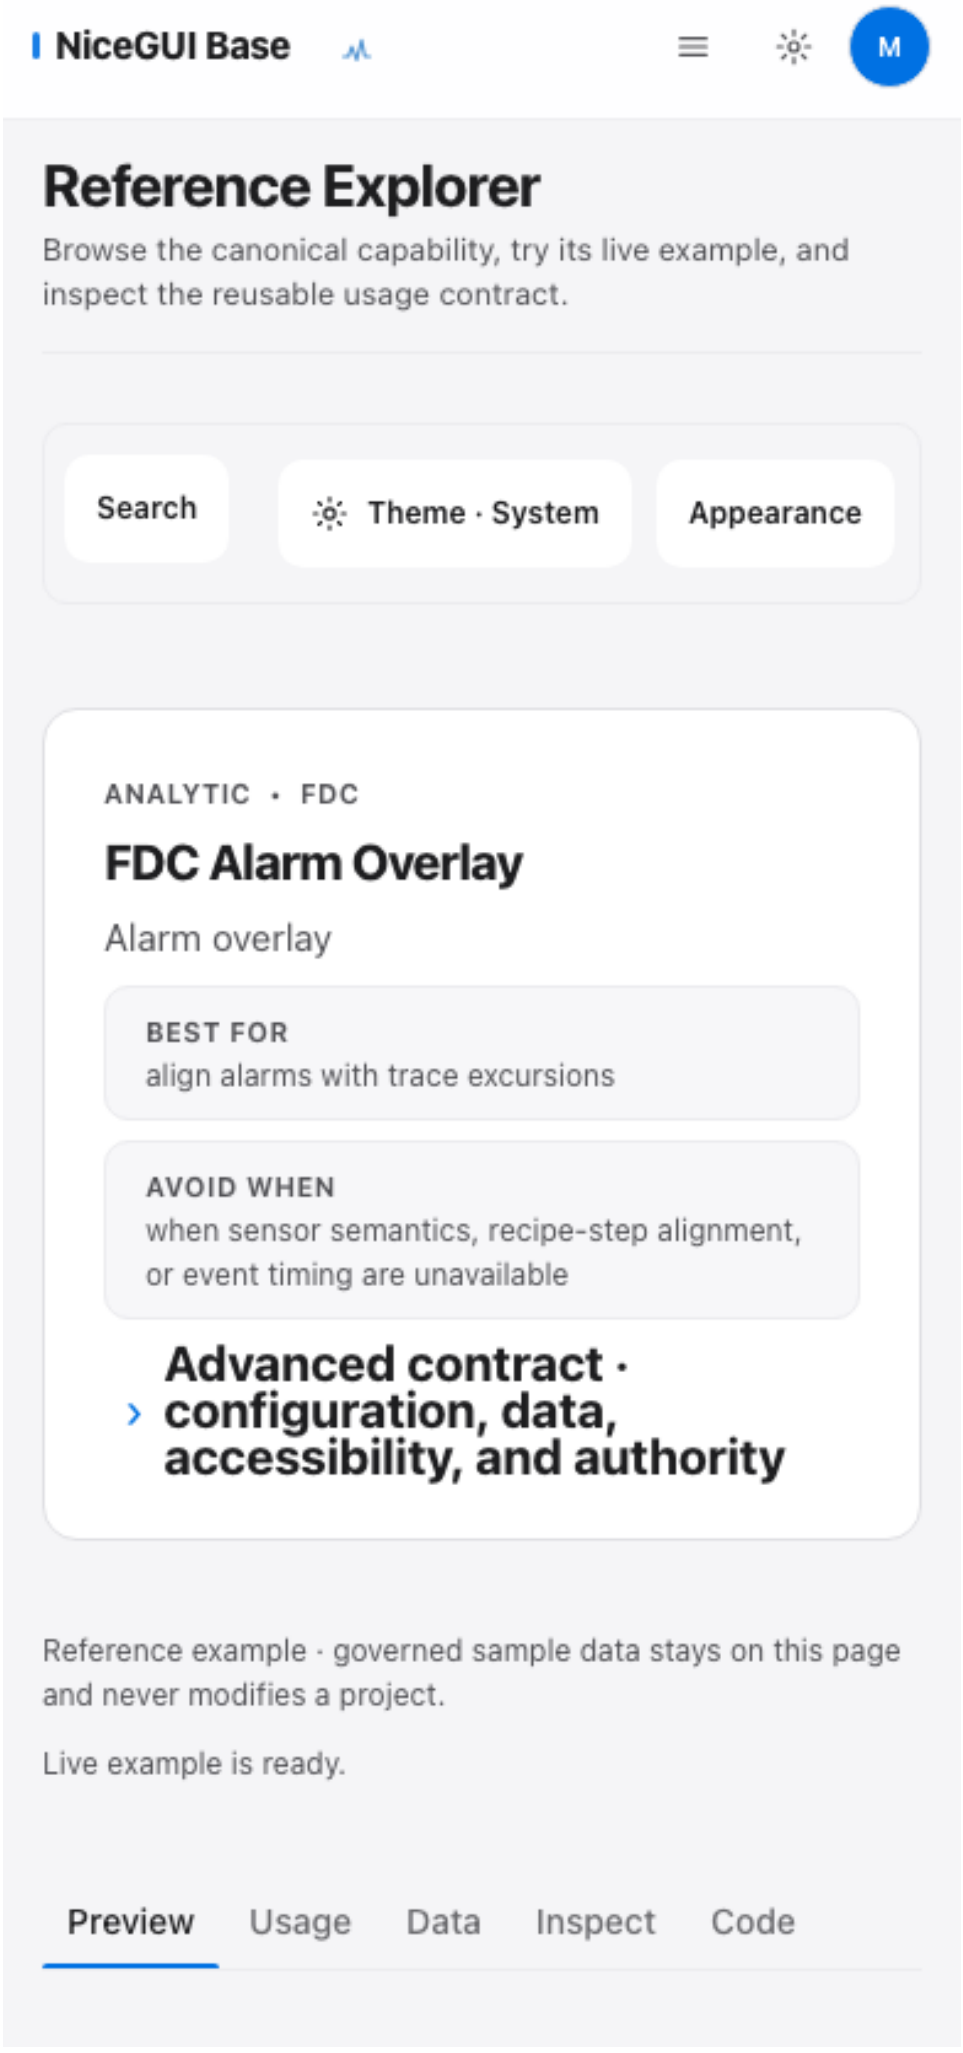

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Chamber Fingerprint
Chamber fingerprint
BEST FOR
multivariate chamber matching
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FdcToolHealth
PMEffectAnalysis
ChamberMatching
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

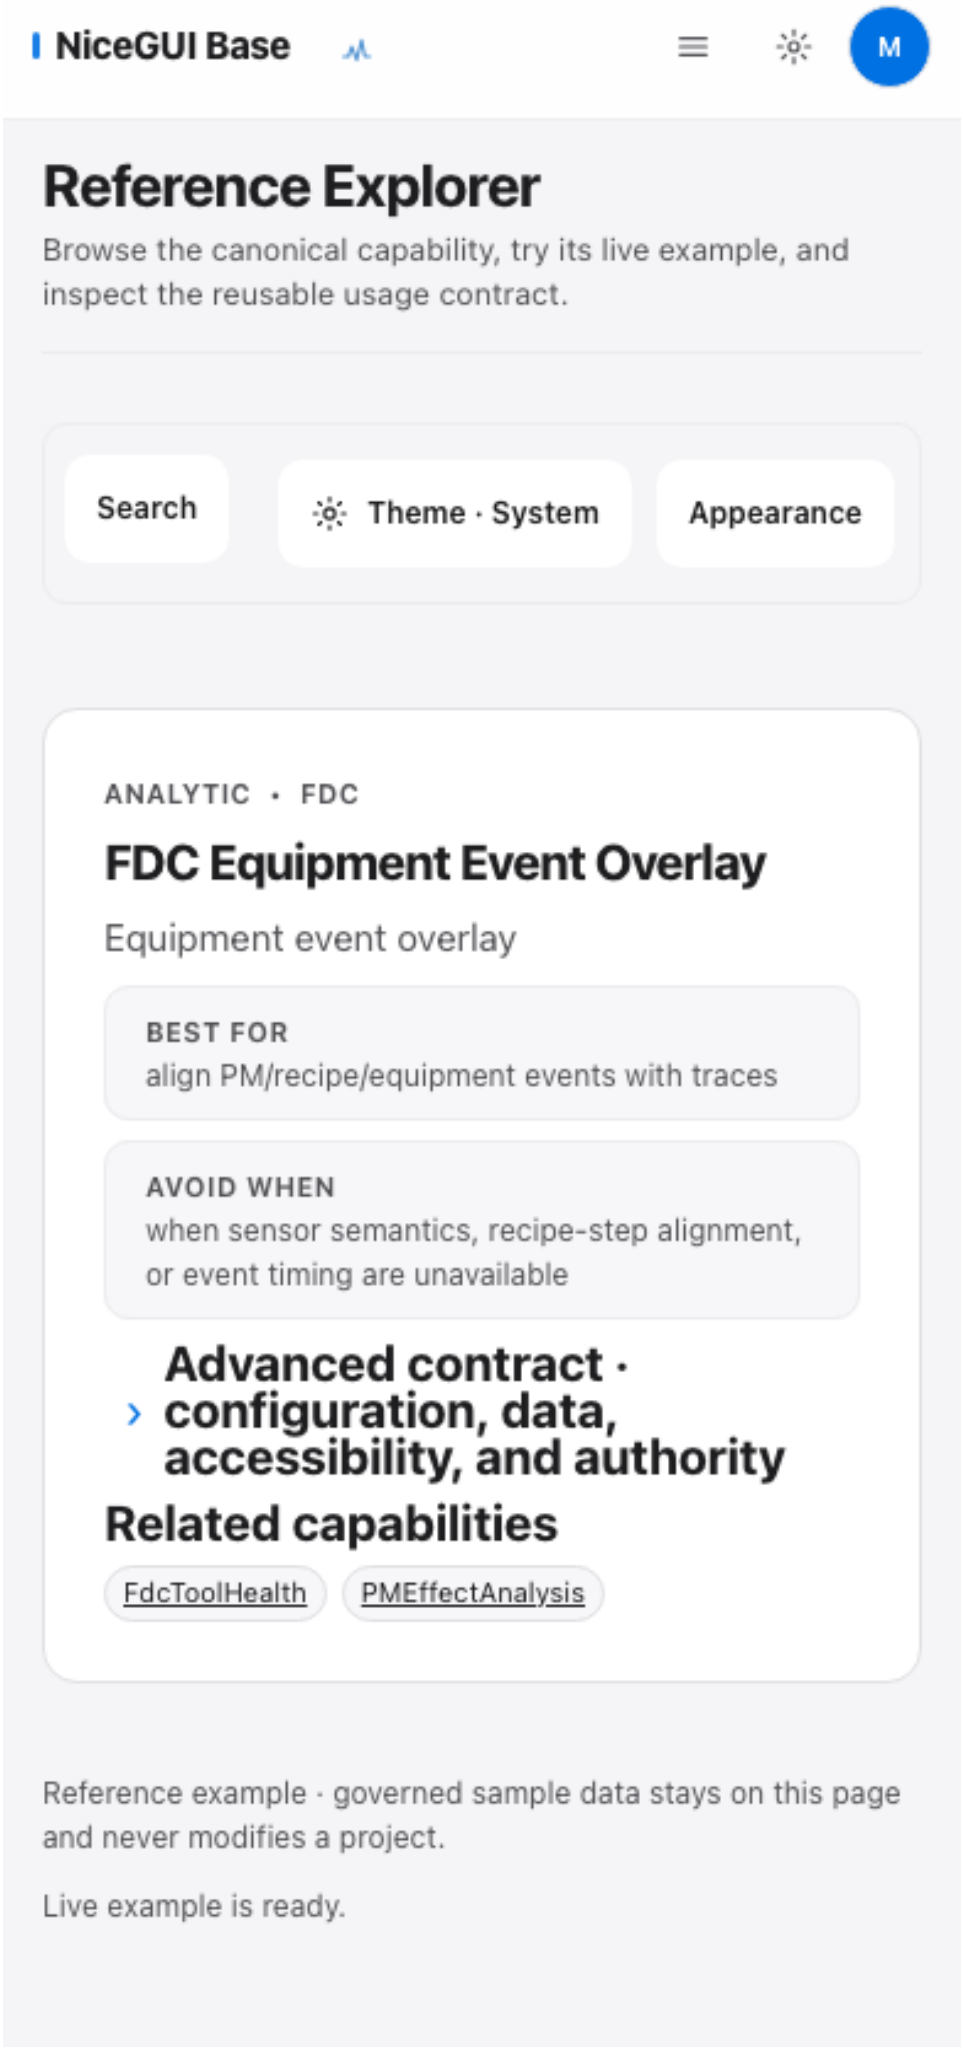
analytics-fdc_sensor_fingerprint

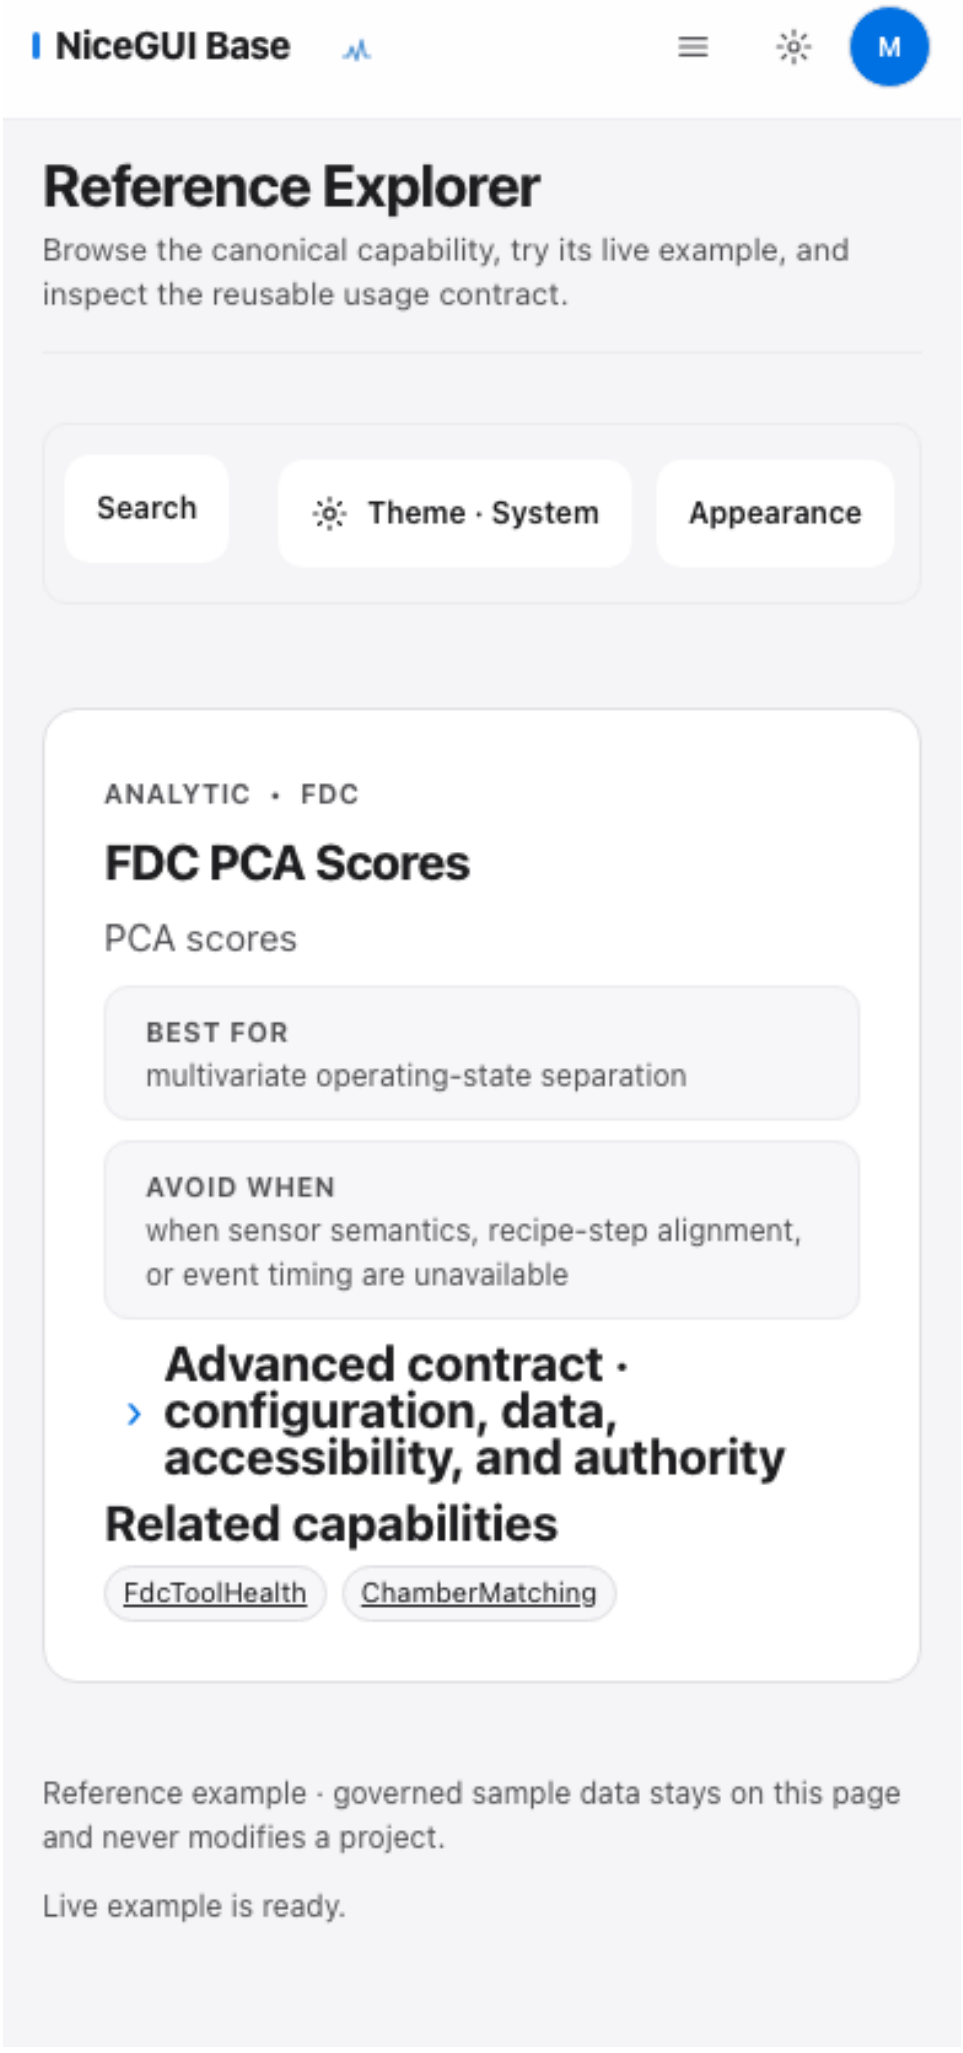
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

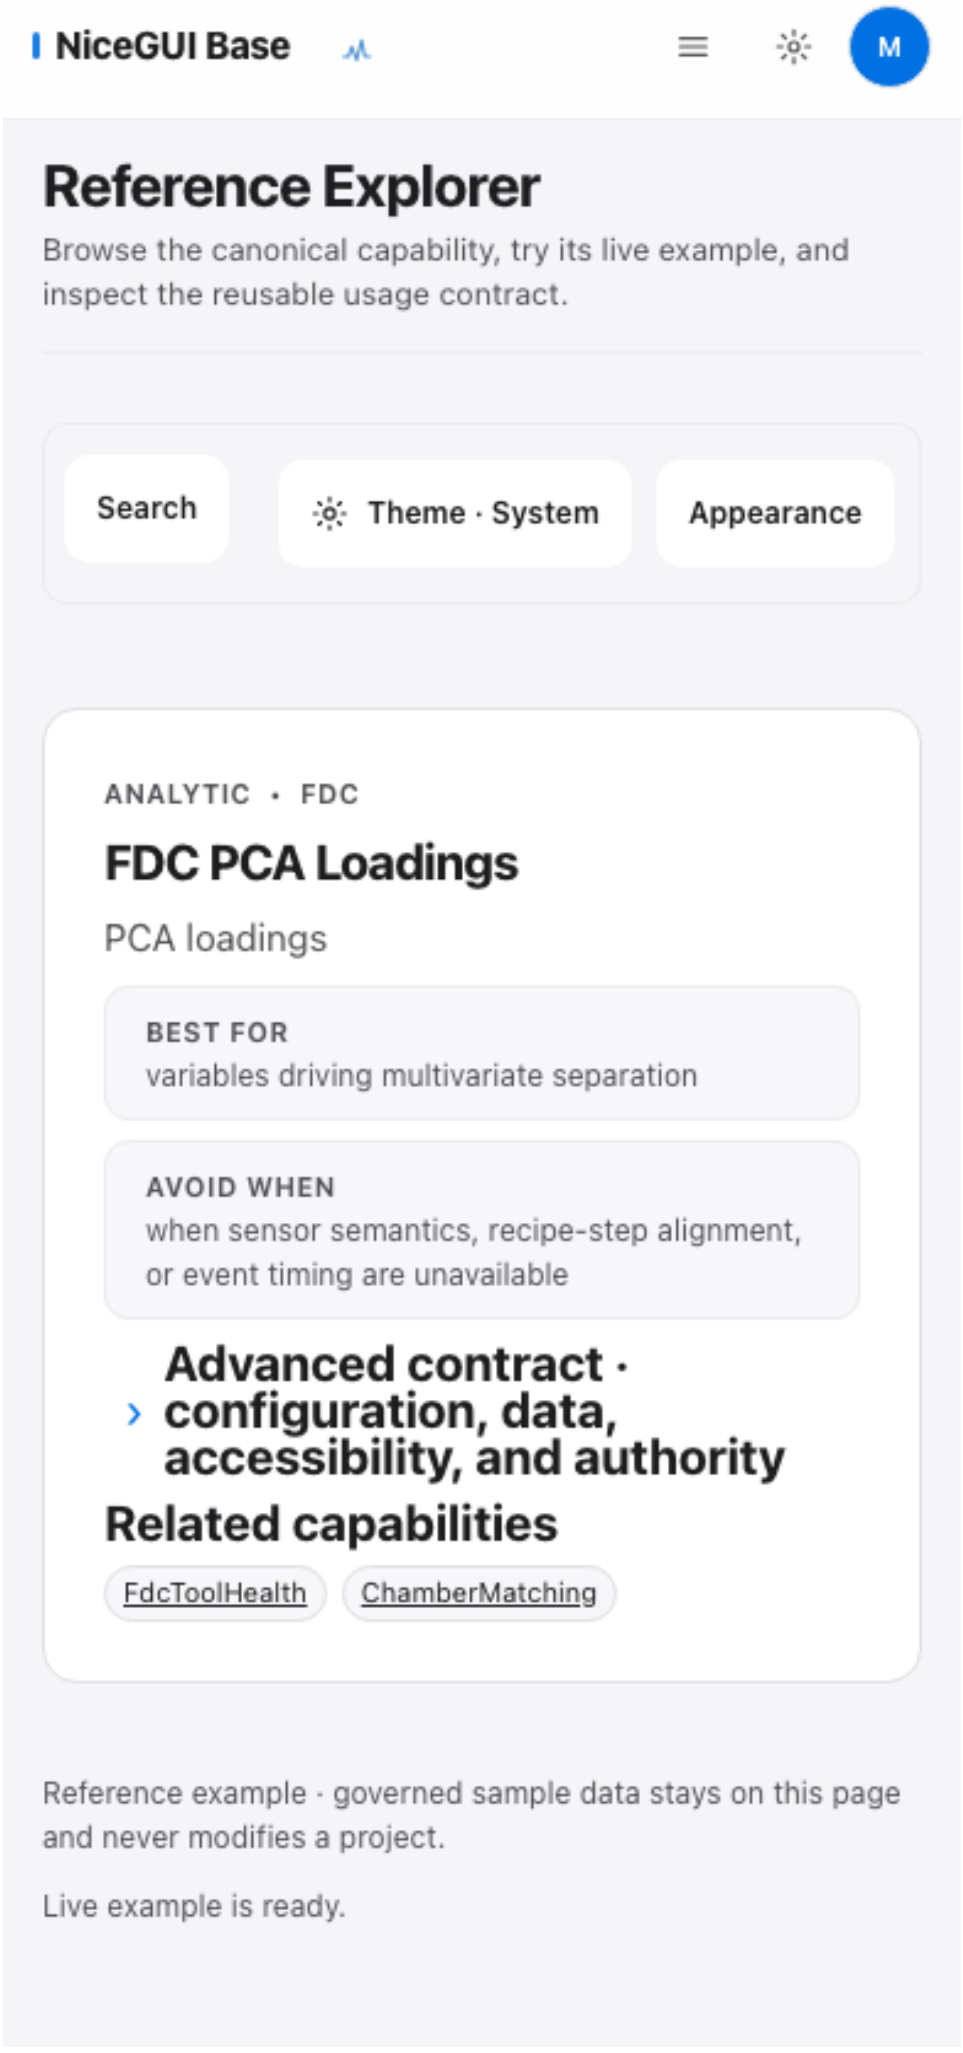
PNG SHA-256 5cb34e16b85fbd4e6d520dd2f5a1a9d22601530e6728b62bec7c035ec41381a6

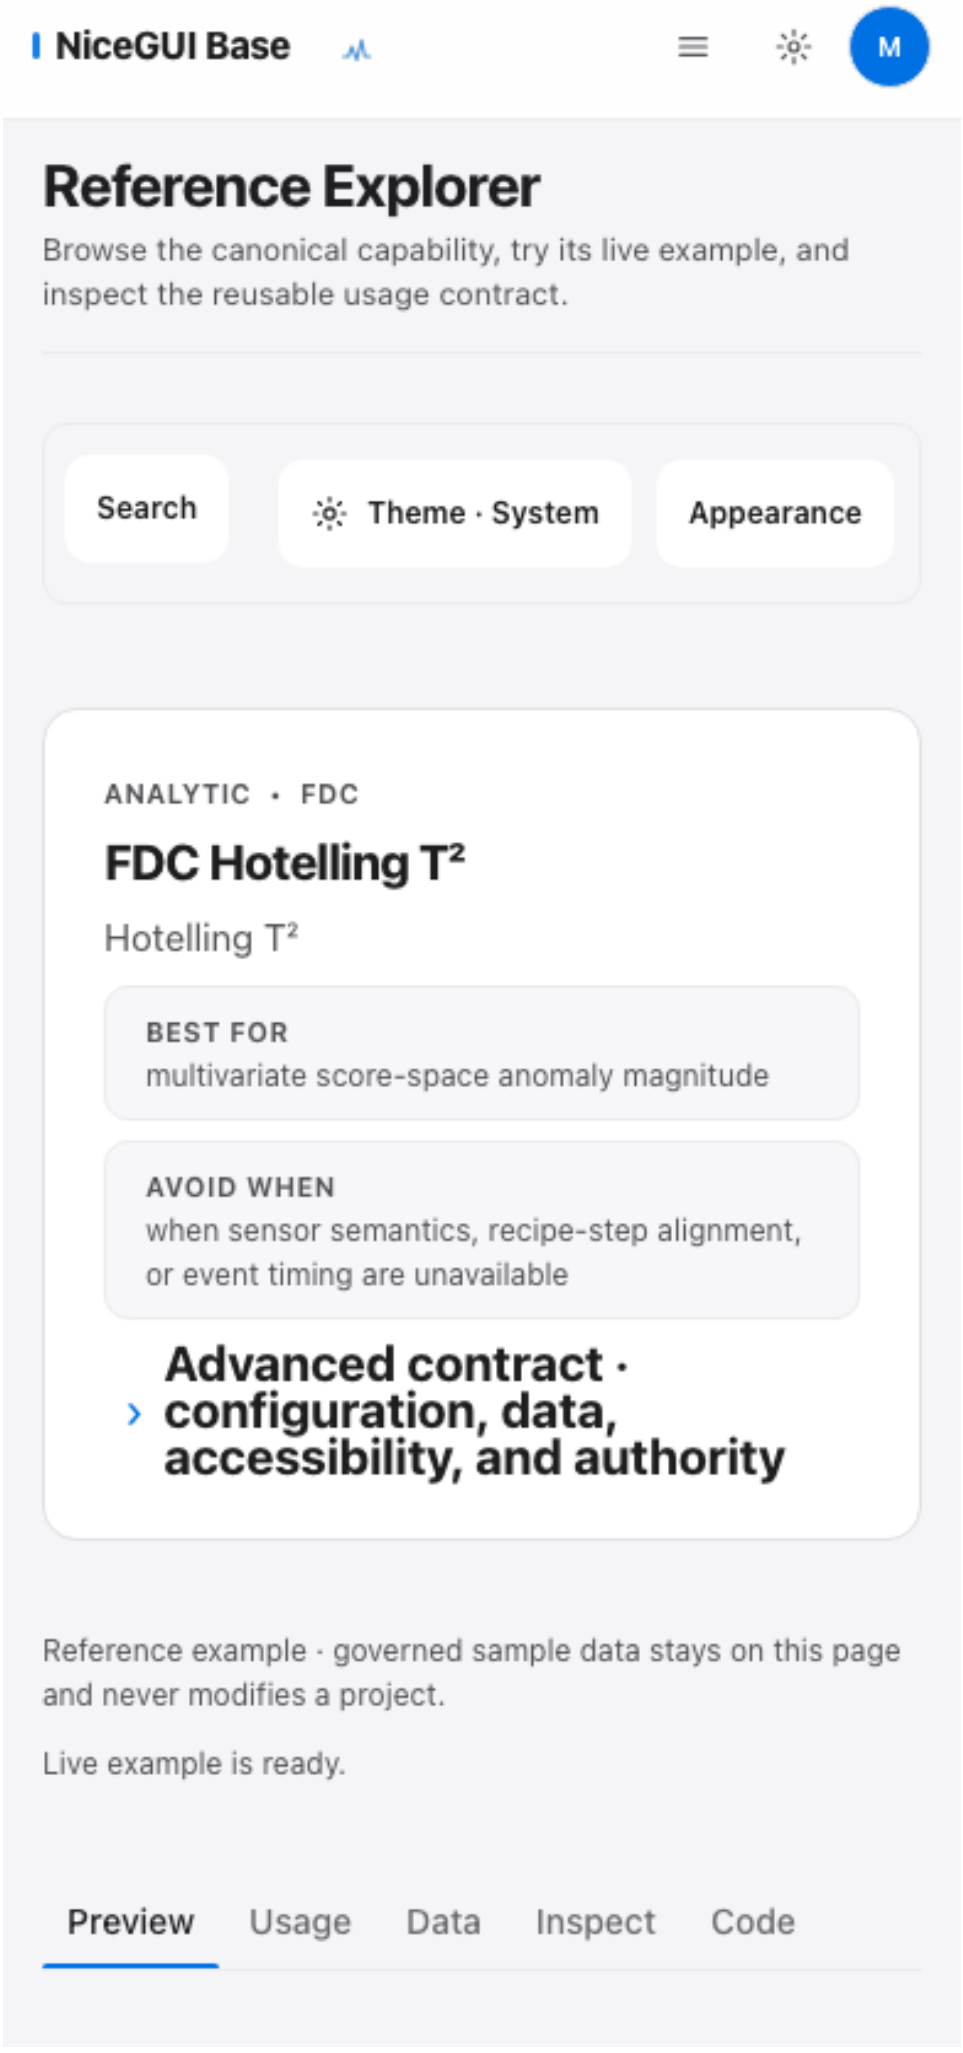


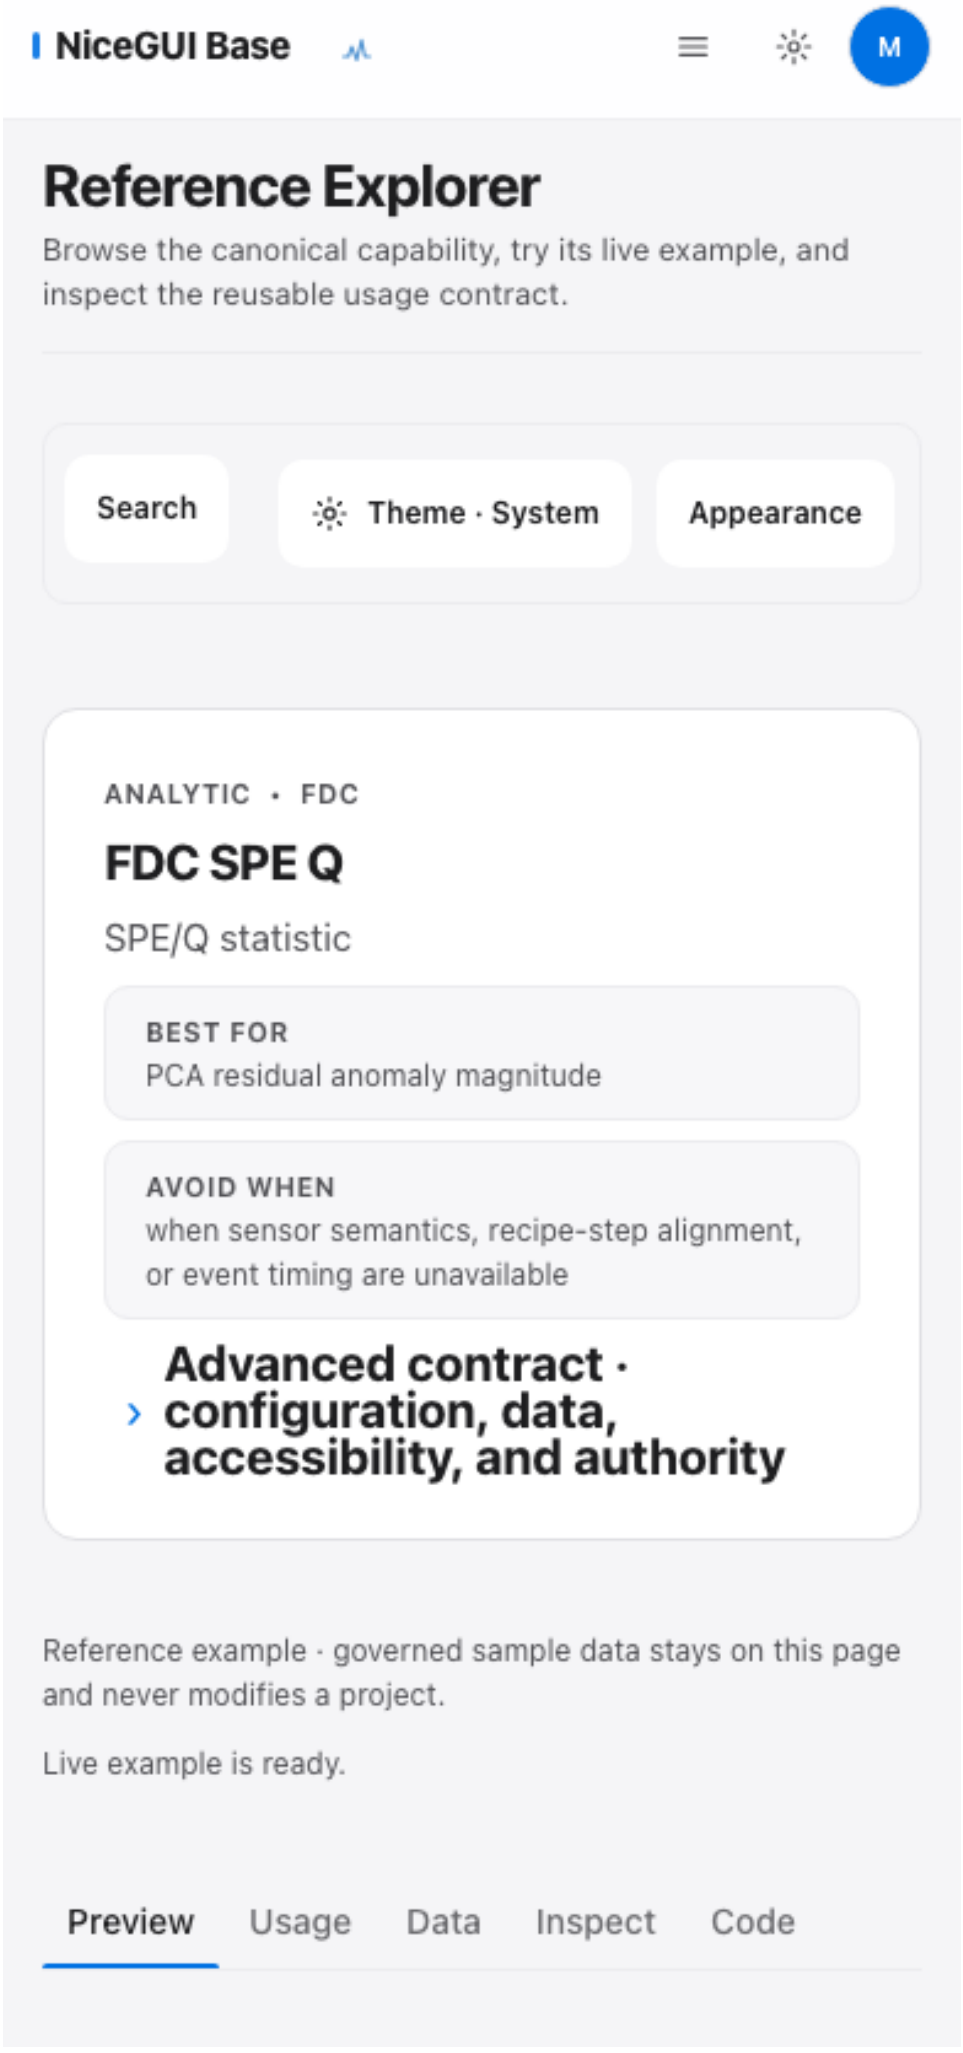

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Alarm Overlay
Alarm overlay
BEST FOR
align alarms with trace excursions
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

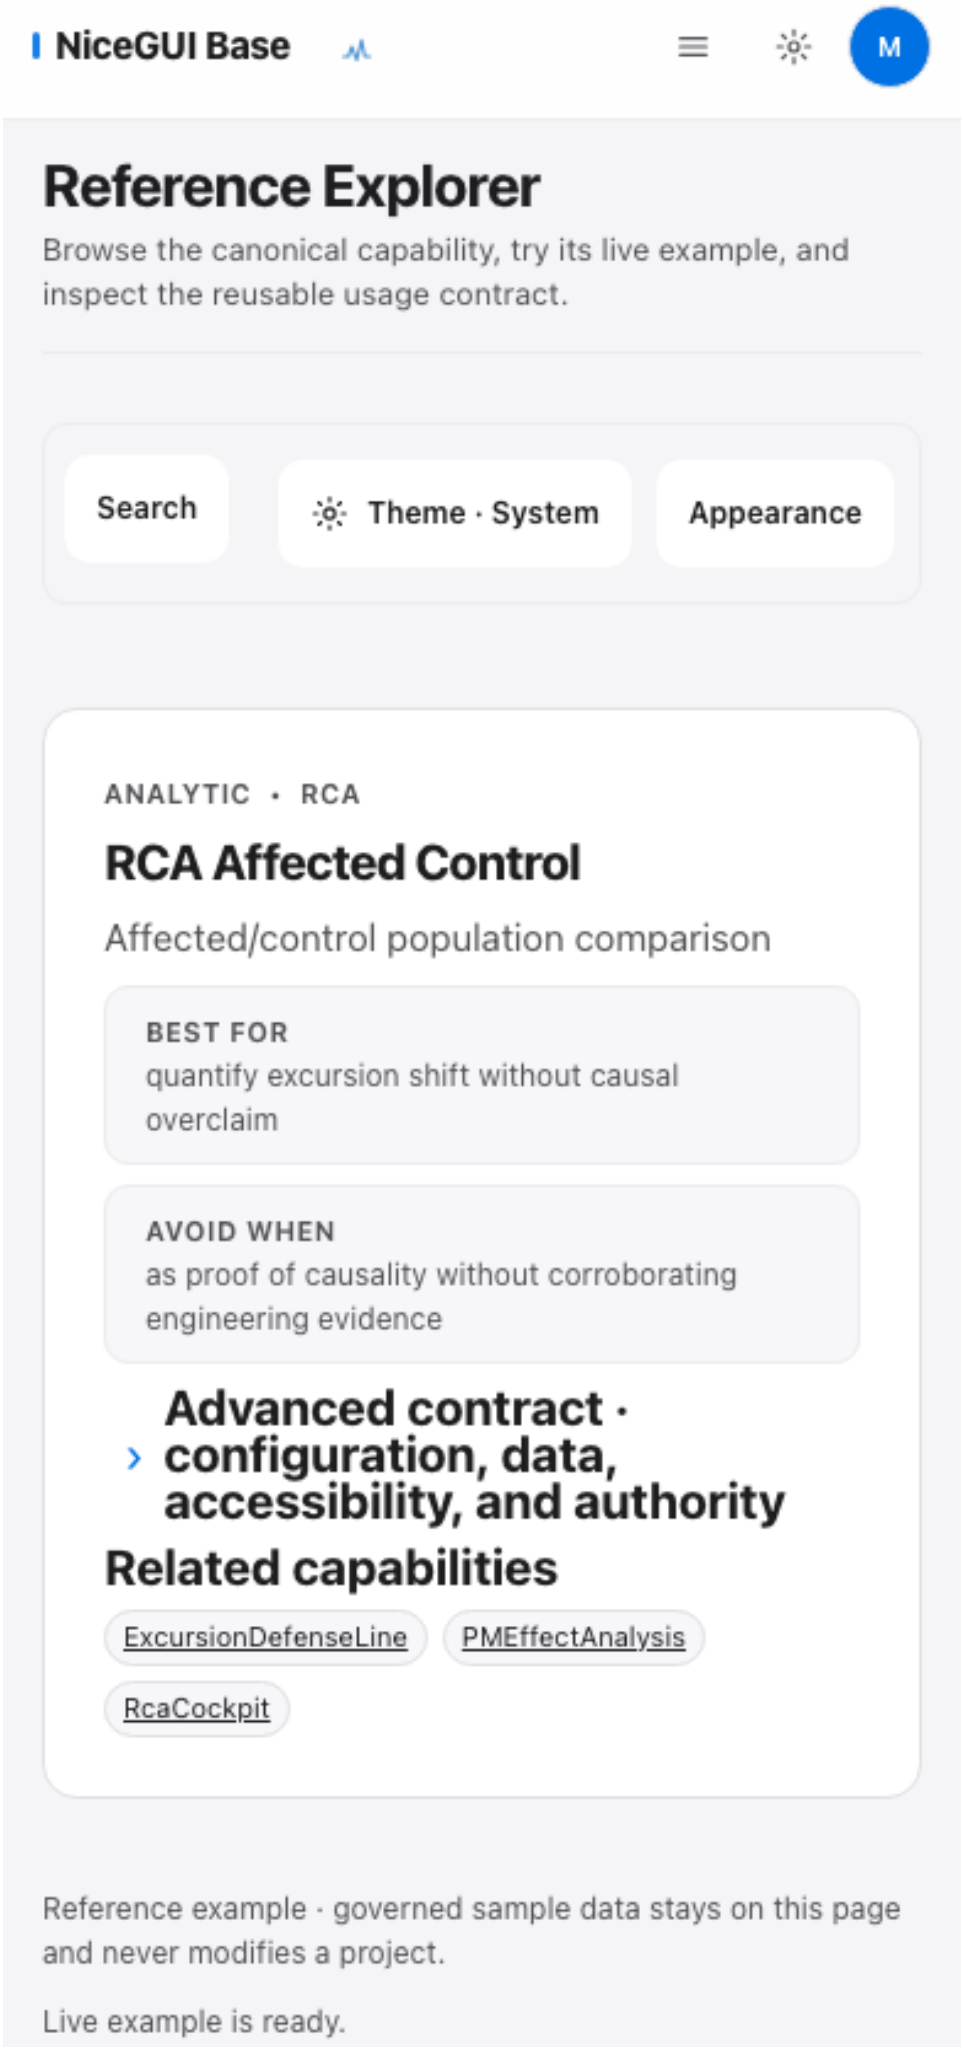

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Equipment Event Overlay
Equipment event overlay
BEST FOR
align PM/recipe/equipment events with traces
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FdcToolHealth
PMEffectAnalysis
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

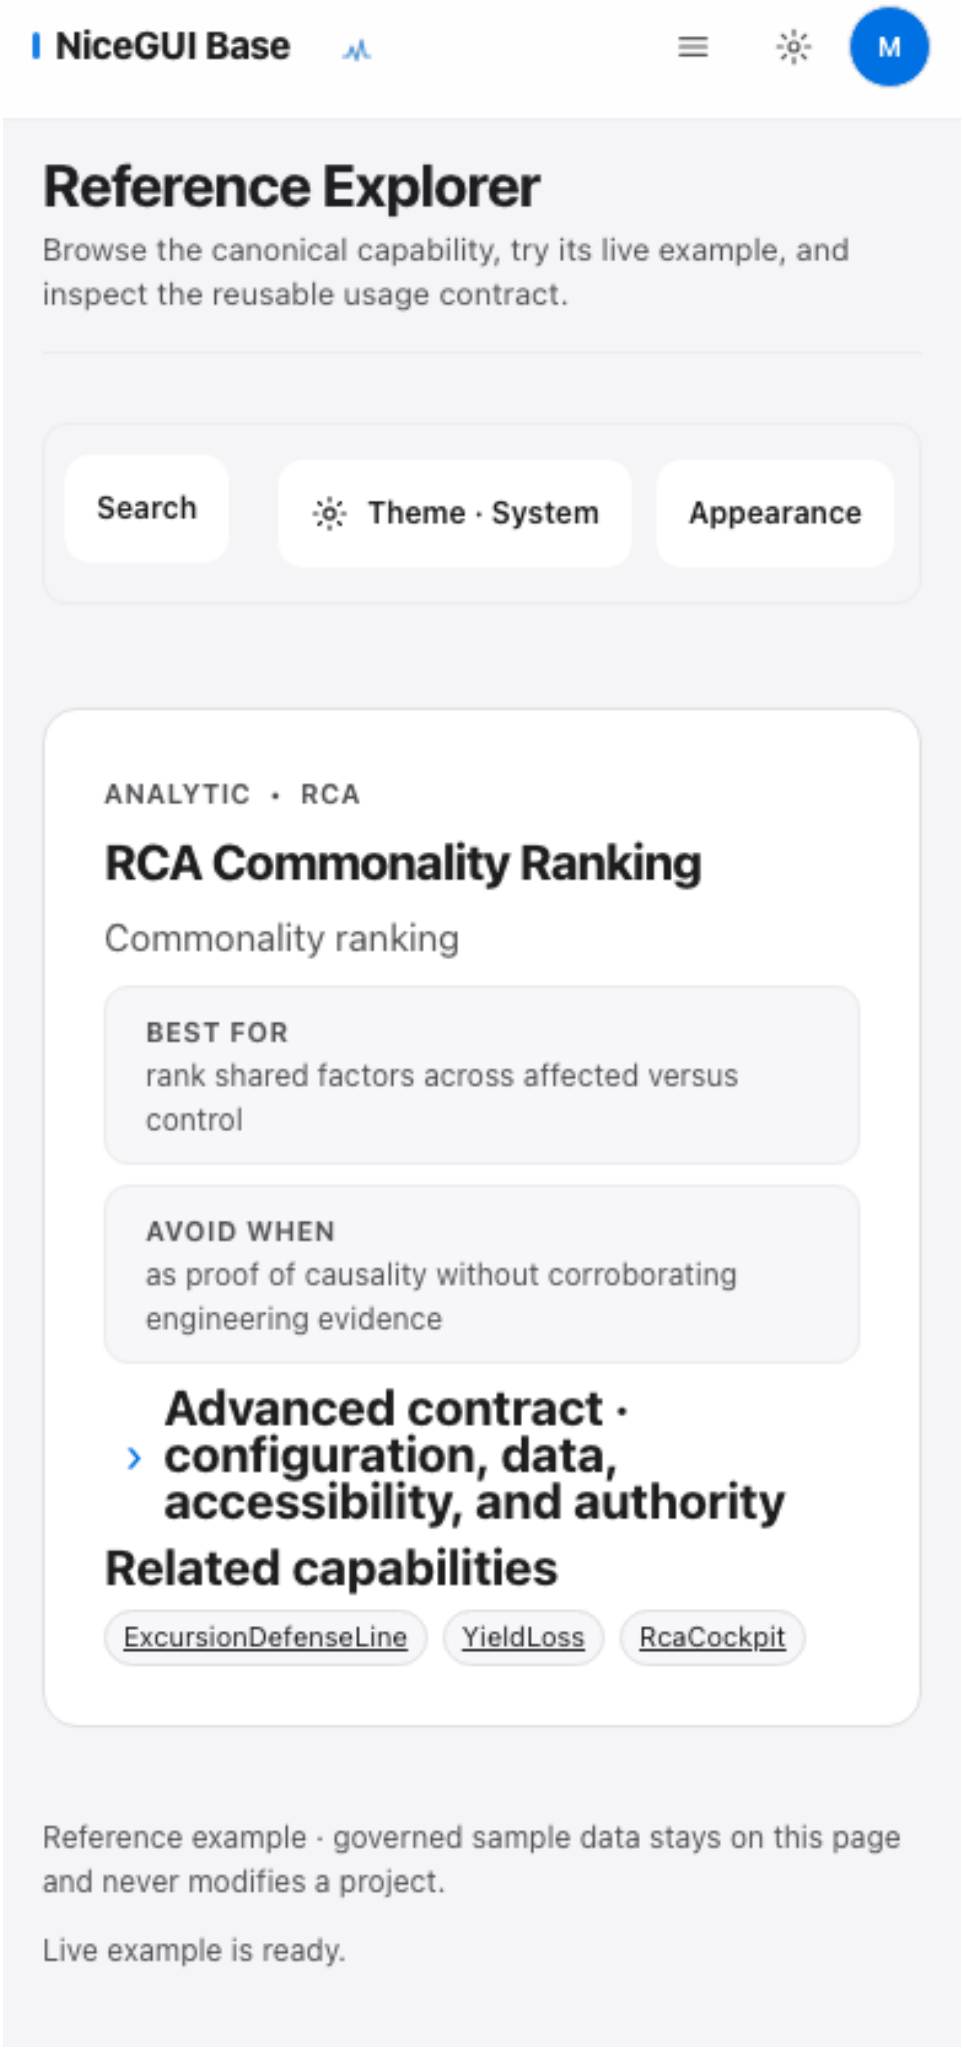

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC PCA Scores
PCA scores
BEST FOR
multivariate operating-state separation
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FdcToolHealth
ChamberMatching
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC PCA Loadings
PCA loadings
BEST FOR
variables driving multivariate separation
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FdcToolHealth
ChamberMatching
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC Hotelling T²
Hotelling T²
BEST FOR
multivariate score-space anomaly magnitude
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • FDC
FDC SPE Q
SPE/Q statistic
BEST FOR
PCA residual anomaly magnitude
AVOID WHEN
when sensor semantics, recipe-step alignment, or event timing are unavailable
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

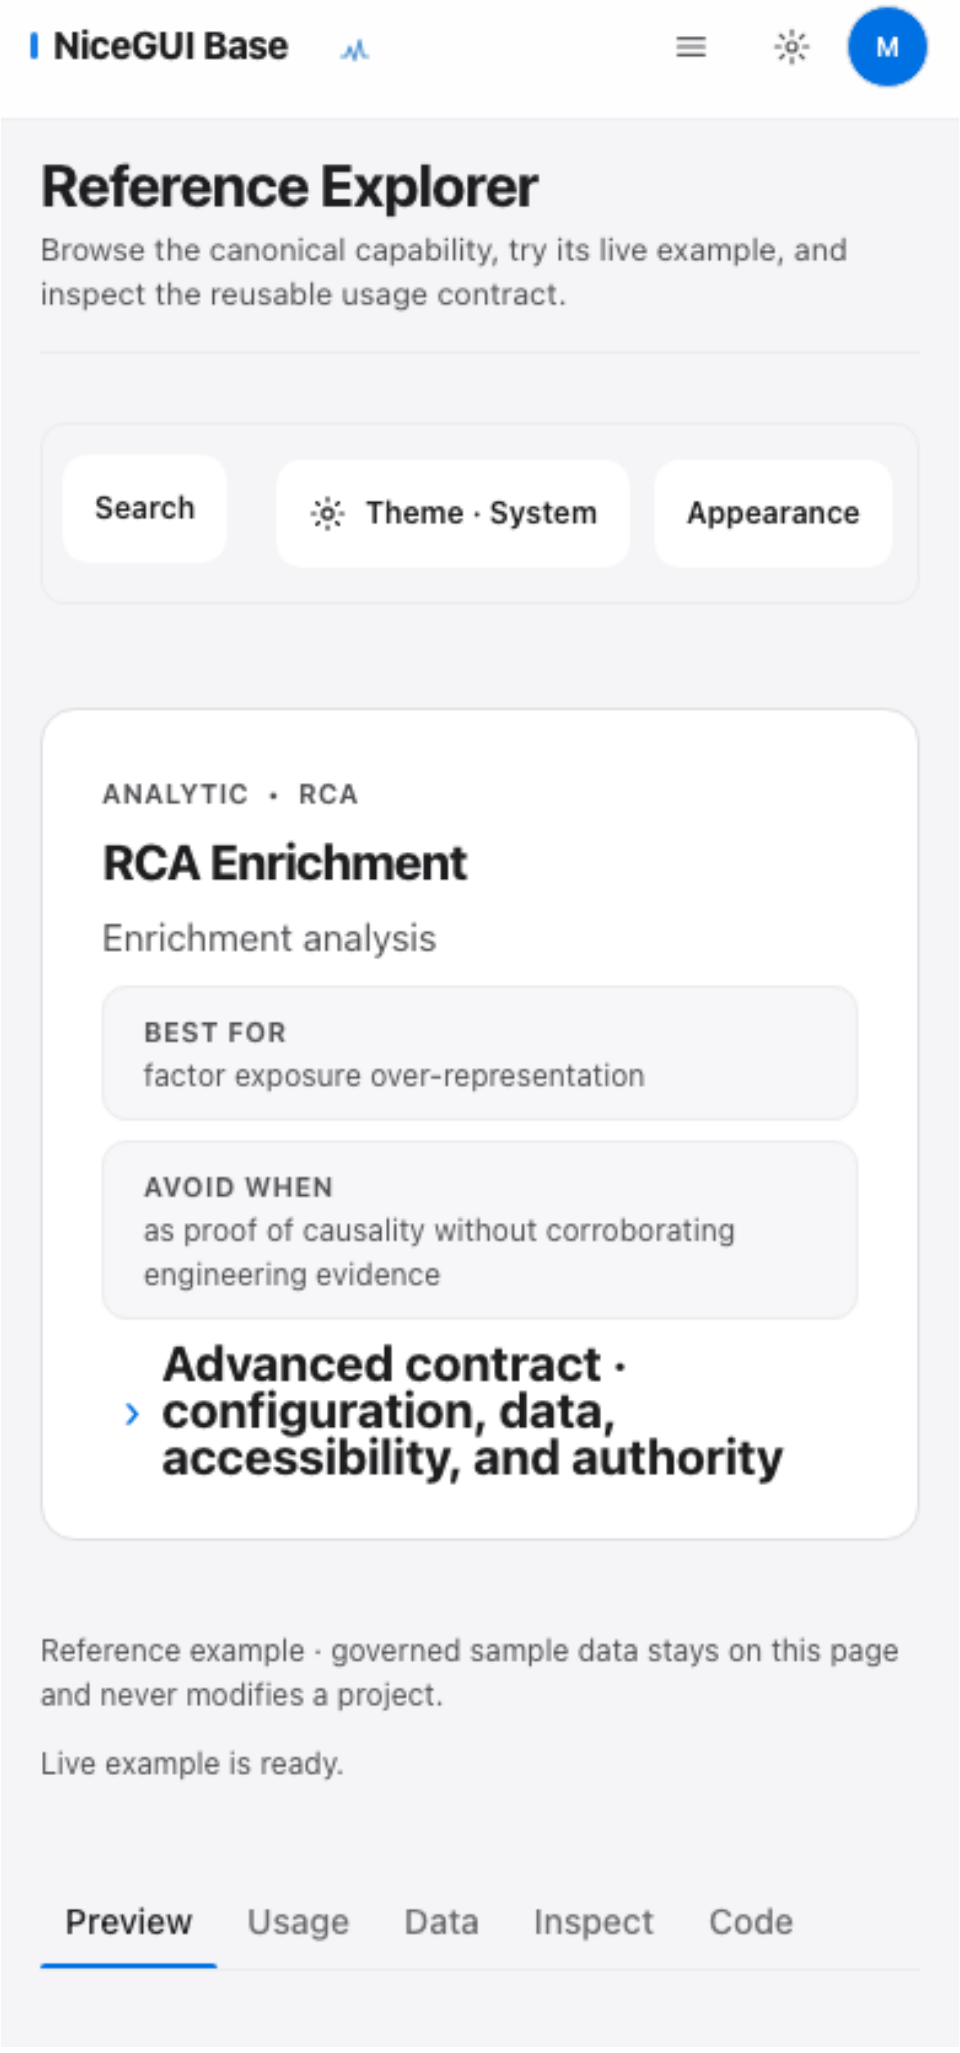

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Affected Control
Affected/control population comparison
BEST FOR
quantify excursion shift without causal overclaim
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ExcursionDefenseLine
PMEffectAnalysis
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

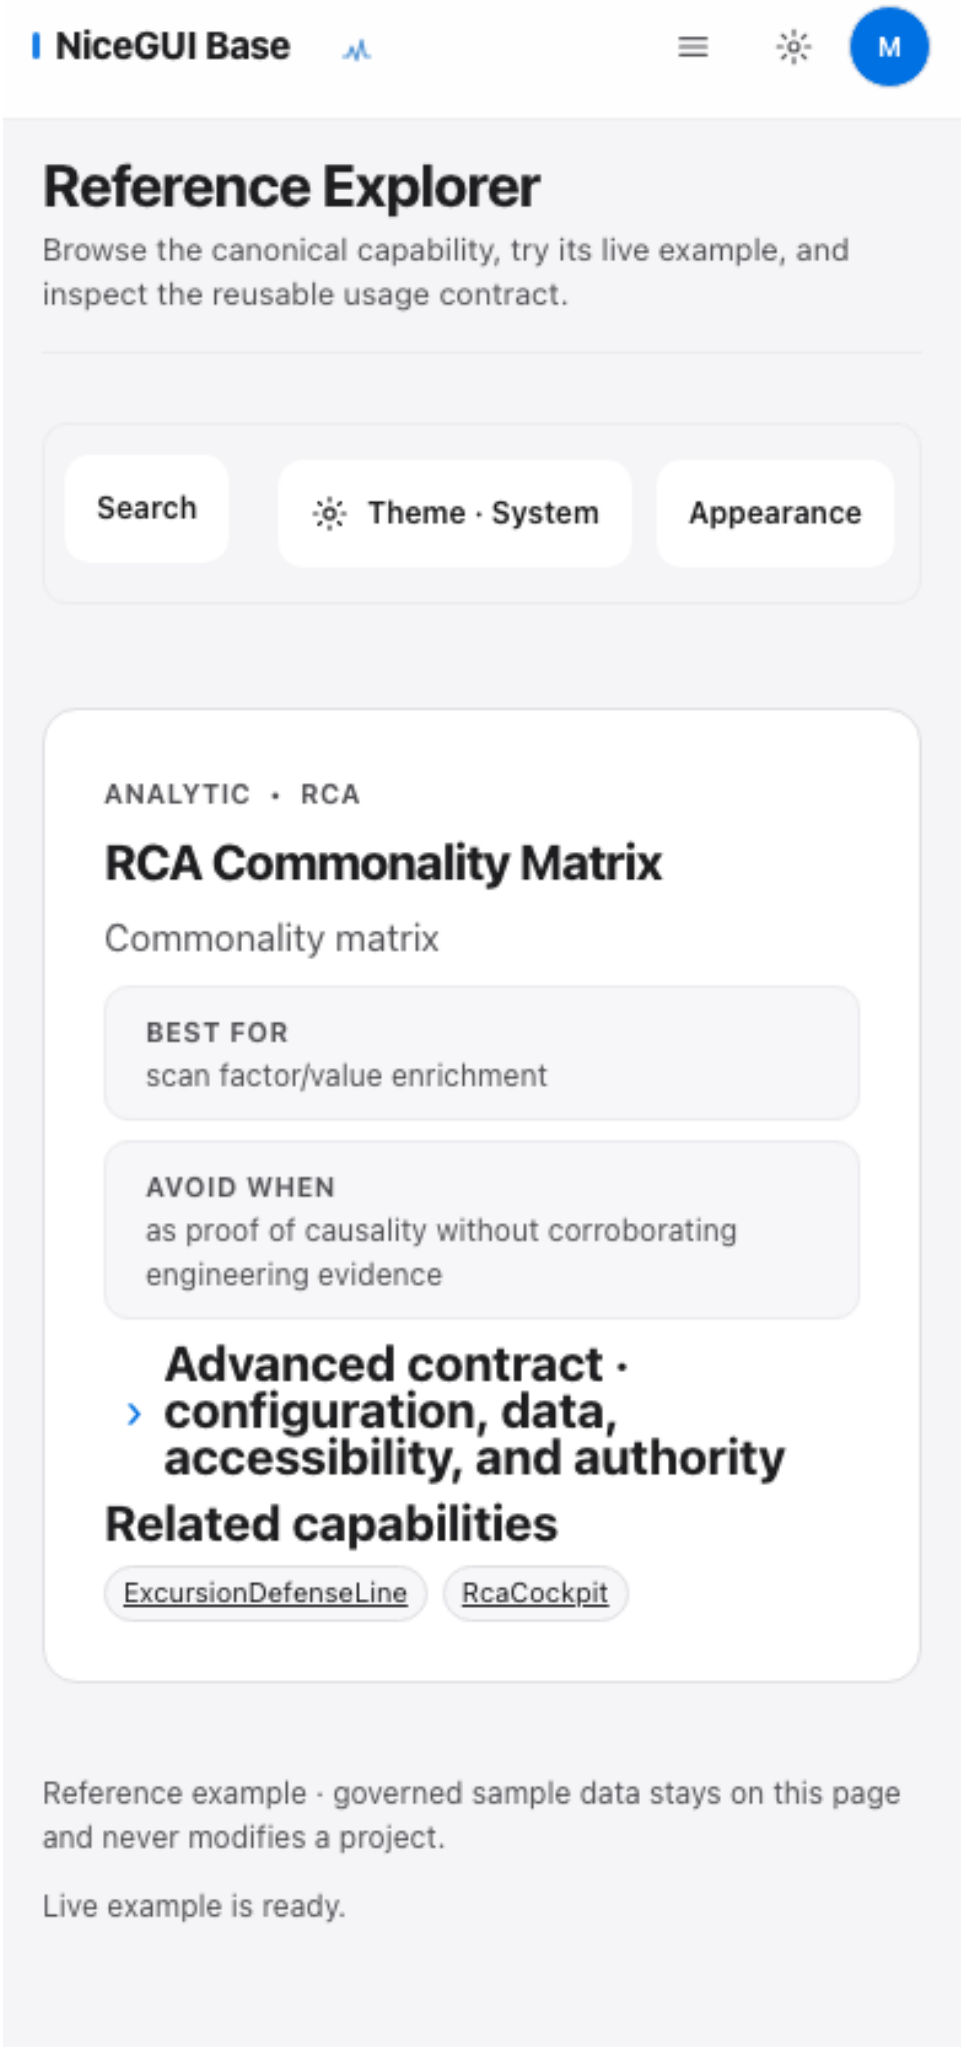

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Commonality Ranking
Commonality ranking
BEST FOR
rank shared factors across affected versus control
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ExcursionDefenseLine
YieldLoss
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

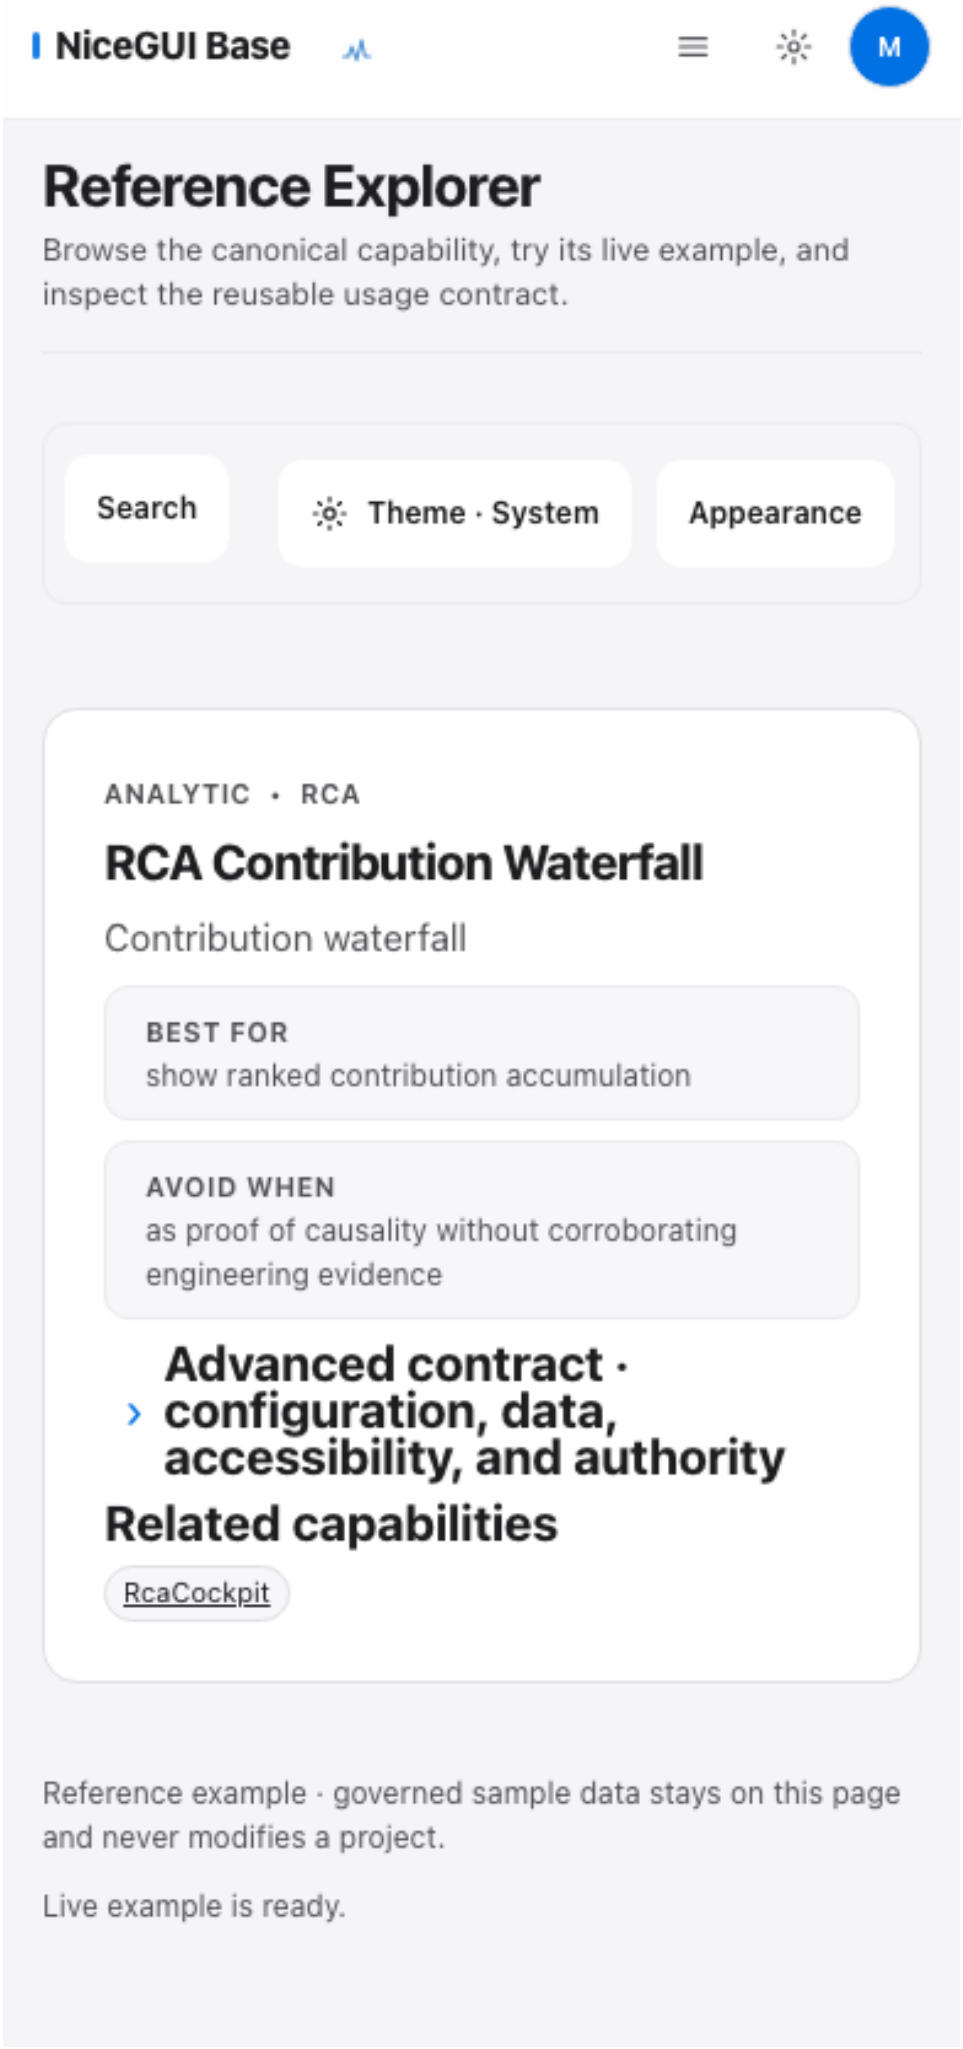
analytics-rca_enrichment

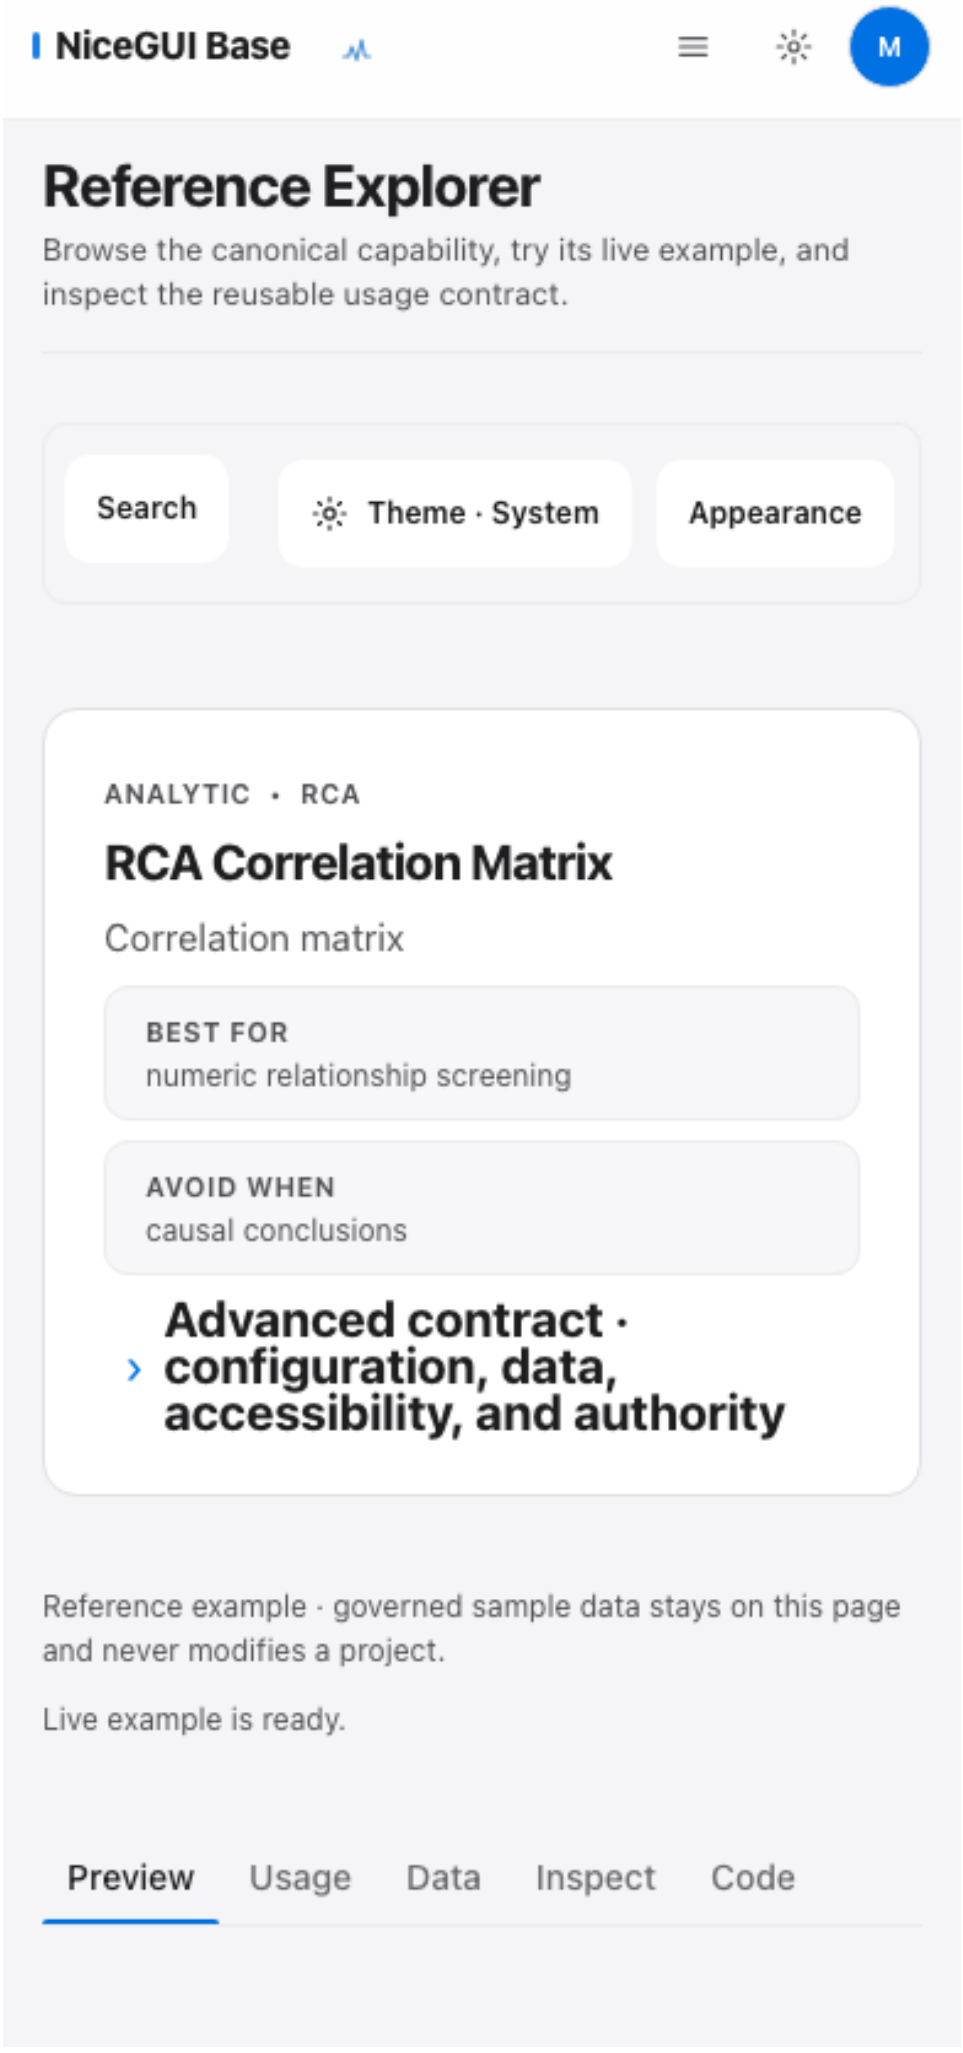
Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

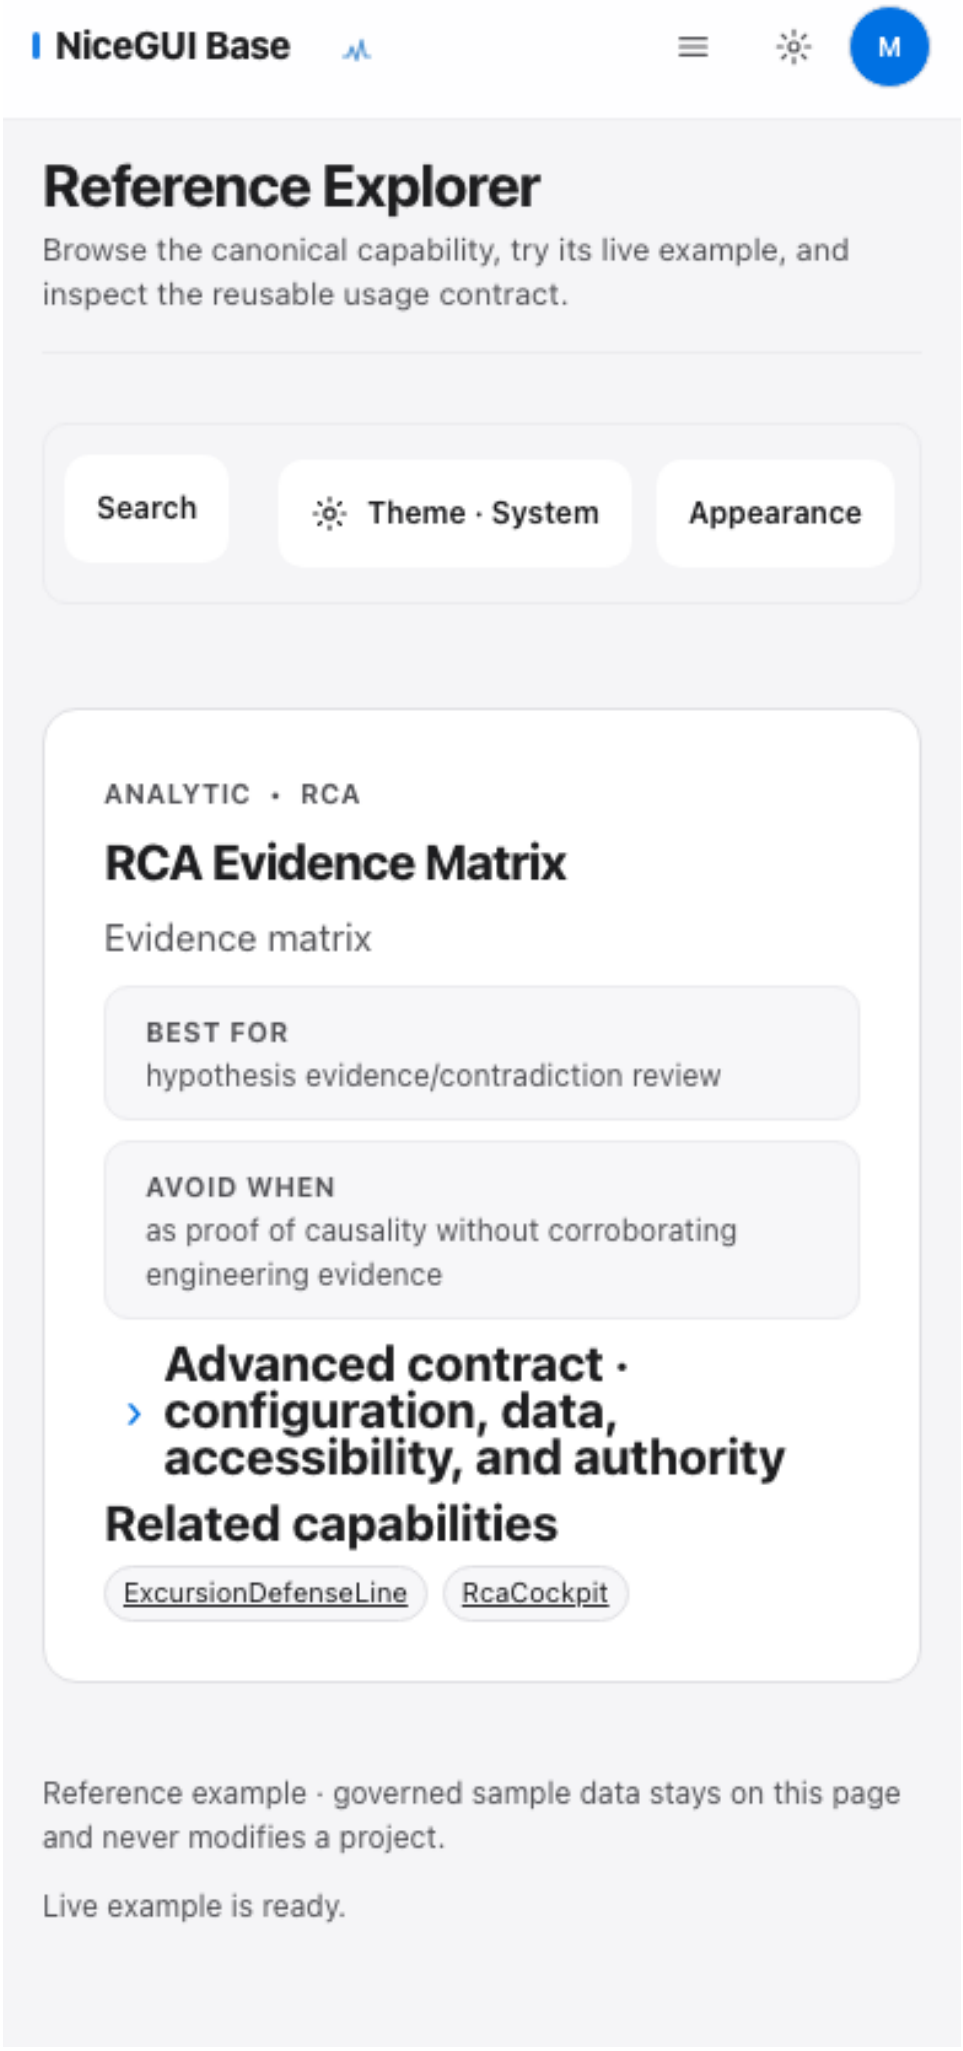
PNG SHA-256 c706824b77311df2b533de329a89caa4ad48f5f6c6b7324c0ad0d2e672d8c4bd

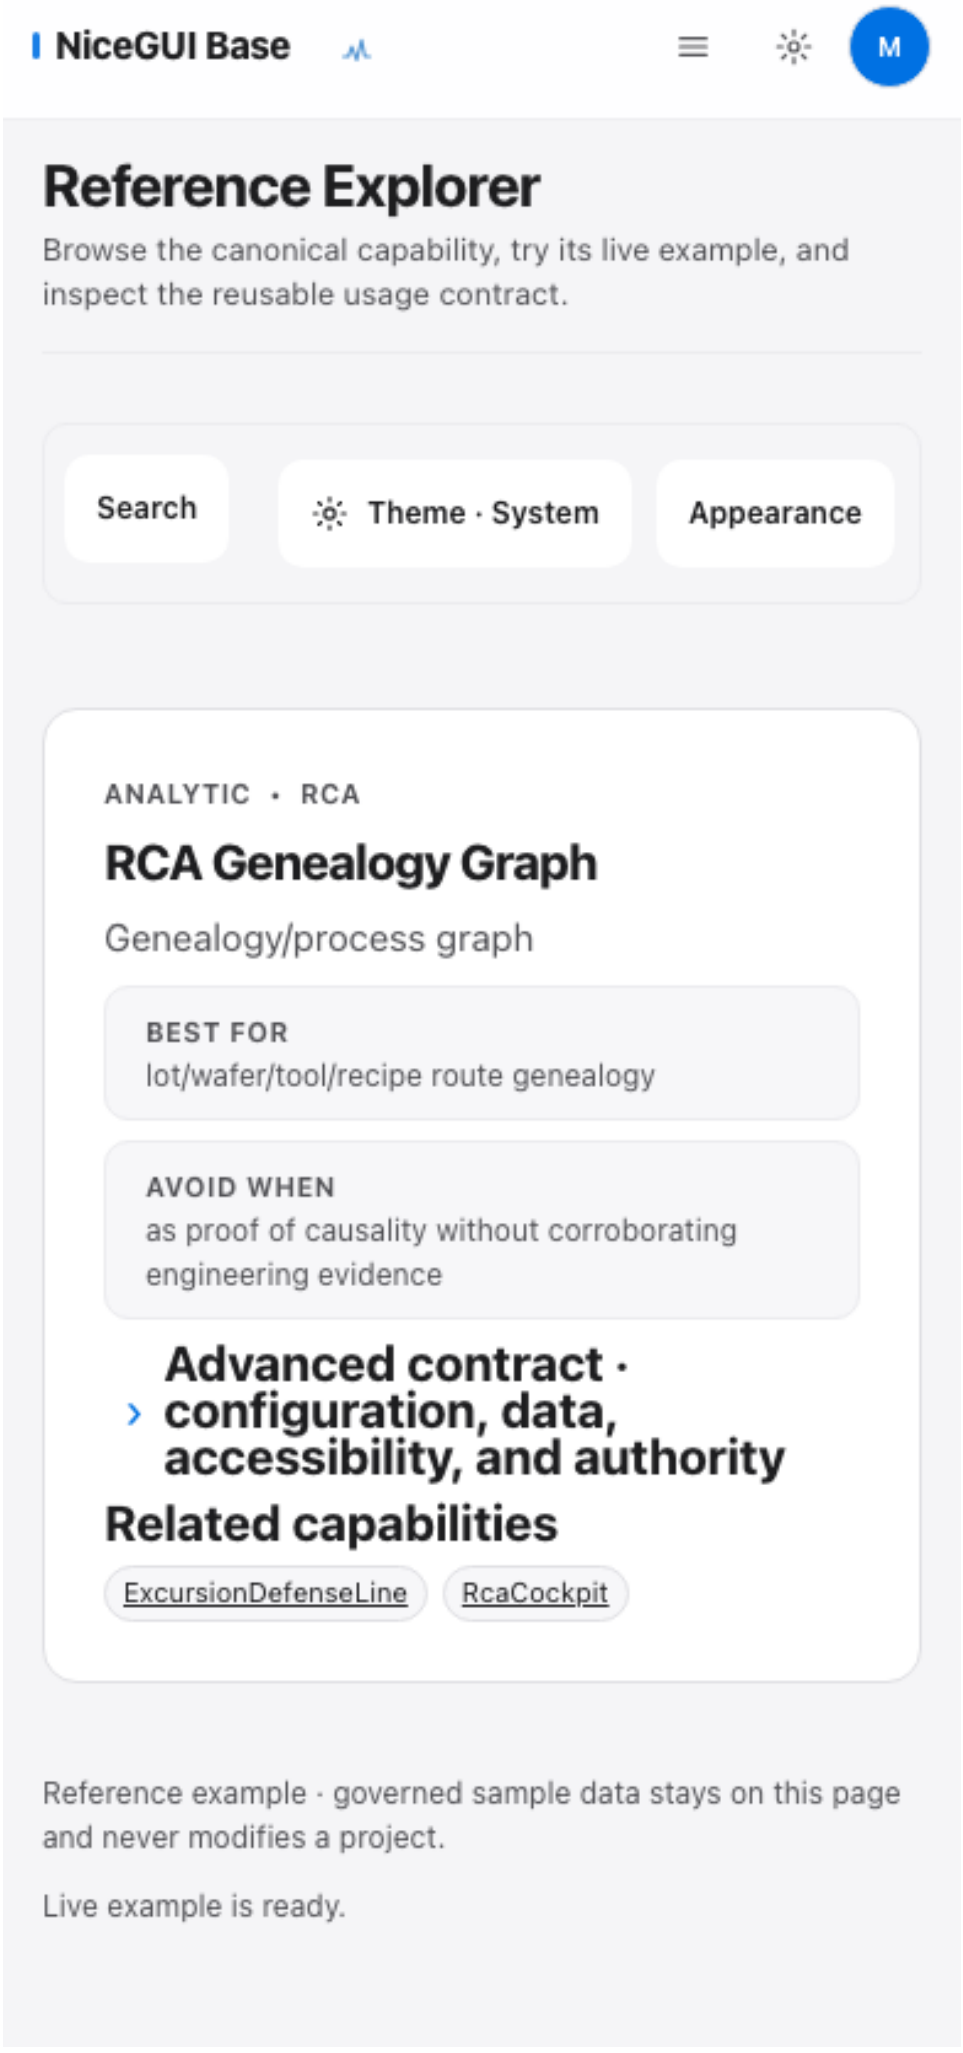


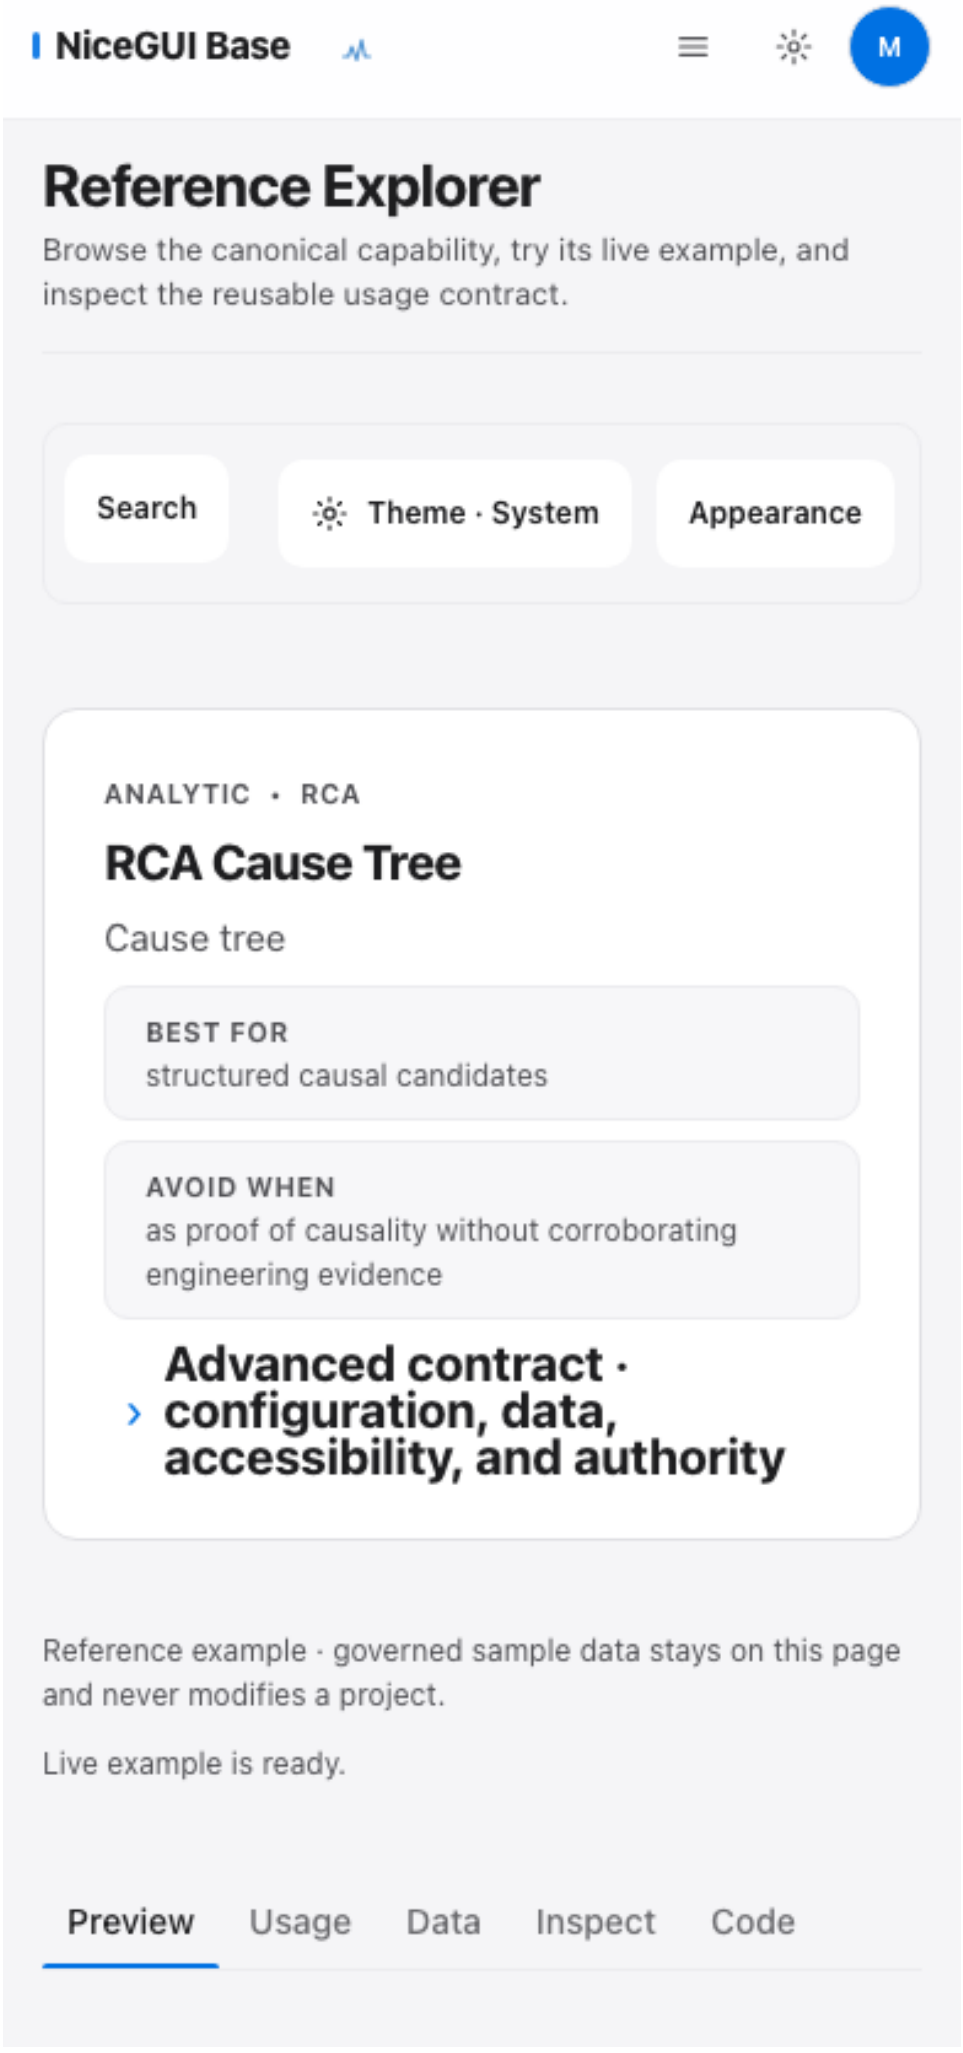

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Commonality Matrix
Commonality matrix
BEST FOR
scan factor/value enrichment
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ExcursionDefenseLine
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

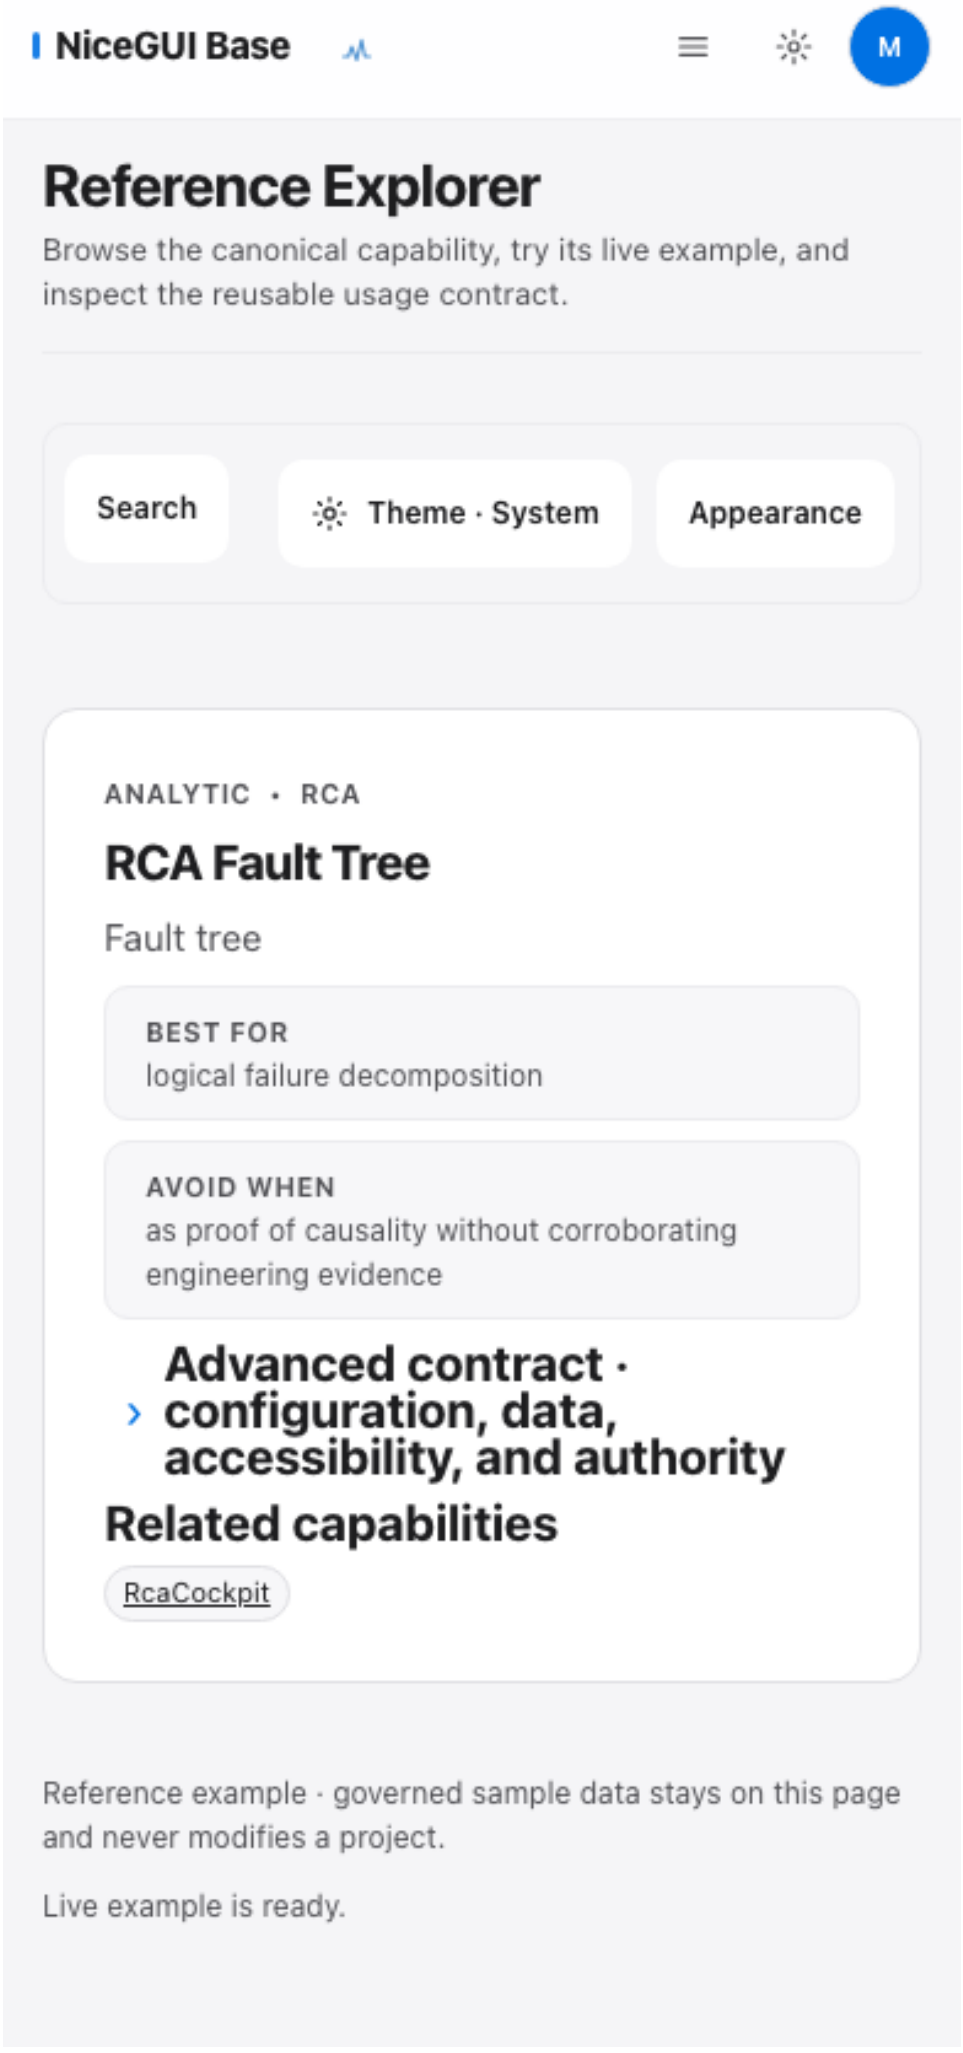

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Contribution Waterfall
Contribution waterfall
BEST FOR
show ranked contribution accumulation
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

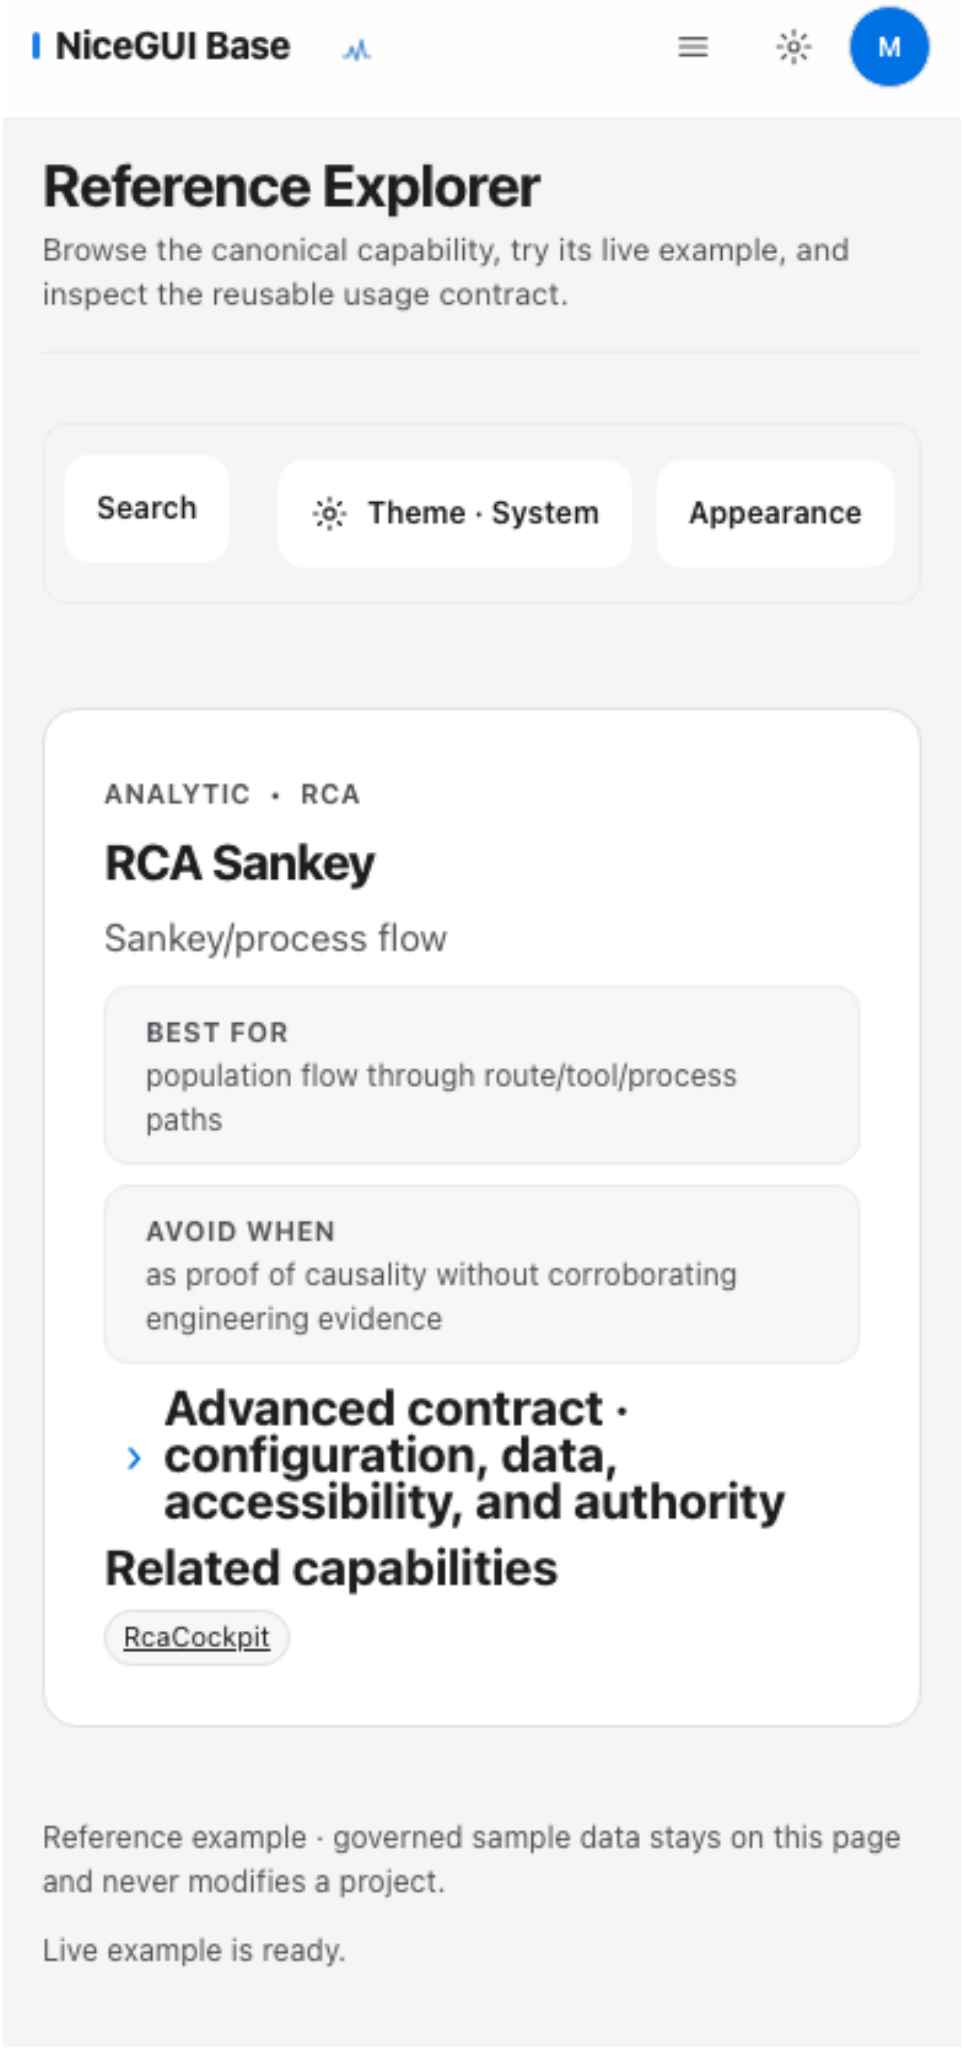

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Correlation Matrix
Correlation matrix
BEST FOR
numeric relationship screening
AVOID WHEN
causal conclusions
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

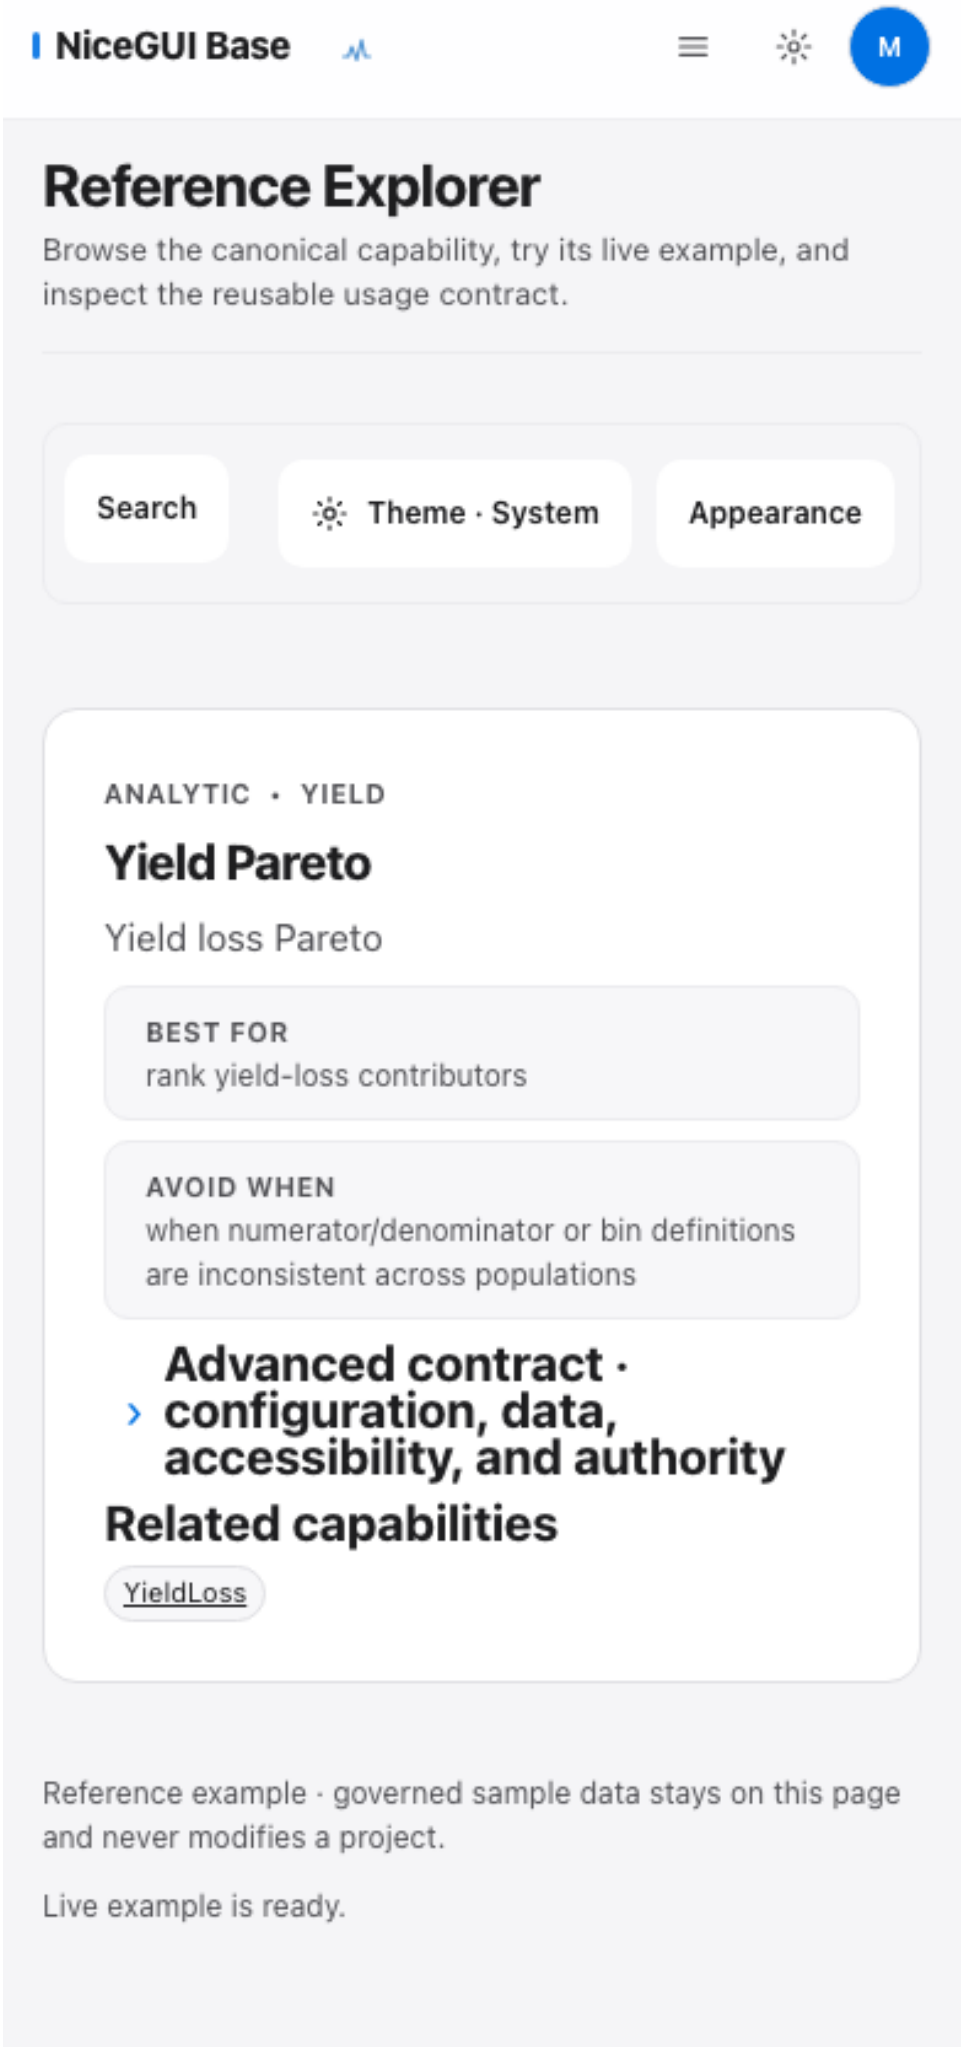

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Evidence Matrix
Evidence matrix
BEST FOR
hypothesis evidence/contradiction review
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ExcursionDefenseLine
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

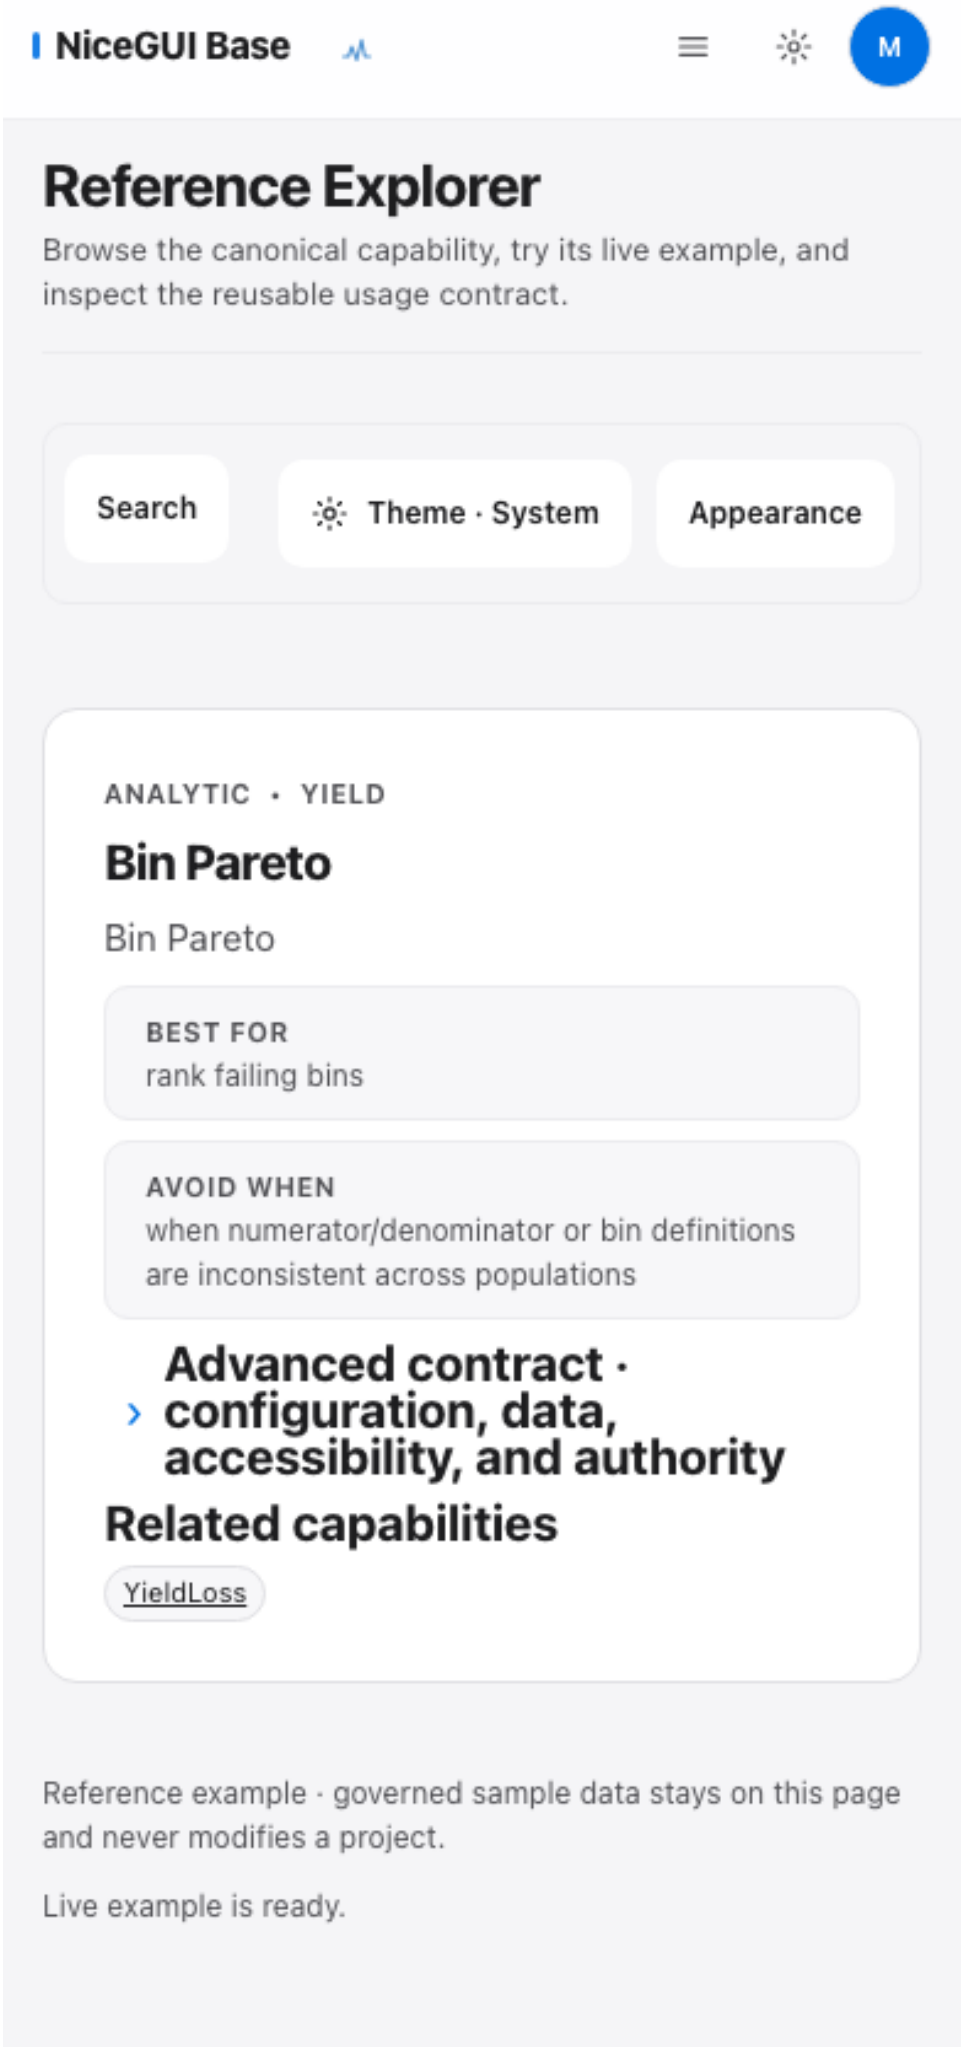

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Genealogy Graph
Genealogy/process graph
BEST FOR
lot/wafer/tool/recipe route genealogy
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
ExcursionDefenseLine
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

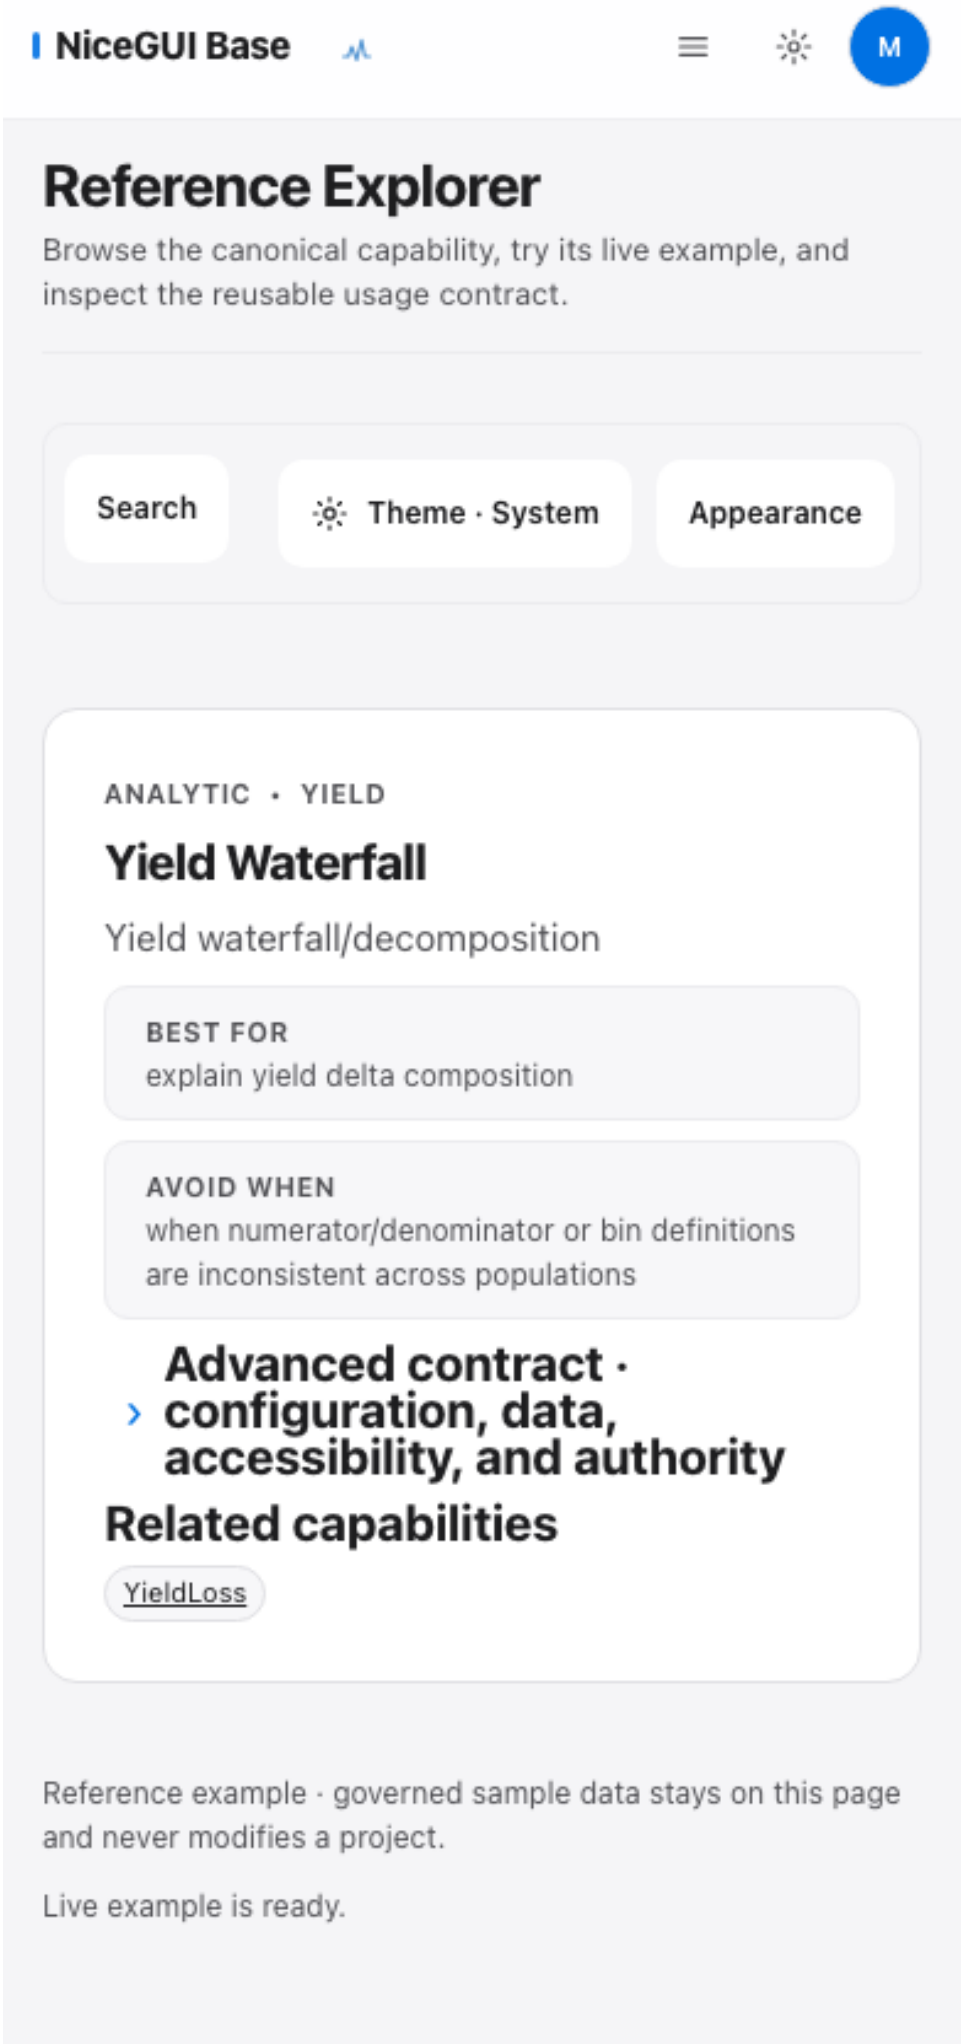

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Cause Tree
Cause tree
BEST FOR
structured causal candidates
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

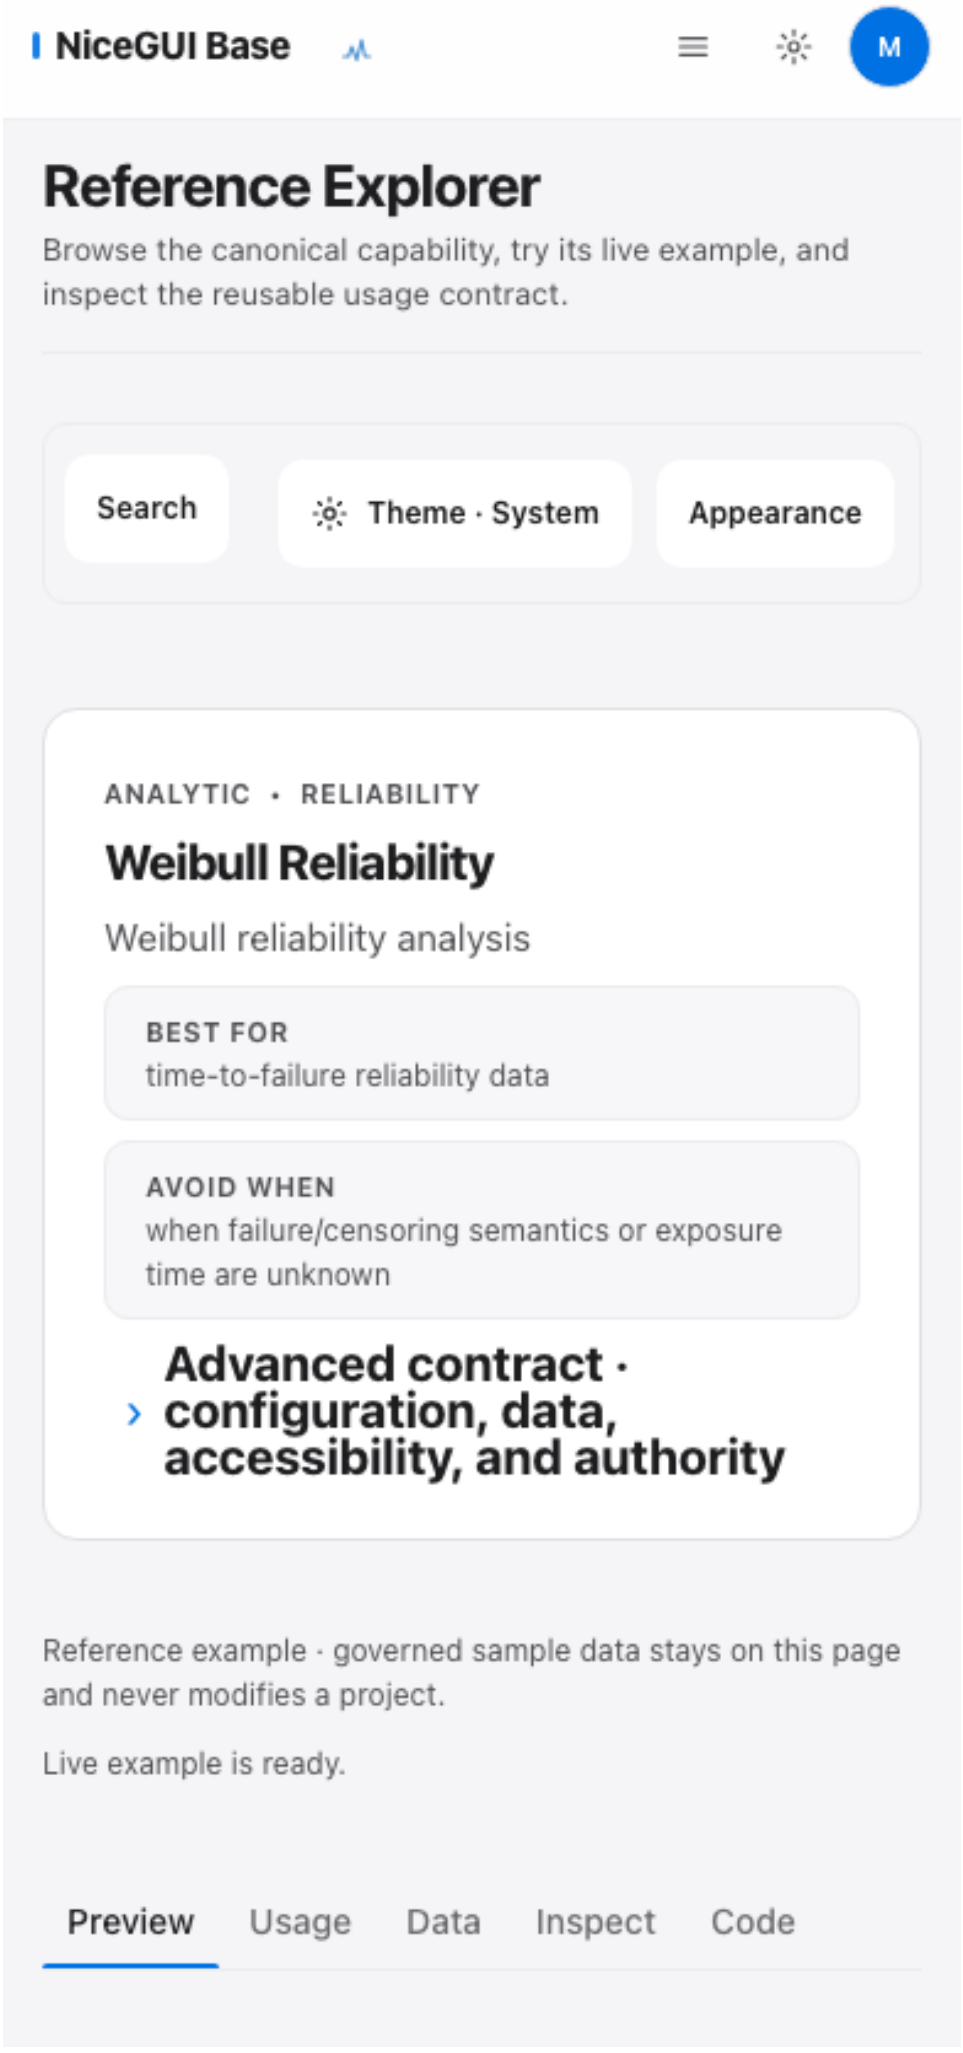

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Fault Tree
Fault tree
BEST FOR
logical failure decomposition
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

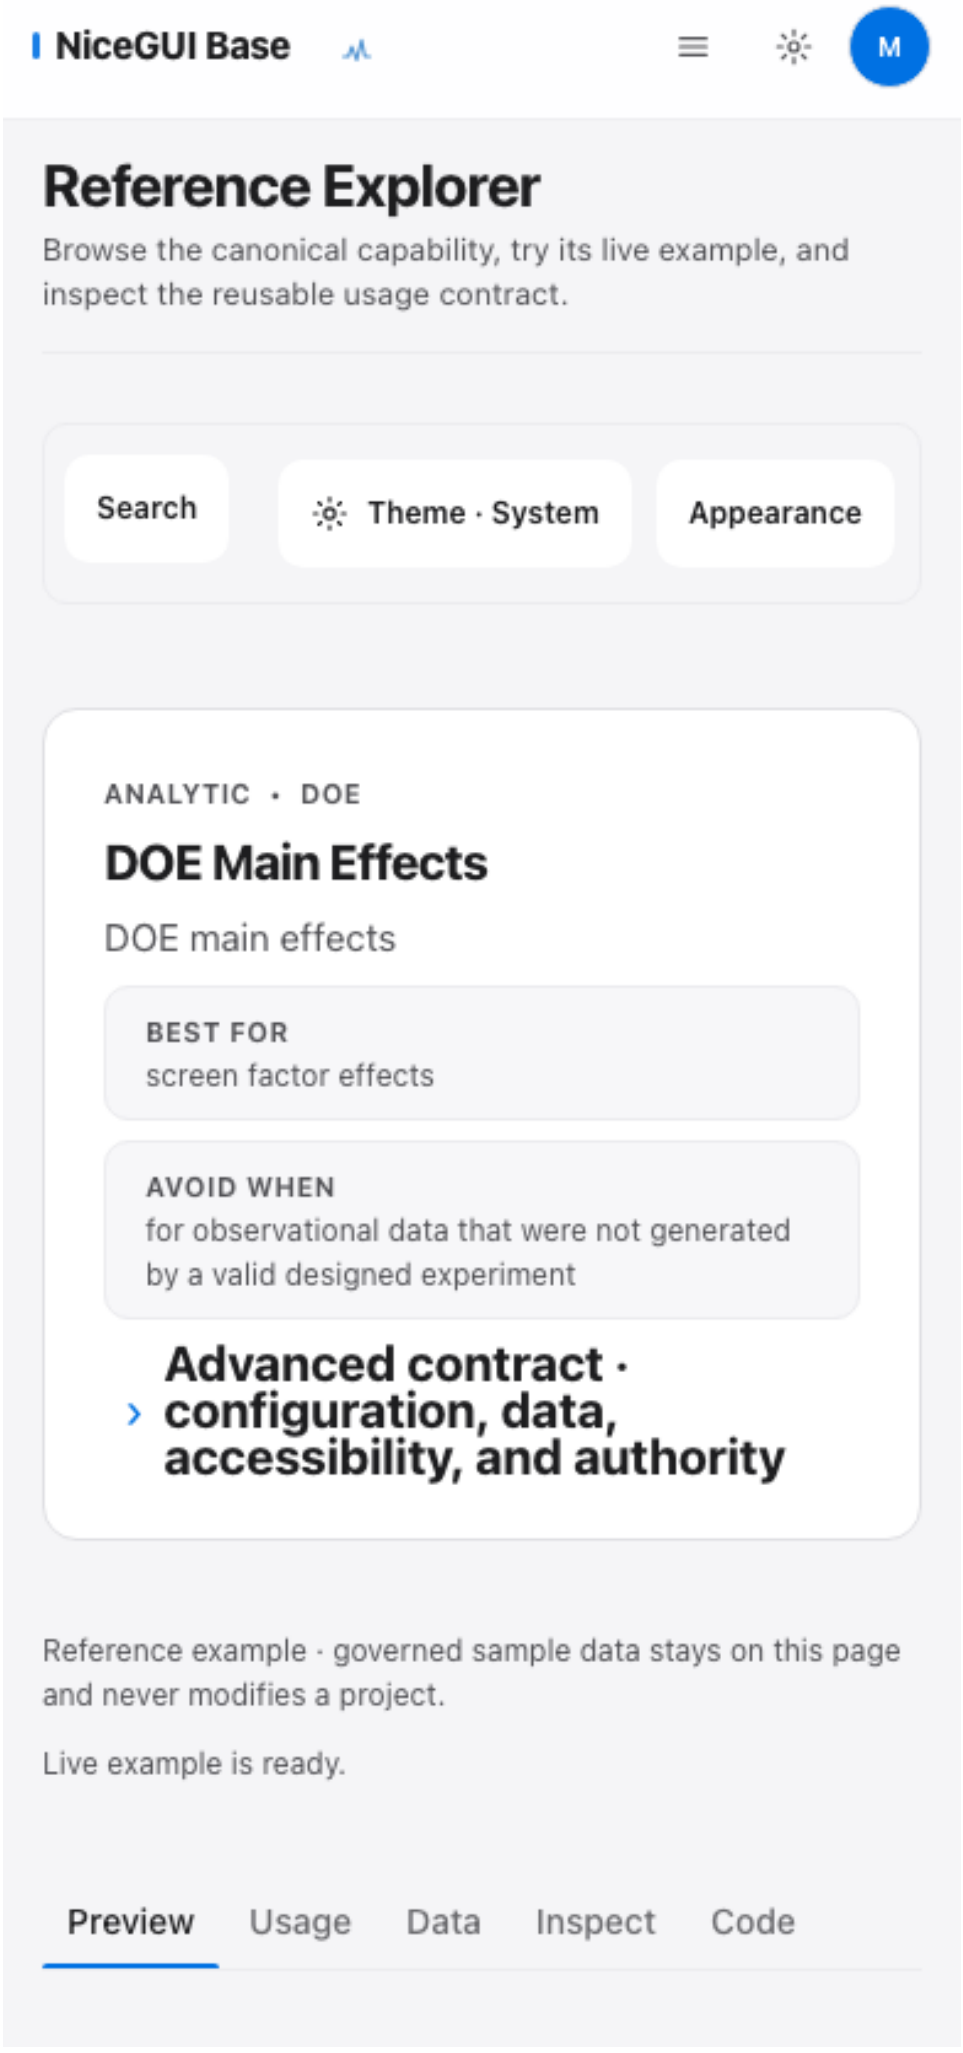

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RCA
RCA Sankey
Sankey/process flow
BEST FOR
population flow through route/tool/process paths
AVOID WHEN
as proof of causality without corroborating engineering evidence
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
RcaCockpit
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

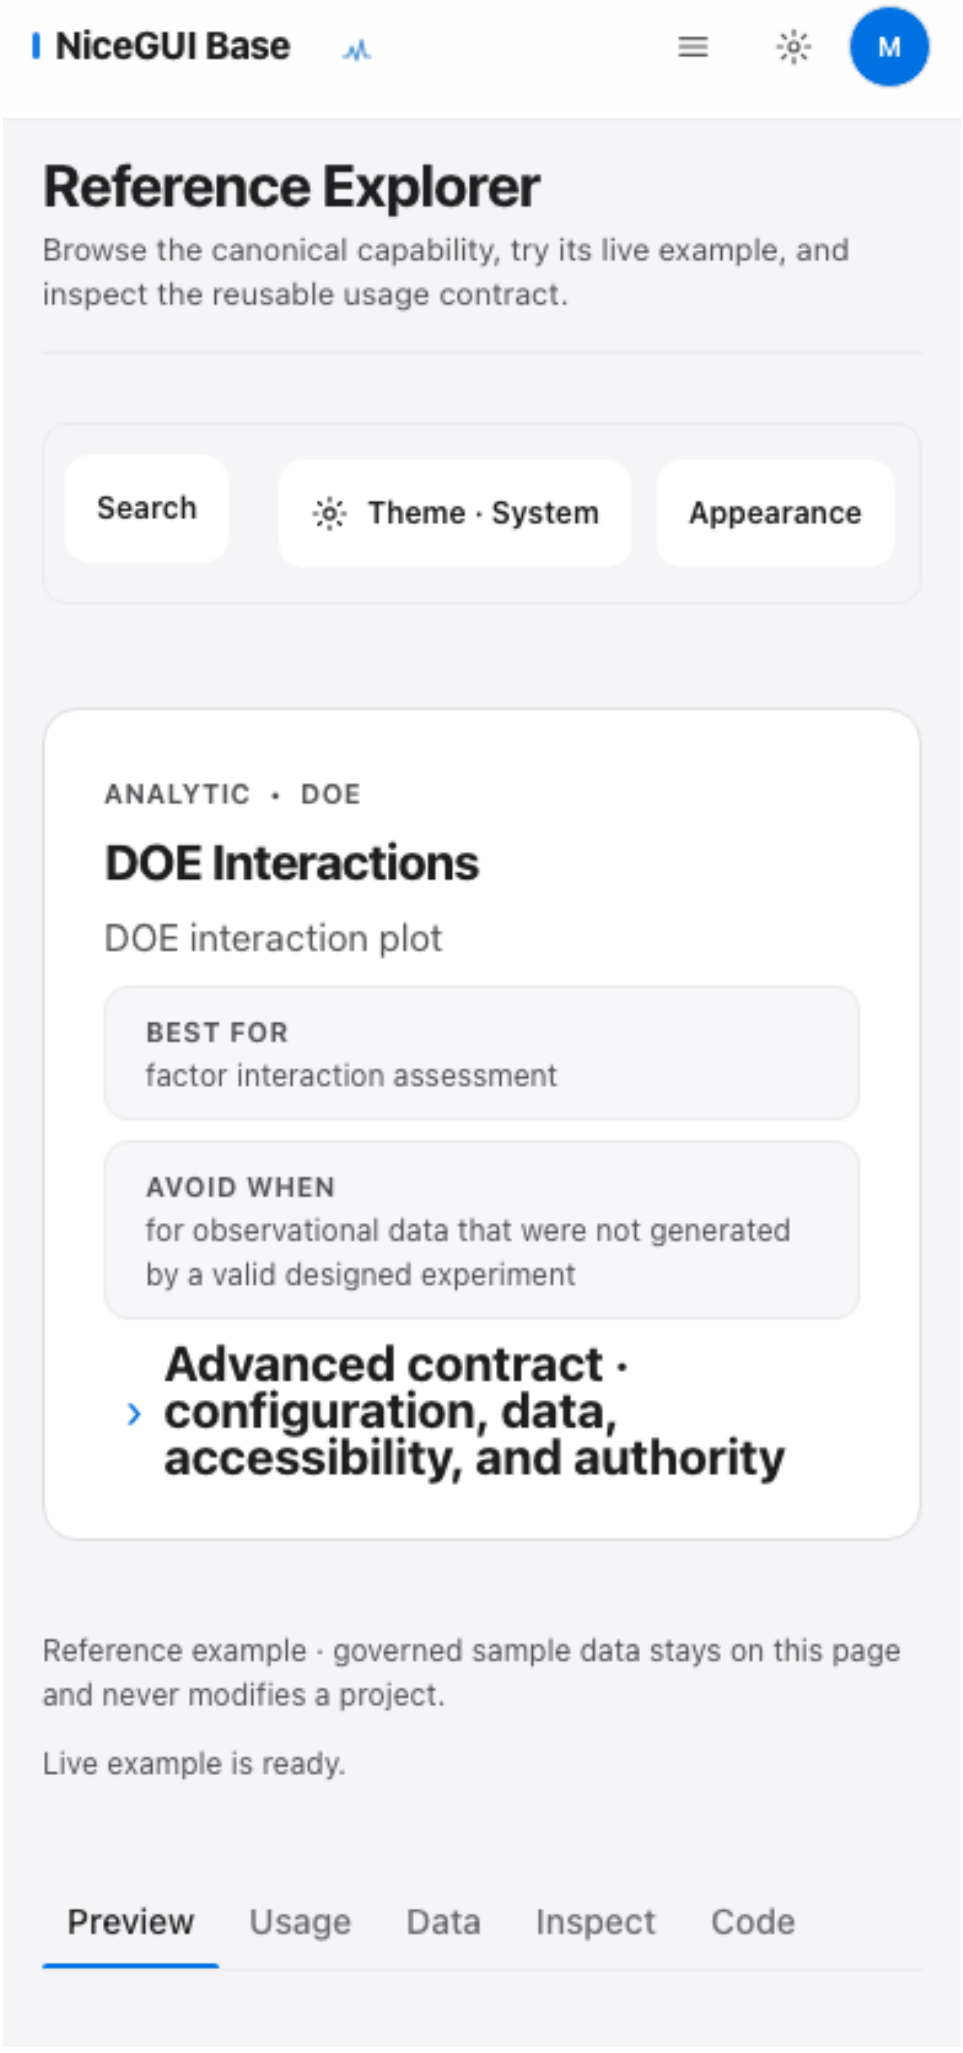

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • YIELD
Yield Pareto
Yield loss Pareto
BEST FOR
rank yield-loss contributors
AVOID WHEN
when numerator/denominator or bin definitions are inconsistent across populations
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
YieldLoss
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

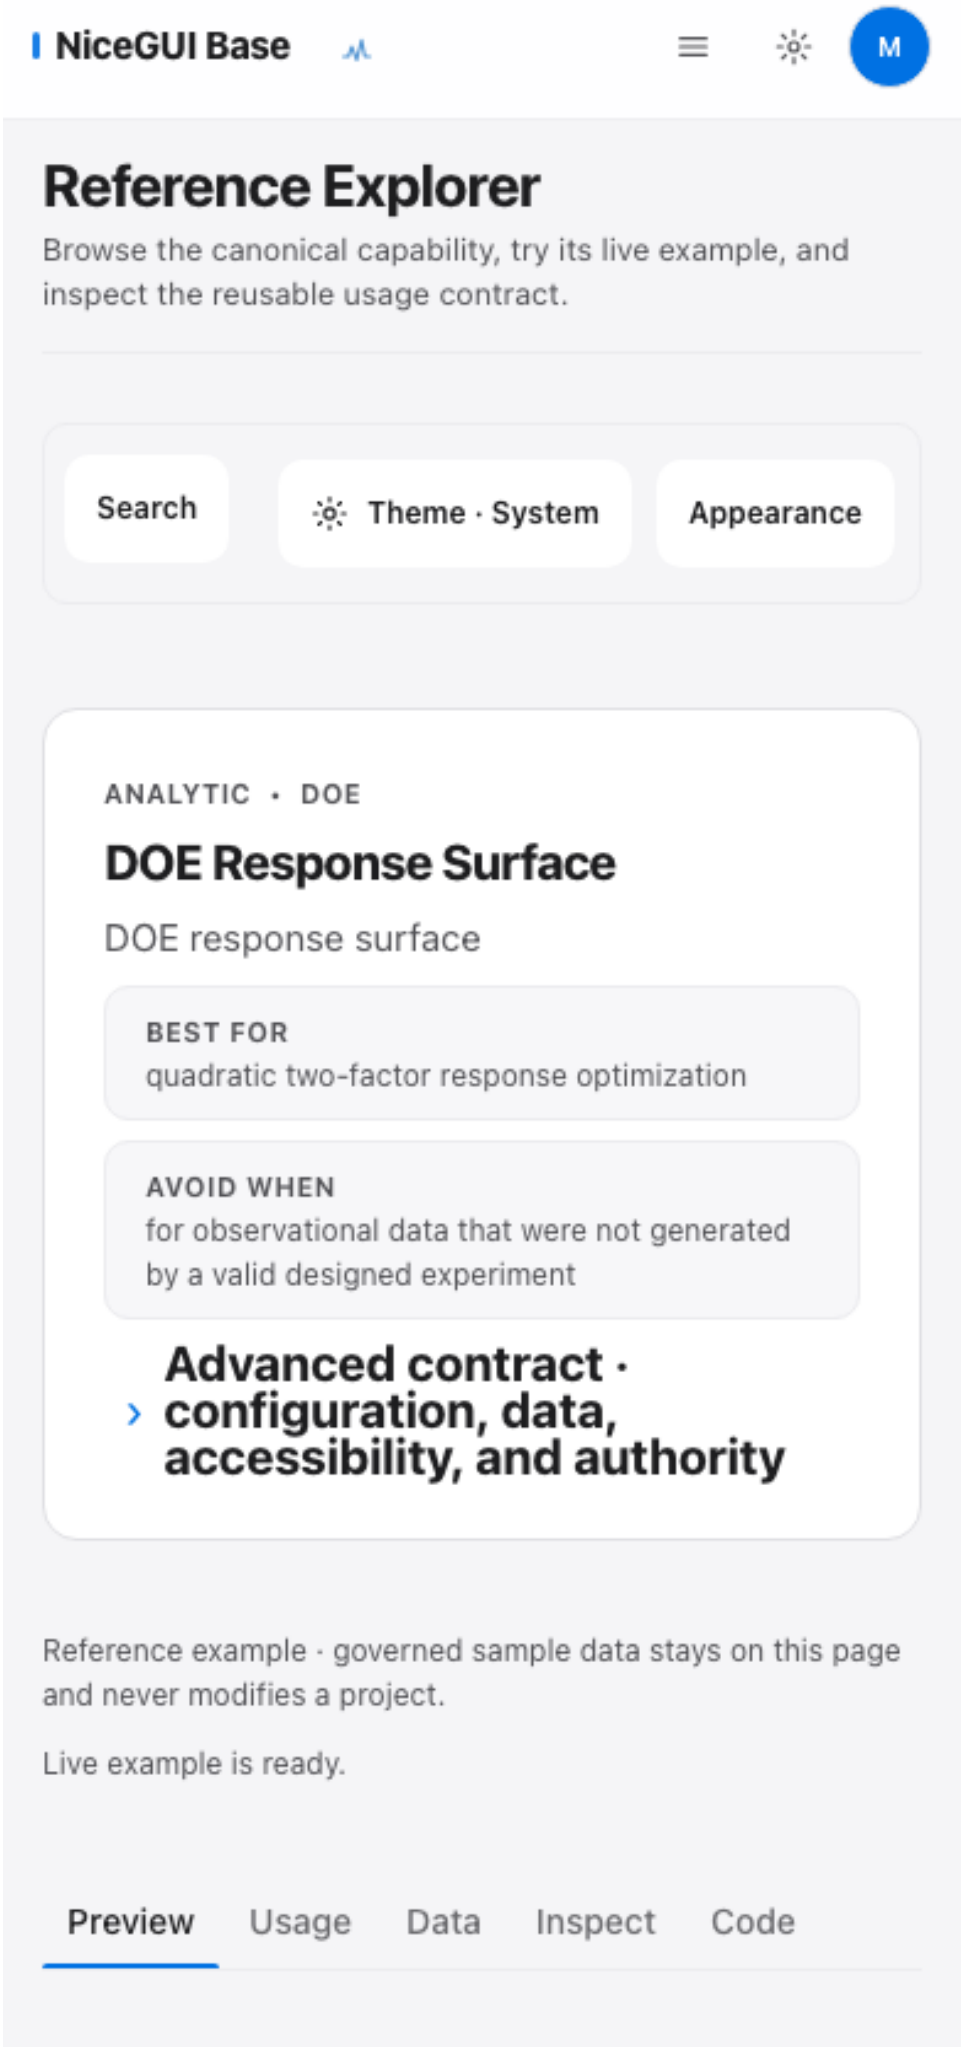

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • YIELD
Bin Pareto
Bin Pareto
BEST FOR
rank failing bins
AVOID WHEN
when numerator/denominator or bin definitions are inconsistent across populations
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
YieldLoss
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

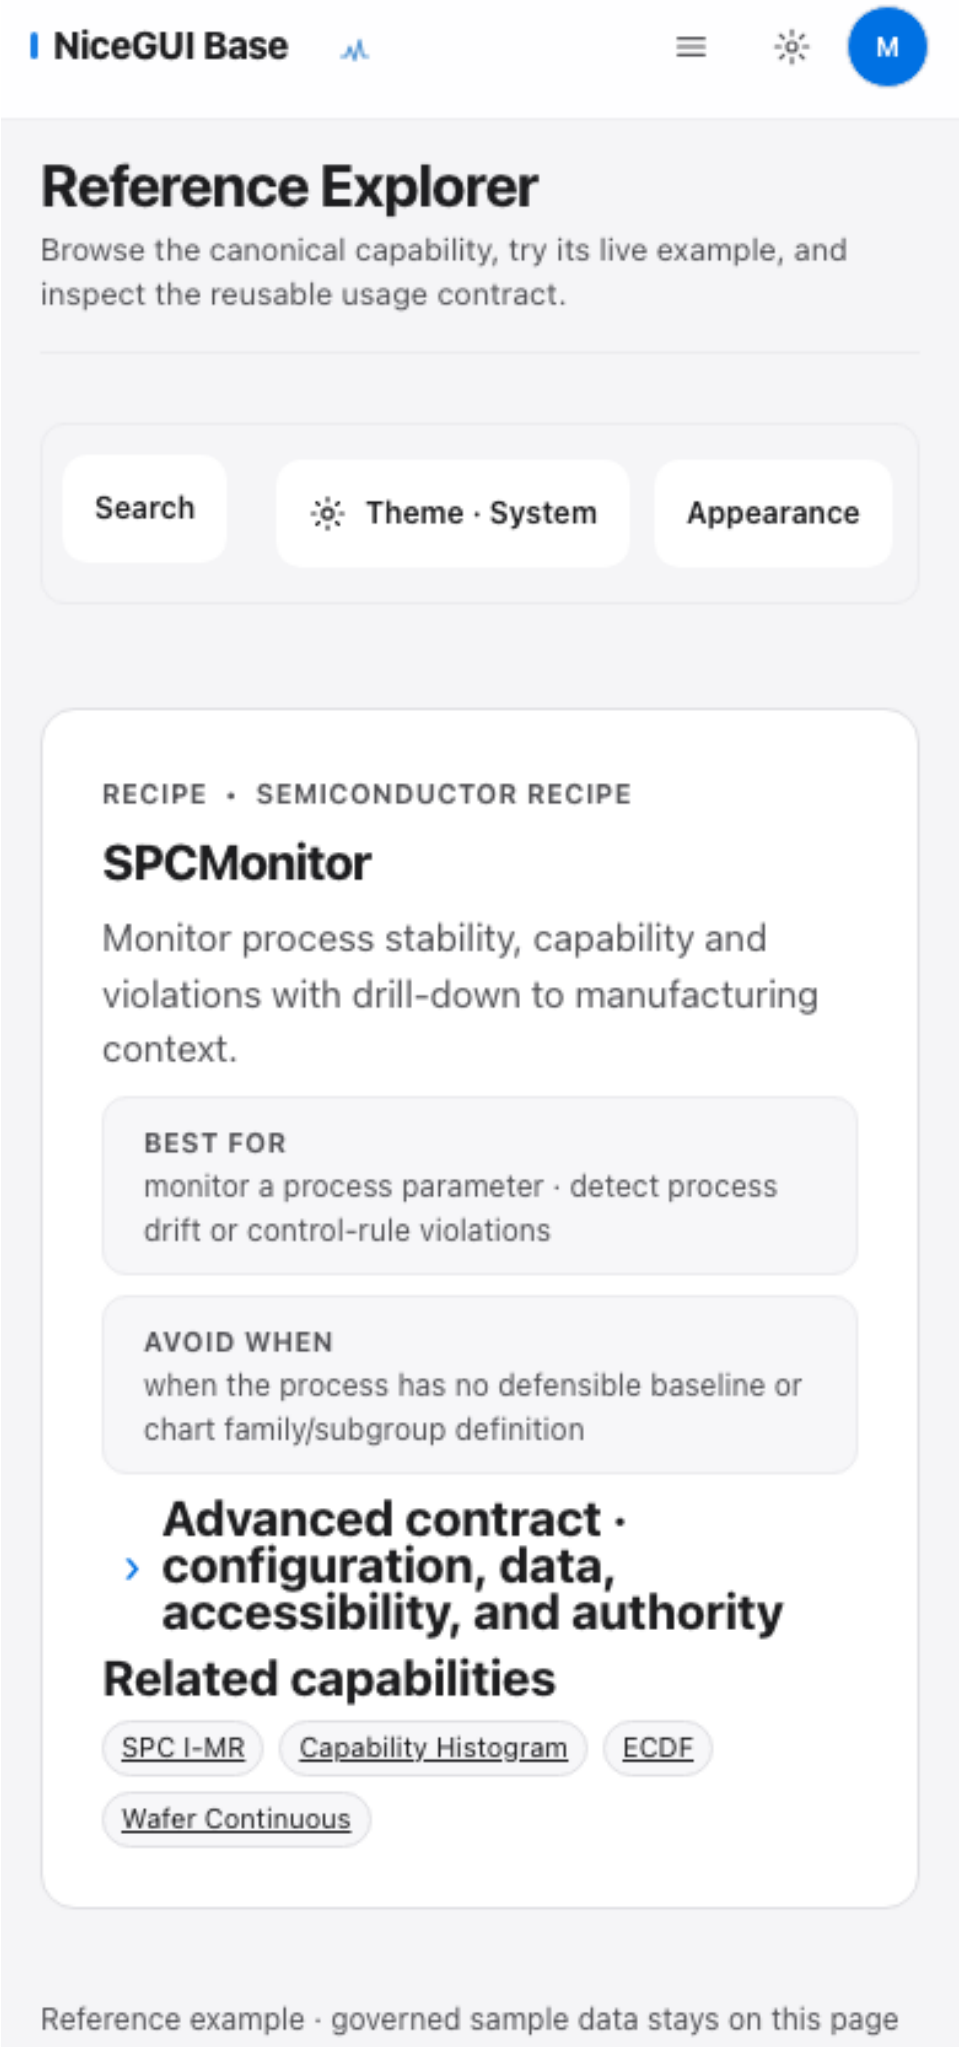

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • YIELD
Yield Waterfall
Yield waterfall/decomposition
BEST FOR
explain yield delta composition
AVOID WHEN
when numerator/denominator or bin definitions are inconsistent across populations
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
YieldLoss
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.

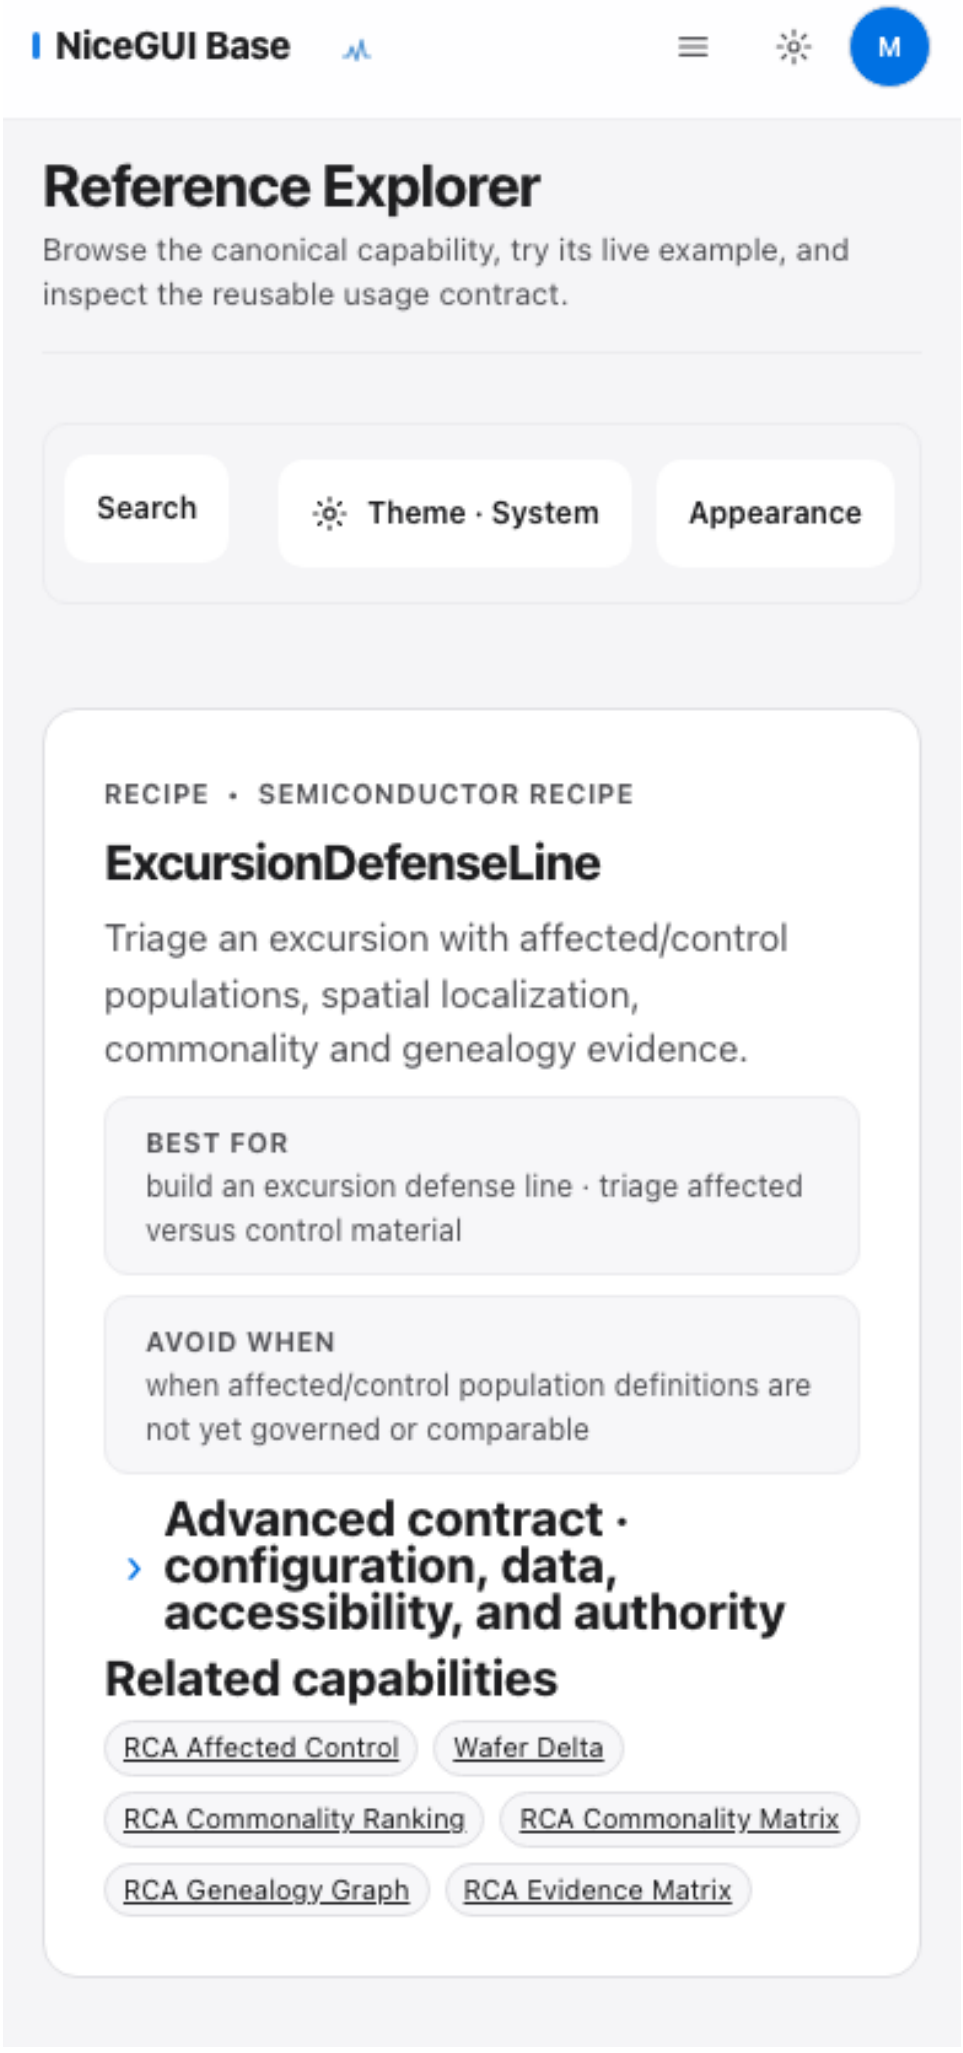

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • RELIABILITY
Weibull Reliability
Weibull reliability analysis
BEST FOR
time-to-failure reliability data
AVOID WHEN
when failure/censoring semantics or exposure time are unknown
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

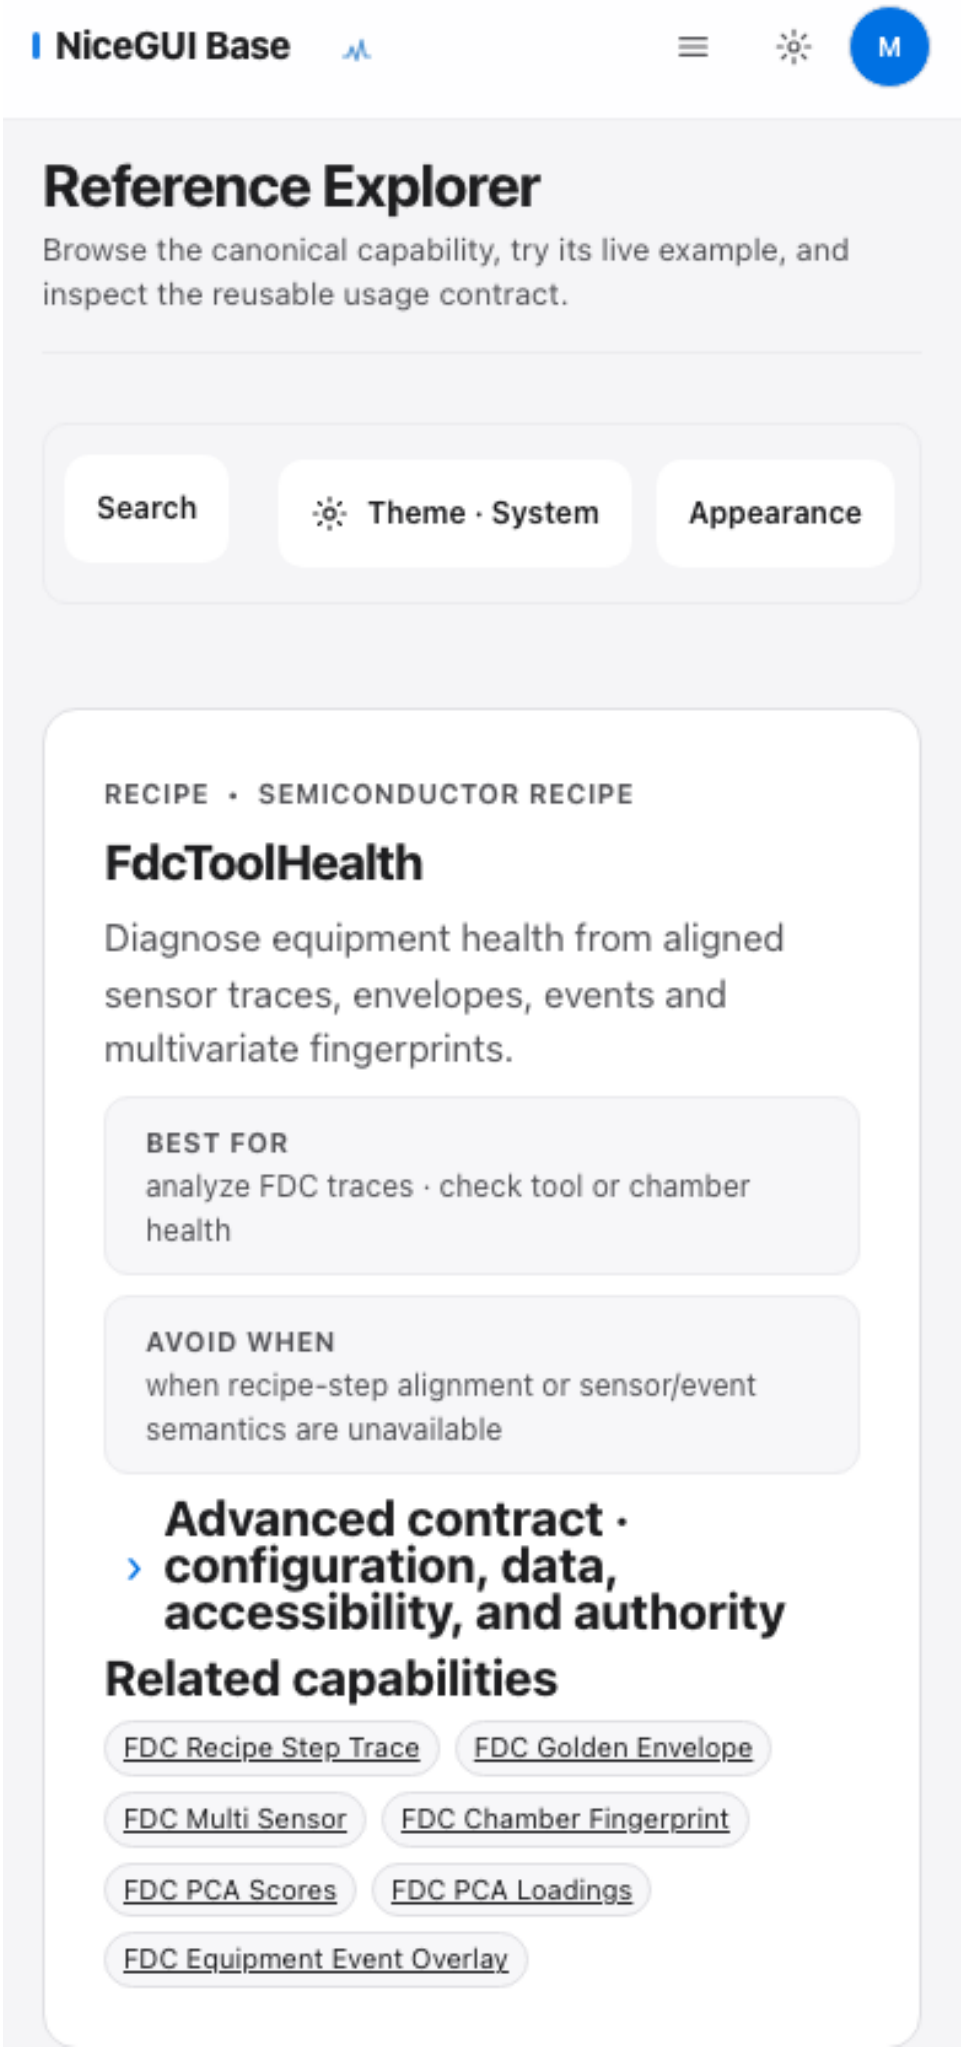

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • DOE
DOE Main Effects
DOE main effects
BEST FOR
screen factor effects
AVOID WHEN
for observational data that were not generated by a valid designed experiment
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

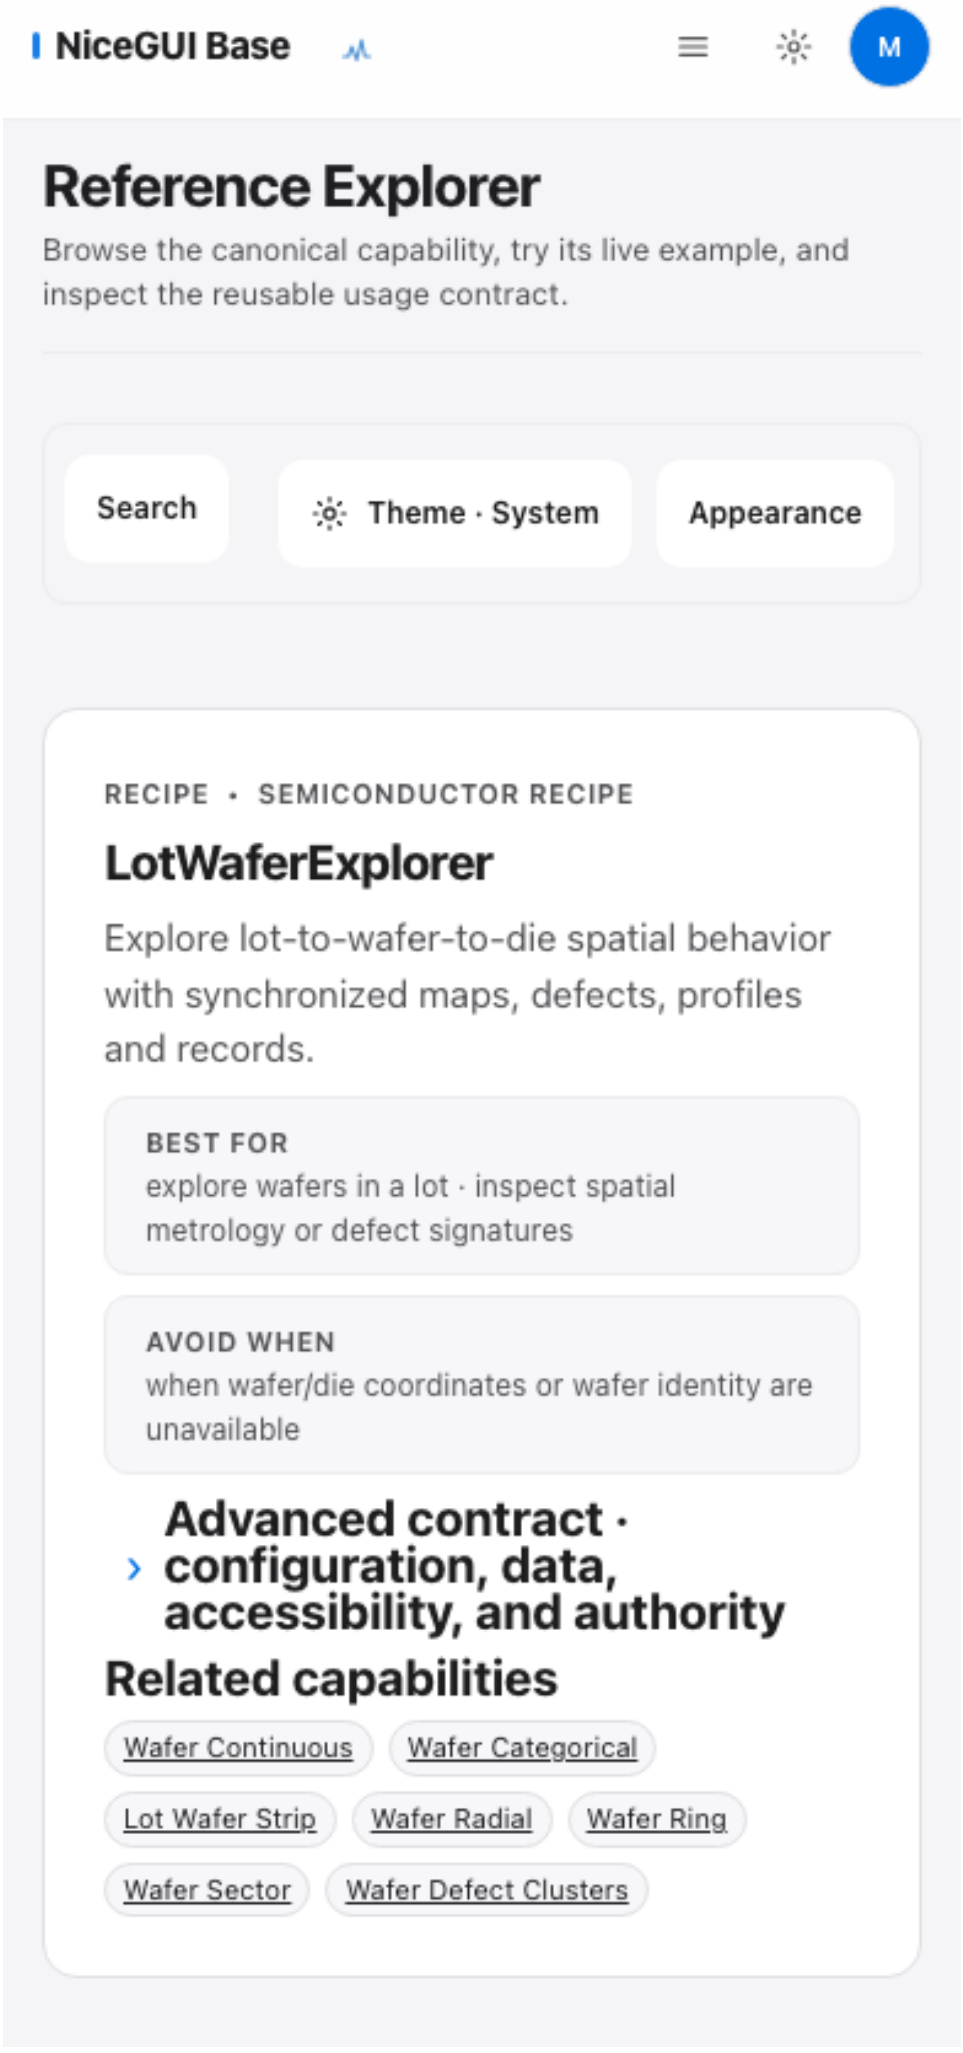

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • DOE
DOE Interactions
DOE interaction plot
BEST FOR
factor interaction assessment
AVOID WHEN
for observational data that were not generated by a valid designed experiment
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

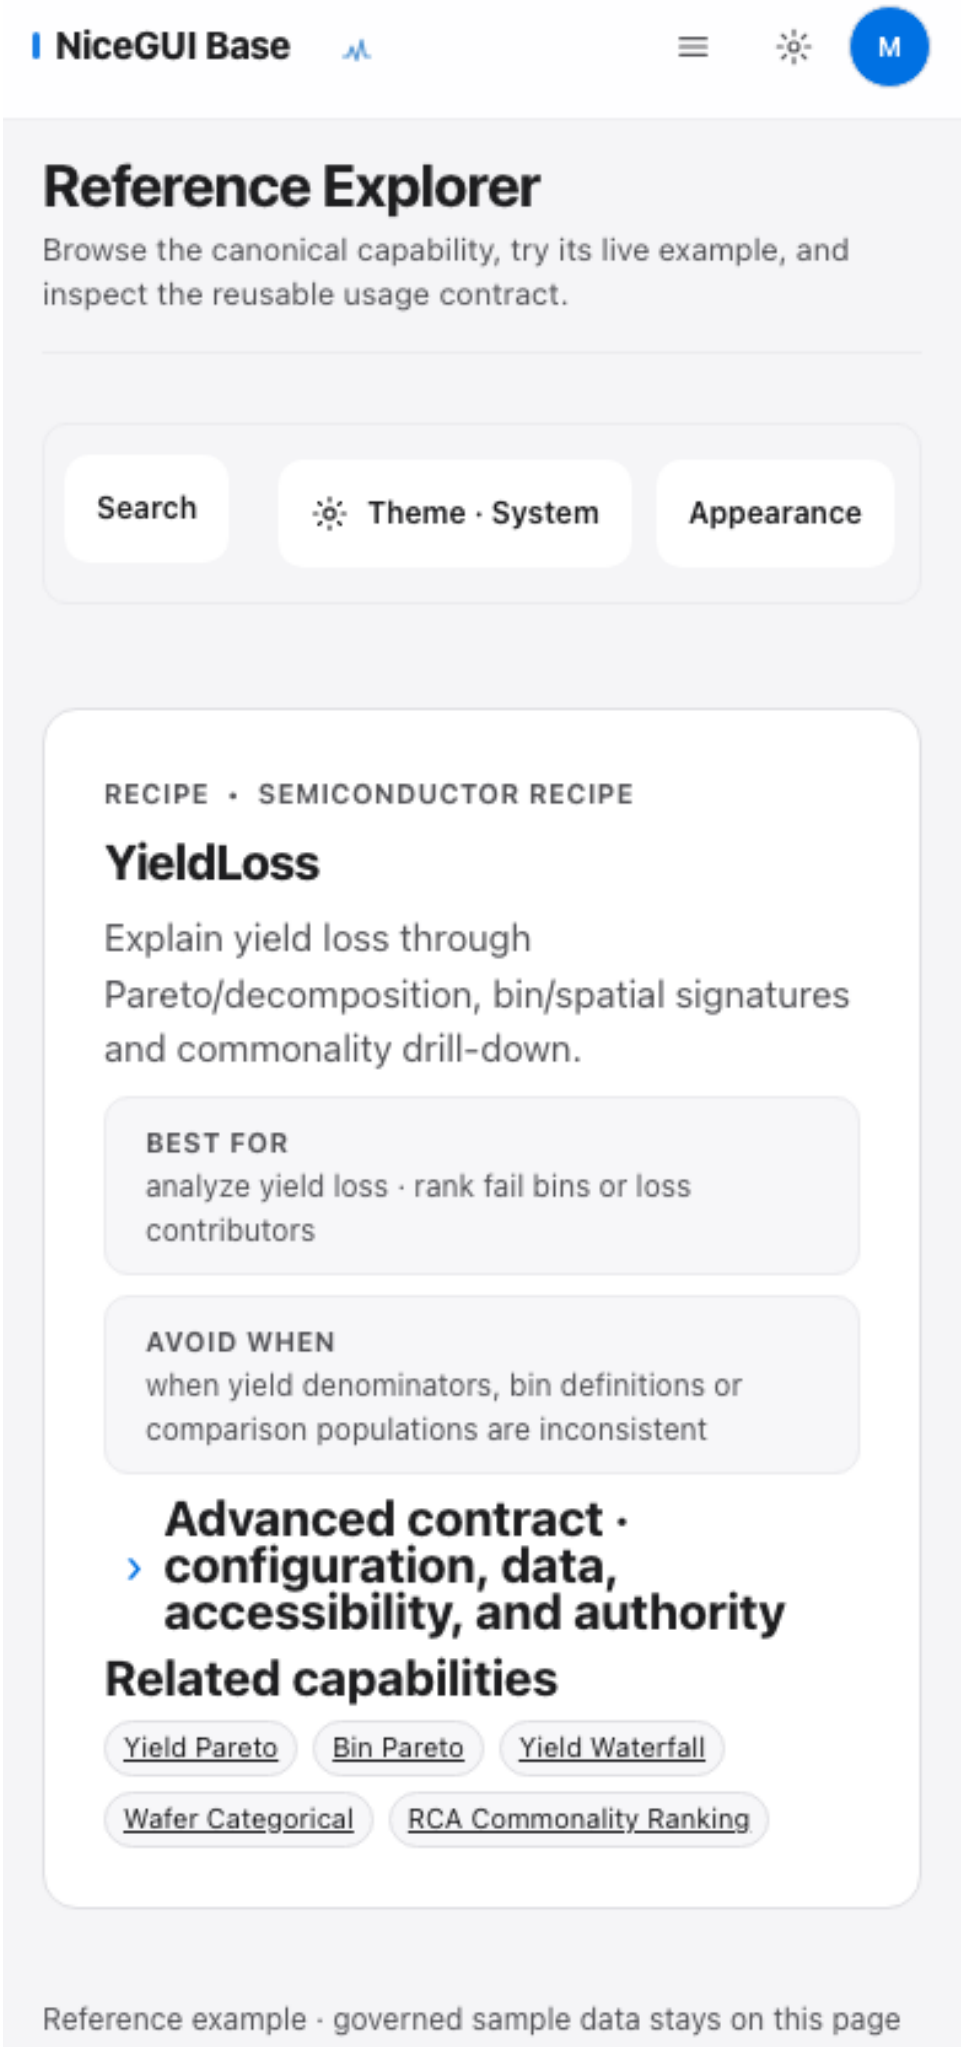

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
ANALYTIC • DOE
DOE Response Surface
DOE response surface
BEST FOR
quadratic two-factor response optimization
AVOID WHEN
for observational data that were not generated by a valid designed experiment
Advanced contract · configuration, data, accessibility, and authority
Reference example · governed sample data stays on this page and never modifies a project.
Live example is ready.
Preview
Usage
Data
Inspect
Code

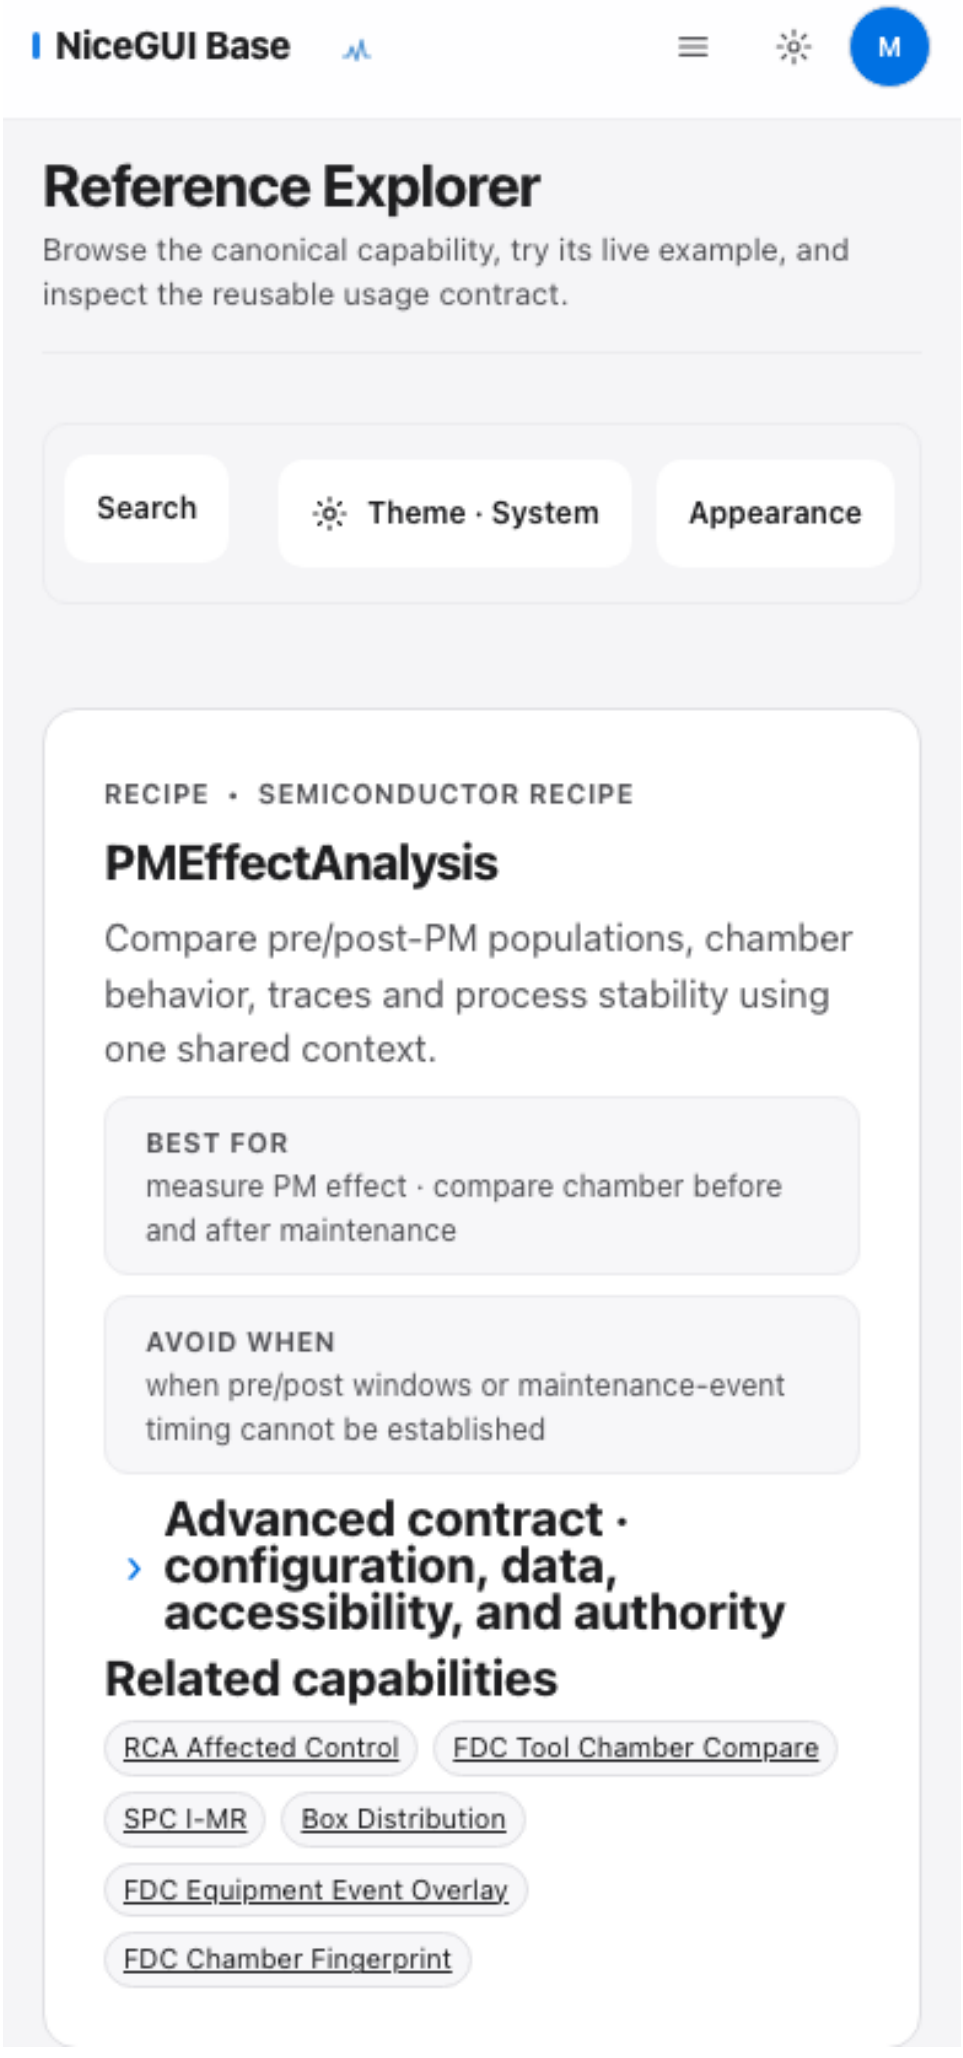

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
SPCMonitor
Monitor process stability, capability and violations with drill-down to manufacturing context.
BEST FOR
monitor a process parameter · detect process drift or control-rule violations
AVOID WHEN
when the process has no defensible baseline or chart family/subgroup definition
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
SPC I-MR
Capability Histogram
ECDF
Wafer Continuous
Reference example · governed sample data stays on this page

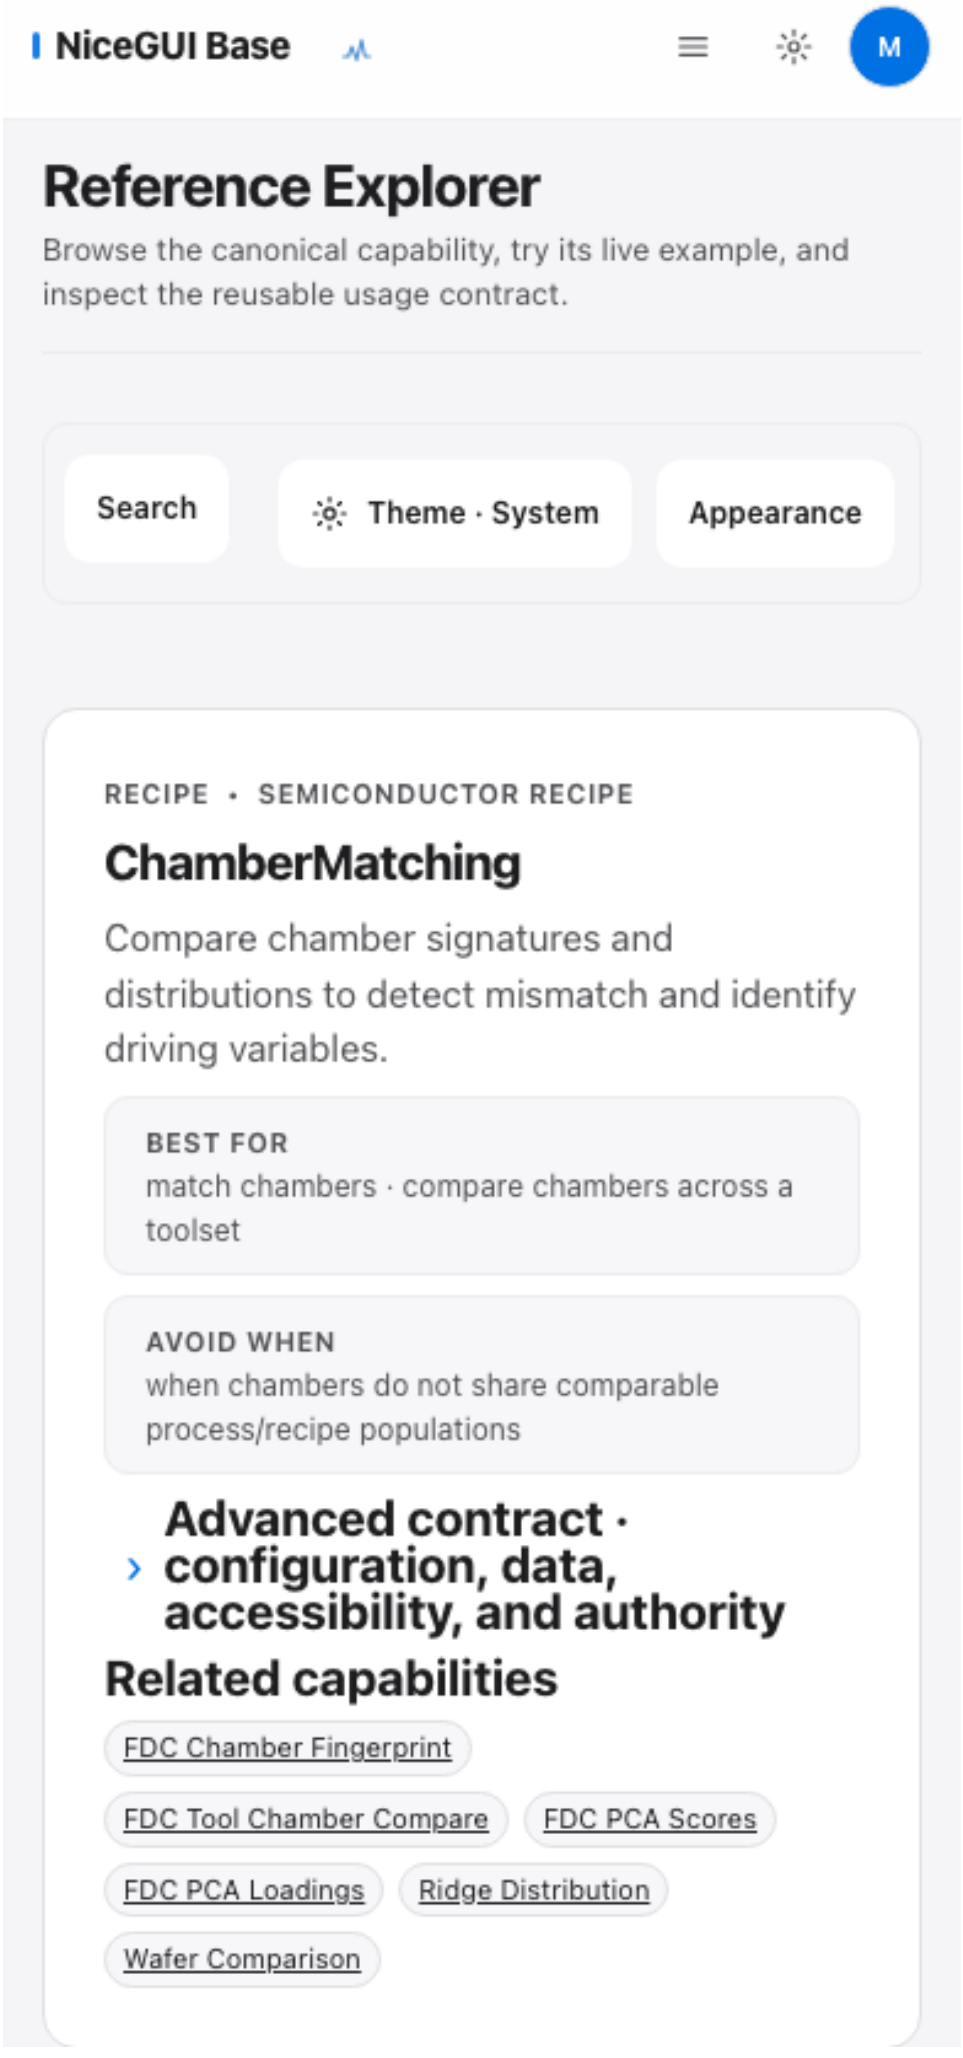

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
ExcursionDefenseLine
Triage an excursion with affected/control populations, spatial localization, commonality and genealogy evidence.
BEST FOR
build an excursion defense line · triage affected versus control material
AVOID WHEN
when affected/control population definitions are not yet governed or comparable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
RCA Affected Control
Wafer Delta
RCA Commonality Ranking
RCA Commonality Matrix
RCA Genealogy Graph
RCA Evidence Matrix

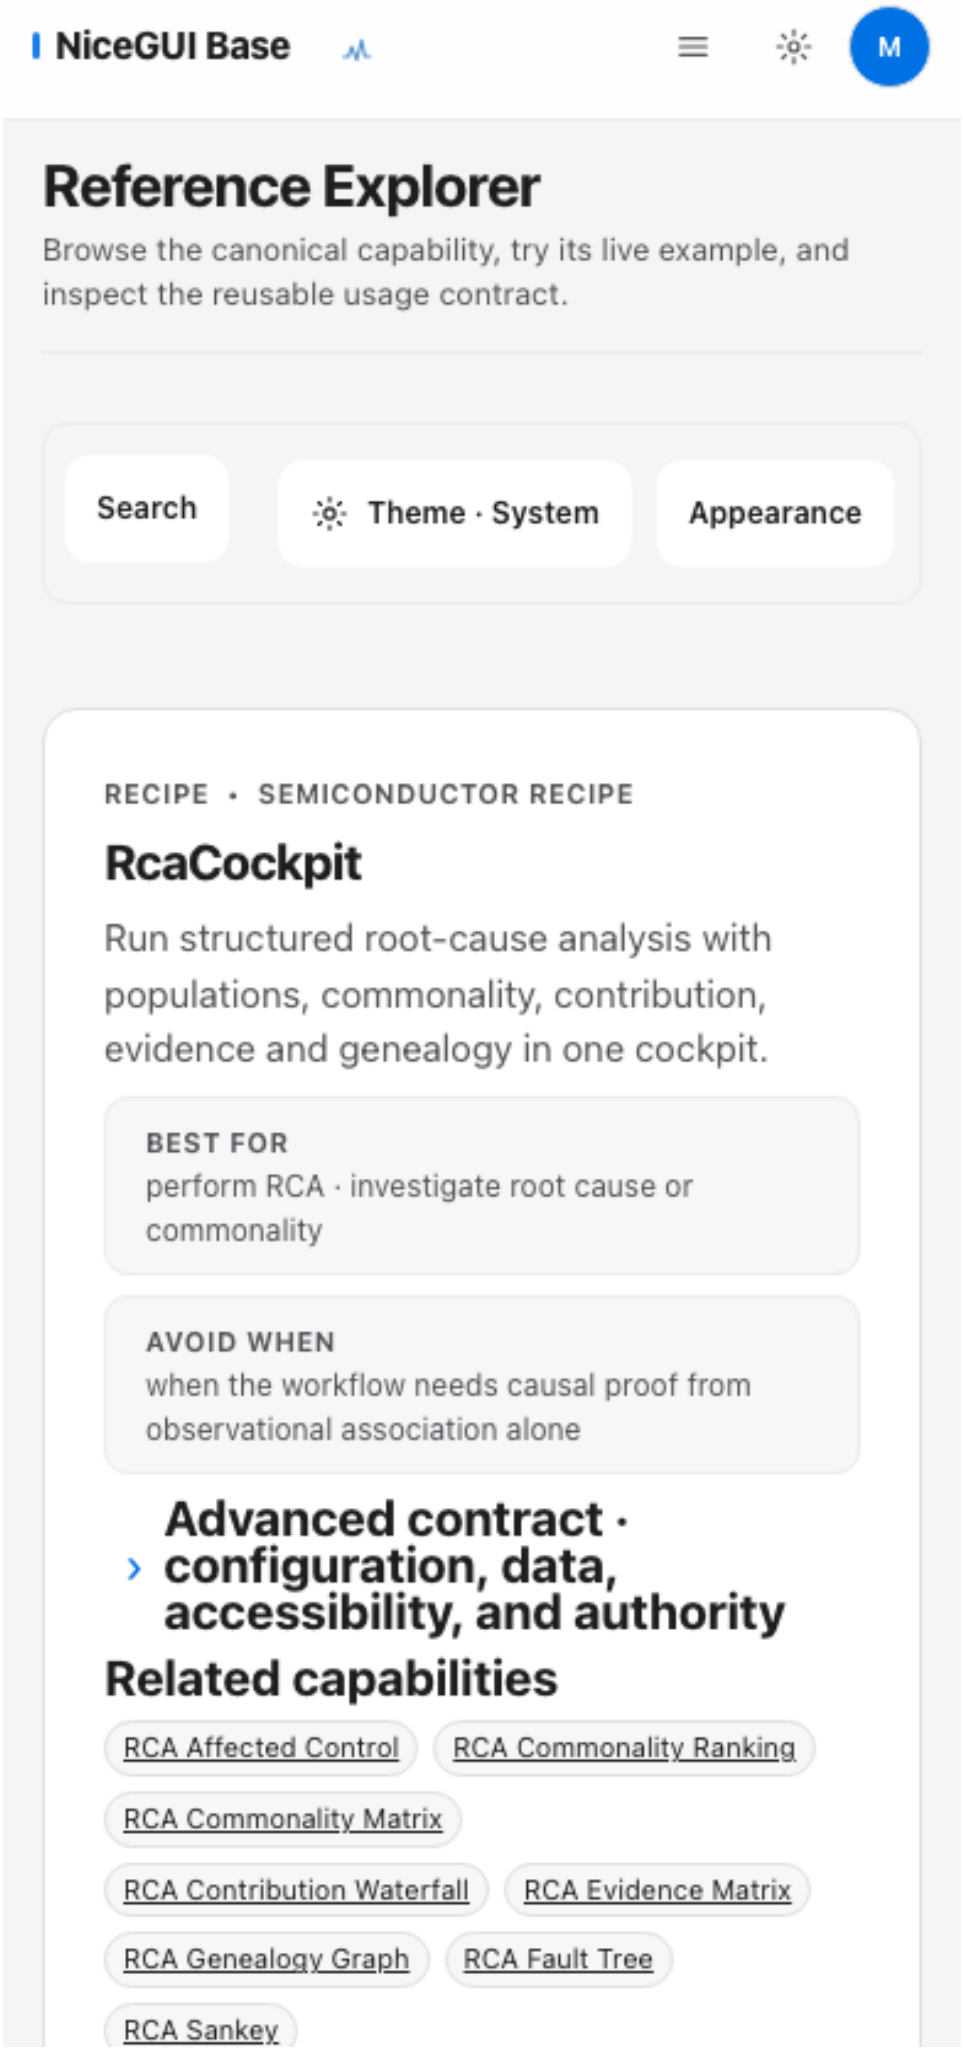

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
FdcToolHealth
Diagnose equipment health from aligned sensor traces, envelopes, events and multivariate fingerprints.
BEST FOR
analyze FDC traces · check tool or chamber health
AVOID WHEN
when recipe-step alignment or sensor/event semantics are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FDC Recipe Step Trace
FDC Golden Envelope
FDC Multi Sensor
FDC Chamber Fingerprint
FDC PCA Scores
FDC PCA Loadings
FDC Equipment Event Overlay


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
LotWaferExplorer
Explore lot-to-wafer-to-die spatial behavior with synchronized maps, defects, profiles and records.
BEST FOR
explore wafers in a lot · inspect spatial metrology or defect signatures
AVOID WHEN
when wafer/die coordinates or wafer identity are unavailable
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
Wafer Continuous
Wafer Categorical
Lot Wafer Strip
Wafer Radial
Wafer Ring
Wafer Sector
Wafer Defect Clusters


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
YieldLoss
Explain yield loss through Pareto/decomposition, bin/spatial signatures and commonality drill-down.
BEST FOR
analyze yield loss · rank fail bins or loss contributors
AVOID WHEN
when yield denominators, bin definitions or comparison populations are inconsistent
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
Yield Pareto
Bin Pareto
Yield Waterfall
Wafer Categorical
RCA Commonality Ranking
Reference example · governed sample data stays on this page


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
PMEffectAnalysis
Compare pre/post-PM populations, chamber behavior, traces and process stability using one shared context.
BEST FOR
measure PM effect · compare chamber before and after maintenance
AVOID WHEN
when pre/post windows or maintenance-event timing cannot be established
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
RCA Affected Control
FDC Tool Chamber Compare
SPC I-MR
Box Distribution
FDC Equipment Event Overlay
FDC Chamber Fingerprint

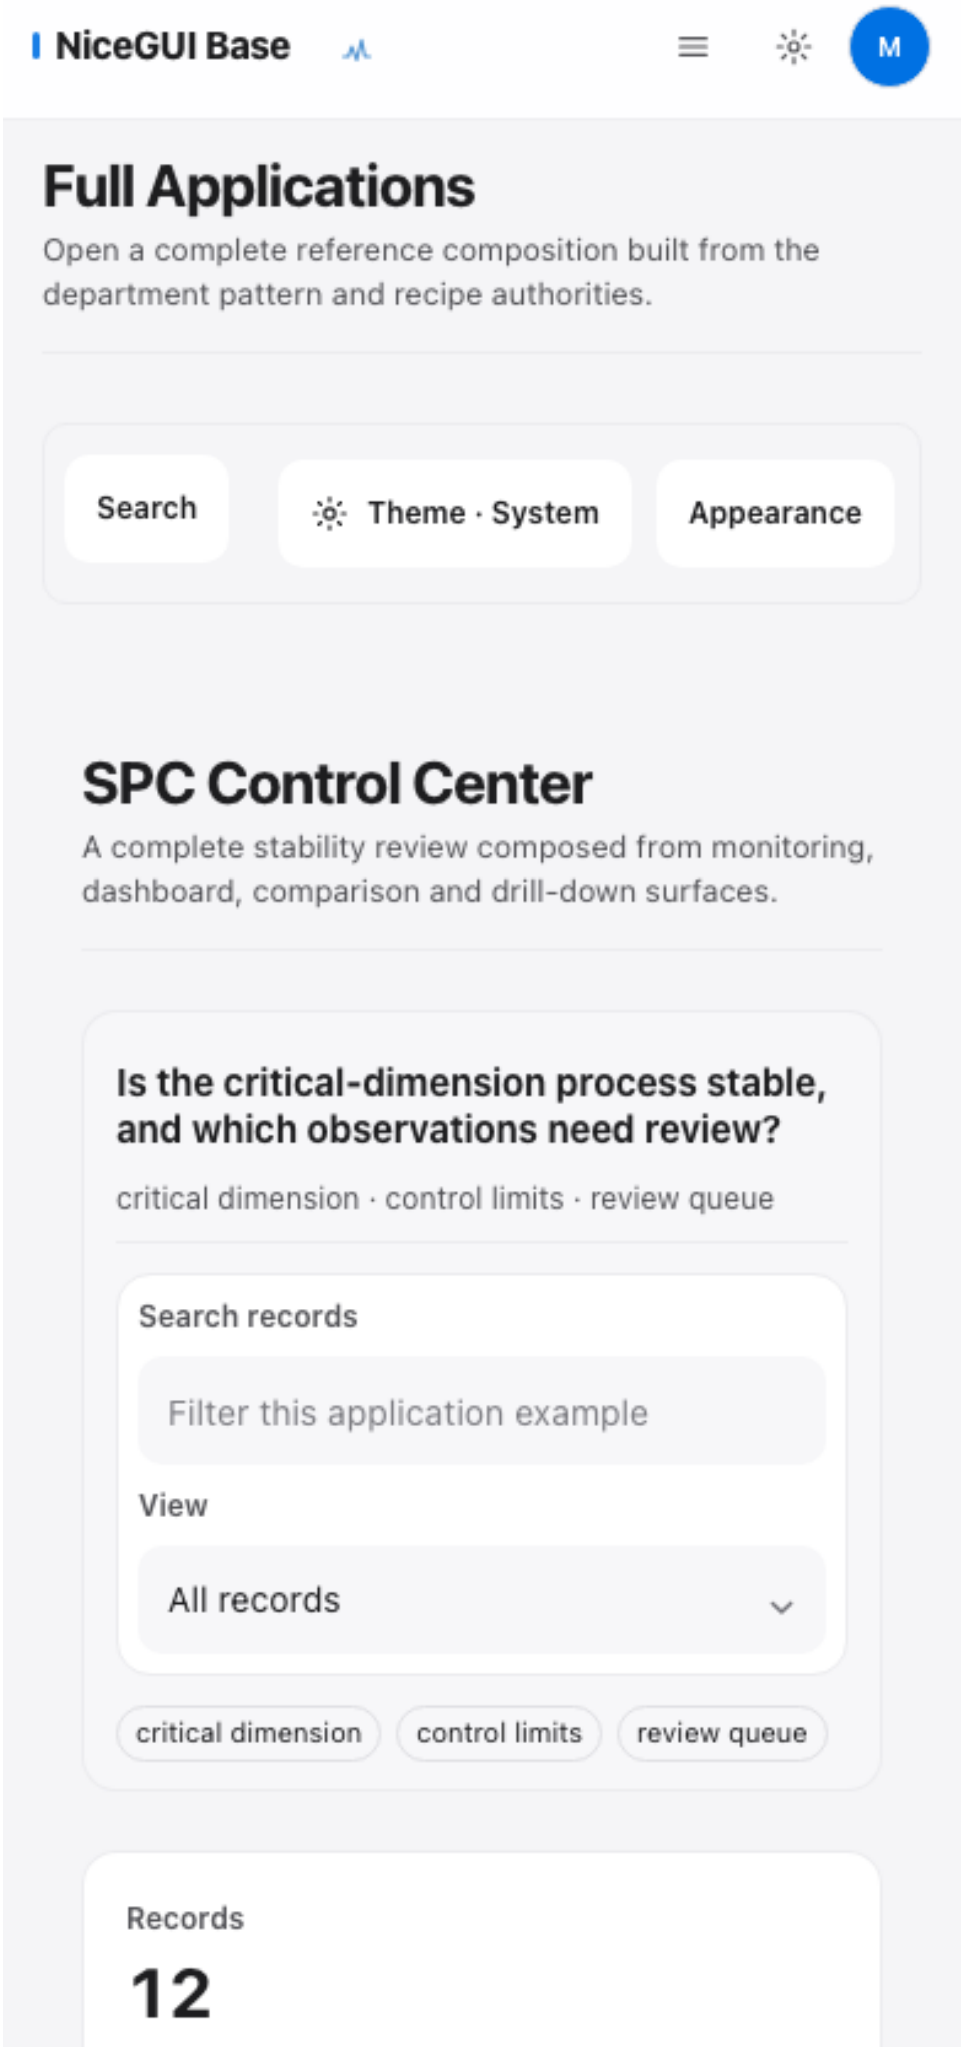

NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
ChamberMatching
Compare chamber signatures and distributions to detect mismatch and identify driving variables.
BEST FOR
match chambers · compare chambers across a toolset
AVOID WHEN
when chambers do not share comparable process/recipe populations
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
FDC Chamber Fingerprint
FDC Tool Chamber Compare
FDC PCA Scores
FDC PCA Loadings
Ridge Distribution
Wafer Comparison


NiceGUI Base
M
Reference Explorer
Browse the canonical capability, try its live example, and inspect the reusable usage contract.
Search
Theme · System
Appearance
RECIPE • SEMICONDUCTOR RECIPE
RcaCockpit
Run structured root-cause analysis with populations, commonality, contribution, evidence and genealogy in one cockpit.
BEST FOR
perform RCA · investigate root cause or commonality
AVOID WHEN
when the workflow needs causal proof from observational association alone
Advanced contract · configuration, data, accessibility, and authority
Related capabilities
RCA Affected Control
RCA Commonality Ranking
RCA Commonality Matrix
RCA Contribution Waterfall
RCA Evidence Matrix
RCA Genealogy Graph
RCA Fault Tree
RCA Sankey

application-spc-control-center

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

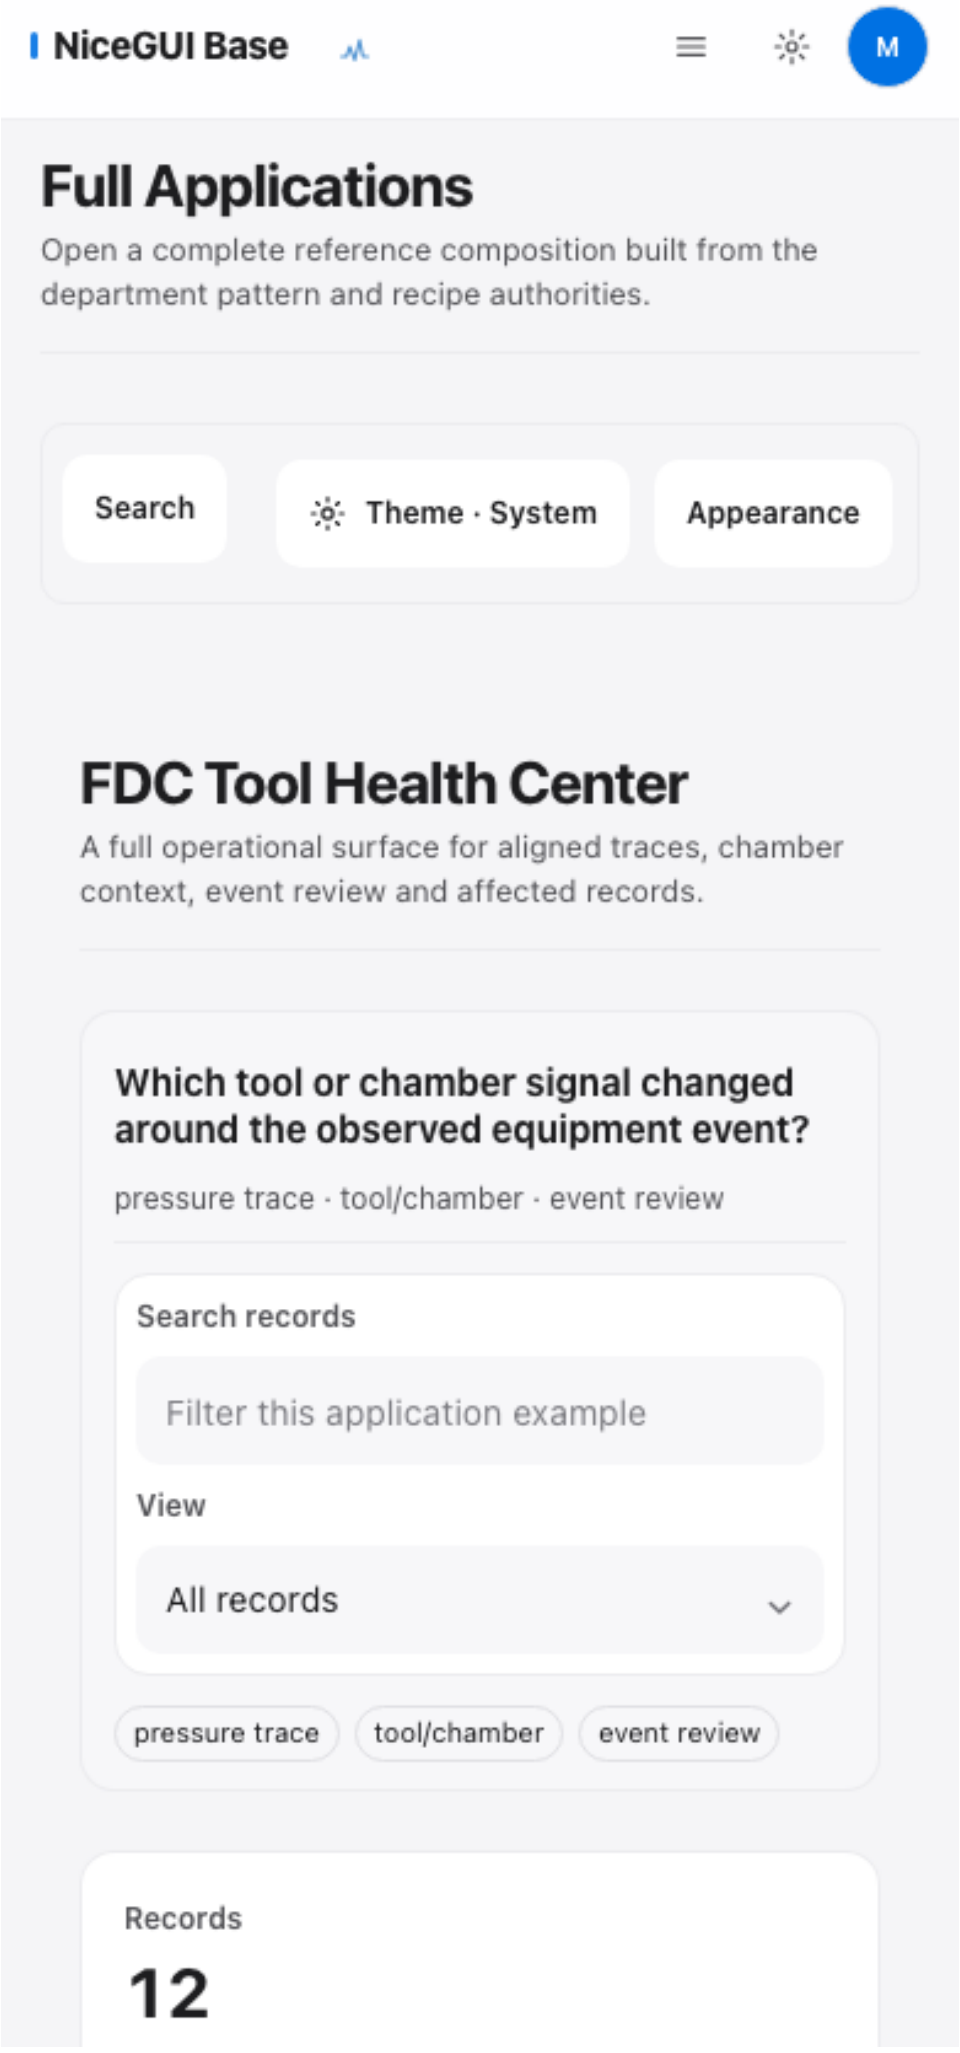
PNG SHA-256 58cb376fb8f9bf77e44d61d88b405aec50d63d8faaf6cc08a47f38df561743fd

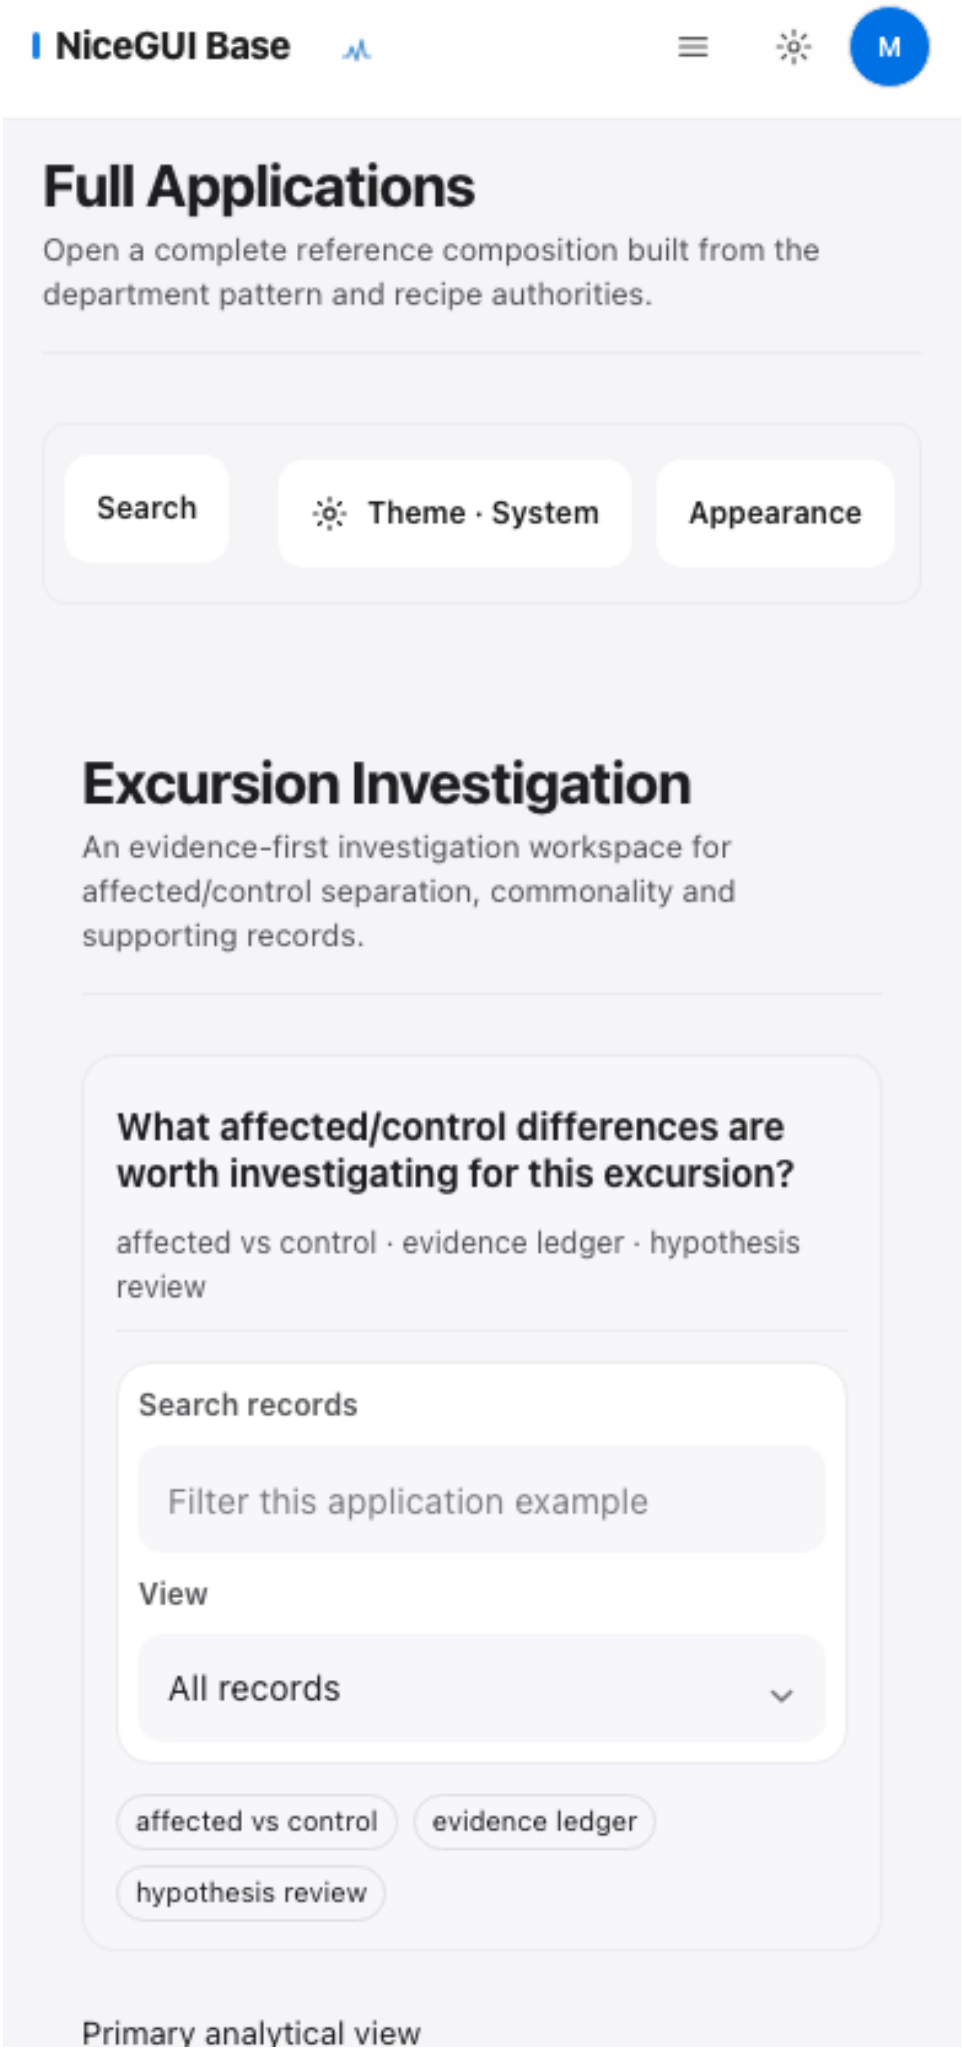


application-fdc-health-center

Mobile · 390×844 CSS px · DPR 1 · RECOVERED_VERIFY5

PNG SHA-256 edc78ed9b03e9f65fecba7e4e1de955a97eeadefe8455cbb5ca924ff689a36f3




NiceGUI Base
M
Full Applications
Open a complete reference composition built from the department pattern and recipe authorities.
Search
Theme · System
Appearance
Excursion Investigation
An evidence-first investigation workspace for affected/control separation, commonality and supporting records.
What affected/control differences are worth investigating for this excursion?
affected vs control · evidence ledger · hypothesis review
Search records
Filter this application example
View
All records
affected vs control
evidence ledger
hypothesis review
Primary analytical view