



LECTURE 3

COMP 3760 – Fall 2019



Today's agenda

- Do the attendance quiz now!
- Brute force algorithms
 - *Sorting problems*
 - *String matching*
 - *Optimization problems*

Brute force technique

- The “obvious and straightforward” approach for solving a problem
- Not really trying to be efficient
- Typically these are easy to implement
- Often involves trying all possible solutions and seeing which one was right


Brute force examples

- What is the brute force solution for these problems:
 - *Computing a^n ($a > 0$, n a nonnegative integer)*
 - *Computing $n!$*
 - *Searching for a key value in a list*

SELECTION SORT



Selection sort

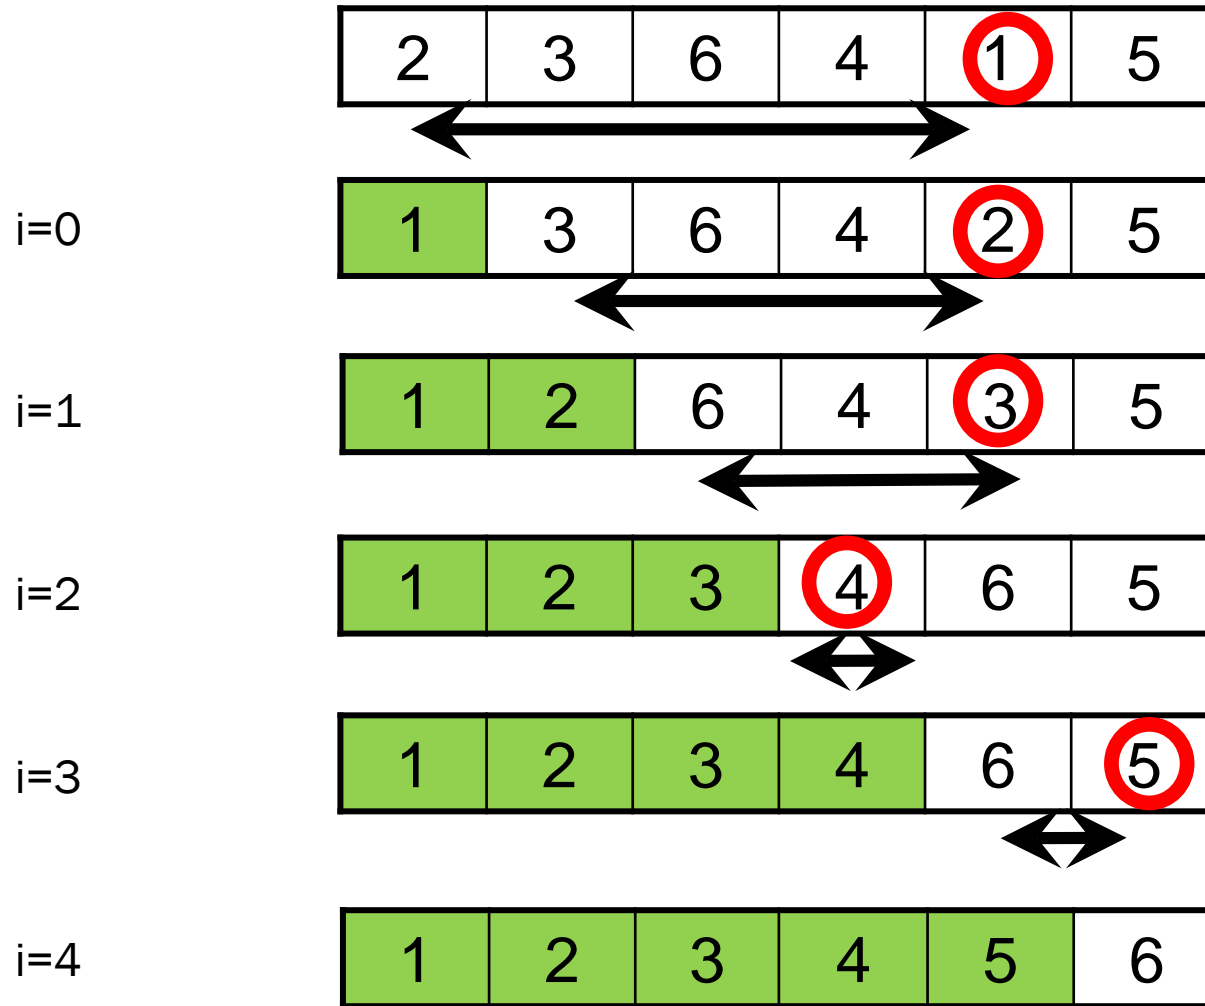

Selection sort

- Scan the array to find the smallest element.
- Swap it with the first element.
- Repeat for the second element.
- Generally: on pass i , find the smallest element in $A[i..n-1]$ and swap it with $A[i]$.

Selection sort (pseudocode)

ALGORITHM *SelectionSort*($A[0..n - 1]$)

//Sorts a given array by selection sort

//Input: An array $A[0..n - 1]$ of orderable elements

//Output: Array $A[0..n - 1]$ sorted in nondecreasing order

for $i \leftarrow 0$ **to** $n - 2$ **do**

$min \leftarrow i$

for $j \leftarrow i + 1$ **to** $n - 1$ **do**

if $A[j] < A[min]$

$min \leftarrow j$

 swap $A[i]$ and $A[min]$

Efficiency?

$O(n^2)$

BUBBLE SORT



Bubble sort

3	2	6	4	1	5
---	---	---	---	---	---

3	2	6	4	1	5
---	---	---	---	---	---



2	3	6	4	1	5
---	---	---	---	---	---



2	3	6	4	1	5
---	---	---	---	---	---



2	3	4	6	1	5
---	---	---	---	---	---



2	3	4	1	6	5
---	---	---	---	---	---



2	3	4	1	5	6
---	---	---	---	---	---

Bubble sort

2	3	4	1	5	6
---	---	---	---	---	---

2	3	4	1	5	6
---	---	---	---	---	---



2	3	4	1	5	6
---	---	---	---	---	---



2	3	4	1	5	6
---	---	---	---	---	---



2	3	1	4	5	6
---	---	---	---	---	---



2	3	1	4	5	6
---	---	---	---	---	---

Bubble sort

ALGORITHM *BubbleSort*($A[0..n - 1]$)

//Sorts a given array by bubble sort

//Input: An array $A[0..n - 1]$ of orderable elements

//Output: Array $A[0..n - 1]$ sorted in nondecreasing order

for $i \leftarrow 0$ **to** $n - 2$ **do**

for $j \leftarrow 0$ **to** $n - 2 - i$ **do**

if $A[j + 1] < A[j]$

 swap $A[j]$ and $A[j + 1]$

$$C(n) = \sum_{i=0}^{n-2} \sum_{j=0}^{n-2-i} 1$$

Efficiency? $O(n^2)$

STRING MATCHING



String matching

Pattern:

compress

Text:

We introduce a general framework which is suitable to capture an essence of **compressed** pattern matching

The String Matching Problem

Input:

- Pattern: A string of m characters to search for
- Text: A longer string of n characters to search in

Problem:

Find a substring in the Text that matches the Pattern

The String Matching Problem

Pattern P

a	b	a	a
---	---	---	---

Text T

a	b	c	a	b	a	a	b	c	a	b	a	a
---	---	---	---	---	---	---	---	---	---	---	---	---

a	b	a	a
---	---	---	---

a	b	a	a
---	---	---	---

a	b	a	a
---	---	---	---



3



Solution (in words)

Brute-force algorithm

1. Align pattern at beginning of text
2. Moving from left to right, compare each character of pattern to the corresponding character in text until
 - all characters are found to match (successful search); or
 - a mismatch is detected
3. While pattern is not found and the text is not yet exhausted, realign pattern one position to the right and repeat Step 2

String matching (pseudocode)

ALGORITHM *BruteForceStringMatch*($T[0..n - 1]$, $P[0..m - 1]$)

//Implements brute-force string matching

//Input: An array $T[0..n - 1]$ of n characters representing a text and

// an array $P[0..m - 1]$ of m characters representing a pattern

//Output: The index of the first character in the text that starts a

// matching substring or -1 if the search is unsuccessful

for $i \leftarrow 0$ **to** $n - m$ **do**

$j \leftarrow 0$


while $j < m$ **and** $P[j] = T[i + j]$ **do**

$j \leftarrow j + 1$

if $j = m$ **return** i

return -1

Analysis: worst-case example

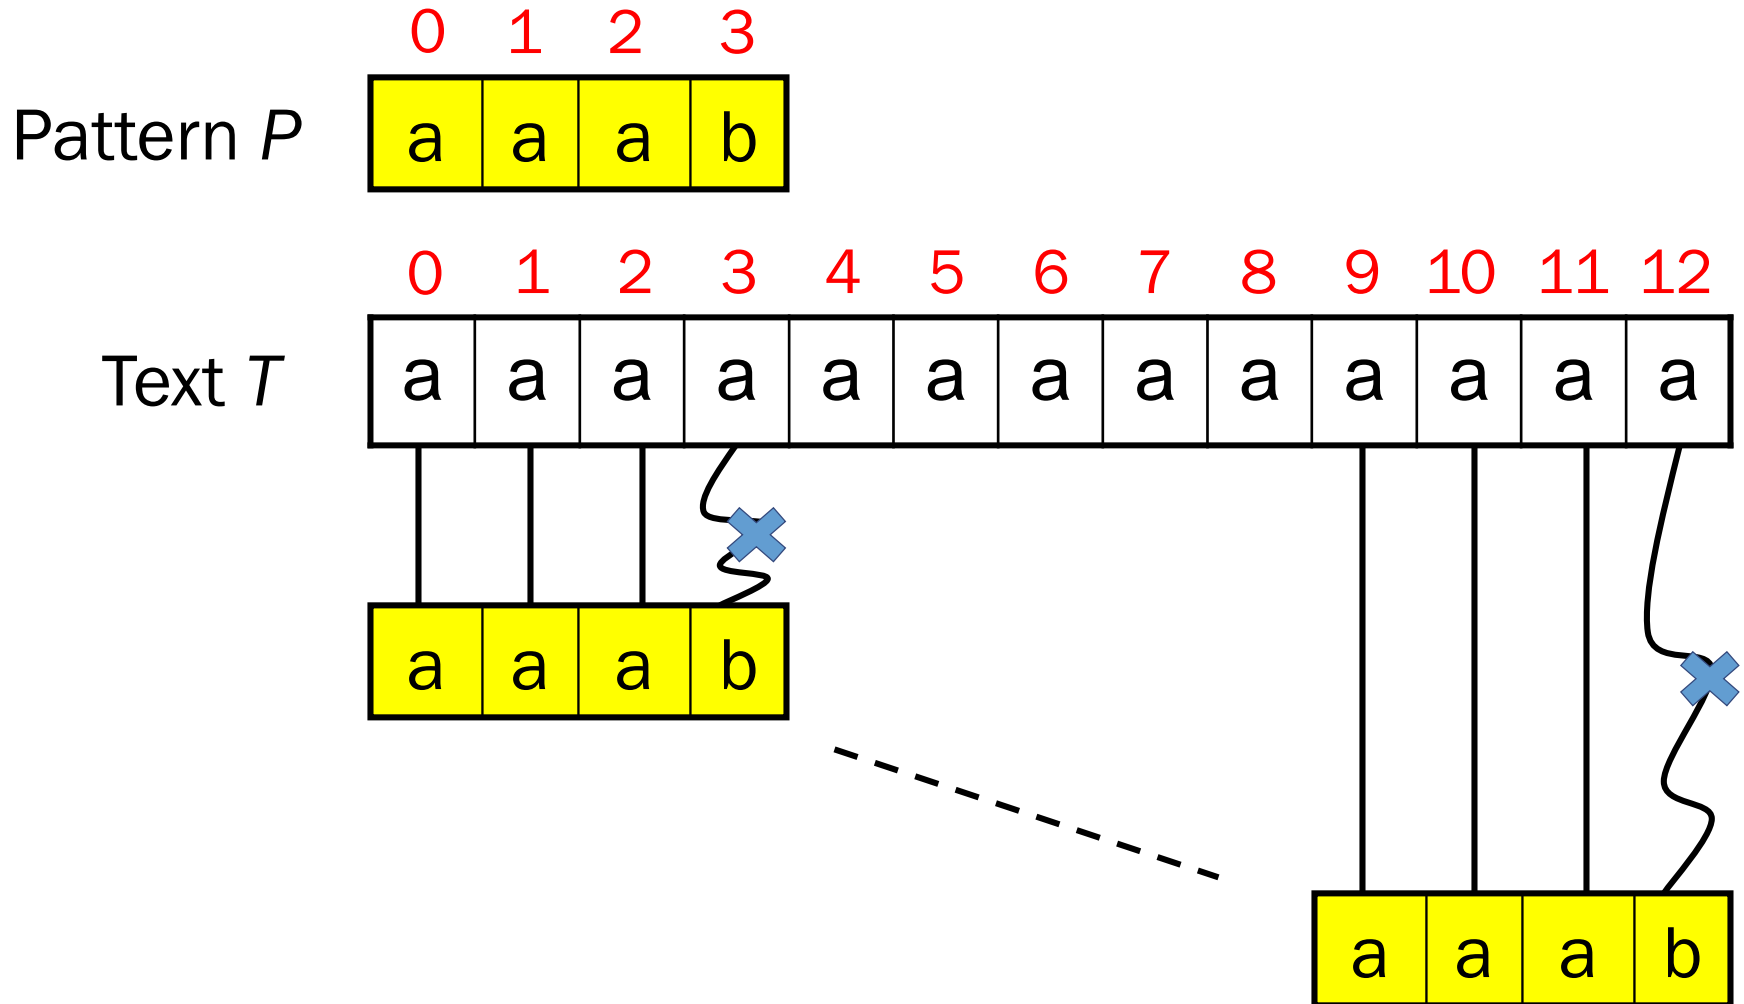

Worst-case analysis

- There are m comparisons for each shift in the worst case (inner loop)
- There are $n-m+1$ shifts (outer loop)
- So, the worst-case running time is:

$$O((n-m+1)*m)$$


- In the example on previous slide, we have $(13-4+1)*4$ comparisons in total

TRAVELING SALESMAN PROBLEM



Traveling salesman problem

- A salesman needs to visit n cities. You know the distance between each city.
Find the shortest path that visits each city exactly once and returns to the starting city.
- Note that this has lots of applications in real life.

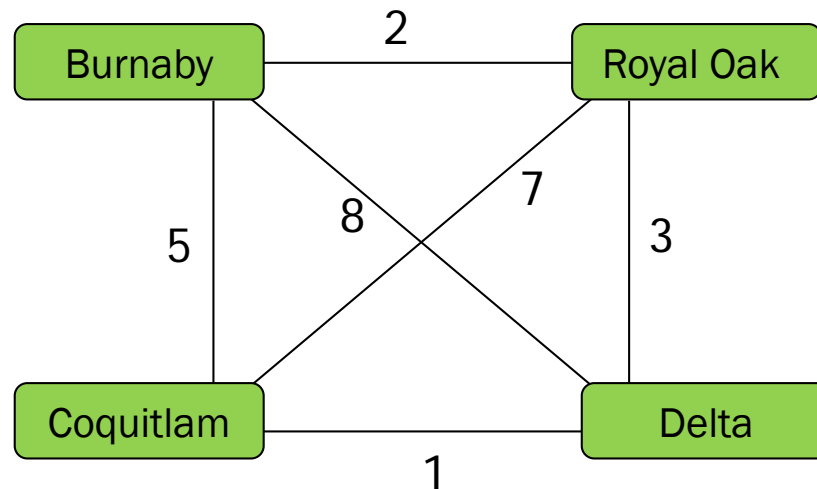

Brute force for “optimization problems”

- Generate a list of all potential solutions to the problem in a systematic manner
- Evaluate potential solutions one by one, disqualifying infeasible ones, and keeping track of the best one found so far
- When search ends, announce the solution(s) found


Traveling salesman problem (aka TSP)

- Abstract model:

- A weighted graph.

- Goal:

- Find shortest Hamiltonian circuit
- Hamiltonian circuit: a circuit that visits every node exactly once.

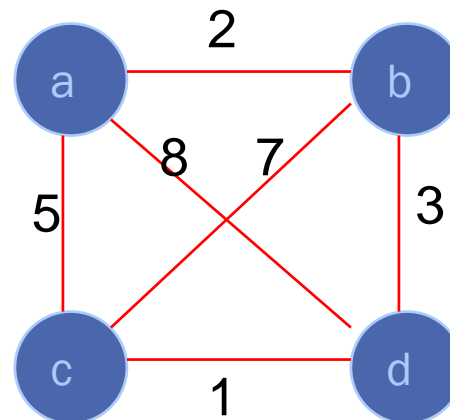

Traveling salesman problem

- Assume our salesman starts at city a. then one possible solution would be ...

$a \rightarrow b \rightarrow c \rightarrow d \rightarrow a$

... and the length of this route is

$$L = 2 + 7 + 1 + 8 = 18$$

- Other possible solutions include ...


$$a \rightarrow b \rightarrow d \rightarrow c \rightarrow a \quad L = 2 + 3 + 1 + 5 = 11$$

$$a \rightarrow c \rightarrow b \rightarrow d \rightarrow a \quad L = 5 + 7 + 3 + 8 = 23$$

$$a \rightarrow c \rightarrow d \rightarrow b \rightarrow a \quad L = 5 + 1 + 3 + 2 = 11$$

$$a \rightarrow d \rightarrow b \rightarrow c \rightarrow a \quad L = 8 + 3 + 7 + 5 = 23$$

$$a \rightarrow d \rightarrow c \rightarrow b \rightarrow a \quad L = 8 + 1 + 7 + 2 = 18$$

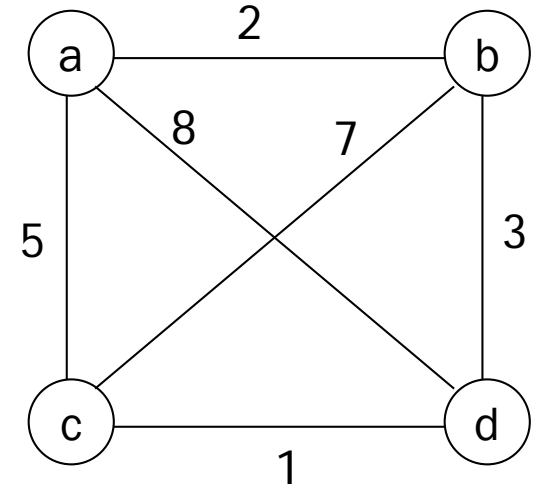

TSP example (cont'd)

a→b→c→d→a
a→b→d→c→a
a→c→b→d→a
a→c→d→b→a
a→d→b→c→a
a→d→c→b→a

Are there more tours?

No. We have to start and end at a. Any possible order of b, c, d must be considered. We have all of them listed.

Are some tours redundant?

Yes. We have counted each route twice (in each direction). We need only check half of the routes listed.

Efficiency:

The time consuming task is finding all the different permutations of b, c, d. For three things there are $3!=6$. But for a big map, this gets hard.

TSP efficiency

- How many possible routes – for large n ?
- Remember that since we are always starting and ending at a specific city (eg: a), we only need to consider routes that start with ' a '
 - ie: we would consider $a \rightarrow b \rightarrow d \rightarrow c \rightarrow a$ but not $b \rightarrow d \rightarrow c \rightarrow a \rightarrow b$
 - this means there are only $(n-1)!$ *permutations* to consider
- but we also notice that there are some duplicate routes, eg:
 $a \rightarrow b \rightarrow d \rightarrow c \rightarrow a$ is the same as $a \rightarrow c \rightarrow d \rightarrow b \rightarrow a$ (it is just reversed)
 - so we only consider one of them
 - every route has a reverse path, so ...
- the brute force solution requires that we generate and compute the length of $(n-1)!/2$ routes

TSP brute-force solution

```
for each permutation P of cities
  for each city i in P
    length ← length + weight(i,i+1)
  if length < min
    min ← length
    minroute ← P
return minroute
```

Efficiency?

$(n-1)!/2 = O(n!)$


How long does it take?

- Suppose there are N cities, all connected:
 - *For 10 cities: about 180,000 tours*
 - *For 100 cities: 4.66×10^{155}*

KNAPSACK PROBLEM



Knapsack problem

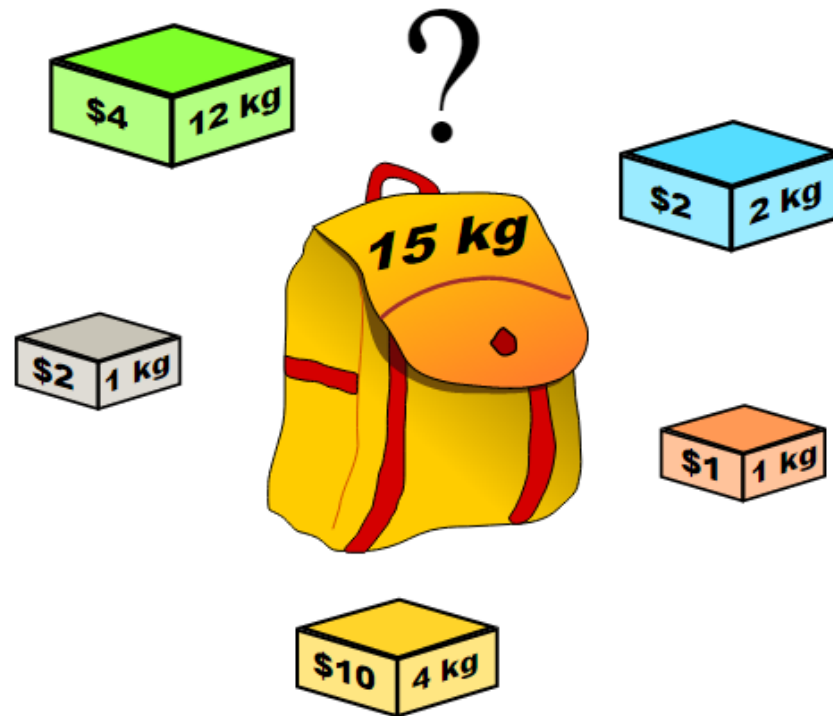

Knapsack problem

- Input:

- *weights:* $w_1 \ w_2 \ \dots \ w_n$
- *values:* $v_1 \ v_2 \ \dots \ v_n$
- *a knapsack of capacity W*


- Goal:

- *Find most valuable subset of the items that fit into the knapsack*

Knapsack problem

Example: Knapsack capacity $W=16$

<u>item</u>	<u>weight</u>	<u>value</u>
1	2	\$20
2	5	\$30
3	10	\$50
4	5	\$10

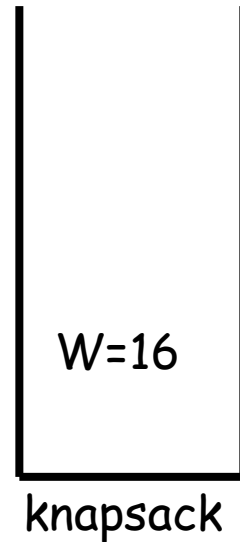

$$\begin{aligned} w_1 &= 2 \\ v_1 &= \$20 \end{aligned}$$

$$\begin{aligned} w_2 &= 5 \\ v_2 &= \$30 \end{aligned}$$

$$\begin{aligned} w_3 &= 10 \\ v_3 &= \$50 \end{aligned}$$

$$\begin{aligned} w_4 &= 5 \\ v_4 &= \$10 \end{aligned}$$

Knapsack problem

- Generate all possible subsets of the n items
- Compute total weight of each subset
- Identify feasible subsets
- Find the subset of the largest value

Knapsack example

Subset	Total weight	Total value
{1}	2	\$20
{2}	5	\$30
{3}	10	\$50
{4}	5	\$10
{1,2}	7	\$50
{1,3}	12	\$70
{1,4}	7	\$30
{2,3}	15	\$80
{2,4}	10	\$40
{3,4}	15	\$60
{1,2,3}	17	not feasible
{1,2,4}	12	\$60
{1,3,4}	17	not feasible
{2,3,4}	20	not feasible
{1,2,3,4}	22	not feasible

item	weight	value
1	2	\$20
2	5	\$30
3	10	\$50
4	5	\$10

Efficiency?

Need to generate all subsets. For n items, there are 2^n subsets. So this is an $O(2^n)$ algorithm.

ASSIGNMENT PROBLEM




Assignment problem

- There are n people who need to be assigned n jobs, and there is a (possibly different) cost for each person to do each job
- This is a classic optimization problem
- The problem is to find the combination of people and jobs that has the minimum (or maximum) overall cost



Assignment problem

	Job 1	Job 2	Job 3	Job 4
Person 1	9	2	7	8
Person 2	6	4	3	7
Person 3	5	8	1	8
Person 4	7	6	9	4

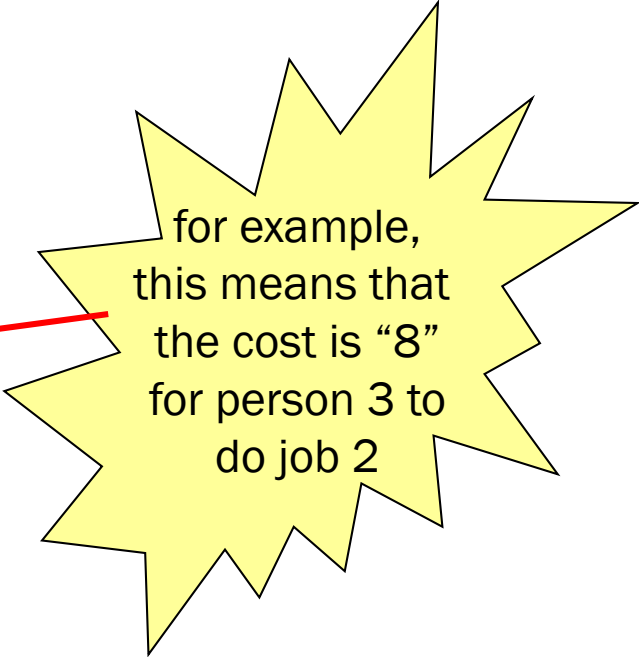

for example,
this means that
the cost is “8”
for person 3 to
do job 2

Goal:

Find the combination of people and jobs that has the minimum overall cost

Assignment problem

- Possible solution 1: <1, 2, 3, 4>

	Job 1	Job 2	Job 3	Job 4
Person 1	9	2	7	8
Person 2	6	4	3	7
Person 3	5	8	1	8
Person 4	7	6	9	4

- in this case the total cost is $9+4+1+4 = 18$

Assignment problem

- Another possible solution: <2, 1, 3, 4>

	Job 1	Job 2	Job 3	Job 4
Person 1	9	2	7	8
Person 2	6	4	3	7
Person 3	5	8	1	8
Person 4	7	6	9	4

*in this case the
total cost is
 $6+2+1+4 = 13$*

... and another possible solution: <2, 3, 1, 4>

	Job 1	Job 2	Job 3	Job 4
Person 1	9	2	7	8
Person 2	6	4	3	7
Person 3	5	8	1	8
Person 4	7	6	9	4

*in this case the
total cost is
 $5+2+3+4 = 14$*

Assignment problem

- Brute force algorithm:
 - *Check every combination of assignments*
 - *Calculate the total cost*
 - *Find the combination with minimum cost*

```
for each permutation P of job assignments
  totalcost ← sum of the job costs for P
  if totalcost < mincost
    mincost ← totalcost
    minperm ← P
return minperm
```

Efficiency?

Need to generate *all permutations*. For n jobs, there are $n!$ permutations. So this is an $O(n!)$ algorithm.

Comments on brute force

- Brute force (exhaustive-search) algorithms run in a realistic amount of time only on very small inputs
- In many cases, exhaustive search or its variation is the only known way to get an exact solution

B.F. Strengths and Weaknesses

■ Strengths

- *wide applicability*
- *simplicity*
- *yields reasonable algorithms for some important problems*
 - matrix mult.
 - sorting
 - searching
 - string matching

■ Weaknesses


- *rarely yields efficient algorithms*
- *some brute-force algorithms are unacceptably slow*
- *not as constructive as some other design techniques*

Practice example

- Consider the following problem:

You have 1 row of n discs of 2 colors, n dark and n light. They alternate dark, light, dark, light, dark, and so on. You want to get all the dark discs on the right hand side and all the light discs on the left.

The only move you are allowed to make is to interchange two adjacent discs.

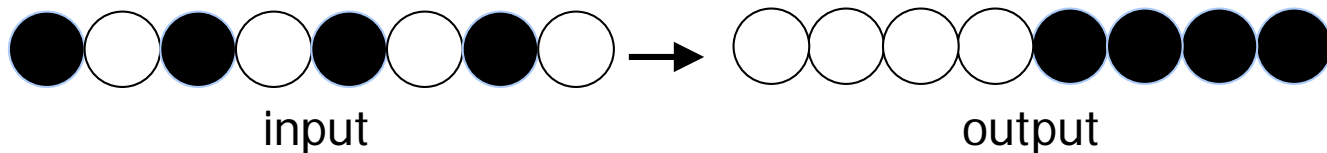

- Design an algorithm that solves this problem
- Analyze the efficiency of your algorithm.

Try it/homework

1. Chapter 3.1, page 102, questions 4, 8, 11
2. Chapter 3.1, page 107, question 5, 8