Class14

Kimberly Navarro (A17485724)

Table of contents

Background . . . 1
Clean up (data tidying) . . . 4
DESEq Analysis . . . 5
Setting up the DESEq object . . . 5
Running DESeq . . . 7
Getting results . . . 8
Volcano plot . . . 8
Adding gene annotation . . . 10
Pathway Analysis . . . 12
KEGG pathways . . . 12
Gene Oncology (GO) . . . 21
Reactome Analysis . . . 22

Background

The data for today's mini-project comes from a study of an important HOX gene.

Data Import

```
library(DESeq2)
```

```
Loading required package: S4Vectors

Loading required package: stats4

Loading required package: BiocGenerics

Loading required package: generics
```

```
Attaching package: 'generics'

The following objects are masked from 'package:base':

    as.difftime, as.factor, as.ordered, intersect, is.element, setdiff,
    setequal, union


Attaching package: 'BiocGenerics'

The following objects are masked from 'package:stats':

    IQR, mad, sd, var, xtabs

The following objects are masked from 'package:base':

    anyDuplicated, aperm, append, as.data.frame, basename, cbind,
    colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,
    get, grep, grepl, is.unsorted, lapply, Map, mapply, match, mget,
    order, paste, pmax, pmax.int, pmin, pmin.int, Position, rank,
    rbind, Reduce, rownames, sapply, saveRDS, table, tapply, unique,
    unsplit, which.max, which.min


Attaching package: 'S4Vectors'

The following object is masked from 'package:utils':

    findMatches

The following objects are masked from 'package:base':

    expand.grid, I, unname

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: Seqinfo
```

```
Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats


Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

    colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
    colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
    colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
    colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
    colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
    colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
    colWeightedMeans, colWeightedMedians, colWeightedSds,
    colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
    rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
    rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
    rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
    rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
    rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
    rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
    rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

    Vignettes contain introductory material; view with
    'browseVignettes()'. To cite Bioconductor, see
    'citation("Biobase")', and for packages 'citation("pkgname")'.


Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

    rowMedians
```

```
The following objects are masked from 'package:matrixStats':

    anyMissing, rowMedians
```

```r
countData <- read.csv("GSE37704_featurecounts.csv", row.names = 1)
colData <- read.csv("GSE37704_metadata.csv", row.names =1)
```

Let's gave a wee peak at these:

```r
colData
```

```
              condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```r
head(countData)
```

```
                length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092    918         0         0         0         0         0
ENSG00000279928    718         0         0         0         0         0
ENSG00000279457   1982        23        28        29        29        28
ENSG00000278566    939         0         0         0         0         0
ENSG00000273547    939         0         0         0         0         0
ENSG00000187634   3214       124       123       205       207       212
                SRR493371
ENSG00000186092         0
ENSG00000279928         0
ENSG00000279457        46
ENSG00000278566         0
ENSG00000273547         0
ENSG00000187634       258
```

Clean up (data tidying)

We need to remove the funny "length" column from our countData to make the columns match in the rows in colData

```r
countData <- countData [, -1]
```

Check match of colData and countData

```r
rownames(colData) == colnames(countData)
```

```
[1] TRUE TRUE TRUE TRUE TRUE TRUE
```

```r
head(countData)
```

```
                 SRR493366 SRR493367 SRR493368 SRR493369 SRR493370 SRR493371
ENSG00000186092         0         0         0         0         0         0
ENSG00000279928         0         0         0         0         0         0
ENSG00000279457        23        28        29        29        28        46
ENSG00000278566         0         0         0         0         0         0
ENSG00000273547         0         0         0         0         0         0
ENSG00000187634       124       123       205       207       212       258
```

```r
to.keep <- rowSums(countData) > 0
countData <- countData[to.keep,]
```

DESEq Analysis

```r
library (DESeq2)
```

Setting up the DESEq object

```r
dds <- DESeqDataSetFromMatrix(countData = countData,
                              colData = colData,
                              design= ~condition)
```

```
Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in
design formula are characters, converting to factors
```

```r
dds = DESeq(dds)
```

```
estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing
```

```r
dds
```

```
class: DESeqDataSet
dim: 15975 6
metadata(1): version
assays(4): counts mu H cooks
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345
  ENSG00000271254
rowData names(22): baseMean baseVar ... deviance maxCooks
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371
colData names(2): condition sizeFactor
```

```r
res <- results (dds)
```

```r
summary(res)
```

```
out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)       : 4349, 27%
LFC < 0 (down)     : 4396, 28%
outliers [1]       : 0, 0%
low counts [2]     : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

```r
colData
```

```
              condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

Running DESeq

```r
dds <- DESeq(dds)
```

```
using pre-existing size factors

estimating dispersions

found already estimated dispersions, replacing these

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing
```

```r
res <- results(dds)
```

Getting results

```r
res <- results(dds)
head(res)
```

```
log2 fold change (MLE): condition hoxa1 kd vs control sirna
Wald test p-value: condition hoxa1 kd vs control sirna
DataFrame with 6 rows and 6 columns
                 baseMean log2FoldChange     lfcSE       stat      pvalue
                <numeric>      <numeric> <numeric>  <numeric>   <numeric>
ENSG00000279457   29.9136      0.1792571 0.3248216   0.551863 5.81042e-01
ENSG00000187634  183.2296      0.4264571 0.1402658   3.040350 2.36304e-03
ENSG00000188976 1651.1881     -0.6927205 0.0548465 -12.630158 1.43990e-36
ENSG00000187961  209.6379      0.7297556 0.1318599   5.534326 3.12428e-08
ENSG00000187583   47.2551      0.0405765 0.2718928   0.149237 8.81366e-01
ENSG00000187642   11.9798      0.5428105 0.5215598   1.040744 2.97994e-01
                      padj
                 <numeric>
ENSG00000279457 6.86555e-01
ENSG00000187634 5.15718e-03
ENSG00000188976 1.76549e-35
ENSG00000187961 1.13413e-07
ENSG00000187583 9.19031e-01
ENSG00000187642 4.03379e-01
```

Volcano plot

```r
library(ggplot2)

ggplot(res) +
  aes(log2FoldChange,
      -log(padj)) +
  geom_point()
```

```
Warning: Removed 1237 rows containing missing values or values outside the scale range
(`geom_point()`).
```

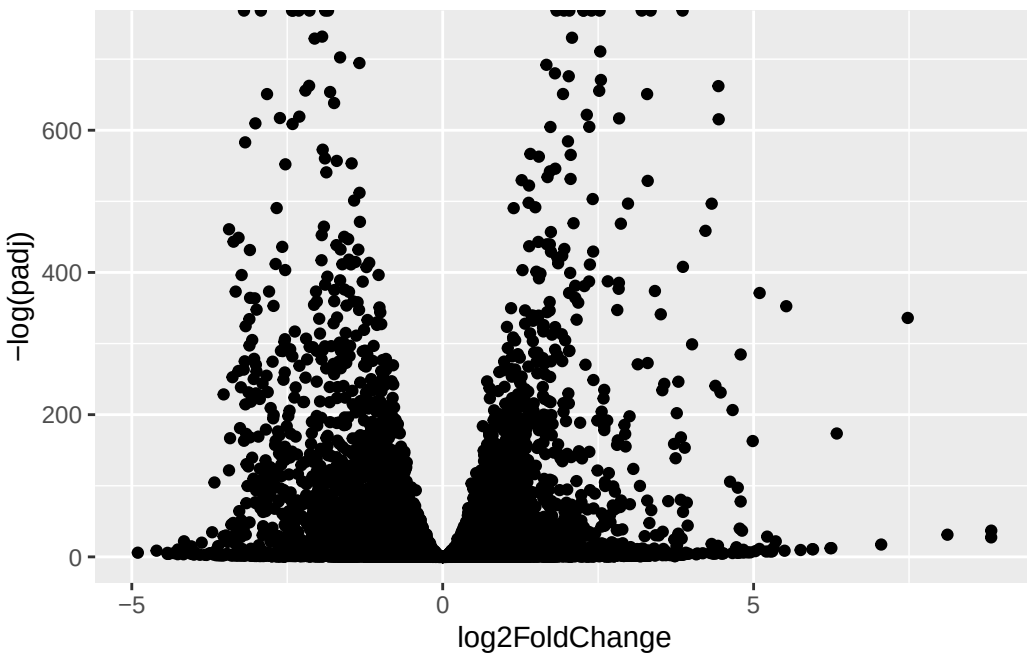


```
library(ggplot2)

mycols <- rep("gray", nrow(as.data.frame(res)))

mycols[ abs(res$log2FoldChange) > 2 ] <- "blue"
mycols[ res$padj > 0.01 ] <- "gray"

ggplot(res) +
  aes(log2FoldChange, -log10(padj)) +
  geom_point(color = mycols) +
  xlab("Log2(FoldChange)") +
  ylab("-Log(P-value)") +
  geom_vline(xintercept = c(-2, 2)) +
  geom_hline(yintercept = -log10(0.01))
```

```
Warning: Removed 1237 rows containing missing values or values outside the scale range
(`geom_point()`).
```

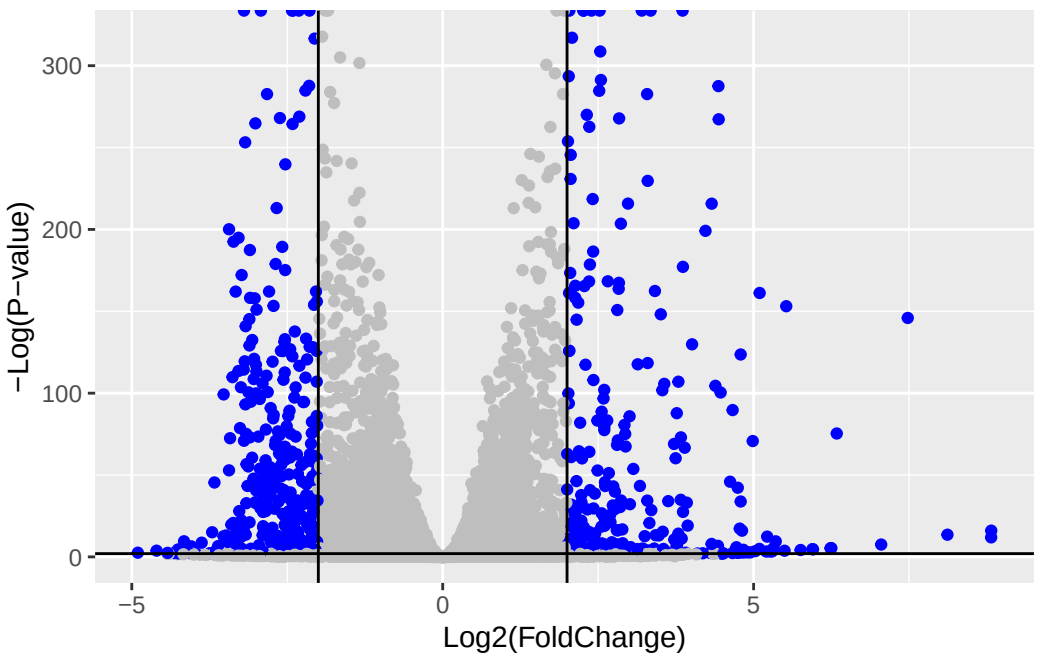

Adding gene annotation

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
 [1] "ACCNUM"       "ALIAS"        "ENSEMBL"      "ENSEMBLPROT"  "ENSEMBLTRANS"
 [6] "ENTREZID"     "ENZYME"       "EVIDENCE"     "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"     "GO"           "GOALL"        "IPI"          "MAP"
[16] "OMIM"         "ONTOLOGY"     "ONTOLOGYALL"  "PATH"         "PFAM"
[21] "PMID"         "PROSITE"      "REFSEQ"       "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol <- mapIds(org.Hs.eg.db,
                     keys = row.names(res),
                     keytype = "ENSEMBL",
```

```
                      column = "SYMBOL",
                      multiVals = "first")
```

```
'select()' returned 1:many mapping between keys and columns
```

```
res$entrez <- mapIds(org.Hs.eg.db,
                     keys = row.names(res),
                     keytype = "ENSEMBL",
                     column = "ENTREZID",
                     multiVals = "first")
```

```
'select()' returned 1:many mapping between keys and columns
```

```
res$name <- mapIds(org.Hs.eg.db,
                   keys = row.names(res),
                   keytype = "ENSEMBL",
                   column = "GENENAME",
                   multiVals = "first")
```

```
'select()' returned 1:many mapping between keys and columns
```

```
head(res, 10)
```

```
log2 fold change (MLE): condition hoxa1 kd vs control sirna
Wald test p-value: condition hoxa1 kd vs control sirna
DataFrame with 10 rows and 9 columns
                   baseMean log2FoldChange     lfcSE       stat      pvalue
                  <numeric>      <numeric> <numeric>  <numeric>   <numeric>
ENSG00000279457   29.913579      0.1792571 0.3248216   0.551863 5.81042e-01
ENSG00000187634  183.229650      0.4264571 0.1402658   3.040350 2.36304e-03
ENSG00000188976 1651.188076     -0.6927205 0.0548465 -12.630158 1.43990e-36
ENSG00000187961  209.637938      0.7297556 0.1318599   5.534326 3.12428e-08
ENSG00000187583   47.255123      0.0405765 0.2718928   0.149237 8.81366e-01
ENSG00000187642   11.979750      0.5428105 0.5215598   1.040744 2.97994e-01
ENSG00000188290  108.922128      2.0570638 0.1969053  10.446970 1.51282e-25
ENSG00000187608  350.716868      0.2573837 0.1027266   2.505522 1.22271e-02
ENSG00000188157 9128.439422      0.3899088 0.0467163   8.346304 7.04321e-17
ENSG00000237330    0.158192      0.7859552 4.0804729   0.192614 8.47261e-01
                       padj      symbol      entrez                   name
```

```
                  <numeric> <character> <character>            <character>
ENSG00000279457 6.86555e-01          NA          NA                     NA
ENSG00000187634 5.15718e-03      SAMD11      148398 sterile alpha motif ..
ENSG00000188976 1.76549e-35       NOC2L       26155 NOC2 like nucleolar ..
ENSG00000187961 1.13413e-07      KLHL17      339451 kelch like family me..
ENSG00000187583 9.19031e-01     PLEKHN1       84069 pleckstrin homology ..
ENSG00000187642 4.03379e-01       PERM1       84808 PPARGC1 and ESRR ind..
ENSG00000188290 1.30538e-24        HES4       57801 hes family bHLH tran..
ENSG00000187608 2.37452e-02       ISG15        9636 ISG15 ubiquitin like..
ENSG00000188157 4.21963e-16        AGRN      375790                   agrin
ENSG00000237330          NA      RNF223      401934 ring finger protein ..
```

```
res <- res[order(res$padj), ]
write.csv(res, file = "deseq_results.csv")
```

Pathway Analysis

KEGG pathways

```
library(gage)
library(gageData)
library(pathview)

data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
[1] "10"   "1544" "1548" "1549" "1553" "7498" "9"

$`hsa00983 Drug metabolism - other enzymes`
 [1] "10"     "1066"   "10720"  "10941"  "151531" "1548"   "1549"   "1551"
 [9] "1553"   "1576"   "1577"   "1806"   "1807"   "1890"   "221223" "2990"
[17] "3251"   "3614"   "3615"   "3704"   "51733"  "54490"  "54575"  "54576"
[25] "54577"  "54578"  "54579"  "54600"  "54657"  "54658"  "54659"  "54963"
```

```
[33] "574537" "64816"  "7083"   "7084"   "7172"   "7363"   "7364"   "7365"
[41] "7366"   "7367"   "7371"   "7372"   "7378"   "7498"   "79799"  "83549"
[49] "8824"   "8833"   "9"      "978"

$`hsa00230 Purine metabolism`
  [1] "100"    "10201"  "10606"  "10621"  "10622"  "10623"  "107"    "10714"
  [9] "108"    "10846"  "109"    "111"    "11128"  "11164"  "112"    "113"
 [17] "114"    "115"    "122481" "122622" "124583" "132"    "158"    "159"
 [25] "1633"   "171568" "1716"   "196883" "203"    "204"    "205"    "221823"
 [33] "2272"   "22978"  "23649"  "246721" "25885"  "2618"   "26289"  "270"
 [41] "271"    "27115"  "272"    "2766"   "2977"   "2982"   "2983"   "2984"
 [49] "2986"   "2987"   "29922"  "3000"   "30833"  "30834"  "318"    "3251"
 [57] "353"    "3614"   "3615"   "3704"   "377841" "471"    "4830"   "4831"
 [65] "4832"   "4833"   "4860"   "4881"   "4882"   "4907"   "50484"  "50940"
 [73] "51082"  "51251"  "51292"  "5136"   "5137"   "5138"   "5139"   "5140"
 [81] "5141"   "5142"   "5143"   "5144"   "5145"   "5146"   "5147"   "5148"
 [89] "5149"   "5150"   "5151"   "5152"   "5153"   "5158"   "5167"   "5169"
 [97] "51728"  "5198"   "5236"   "5313"   "5315"   "53343"  "54107"  "5422"
[105] "5424"   "5425"   "5426"   "5427"   "5430"   "5431"   "5432"   "5433"
[113] "5434"   "5435"   "5436"   "5437"   "5438"   "5439"   "5440"   "5441"
[121] "5471"   "548644" "55276"  "5557"   "5558"   "55703"  "55811"  "55821"
[129] "5631"   "5634"   "56655"  "56953"  "56985"  "57804"  "58497"  "6240"
[137] "6241"   "64425"  "646625" "654364" "661"    "7498"   "8382"   "84172"
[145] "84265"  "84284"  "84618"  "8622"   "8654"   "87178"  "8833"   "9060"
[153] "9061"   "93034"  "953"    "9533"   "954"    "955"    "956"    "957"
[161] "9583"   "9615"
```

We need a foldchanges vector for `gage()`

```
foldchanges <- res$log2FoldChange
names(foldchanges) <- res$entrez
head (foldchanges)
```

```
     1266     54855      1465      2034      2150      6659
-2.422719  3.201955 -2.313738 -1.888019  3.344508  2.392288
```

Now, let's run gage pathway analysis

```
keggres = gage(foldchanges, gsets=kegg.sets.hs)
```

Now, let's look at the object returned from gage().

```r
attributes(keggres)
```

```
$names
[1] "greater" "less"    "stats"
```

Lets look at the first few down (less) pathway results:

```r
head(keggres$less)
```

```
                                        p.geomean stat.mean        p.val
hsa04110 Cell cycle                   8.995727e-06 -4.378644 8.995727e-06
hsa03030 DNA replication              9.424076e-05 -3.951803 9.424076e-05
hsa03013 RNA transport                1.375901e-03 -3.028500 1.375901e-03
hsa03440 Homologous recombination     3.066756e-03 -2.852899 3.066756e-03
hsa04114 Oocyte meiosis               3.784520e-03 -2.698128 3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis 8.961413e-03 -2.405398 8.961413e-03
                                            q.val set.size         exp1
hsa04110 Cell cycle                   0.001448312      121 8.995727e-06
hsa03030 DNA replication              0.007586381       36 9.424076e-05
hsa03013 RNA transport                0.073840037      144 1.375901e-03
hsa03440 Homologous recombination     0.121861535       28 3.066756e-03
hsa04114 Oocyte meiosis               0.121861535      102 3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis 0.212222694       53 8.961413e-03
```

Now, let's try out the pathview() function from the pathview package to make a pathway plot with our RNA-Seq expression results shown in color.

```r
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

```
'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kimberlynavarro/Desktop/BIMM 143/Class14/Class14

Info: Writing image file hsa04110.pathview.png
```

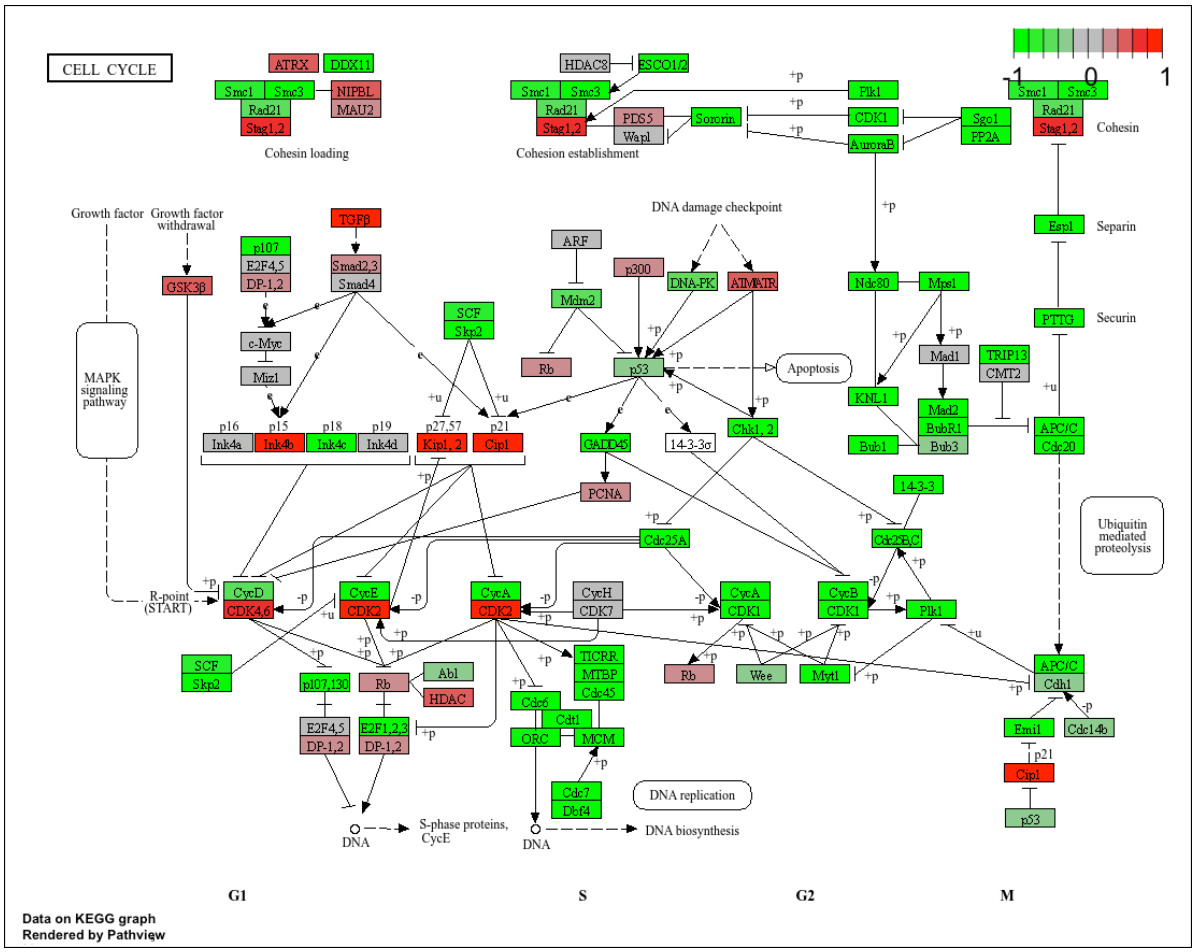


```
keggrespathways <- rownames(keggres$greater)[1:5]

keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

```
'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kimberlynavarro/Desktop/BIMM 143/Class14/Class14

Info: Writing image file hsa04640.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kimberlynavarro/Desktop/BIMM 143/Class14/Class14

Info: Writing image file hsa04630.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kimberlynavarro/Desktop/BIMM 143/Class14/Class14

Info: Writing image file hsa00140.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kimberlynavarro/Desktop/BIMM 143/Class14/Class14

Info: Writing image file hsa04142.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kimberlynavarro/Desktop/BIMM 143/Class14/Class14

Info: Writing image file hsa04330.pathview.png
```

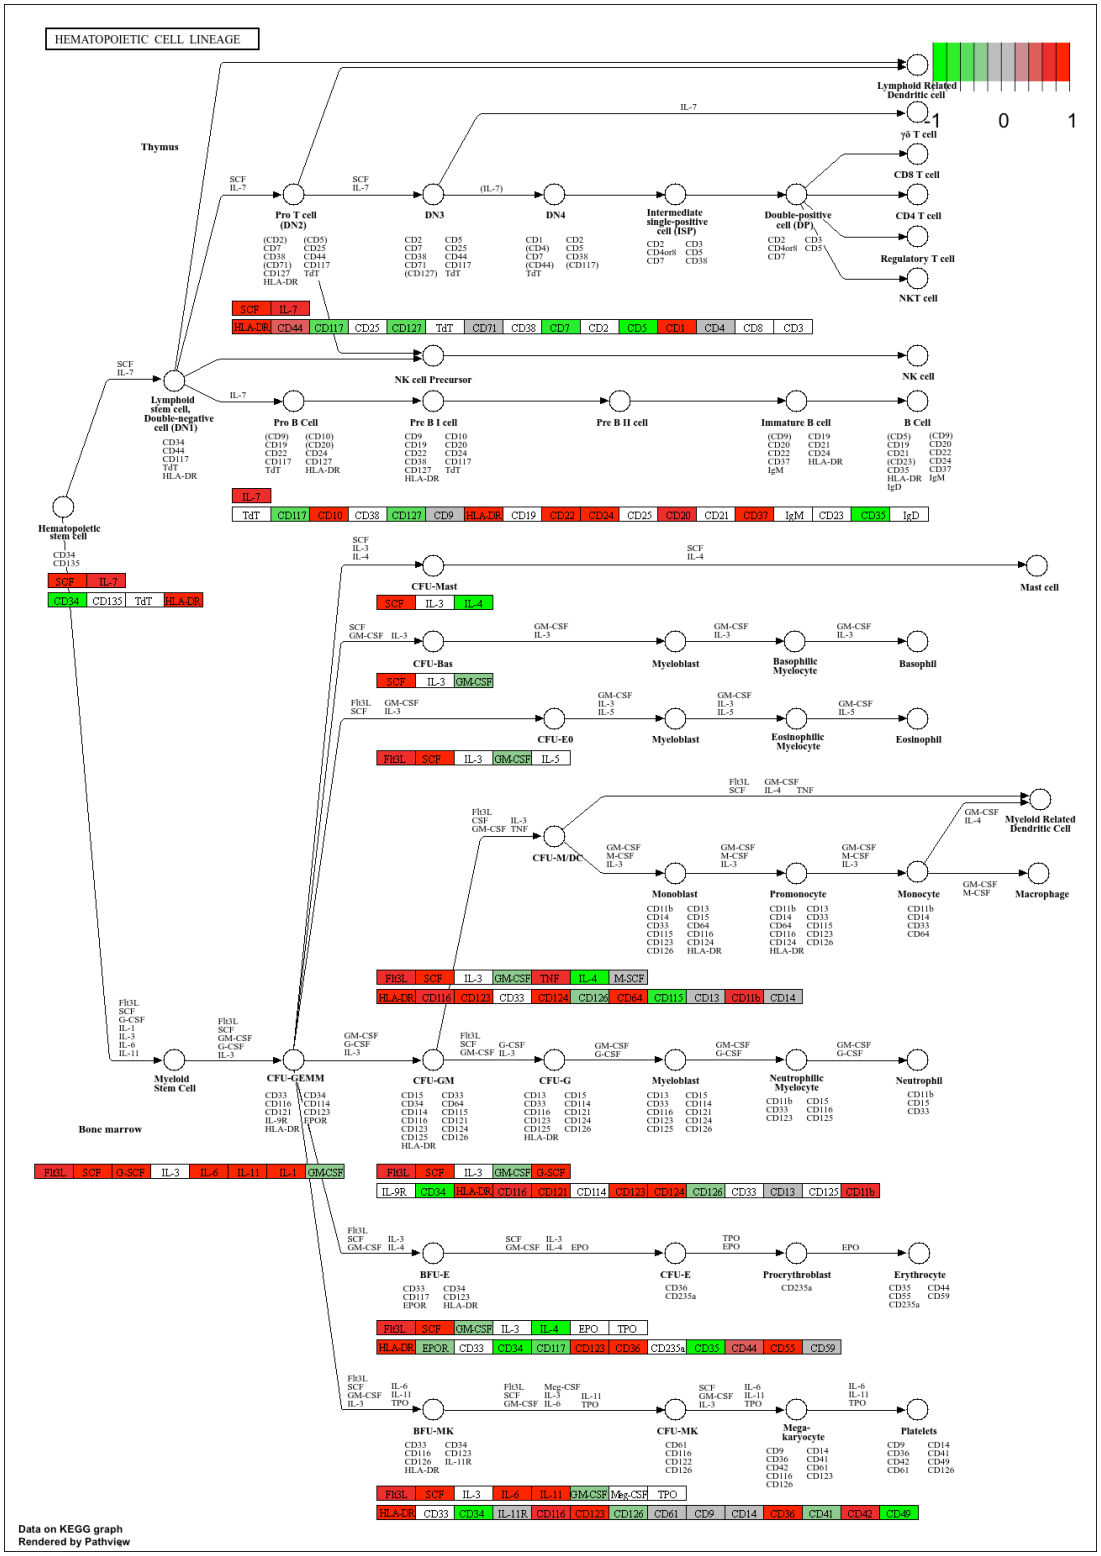
HEMATOPOIETIC CELL LINEAGE
Lymphoid Related Dendritic cell
γδ T cell
CD8 T cell
CD4 T cell
Regulatory T cell
NKT cell
Thymus
Pro T cell (DN2)
DN3
DN4
Intermediate single-positive cell (ISP)
Double-positive cell (DP)
NK cell Precursor
NK cell
Lymphoid stem cell, Double-negative cell (DN1)
Pro B Cell
Pre B I cell
Pre B II cell
Immature B cell
B Cell
Hematopoietic stem cell
CFU-Mast
Mast cell
CFU-Bas
Myeloblast
Basophilic Myelocyte
Basophil
CFU-E0
Eosinophilic Myelocyte
Eosinophil
CFU-M/DC
Myeloid Related Dendritic Cell
Monoblast
Promonocyte
Monocyte
Macrophage
Myeloid Stem Cell
CFU-GEMM
CFU-GM
CFU-G
Neutrophilic Myelocyte
Neutrophil
Bone marrow
BFU-E
CFU-E
Proerythroblast
Erythrocyte
BFU-MK
CFU-MK
Mega-karyocyte
Platelets
Data on KEGG graph
Rendered by Pathview

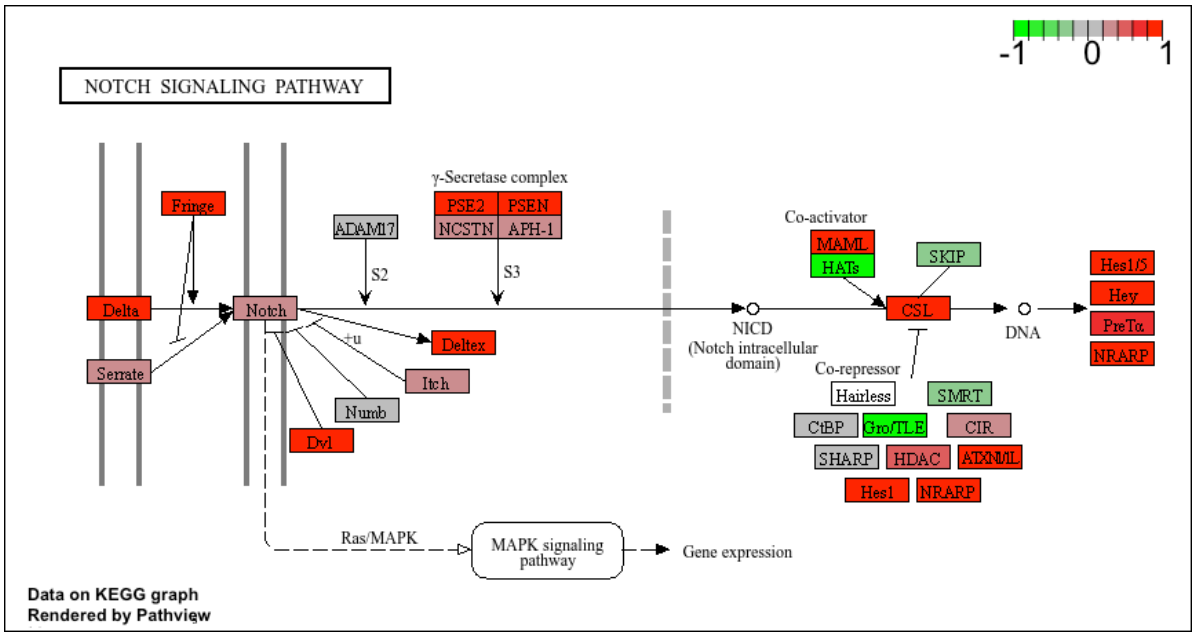
-1
0
1
NOTCH SIGNALING PATHWAY
γ-Secretase complex
PSE2
PSEN
NCSTN
APH-1
Fringe
ADAM17
S2
S3
Co-activator
MAML
HATs
SKIP
Hes1/5
Hey
PreTα
NRARP
Delta
Notch
Serrate
+u
Deltex
Itch
Numb
Dvl
NICD
(Notch intracellular domain)
CSL
DNA
Co-repressor
Hairless
SMRT
CtBP
Gro/TLE
CIR
SHARP
HDAC
ATXN1/L
Hes1
NRARP
Ras/MAPK
MAPK signaling pathway
Gene expression
Data on KEGG graph
Rendered by Pathview

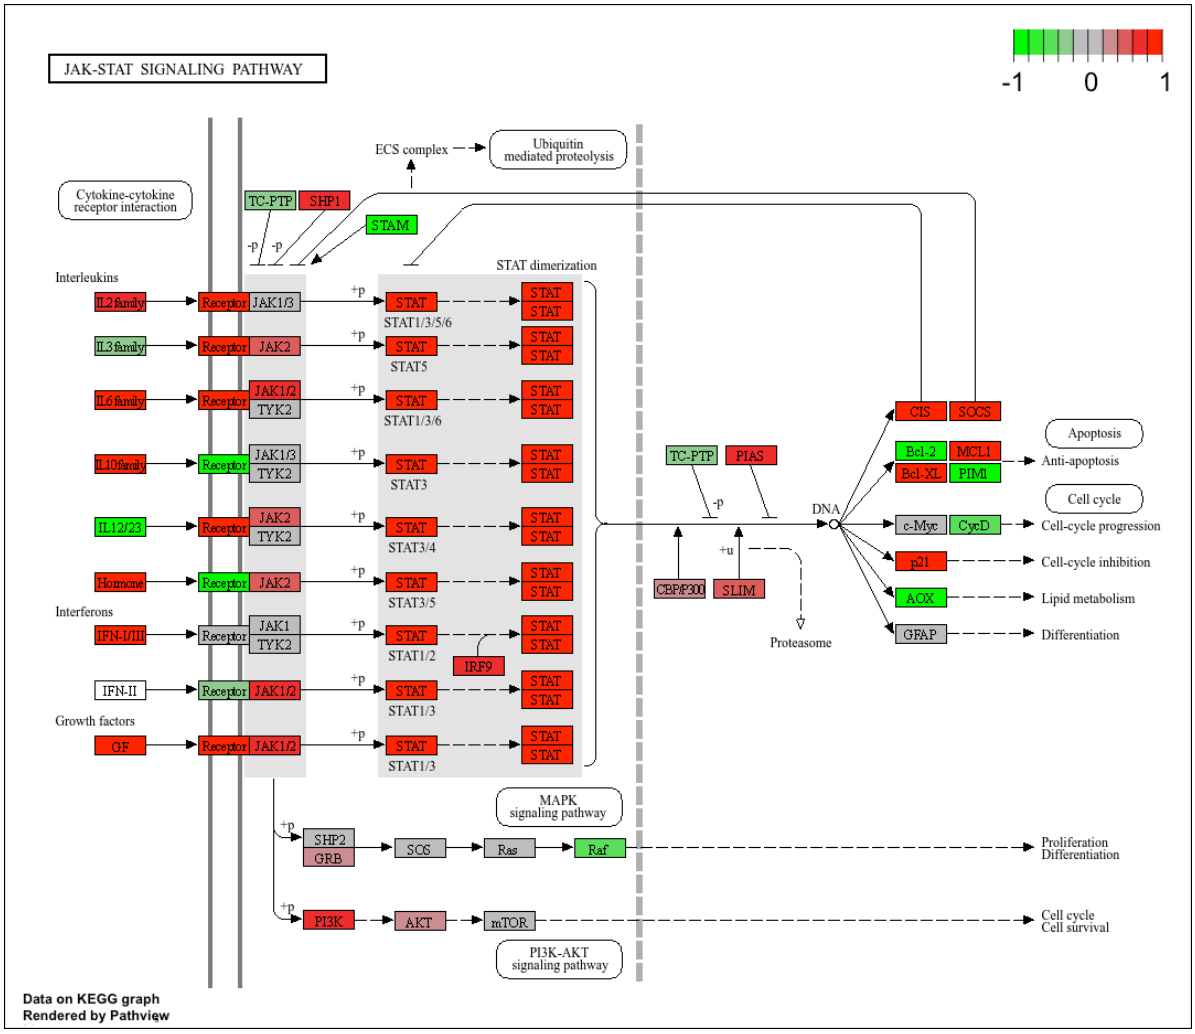
JAK-STAT SIGNALING PATHWAY
-1
0
1
ECS complex
Ubiquitin mediated proteolysis
Cytokine-cytokine receptor interaction
TC-PTP
SHP1
STAM
-p
-p
STAT dimerization
Interleukins
IL2family
Receptor
JAK1/3
+p
STAT
STAT
STAT1/3/5/6
IL3family
JAK2
STAT5
IL6family
JAK1/2
TYK2
STAT1/3/6
IL10family
JAK1/3
TYK2
STAT3
IL12/23
JAK2
TYK2
STAT3/4
Hormone
JAK2
STAT3/5
Interferons
IFN-I/III
JAK1
TYK2
STAT1/2
IRF9
IFN-II
JAK1/2
STAT1/3
Growth factors
GF
JAK1/2
STAT1/3
CIS
SOCS
Apoptosis
Bcl-2
MCL1
Bcl-XL
PIM1
Anti-apoptosis
TC-PTP
PIAS
-p
DNA
Cell cycle
c-Myc
CycD
Cell-cycle progression
+u
p21
Cell-cycle inhibition
CBP/P300
SLIM
AOX
Lipid metabolism
Proteasome
GFAP
Differentiation
MAPK signaling pathway
SHP2
GRB
SOS
Ras
Raf
Proliferation
Differentiation
PI3K
AKT
mTOR
Cell cycle
Cell survival
PI3K-AKT signaling pathway
Data on KEGG graph
Rendered by Pathview

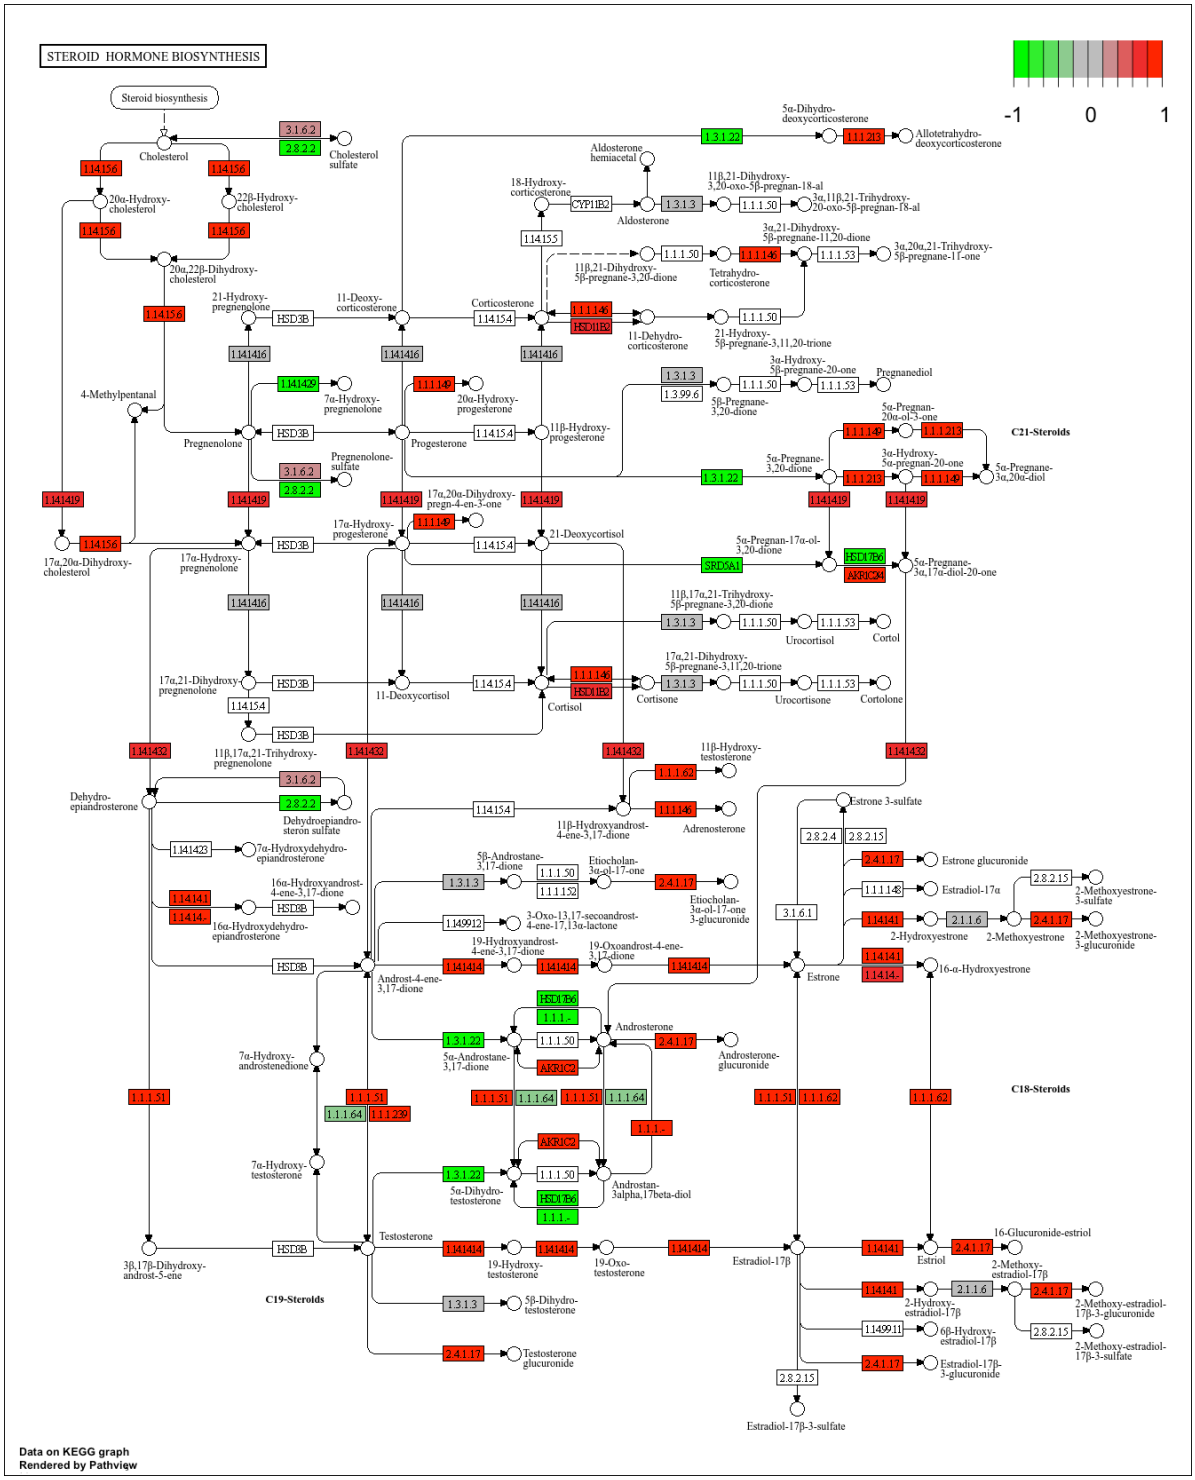
STEROID HORMONE BIOSYNTHESIS
-1
0
1
Steroid biosynthesis
Cholesterol
Cholesterol sulfate
20α-Hydroxy-cholesterol
22β-Hydroxy-cholesterol
20α,22β-Dihydroxy-cholesterol
21-Hydroxy-pregnenolone
11-Deoxy-corticosterone
Corticosterone
11-Dehydro-corticosterone
21-Hydroxy-5β-pregnane-3,11,20-trione
Tetrahydro-corticosterone
11β,21-Dihydroxy-5β-pregnane-3,20-dione
3α,21-Dihydroxy-5β-pregnane-11,20-dione
3α,20α,21-Trihydroxy-5β-pregnane-11-one
5α-Dihydro-deoxycorticosterone
Allotetrahydro-deoxycorticosterone
Aldosterone hemiacetal
Aldosterone
18-Hydroxy-corticosterone
11β,21-Dihydroxy-3,20-oxo-5β-pregnan-18-al
3α,11β,21-Trihydroxy-20-oxo-5β-pregnan-18-al
4-Methylpentanal
Pregnenolone
Pregnenolone-sulfate
7α-Hydroxy-pregnenolone
20α-Hydroxy-progesterone
Progesterone
11β-Hydroxy-progesterone
3α-Hydroxy-5β-pregnane-20-one
Pregnanediol
5β-Pregnane-3,20-dione
5α-Pregnan-20α-ol-3-one
5α-Pregnan-3,20-dione
3α-Hydroxy-5α-pregnan-20-one
5α-Pregnane-3α,20α-diol
C21-Sterolds
17α,20α-Dihydroxy-pregn-4-en-3-one
17α,20α-Dihydroxy-cholesterol
17α-Hydroxy-pregnenolone
17α-Hydroxy-progesterone
21-Deoxycortisol
5α-Pregnan-17α-ol-3,20-dione
5α-Pregnane-3α,17α-diol-20-one
11β,17α,21-Trihydroxy-5β-pregnane-3,20-dione
Urocortisol
Cortol
17α,21-Dihydroxy-pregnenolone
11-Deoxycortisol
Cortisol
17α,21-Dihydroxy-5β-pregnane-3,11,20-trione
Cortisone
Urocortisone
Cortolone
11β,17α,21-Trihydroxy-pregnenolone
11β-Hydroxy-testosterone
Dehydro-epiandrosterone
Dehydroepiandro-steron sulfate
11β-Hydroxyandrost-4-ene-3,17-dione
Adrenosterone
Estrone 3-sulfate
7α-Hydroxydehydro-epiandrosterone
5β-Androstane-3,17-dione
Etiocholan-3α-ol-17-one
Etiocholan-3α-ol-17-one 3-glucuronide
Estrone glucuronide
Estradiol-17α
2-Methoxyestrone-3-sulfate
16α-Hydroxyandrost-4-ene-3,17-dione
16α-Hydroxydehydro-epiandrosterone
3-Oxo-13,17-secoandrost-4-ene-17,13α-lactone
2-Hydroxyestrone
2-Methoxyestrone
2-Methoxyestrone-3-glucuronide
19-Hydroxyandrost-4-ene-3,17-dione
19-Oxoandrost-4-ene-3,17-dione
Androst-4-ene-3,17-dione
Estrone
16-α-Hydroxyestrone
Androsterone
5α-Androstane-3,17-dione
Androsterone-glucuronide
7α-Hydroxy-androstenedione
C18-Sterolds
7α-Hydroxy-testosterone
5α-Dihydro-testosterone
Androstan-3alpha,17beta-diol
Testosterone
3β,17β-Dihydroxy-androst-5-ene
19-Hydroxy-testosterone
19-Oxo-testosterone
Estradiol-17β
16-Glucuronide-estriol
Estriol
2-Methoxy-estradiol-17β
2-Hydroxy-estradiol-17β
2-Methoxy-estradiol-17β-3-glucuronide
6β-Hydroxy-estradiol-17β
2-Methoxy-estradiol-17β-3-sulfate
Estradiol-17β-3-glucuronide
C19-Sterolds
5β-Dihydro-testosterone
Testosterone glucuronide
Estradiol-17β-3-sulfate
Data on KEGG graph
Rendered by Pathview

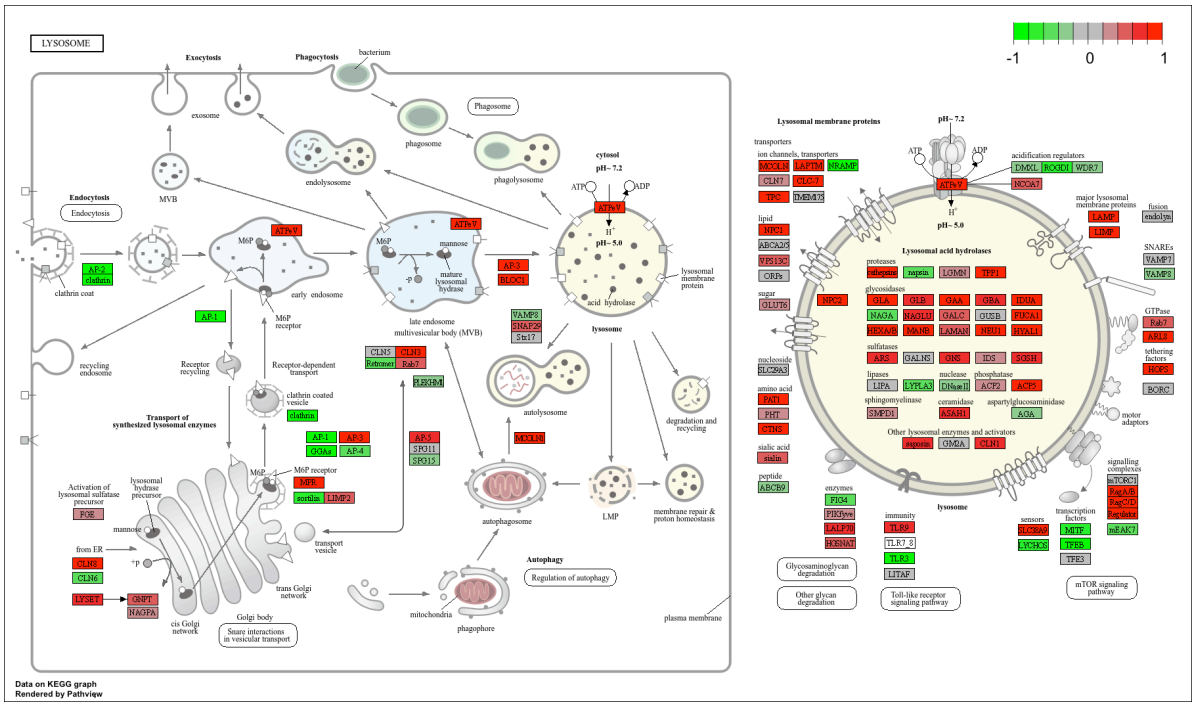

Gene Oncology (GO)

```
data(go.sets.hs)
data(go.subs.hs)

# Focus on Biological Process subset of GO
gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets)

lapply(gobpres, head)
```

```
$greater
                                          p.geomean stat.mean        p.val
GO:0007156 homophilic cell adhesion       8.519724e-05  3.824205 8.519724e-05
GO:0002009 morphogenesis of an epithelium 1.396681e-04  3.653886 1.396681e-04
GO:0048729 tissue morphogenesis           1.432451e-04  3.643242 1.432451e-04
GO:0007610 behavior                       1.925222e-04  3.565432 1.925222e-04
GO:0060562 epithelial tube morphogenesis  5.932837e-04  3.261376 5.932837e-04
GO:0035295 tube development               5.953254e-04  3.253665 5.953254e-04
```

```
                                          q.val set.size         exp1
GO:0007156 homophilic cell adhesion       0.1951953      113 8.519724e-05
GO:0002009 morphogenesis of an epithelium 0.1951953      339 1.396681e-04
GO:0048729 tissue morphogenesis           0.1951953      424 1.432451e-04
GO:0007610 behavior                       0.1967577      426 1.925222e-04
GO:0060562 epithelial tube morphogenesis  0.3565320      257 5.932837e-04
GO:0035295 tube development               0.3565320      391 5.953254e-04

$less
                                            p.geomean stat.mean        p.val
GO:0048285 organelle fission             1.536227e-15 -8.063910 1.536227e-15
GO:0000280 nuclear division              4.286961e-15 -7.939217 4.286961e-15
GO:0007067 mitosis                       4.286961e-15 -7.939217 4.286961e-15
GO:0000087 M phase of mitotic cell cycle 1.169934e-14 -7.797496 1.169934e-14
GO:0007059 chromosome segregation        2.028624e-11 -6.878340 2.028624e-11
GO:0000236 mitotic prometaphase          1.729553e-10 -6.695966 1.729553e-10
                                                q.val set.size         exp1
GO:0048285 organelle fission             5.841698e-12      376 1.536227e-15
GO:0000280 nuclear division              5.841698e-12      352 4.286961e-15
GO:0007067 mitosis                       5.841698e-12      352 4.286961e-15
GO:0000087 M phase of mitotic cell cycle 1.195672e-11      362 1.169934e-14
GO:0007059 chromosome segregation        1.658603e-08      142 2.028624e-11
GO:0000236 mitotic prometaphase          1.178402e-07       84 1.729553e-10

$stats
                                         stat.mean     exp1
GO:0007156 homophilic cell adhesion       3.824205 3.824205
GO:0002009 morphogenesis of an epithelium 3.653886 3.653886
GO:0048729 tissue morphogenesis           3.643242 3.643242
GO:0007610 behavior                       3.565432 3.565432
GO:0060562 epithelial tube morphogenesis  3.261376 3.261376
GO:0035295 tube development               3.253665 3.253665
```

Reactome Analysis

```r
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```r
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```

> Q: What pathway has the most significant "Entities p-value"? Do the most significant pathways listed match your previous KEGG results? What factors could cause differences between the two methods?

Cell cycle, Mitotic has the most significant "entities p-value" with 2.1E-5. Yes, the most significant pathways listed do match previous KEGG results. Some factors that could cause differences between the two methods are pathway definitions, gene coverage, background sets, ID mapping losses, among others.

```r
sessionInfo()
```

```
R version 4.5.2 (2025-10-31)
Platform: aarch64-apple-darwin20
Running under: macOS Ventura 13.4

Matrix products: default
BLAS:   /System/Library/Frameworks/Accelerate.framework/Versions/A/Frameworks/vecLib.framewo
LAPACK: /Library/Frameworks/R.framework/Versions/4.5-arm64/Resources/lib/libRlapack.dylib;  

locale:
[1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8

time zone: America/Los_Angeles
tzcode source: internal

attached base packages:
[1] stats4    stats     graphics  grDevices utils     datasets  methods
[8] base

other attached packages:
 [1] pathview_1.50.0             gageData_2.48.0
 [3] gage_2.60.0                 org.Hs.eg.db_3.22.0
 [5] AnnotationDbi_1.72.0        ggplot2_4.0.1
 [7] DESeq2_1.50.2               SummarizedExperiment_1.40.0
 [9] Biobase_2.70.0              MatrixGenerics_1.22.0
[11] matrixStats_1.5.0           GenomicRanges_1.62.1
[13] Seqinfo_1.0.0               IRanges_2.44.0
[15] S4Vectors_0.48.0            BiocGenerics_0.56.0
[17] generics_0.1.4
```

```
loaded via a namespace (and not attached):
 [1] KEGGREST_1.50.0     gtable_0.3.6        xfun_0.55
 [4] lattice_0.22-7      bitops_1.0-9        vctrs_0.7.0
 [7] tools_4.5.2         parallel_4.5.2      tibble_3.3.1
[10] RSQLite_2.4.6       blob_1.3.0          pkgconfig_2.0.3
[13] Matrix_1.7-4        RColorBrewer_1.1-3  S7_0.2.1
[16] graph_1.88.1        lifecycle_1.0.5     compiler_4.5.2
[19] farver_2.1.2        Biostrings_2.78.0   codetools_0.2-20
[22] htmltools_0.5.9     RCurl_1.98-1.17     yaml_2.3.12
[25] GO.db_3.22.0        pillar_1.11.1       crayon_1.5.3
[28] BiocParallel_1.44.0 DelayedArray_0.36.0 cachem_1.1.0
[31] abind_1.4-8         tidyselect_1.2.1    locfit_1.5-9.12
[34] digest_0.6.39       dplyr_1.1.4         labeling_0.4.3
[37] fastmap_1.2.0       grid_4.5.2          cli_3.6.5
[40] SparseArray_1.10.8  magrittr_2.0.4      S4Arrays_1.10.1
[43] XML_3.99-0.22       withr_3.0.2         scales_1.4.0
[46] bit64_4.6.0-1       rmarkdown_2.30      XVector_0.50.0
[49] httr_1.4.7          bit_4.6.0           otel_0.2.0
[52] png_0.1-8           memoise_2.0.1       evaluate_1.0.5
[55] knitr_1.51          rlang_1.1.7         Rcpp_1.1.1
[58] glue_1.8.0          DBI_1.2.3           Rgraphviz_2.54.0
[61] KEGGgraph_1.70.0    jsonlite_2.0.0      R6_2.6.1
```