



Olive ViewPoint Content Administrator

User Guide

ViewPoint Content Administrator User Guide

Document Version 1

August 2007

© 2005 Olive Software Incorporation. All rights reserved. No part of this publication may be reproduced, transmitted, stored in a retrieval system, nor translated into any human or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of the copyright owner, Olive Software, 2953 Bunker Hill Lane, Suite 203 Santa Clara, 95054, U.S.A. The copyrighted software that accompanies this manual is licensed to the User for use only in strict accordance with the License Agreement, which the Licensee should read carefully before commencing use of the software.

Olive Software may change this manual, correct inaccurate current information, or change or improve the application at any time without prior notice. Some of these changes may be incorporated into new versions of this manual.

Olive Software, the Olive Software logo, ViewPoint, Content Administrator, XML Distiller, ViewPoint Warehouse, PipeX, and XMD, are trademarks or registered trademarks of Olive Software Incorporated. ActivePaper, the ActivePaper logo, ActivePaper Publisher, ActivePaper Daily, ActivePaper Archive, ActiveMagazine, AdLauncher, ActiveTearsheet and all its modules are registered trademarks of Olive Software Incorporated. ABBYY and FineReader are trademarks and/or registered trademarks of ABBYY Software House. Adobe Acrobat, Acrobat, Portable Document Format, and PDF are trademarks and/or registered trademarks of Adobe Systems Inc. Neevia and Document Converter Pro are trademarks and/or registered trademarks of Neevia Technology, Inc.

All other trademarks are the property of their respective owners.

Olive Software Inc.
2953 Bunker Hill Lane
Suite 203
Santa Clara
95054

Tel: 408.200.1780

Fax: 408-200-1790

E-mail: info@olivesoftware.com

Table of Contents

1. OVERVIEW	5
1.1 THE VIEWPOINT WORKFLOW.....	5
1.2 PURPOSE OF THIS DOCUMENT	5
1.3 INTENDED AUDIENCE	6
2. BASIC OPERATION	6
2.1 RUNNING CONTENT ADMINISTRATOR	6
2.1.1 Requirements	7
2.1.2 Logging On to Content Administrator.....	7
2.1.3 Making ViewPoint Content Administrator Accessible	8
2.2 VIEWING AND NAVIGATING DOCUMENTS	10
2.2.1 Finding and Sorting Documents.....	10
2.2.2 Viewing Document Information.....	11
2.2.3 Navigating Through a Document.....	16
2.2.4 Zooming, Rotating, and Printing a Document.....	19
2.3 ALTERNATIVE VIEW MODES.....	20
2.3.1 Text View Mode	20
2.3.2 Downloading PDF Version of the Document.....	22
2.4 ASSIGNING DOCUMENTS TO FOLDERS.....	23
2.5 EDITING METADATA.....	24
2.5.1 Working Status.....	27
2.5.2 Templates.....	27
2.5.3 Saving, Restoring and Clearing Document Metadata.....	28
2.6 INDEXING.....	29
2.7 SEARCHING IN DOCUMENTS	30
3. ADVANCED OPERATION	32
3.1 PUBLISHING DOCUMENTS THROUGH CHANNELS	32
3.2 FOLDER TREE MANAGEMENT	34
3.3 IMPORTING DOCUMENTS.....	39
3.4 ADVANCED INDEXING (CONCEPTS).....	42
4. APPENDIX A: CHANNEL CONFIGURATION.....	43
5. APPENDIX B: ADVANCED CONFIGURATION.....	45
5.1 PUBLICATION CONFIGURATION.....	45
5.2 COLLECTION CONFIGURATION (INDEXING).....	48
5.3 BINDING PUBLICATIONS TO COLLECTIONS	50
5.4 BUILDING A FOLDERS TREE	52
5.5 METADATA TEMPLATES	54
5.6 DISTRIBUTED CONFIGURATION.....	54
6. APPENDIX D: EXTERNAL UTILITIES.....	55
6.1 APRIA.....	55
6.2 DOCCOPY	58

6.3	ENVELOPE.....	59
6.4	VPIMPORT, VPWAREHOUSEIMPORT.....	60
6.5	REPVAL	62
7.	APPENDIX E: ERROR MESSAGES	63


1. Overview

Olive's ViewPoint Content Administrator is a virtual library management application that empowers administrators and other ViewPoint users with the ability to manage individual and groups of XML documents within large repositories.

Content Administrator is designed to assist and automate the management of large document repositories, as Olive's ViewPoint migrates legacy paper and electronic documents to a unified and repurposed XML format.

1.1 The ViewPoint Workflow

ViewPoint Content Administrator is an application that occupies an intersection in the Olive ViewPoint workflow. Content Administrator accepts Olive's PrXML format documents, a rich version of generic XML documents, converted from legacy hardcopy and digital formats, and repurposes them, exporting them to a variety of formats, from generic XML, HTML, and other common formats.

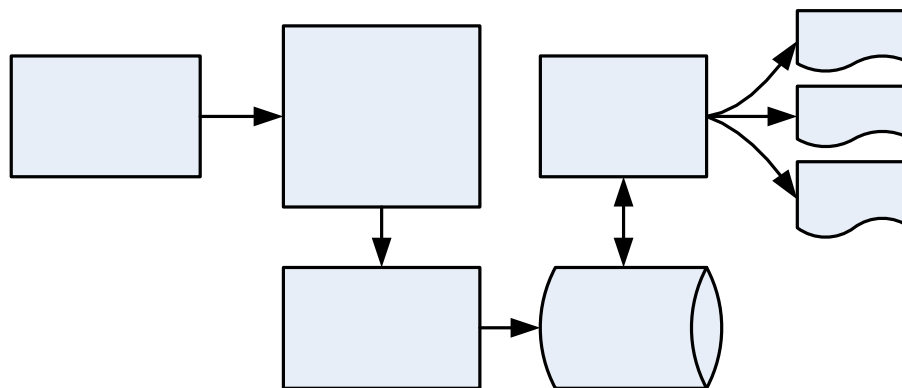

The Olive Enterprise Platform Workflow

1.2 Purpose of this Document

This document describes the concepts of how the ViewPoint Content Administrator operates and instructs how to configure and operate Olive's ViewPoint Content Administrator.

The information and instructions in this user manual are divided into separate levels, and intended for different levels of users.

- **Basic Operation** – ViewPoint Content Administrator allows users to manually perform some tasks that are done automatically by other ViewPoint Applications, such as XML Distiller and ViewPoint Client. The Basic Operation chapter instructs the user how to open, view, move, and navigate through documents that have been processed through the ViewPoint XML Distiller, edit some of the metadata for those documents, and make changes to indexing.

Preprocess:

- Clarity and Contrast
- Cropping and Straightening
- OCR

Scan Hardcopy

Documents Toll Free: 866.654.8387 | www.olivesoftware.com

Users who do not have the skills of system administrators can easily perform these simple operations without damaging ViewPoint system or the documents.

Caution: Content Administrator does not restrict certain users from performing certain functions. All users who can access Content Administrator can perform all its functions, including functions that can potentially cause damage. Before allowing unskilled users to access to Content Administrator, verify that they are adequately informed and trained where they can work and what functions they can perform.

- **Advanced Operation** – ViewPoint Content Administrator includes powerful functions that allow system administrators to maintain and manage large and complex document repositories, as well as configure various settings and manage an efficient document workflow. Content Administrator provides a clear and friendly user interface for managing complex operations.

1.3 Intended Audience

Many of the functions in ViewPoint Content Administrator can be performed automatically, on large batches of documents, by other ViewPoint modules. Content Administrator is intended to fine tune the ViewPoint production workflow and to perform processing on individual or small groups of documents.

Content Administrator is intended to be used by a variety of users, such as:

- System administrators
- Documentation managers
- Librarians
- Olive Professional Services' support personnel

2. Basic Operation

The basic functions include viewing individual documents, manually adding or editing the metadata of individual documents, and manually indexing the documents.

2.1 Running Content Administrator

ViewPoint Content Administrator operates as a Web-based application from the ViewPoint server. It can be accessed locally or over a network, using Microsoft Internet Explorer, from any computer that can access and log on to the server where ViewPoint is installed.

2.1.1 Requirements

To access ViewPoint Content Administrator, **Microsoft Internet Explorer version 6.0** or higher must be installed on the computer.

The client computer must be configured to recognize and accept the ViewPoint server as a trusted site. See section 2.1.3, Making ViewPoint Content Administrator Accessible on page 8 for instructions.

2.1.2 Logging On to Content Administrator

ViewPoint Content Administrator may be accessed from any client computer by using Microsoft Internet Explorer 6 browser, or it may be installed in the client computer that is to access the server. Installing Content Administrator simply saves a bookmarked Web page on the client computer.

► To log on to ViewPoint Content Administrator:

1. Enter the following URL into Internet Explorer's Address bar:
`http://[servername]/ContentAdministrator/default.asp?wm=Enterprise`
Where **[servername]** is the name of the server where ViewPoint is installed.
2. A logon dialog box appears.

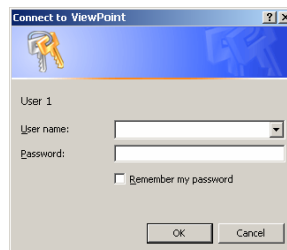


Figure 1: ViewPoint Content Administrator Logon Dialog Box

Enter your user name and password, and click **OK**.

3. The first time you log on to ViewPoint Content Administrator, a trusted site instruction dialog box appears.

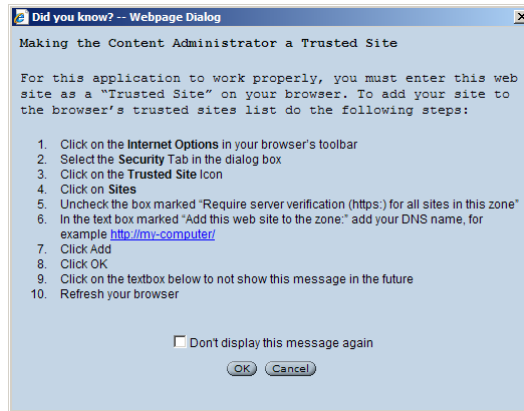


Figure 2: Trusted Site Instructions

Follow the instructions as described section **2.1.3 Making ViewPoint Content Administrator Accessible** on page 8.

4. The ViewPoint Content Administrator main window appears in the Internet Explorer window.

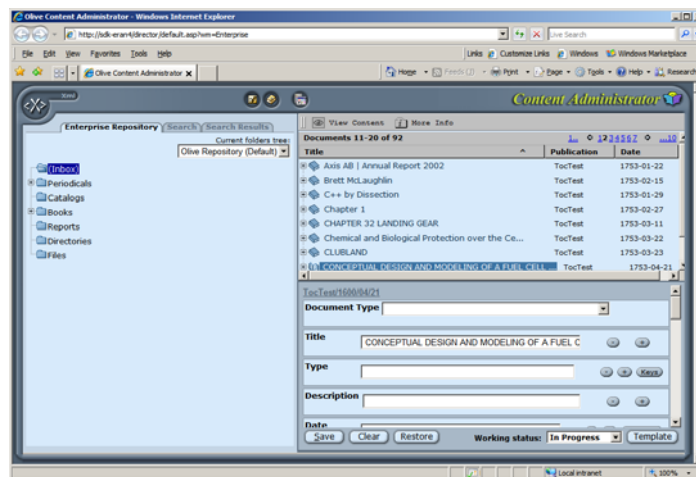


Figure 3: ViewPoint Content Administrator Main Window

2.1.3 Making ViewPoint Content Administrator Accessible

The client's computer or Internet Explorer browser may refuse or have difficulty connecting to Content Administrator due to suspicion that it is a non-secure site. To prevent difficulty accessing and using Content Administrator, the Internet Settings on the client's computer should be set to accept the ViewPoint server as a trusted site.

► **To set the ViewPoint server as a trusted site:**

1. Open Microsoft Internet Explorer browser on the client computer.
2. Click the menu **Tools >> Internet Options**.

The Internet Options window appears.

3. Click the **Security** tab and then click the **Trusted sites** icon.



Figure 4: Internet Options Window with Trusted Sites

4. Click Sites.
The Trusted Sites dialog box appears.

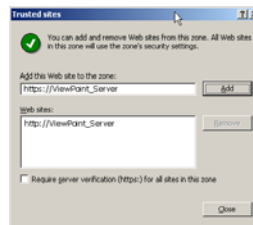


Figure 5: Trusted Sites Dialog Box

5. Enter the network name or address of the server where ViewPoint is installed.
6. Uncheck the checkbox
Require server verification (https:) for all sites in this zone
7. Click **OK** to close the Trusted Sites dialog box.
8. Click **OK** to close the Internet Options window.

2.2 Viewing and Navigating Documents

Once opening Content Administrator, certain elements of the Content Administrator window appear.

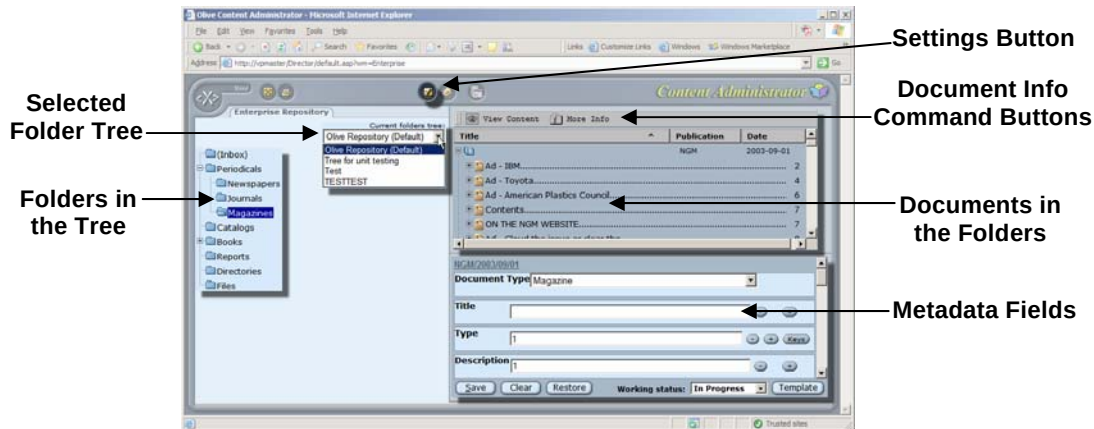


Figure 6: ViewPoint Content Administrator Window

2.2.1 Finding and Sorting Documents

ViewPoint accesses documents that are stored in warehouses, either locally or on remote servers. You can view ViewPoint documents that have been imported into Content Administrator in either the folders to which they were associated, or unassociated documents that are visible in the Inbox folders.

► To find and sort documents:

1. In the window's left pane, click the down-arrow (▼) to the right of the **Current folders tree** field and select a folder tree from the drop-down list.
2. Click on the **(Inbox)** folder in the tree that appears.
The (Inbox) folder shows all documents in defined warehouses that have not been associated with a specific folder in the selected tree.
3. In the right pane, click on a document that appears in the list.
Clicking the plus sign (+) to the left of one of the books, displaying the pages within the publication.
4. You can sort the documents by name or date:
 - A. Click the **Name** column header above the list of documents.
Each click lists the documents in alphabetical or reverse-alphabetical order.
 - B. Click the **Date** column header above the list of documents.
Each click lists the document in chronological or reverse-chronological order.

5. Click on another folder in the current tree or select another folder tree in the **Current folder tree** drop-down list.

Each selected folder displays its associated documents.

2.2.2 Viewing Document Information

Content Administrator enables the user to view information on selected documents or the entire contents of the documents themselves.

► To view document information:

1. In the window's left pane, click the down-arrow (▼) to the right of the **Current folders tree** field and select a folder tree from the drop-down list.

2. Click on a directory in the tree that appears below the Current folders tree.

3. In the right pane, click on a document that appears in the list.

Clicking the plus sign (+) to the left of one of the books, displaying the pages or sections within the publication.

4. Right-Click and select **More Info** from the drop-down menu.




Figure 7: Document Drop-Down Menu with More Info Selected

5. A document card appears, listing document information.



Figure 8: Document Card

Table 1: Document Card Fields

Field	Description
Name	Name of document, as defined when it was distilled
Publication	Publication in warehouse where the document is stored
Date	Date associated to the document
Location	Publication and directory path in warehouse where the document files are stored
Content ID	Document's identification code
Version	Version of the document
Number of Pages	Total number of pages in the document
Solid Document	A solid document is a document with only one entity.
Periodical Document	A periodical document is a document that is issued periodically under the same publication name.
Source Type	File format from which the document was distilled
Language	Language the document is written
VP Publisher Version	Version of ViewPoint Publisher used to distil the document
Output Date	Date the document was distilled
Check-In Date	Date the document was checked-in (saved) to the warehouse.
View Content	Opens the document for viewing
Print	Prints the document card
Send by E-mail	Sends a PDF version of the document

6. You open the document by clicking the **View Content...** button.
See **To open a document** in the following procedure.
7. You can print the content of the document card by clicking the **Print** button.
8. You can send a link to the document by clicking **Send by E-mail** button.

- A. This opens a Send by E-mail dialog box.

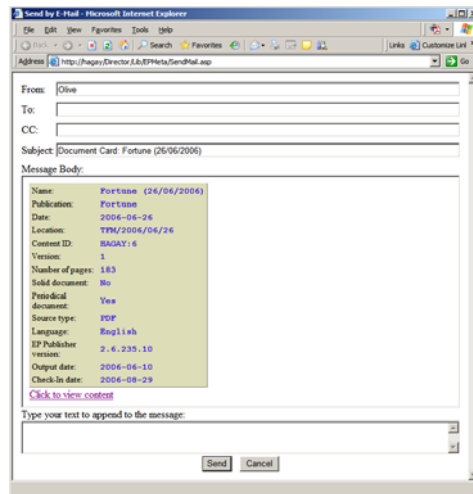


Figure 9: Send by Email Dialog Box

Enter the required information in the email destination fields (To:, CC:).

You may also enter text in the box at the bottom of the dialog box.

- B. Click **Send** to send the document by email.

The recipient receives a link to the document, in the warehouse where it is located. Access to the warehouse must be configured so that email recipients who receive these documents will be able access them.

► **To view the document:**

1. In the window's left pane, click the down-arrow (▼) to the right of the **Current folders tree** field and select a folder tree from the drop-down list.
2. Click on a directory in the tree that appears below the Current folders tree.
3. In the right pane, click on a document that appears in the list.

Clicking the plus sign (+) to the left of one of the books, displaying the pages or sections within the publication.

4. Click the **View Content** icon () above the documents list

A reading view window appears with the selected document and a toolbar above the document.



Figure 10: Reading View Window with Toolbar

Table 2: ViewPoint Document Navigation Toolbar

Button	Description
File Menu	File related menu with the following items: • Download PDF – Opens a PDF file of the document, which may be saved, printed, or emailed. • Print – Prints the current page, a range of pages, or the entire document to a selected printer. • About – Opens a window with information on Olive Enterprise Viewer.

View Menu

Menu items related to viewing the document:

- **Double page view** – Displays double page spreads. A check sign appears when double page view is enabled.
- **Flip effect** – Clicking the top right corner of the page to flip to the next page.
- **Table of contents** – Displays the document's table of contents as it was generated by ViewPoint XML Distiller.
- **Rotate** – Clicking button rotates the document view 90° clockwise.

Page Flipping – Bringing the cursor towards the top-right or top-left corners of the page or spread flips down the page corner. Clicking the corner flips the displayed page to the next or previous page.

Click Zoom (standard zoom) – Clicking on the page enlarges the view incrementally. Pressing + (plus) also zooms in and pressing - (minus) zooms out.

Radio buttons:

- **Magazine Reading Style (smart zoom)** – Displays the document as a two page magazine spread.

Toggle Zoom (smart zoom) - A single click enlarges the clicked area to actual size (100%), and clicking again returns zoom to fitting page to the display.

- **Document Reading Style (standard zoom)** – Displays as regular document.

Control Zoom – A single click enlarges area according to preset zoom settings. Pressing + (plus) also zooms in, and pressing - (minus) zooms out.

- **Text Mode (pop-up text window)** – Opens pop-up window with document content appearing as text, which can be selected and copied.

TOC Button

Displays a drop-down Table of Contents, showing document structure and section headings within the document. Clicking on any section heading opens the page where the section begins.

Search Hits Navigation Buttons

When performing a word search within the document, every instance of the requested word is highlighted in the document.

Clicking forward or backward on the search hits navigation buttons shows the page with the next or previous instance of the requested word.

Page Navigation Buttons	Clicking the forward and back arrows moves to the next or previous page. The page number field shows the page number within the document. You can enter a page number and press Enter to go directly to the desired page.
Zoom Buttons	Clicking the enlarging or reducing magnifying glass zooms in or out on the page. Entering a number in the zoom value field enlarges or reduces the zoom to the chosen zoom value.
Page Spread and Rotation Buttons	Clicking the Rotation button rotates the page view 90° clockwise. Each click rotates 90° from the previous view. Clicking the page spread button toggles the page view between single page view and two page spread.
Show/Hide Toolbar Button	Clicking the Show/Hide button minimizes the toolbar. Clicking again on the minimized toolbar makes it appear.

2.2.3 Navigating Through a Document

ViewPoint displays documents in a clear and intuitive magazine-like spread, with pages that flip just like a book or magazine. You can navigate through the document in several ways:

- Flip forward or backward between pages using the fold-over corners
- Clicking the page forward and page backward navigation buttons
- Entering the desired page in the navigation page field
- Using the TOC (Table of Contents) menu
- Clicking Hot-Links in the document

► **To navigate through a ViewPoint document:**

1. Open a ViewPoint Document, as described in the procedure in section **2.2 Viewing and Navigating Documents on page 10**.
2. To flip between pages:
 - A. Move the cursor to the upper-right or upper-left corner of the page.



Figure 11: Fold-Over Page Corner

The corner “folds up”, as if the page is about to turn.

- B. Click the folded-up corner.

The page flips to the next or previous page.

Fold-over corners may also appear on the inside binding of a spread, where gatefolds open.

3. To navigate pages using the navigation buttons and page number field:
 - A. Locate the page navigation buttons on the document toolbar.




Figure 12: Page Navigation Buttons and Page Number Field

Between the two page navigation buttons pointing left (previous) and right (next) is a page number field, showing the current page number of total pages in the document.

- B. Click the right arrow (►) to go to the next page or the left arrow (◄) to go to the previous page.
 - C. Enter the desired page into the page number field, between the two navigation buttons, and press **Enter**.
4. To navigate to specific sections using the Table of Contents (TOC):
 - A. Click TOC in the toolbar.

A drop-down menu lists all the sections in the document.

POWERS MAGIC MAN	C1
Ad - Philips	C2
Contents	1
Ad - BMW	2
Fortune.com	4
Ad - UPS	5
EDITOR'S DESK	6
MASTHEAD	6
Ad - Samsonite Luggage	7
PUBLISHER'S MASTHEAD	8
Ad - AT&T Brand	9
Ad - AT&T Brand	9
THE INDEX	10
How to reach Fortune	10
Ad - Microsoft Dynamics	10
Ad - American Red Cross	11
Ad - American Chemistry Council	12

Figure 13: Document Drop-Down TOC (Table of Contents)

- B. Scroll down to the desired section and click.
5. To jump to a specific section using Hot-Links:
 - A. ViewPoint documents may have a Table of Contents, cross references, or links within the document to other parts of the document.
Move the cursor over an item in the Table of Contents page.
 - B. Hot-Linked items change color, and a screen hint appears.



Figure 14: Hot-Linked Table of Contents Item

Clicking the Hot-Link immediately navigates to the destination page.

Note: Hot-Links also work to links that are outside the document, such as Web pages.

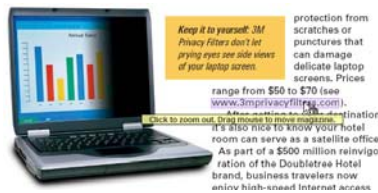


Figure 15: Text in a Document that is Hot-Linked to a Web Site

2.2.4 Zooming, Rotating, and Printing a Document

ViewPoint documents may display documents with large spreads, difficult to read or small text, or rotated pages, for which zoom and rotate buttons help make such documents readable. When viewing and zooming in ViewPoint documents, two zoom modes may be used – Toggle Zoom and Standard Zoom. You may also print an entire document or portion of a document.

► **To zoom, rotate, and print an open document:**

1. Open a ViewPoint Document, as described in the procedure in section **2.2 Viewing and Navigating Documents on page 10**.

2. To select Zoom mode:

ViewPoint offers two zoom functionally:

- **Easy View (Toggle Zoom)** – A single click toggles between fit page view (fits the entire page or spread in the window) and actual size (zoom to 100%).
- **Standard View (Click Zoom)** – Each click zooms the view by one increment. Pressing **Shift** and clicking zooms out by one increment.

- A. Click the **View** menu and select one of the view modes.
- B. Click on the document.

If you selected Easy View, each click will zoom in and then zoom out.

If you selected Standard View, each click zooms and, and each Shift+click zooms out.

3. ViewPoint can display a document as individual pages or in two page spread.
 - A. Click the **Single Page View** button () to show the document as a single page.
 - B. Click the **Double Page View** button () to show the document as a double page spread.
4. To rotate the document, click the **Rotate** button () to rotate the document view 90° clockwise.

Repeatedly clicking the button rotates the view 90° clockwise with each click.

5. To print the document, click the **File** menu and select **Print**.

A print dialog box appears.

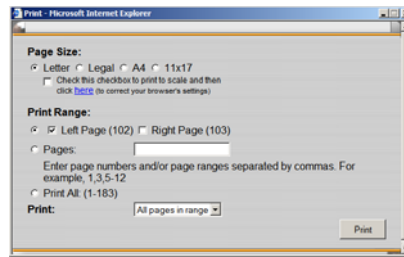


Figure 16: Print Dialog Box

- A. Select print paper size and pages that you want to print, and click **Print**.
A printer selection dialog box appears.

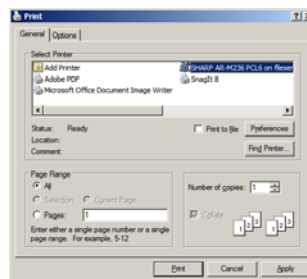


Figure 17: Printer Selection Dialog Box

- B. Select a printer, if necessary click **Preferences** to configure the printer, and click **Print**.

The selected pages are sent to the selected printer.

2.3 Alternative View Modes

ViewPoint uses Adobe's FlashPaper format as the default document view mode, though documents may be viewed in other formats - opening a PDF file of the entire document or viewing the selected entity (chapter or article) as plain text.

2.3.1 Text View Mode

Viewing ViewPoint documents in text mode enables users to copy text and save pictures from a selected entity.

► To view a document as plain text:

1. Open the desired document as described in the previous procedure in section **2.2 Viewing and Navigating Documents on page 10**.
2. To view the document or entity within the document as plain text:

- A. Using the navigation arrows (◀, ▶), navigate to the page in the document where the entity is located, or enter the page number in the field between the navigation arrows.
- B. Click the **View** menu and select **Text Mode (pop-up text window)**.
- C. Click on the entity that you want to view.

A text window opens, showing with the entire text content of the selected entity.



Figure 18: Text Window of ViewPoint Document Entity

3. The text in the window may be selected and copied to other applications.
 - A. To select text, click and drag along the desired text.
 - B. To copy selected text, right-click and select **Copy** from the pop-up menu.
4. To scroll through the entity, move the handle on the scroll bar along the right edge of the text window, or click the up and down arrows (▲, ▼) above and below the scroll bar.
5. To save a picture in the text window, right-click on the picture and select **Save Picture As...** from the pop-up menu.

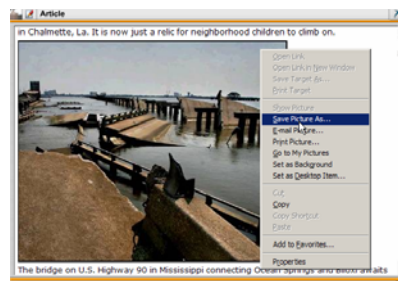


Figure 19: Save Picture from a Text View Window

- A. A save as dialog box appears. Browse to the directory where you want to save the picture.
- B. Click **Save** to save the picture.

2.3.2 Downloading PDF Version of the Document

ViewPoint documents are stored Adobe PDF files, which may be copied, saved, and printed on different computer platforms and systems.

- Note:**
- In order to view PDF files, Adobe Acrobat or Adobe Reader must be installed on your computer.
 - See the Adobe Web site (<http://www.adobe.com/>) for information on Acrobat and to download Adobe Reader.
 - If you are unfamiliar with viewing PDF files, see the Adobe Reader User Guide (<http://www.adobe.com/products/acrobat/pdfs/acrruserguide.pdf>).

► **To view the document as a PDF file:**

1. Open the desired document as described in the previous procedure, section 2.2 **Viewing and Navigating Documents on page 10**.
2. Click **File** and select **Download PDF...** from the menu.

A new browser window opens, showing the document as an Adobe Acrobat PDF file.

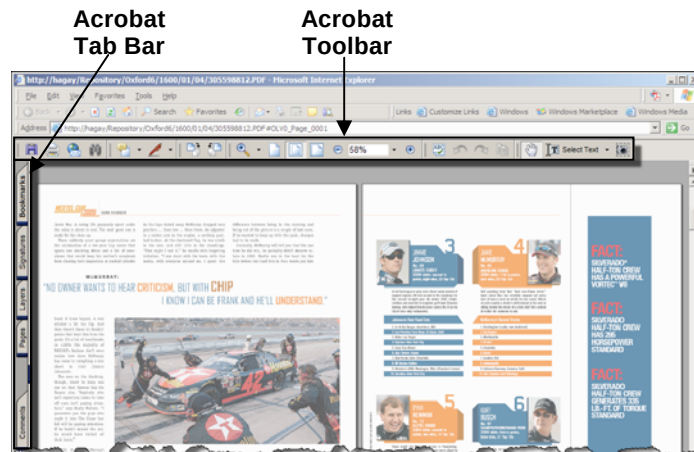


Figure 20: PDF View of Document

3. The browser windows shows the PDF document with the acrobat **Toolbar** and **Tab Bar**.
4. You can perform many functions with the PDF version of the document:

Icon	Function
	Save PDF file
	Print PDF document
	Send PDF file by email
	Search for keywords within the PDF document

	Add comments, edit text, highlight, cross out or underline text, and stamp the PDF document
	Digitally sign the document
	Rotate the document view clockwise or counter-clockwise
	Zoom in/out or view to a selected size
	Spell check document text
	Hand tool to move document on screen
	Select text, table, or image in document
	Snapshot tool copies a selected part of the page to the clipboard

Clicking on the tabs along the left edge of the PDF window displays document information:

Tab	Description
Bookmarks	Lists all the defined bookmarks in the document. Clicking on a bookmark displays the selected section and page automatically.
Signatures	Shows digital signatures of the document
Layers	Shows the document's layers
Pages	Shows a thumbnail of every page in the document
Comment	Shows the comments that were added to the document

2.4 Assigning Documents to Folders

As new documents are entered into the ViewPoint Warehouse, they may be associated to existing folders.

The following procedure instructs how to associate documents in an existing and recognized ViewPoint warehouse to defined folders. To define new folders or a new warehouse, refer to section **3.2. Folder Tree Management** on page **34**.

Note: Content Administrator can only associate documents that are stored in a warehouse that is *trusted*. Refer to section 2.1.3 Making ViewPoint Content Administrator Accessible on page 8 to define a warehouse or server as a trusted site.

► To assign documents to folders:

1. In the window's left pane, click the down-arrow (▼) to the right of the **Current folders tree** field and select a folder tree from the drop-down list.
2. Click the **(Inbox)** folder.

The (Inbox) folder displays all documents that are not yet associated to folders in that tree, and therefore cannot be indexed or viewed by the end users. All the documents are saved in a hierarchal structure of folders and subfolders according to the logic of other ViewPoint applications.

3. In the right pane, click on a folder or document.
4. Select a folder of documents or a single document from the right pane and drag it to the desired directory.

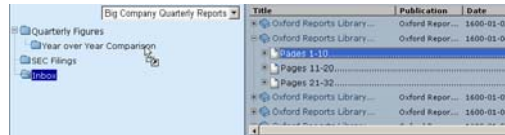


Figure 21: Dragging Documents to Folders

5. Clicking on the selected folder in the left pane shows all the documents that are associated with that folder.



Figure 22: Folder with Associated Documents

2.5 Editing Metadata

The ViewPoint workflow creates PrXML files that include the content of each processed document and additional metadata. The metadata includes document information that is not specifically viewable in the document's content.

The selection of available metadata fields is configurable. ViewPoint's default configuration includes 17 metadata fields that are based on the [Dublin Core](#) standard, with some additional fields that are specific to Olive documents.

Metadata is commonly added to batches of files as they are processed through the ViewPoint workflow. This data is often identical and generic, and does not differentiate between documents, thus creating many documents with no metadata or identical characteristic, often making them indiscernible from each other on the basis of metadata alone. ViewPoint Content Administrator enables the user to differentiate individual documents, or documents entities, such as individual chapters (not pages), by editing their metadata in the fields.

► To add or edit metadata:

1. In the window's left pane, click the down-arrow (▼) to the right of the **Current folders tree** field and select a folder tree from the drop-down list.
2. Select one of the folders in the folder tree or click the plus sign (+) next to the folder to show subfolders.

In the right pane, you can select an individual document or click the plus sign (+) next to the document to show individual pages.

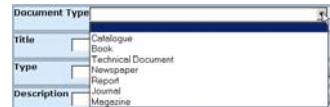
3. In the lower-right pane, below the documents list, are the metadata fields.



Figure 23: Metadata Fields

4. Enter the desired information into each of the metadata fields.
- Enter the data as instructed below. Some fields have buttons to retrieve or add additional data.

Table 3: Metadata Fields

Field	Description	
Document Type (Olive metadata)	Clicking the down arrow opens a drop-down list of available document types.	
Title	Enter the title of the folder, document, or page.	
Type		
Description	Enter a free text description of the folder or document.	
Date	Enter the date to enter into the metadata or click Get Date to select the date from a calendar.	
Publisher	Enter the publisher name and other relevant information.	
Language	Enter associated languages.	

Format	Enter a file or media format (HTML, microfilm, Office, etc.)
Subject	Enter the document's subject
Source	Enter the source from which the document was derived.
Relation	Enter a related resource, such as a related article or resource information
Rights	Enter rights information for the document, such as copyrights, trademark, and patent information.
Contributor	Enter information on any contributing sources.
Creator	Enter information on the document's contributor.
Coverage	Enter the scope or coverage of the document.
Identifier	Enter an identifier for the document, such as ISBN or catalog or serial number.
View Mode	Click the radio button to select document view mode: Regular view displays the scanned document image, with the OCR text above OR Images Only displays only the scanned document image.
Working status	Click the down arrow to select the document's working status: Not Started, In Progress, Needs Review, Completed. See section 2.5.1 below.
Template	Clicking Template applies a selected metadata template to the document. See section 2.5.2 below.
Metadata Command Buttons	Three command buttons to save, restore, and clear the metadata fields. See section 2.5.3 below.

5. You can add additional metadata information in each category by clicking **Add** or **+** next to each field.
6. Clicking **Keys** next to each field opens a list of common keywords that are associated with the metadata category.
Double-click on a keyword to select it **OR** enter a new keyword in the field below the list and click **Add**.





Figure 24: Keyword List Dialog Box

- Right-clicking a selected keyword opens context menu with the following items:

**Figure 25: Keyword Context Menu**

Open	Enters word into the Add field, same as clicking on the word.
Rename	Opens a dialog box to change the keyword.
Delete	Deletes the keyword.
Get Word	Writes the selected word into the selected metadata field
Get Path	Writes the full path to the selected word into the selected metadata field. Applicable only in the Coverage metadata field.

- Click **Save** to save the new or changed metadata.
OR click **Clear** to clear all the metadata fields for the selected document or folder.
OR click **Restore** to restore all metadata to the currently save settings.

2.5.1 Working Status

ViewPoint is designed for archiving, repurposing, and distribution of various document types, including documents that follow a workflow. **Working Status** is one of the default metadata fields that are saved with the document.

Selecting one of the **Working Status** options saves the document's status in the document's metadata, regardless of the document's content. When exporting the document, the metadata may be used by the recipient in different ways, such as for categorizing the documents.

2.5.2 Templates

Many ViewPoint documents may have common characteristics that are listed in the metadata fields. Content administrator uses templates, in the form of XML files, to apply common metadata information to documents. Contact Olive Professional Services for more information on configuring metadata templates.

► To select a metadata template:

- Open ViewPoint Content Administrator and navigate to the folder or document that you want to change the metadata.

See section **2.2.1 Finding and Sorting Documents**, on page 10.

2. Click the **Template** button at the bottom right corner of the metadata pane.

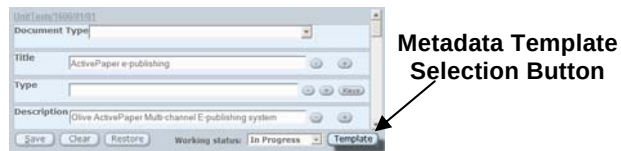


Figure 26: Metadata Template Button

3. A metadata template selection dialog box appears, listing all the available metadata template files.

See section **5.5 Metadata Templates** on page 54.



Figure 27: Metadata Template Selection Dialog Box

Click on the template file that you want to apply to the document.

4. The dialog box closes.

The metadata fields for the selected document have the new settings, as set in the selected template.

2.5.3 Saving, Restoring and Clearing Document Metadata

Content Administrator enables the user to change the metadata, restore old metadata, or clear all metadata fields for a selected document.

The following buttons are at the bottom of the metadata pane:



Figure 28: Metadata Command Buttons

Table 4: Metadata Command Buttons

Button	Description
Save	Saves changes to the document metadata.
Clear	Clears all metadata fields for the selected document.
Restore	Restores metadata fields to the last saved settings.

2.6 Indexing

The ViewPoint workflow converts legacy documents, such as scanned documents or unstructured digital content, to structured digital documents, with all its advantages. Among these advantages is the ability to perform full text searches within the documents, which require indexing of all the text from all the documents. With indexing, legacy documents can be searched and compared, and content can be extracted, exported and repurposed.

Indexing gathers all the digital text and metadata, and the specific location of every piece of data, including document file paths and locations within the documents. Functions that are commonly done on digital documents, such as text searches and document comparisons, can then performed on the indexes.

ViewPoint documents can be indexed individually or as an entire document warehouse. The procedure below instructs how to index a single document. The procedure in sections **5.2 and 5.3, on pages 48 and 50**, instruct how to create an index for an entire document warehouse and bind it to the collection.

► To index an individual document:

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator** on page 7.
2. Click the down arrow (▼) to the right of the **Current folder tree** field and select the folder tree that you want to edit.
3. Select a folder in the left pane and then select a folder documents, an individual document, or a page within a document.
4. Right-click on the selected folder, document, or page and select Index Issue from the pop-up list.

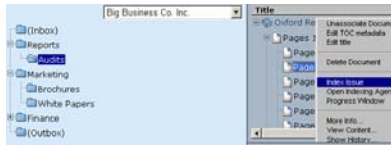


Figure 29: Indexing an Individual Document

5. An **Indexing Process** window opens, displaying a log of current and recent indexing operations.

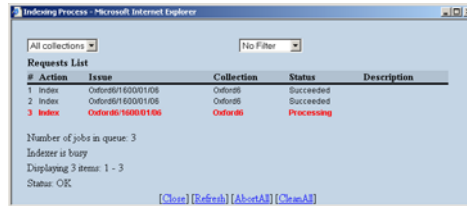


Figure 30: Indexing Process Window

2.7 Searching in Documents

Olive ViewPoint Content Administrator enables searching for keywords within the content and metadata of processed documents. The search feature is both simple and intuitive, in that the user can use simple search keywords to search the content and/or metadata of specific publications or entire libraries, while also being very powerful and customizable.

Note: ViewPoint Content Administrator's Search feature is intended to enhance the application's functionality to edit and manage document metadata. It is not intended to view and edit document content. To search, view, and edit documents, see other Olive applications, such as ActivePaper Archive and Open University.

► To search in ViewPoint documents from Content Administrator:

1. Open ViewPoint Content Administrator and click the **Search** tab in the left pane.
2. The Search pane shows the search options:

Field	Description
Search For	Enter key word or words You may also use regular expressions such as *, and, or, not
Search in Tree	Select the tree and folder in which to search
Search in	Select to search only in the documents' text (Content Only), in the Metadata , or in both Content and Metadata
Publication	Select the publication in which to search
Select Date	Select the starting (From) and ending (To) publication date range

Sort by Select how the search results will be sorted

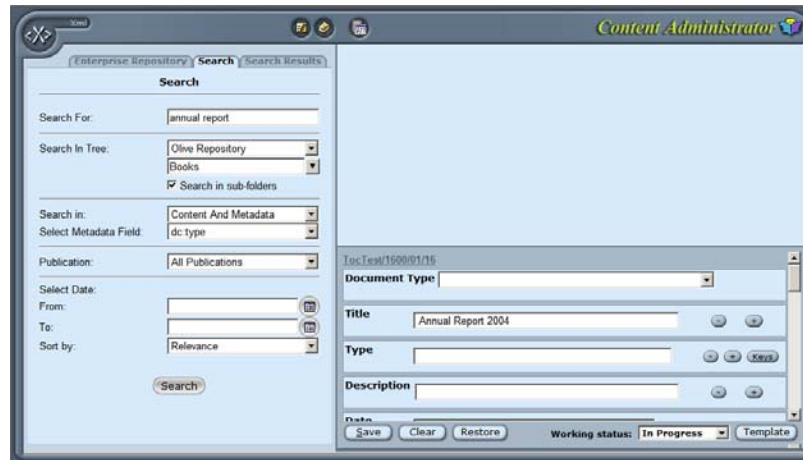


Figure 31: Content Administrator Search Pane

Enter or select the required information in the fields and click **Search**.

3. A list of documents appears in the left pane.

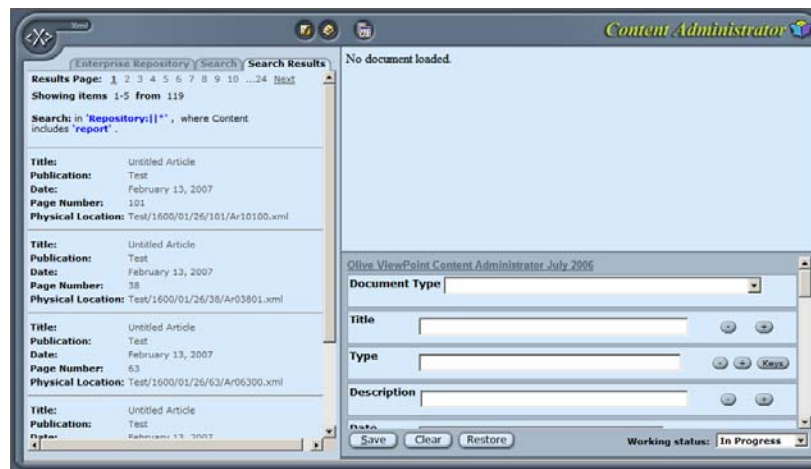


Figure 32: Search Results

Click one of the search results.

4. The top-right pane shows the document and its component pages, and the bottom-right pane show's the document's metadata.

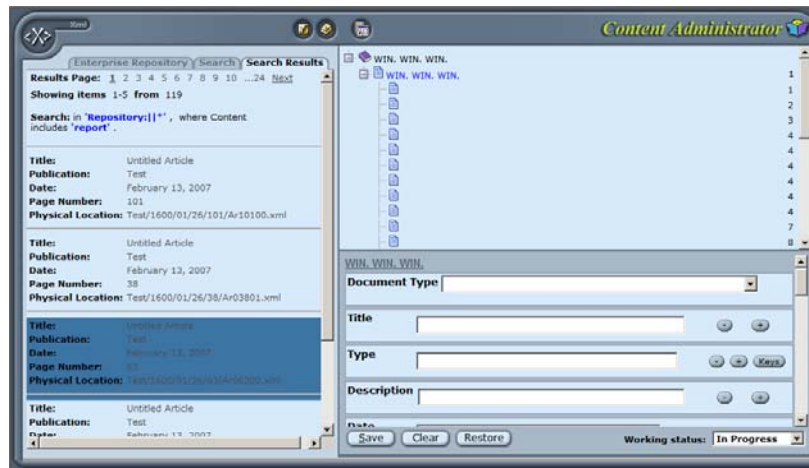


Figure 33: Selected Search Hit Document

Clicking the plus-sign (+) to the left of the document shows the pages where the search located the keyword and the number of search hits on each page.

3. Advanced Operation

Olive ViewPoint Content Administrator is primarily intended to be used by system administrators to reprocess and export documents from the ViewPoint Warehouse. Content Administrator includes a set of powerful tools to build document collections, setting export configuration to a host of formats, and batch processing whole collections to the desired destination file format.

Caution: Content Administrator is a powerful program that includes features that can damage Warehouse data. The instructions in the **Advanced Operation** section are intended for experienced system administrators who have been properly instructed to operate Content Administrator.

3.1 Publishing Documents through Channels

The user may choose to reprocess a document or a collection using a specific configuration that is set in Content Administrator. The following sections instruct how to configure the three (3) basic publishing channels in Content Administrator – XML, HTML, and ASCII.

This appendix does not instruct how to define a new publishing channel. Contact Olive Professional Services for information how to define a new publishing channel.

► To export documents through existing output channels:

1. Right-click on the document and select **Publish** from the context menu.




Figure 34: Right-Click Context Menu

2. The **Publishing Channel** dialog box appears.

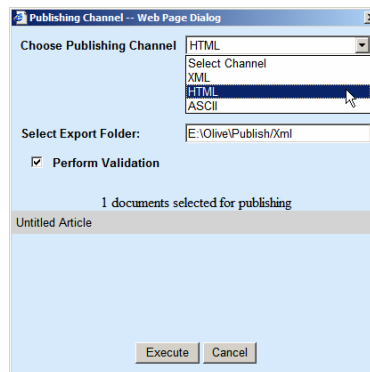


Figure 35: Channel Publishing Dialog Box

Select the publishing channel:

- A. Click the down arrow (▼) to the right of **Select Publishing Channel** field and select the publishing channel through which you want to publish the documents.
 - B. Click the down arrow (▼) to the right of **Publication** and select the publication that you want to publish.
 - C. Check **Perform Validation** if you want Content Administrator to validate the XML content with its associated schema.
3. Click **Execute** to publish the documents.

The Publishing Progress dialog box appears, showing the progress of current publishing jobs.

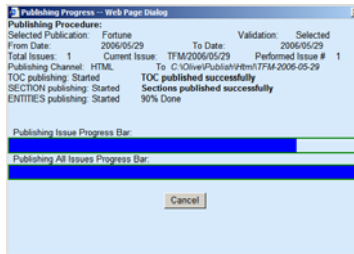


Figure 36: Publishing Progress Dialog Box

4. Click **Publishing Done**.
The published output is saved on the ViewPoint server.
5. ViewPoint logs the result of every attempt to publish documents.
 - A. Click **Publish** (🔍) to open the channel publishing dialog box, as described in step 1 above.
 - B. Click the **View Log** button at the bottom of the dialog box.

3.2 Folder Tree Management

Folder tree management is the process of associating selected documents within the ViewPoint Warehouse to particular publications. This process builds a hierarchal tree publication, with folder and subfolder, and then links specific documents to each folder.

The hierarchal structure is logical, and does not move or change the physical location of any document. The user can define the logic of the tree's structure according to his/her requirements and the publication type. For example, the tree for periodic publications can be structured chronologically, while the tree for reference manuals can be structured alphabetically or according to categories and subjects.

► To edit an existing publication tree:

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator** on page 7.

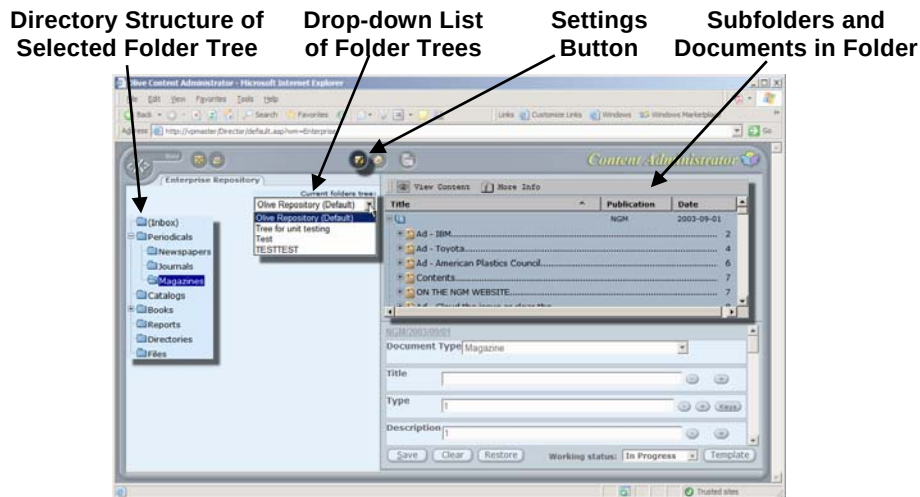


Figure 37: Content Administrator Window

2. Click the down arrow (▼) to the right of the **Current folder tree** field and select the folder tree that you want to edit.
3. Click the Settings button (⚙️).

The Content Administrator Setting window appears.

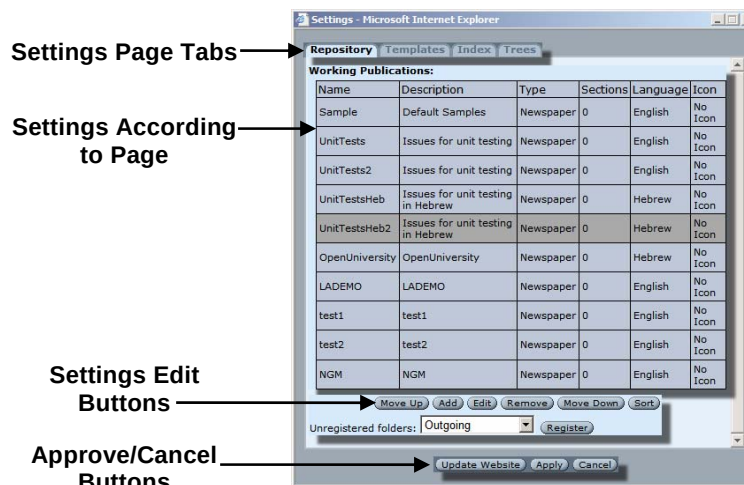


Figure 38: ViewPoint Content Administrator Settings Window

4. Click the **Trees** tab.

The Settings window displays a table with all the registered trees.

Templates Applications Index Trees		
Tree Name	Tree Type	Tree Locale
Olive Repository (Default)		en
Big Company Quarterly Reports		en
Oxford Reports Library		en
Oxford7		en
Add Edit Remove		

Figure 39: Folders Trees Table

5. Edit an existing folder tree:
 - A. Select the folders tree that you want to edit and click **Edit**.
A new window opens with the basic settings for the selected tree.

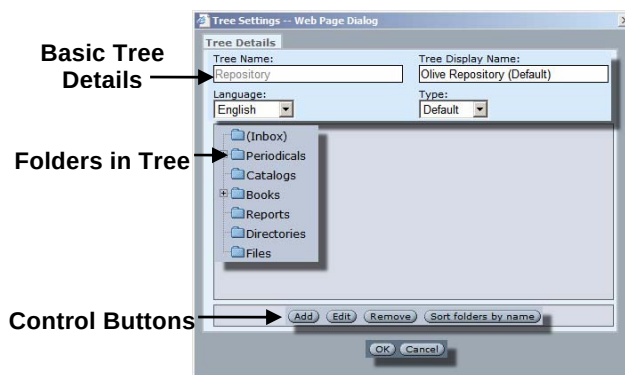


Figure 40: Tree Settings Window

- B. To add a folder to the tree, click **Add** at the bottom of the window.
A folder settings dialog box appears.

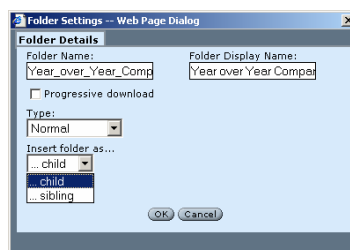


Figure 41: Folder Settings Dialog Box

- C. Enter the folder name in the **Folder Name** field.
The folder name should be with **NO SPACES**.
 - D. Enter the folder display name in the **Folder Display Name** field.
The Folder Display Name is the name that will appear in the user interface.

- E. Check the **Progressive Download** check-box if the folder's content is to be downloaded using Progressive Download.

Progressive Download starts downloading the beginning of the document into a small buffer, and then displays the content of the buffer while the rest of the document is still downloading. This allows the user to begin viewing, without waiting for the entire document to download.

- F. Click the down arrow (▼) to the right of the **Type** field and select if the folder is **Normal** or **Unassociated**.

Normal is assigned to all folders except Inbox, where the content is imported before it is associated to a defined folder. See **Binding Publications to Collections**

Binding publications to collections is the final step to

► **To configure a collection (index):**

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator** on page 7.
2. Click the Settings button (.

The **Content Administrator Setting** window opens.

3. Click the **Repository** tab.

A table of the existing collections (indexes) appears.

**Figure 52: Content Administrator Settings Window
with Index Warehouse Tab Selected**

4. Select a Warehouse that was created as described in section 5.1, Publication Configuration, and then click **Edit**.

The **Publication Details** dialog box appears.

Figure 53: Publication Details Dialog Box

- A. Locate the **Index Bindings** table and click **Add** below the table.
An **SE Data Binding Rule** dialog box appears.

Figure 54: SE Data Binding Rule Dialog Box

- B. Click the down arrow (▼) to the right of the **SE Data** field, and select a collection (index) from the list.
The collections (indexes) that appear were defined as described in section **5.2, Collection Configuration (Indexing)**.
 - C. Click **OK**.
The dialog box closes and the selected collection appears in the **Index Bindings** table.
5. Click **OK** to save changes to the publication settings and close the dialog box.
 6. Click **Apply** to apply the changes and **Update Website** to close the window and show the changes in the main Content Administrator window.
Building a Folders Tree on page **50** for a description of the Inbox folder and *Unassociated* documents.
- A. Click the down arrow (▼) to the right of the **Insert folder as...** field to select if the folder will be a **...sibling** or **...child** folder.
A **sibling** folder will be at the same level in the tree hierarchy as the folder for which it was selected. A **child** folder will be a subfolder of the folder that was previously selected.
 - B. Click **OK** to approve the new folder's settings.
The folder settings dialog box closes.

7. Add more folders to the tree, as required, and click **Close**.
8. The **Settings** window reappears at the **Trees** tab.
Click **Update Website** to implement changes.
9. The Settings window closes.
The new folders appear under the defined tree in the main Content Administrator window.



Figure 42: Content Administrator Window with New Folders

3.3 Importing Documents

The process of importing documents involves importing new published documents from a warehouse. To import documents, they must be indexed and the index must be bound to the warehouse where they are stored, as described in sections 5.2 and 5.3.

The following procedure describes how to import new documents from an existing warehouse.

► **To import documents:**

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to** on page 7.
2. Click the **Run External Applications** button () near the top of the Content Administrator window.
3. To import the documents from a defined warehouse:
 - A. Click the down arrow (▼) to the right of the **Choose Application** field and select **EPReposioryImport**.

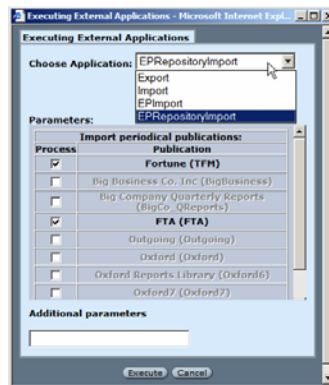


Figure 43: External Applications EPRepositoryImport Dialog Box

A table appears, listing all the collections and warehouse bindings.

- B. Click the checkbox next to each collection to which you want to import new documents.
- C. Click **Execute**.

A pop-up box appears with the message that the process is running.

A confirmation message appears when the process completes.

4. To import documents from a remote warehouse or a warehouse that is not defined:
 - A. Click the down arrow (▼) to the right of the **Choose Application** field and select **EPImport**.

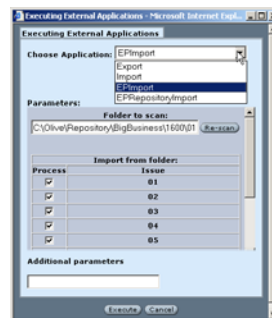


Figure 44: External Applications EPImport Dialog Box


In the **Folder to scan** field, enter the directory path to the warehouse where the documents are stored.

- B. Click **Rescan**.
The table lists directories in the warehouse.
- C. Click the checkbox next to each directory from which you want to import the documents.
- D. Click **Execute**.

A pop-up box appears with the message that the process is running.

A confirmation message appears when the process completes.

5. Close the Externa Applications dialog box.
 6. Go back to the Content Administrator main window and select a folder tree from the **Current folder tree** drop-down list.
 7. Click the **Inbox** folder.
 8. Towards the upper right of the window, click **Last** in the documents pane.
- The new documents appear as the last documents in the list.

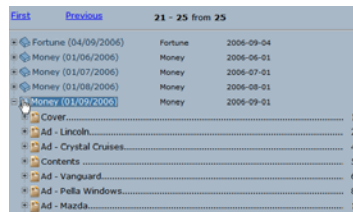

First		Previous		21 - 25 from 25	
+	Fortune (04/09/2006)	Fortune		2006-09-04	
+	Money (01/06/2006)	Money		2006-06-01	
+	Money (01/07/2006)	Money		2006-07-01	
+	Money (01/08/2006)	Money		2006-08-01	
+	Money (01/09/2006)	Money		2006-09-01	
+	Cover.....				1
+	Ad - Lincoln.....				2
+	Ad - Crystal Cruises.....				4
+	Contents.....				5
+	Ad - Vanguard.....				6
+	Ad - Pella Windows.....				8
+	Ad - Mazda.....				10

Figure 45: Newly Imported Documents

3.4 Advanced Indexing (concepts)

Document indexing brings the power of digital documentation to your legacy documents. With indexing, your legacy documents can be searched and compared, and content can be extracted, exported and repurposed.

Indexing gathers all the digital data in the viewpoint documents, including all metadata, digital text and images, and the location of every text frame and image within each page of each document. Functions that are commonly done on digital documents, such as text searches and document comparisons, can then performed on the indexes.

ViewPoint Content Administrator can perform basic indexing on individual and small batches of documents. Content Administrator cannot perform advanced indexing operations, such cleaning or deleting indexes. For advance functions, ViewPoint uses **Apria**, an external indexing application, as described in **section 6.1, on page 55**.

The advanced indexing features in Apria include:

- **Optimize** the performance of the index for a collection.
- **Clean** indexes by removing references to content that may no longer be in the updated source document.
- **Delete** existing indexes to documents, so that new indexes can be generated.
- **Batch** process indexing **jobs**.

4. Appendix A: Channel Configuration

The ViewPoint export channels are built of a group of XSL (eXtensible Stylesheet Language) files that define how each part of the Olive PrXML document is published. XSL files hold the style and tag definitions for publishing PrXML documents to other formats, such as generic XML, HTML and ASCII text.

ViewPoint Content Administrator enables the user to select the specific XSL settings for exporting each part of the source document. Every entity type of the document, such as TOC (Table of Contents), section division, page layout, entities, and images, are transformed individually using a specific XSL definition.

This section instructs how to select the specific XSL definition for each entity type of the **published** document, according to the selected **publishing** channel.

► To define publishing channels:

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator on page 7**.
2. Click the Settings button ().
3. Click the **Templates** tab.

A window appears of the available publishing template with a table of the available export channels.

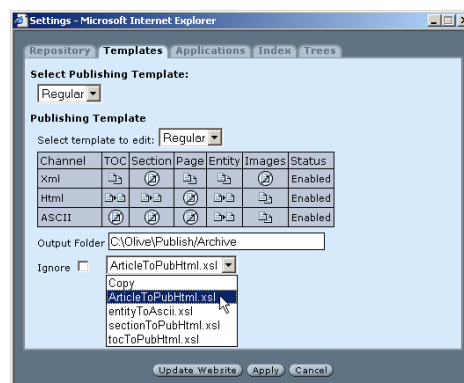


Figure 46: Content Administrator Settings Window with Trees Tab Selected

4. Click the down arrow (▼) to the right of the **Select Publishing Template** field, and select template from the drop-down list.

Note: Only the default **Regular** template is available.

Contact Olive Professional Services for information on designing custom templates for specific publishing requirements.

- 5.

6. Edit an existing publishing template:
 - A. Click the down arrow (▼) to the right of the **Select template to edit** field, and select a template to edit from the drop-down list
 - B. Content Administrator includes three default export channels; **XML**, **HTML**, and **ASCII**.
Select one of the output channels in the table.
 - C. Content Administrator includes individual XSL definitions for the following document entities:
 - **TOC (Table Of Contents)** – ViewPoint identifies the structure, content, and links within the table of contents, and defines the section as a TOC.
 - **Sections** – ViewPoint identifies document with different sections and divides the document accordingly.
 - **Page definitions** - Headers, footers, page sizes, and page breaks are all identified and tagged accordingly. Content Administrator can decide which definitions are exported through the channels.
 - **Entities** - Olive ViewPoint Publisher identifies the various entity types; headings, subheadings, by lines, paragraphs, articles, ads, etc. Content Administrator transforms this information according to the selected export channel.
 - **Images** - According to the export channel, Content Administrator may remove all images, transform only the metadata, or copy the images and metadata.
Click on the cell for the element type that is to be defined.
 - D. Depending on the export channel, Content Administrator can choose to **Ignore**, or not to export, certain entity types, such as TOC or images.
If the entity type is not to be exported, click the **Ignore** check box.
 - E. If **Image** entity type was selected, click the **Copy Image** check box to copy the image file along with the text, tags and metadata.
 - F. Click the down arrow (▼) to the right of the field next to **Ignore**, and select the XSL that is to be implemented on the selected export channel and entity type.
7. After configuring each export channel as required, click **Apply** to save any configuration changes, and then click **Update Website** to close the Settings window and view any changes on the main Content Administrator window.

5. Appendix B: Advanced Configuration

Olive ViewPoint Content Administrator includes powerful functions for building and configuring document repositories and collections. Some of these functions are intended to be operated by advanced users - system administrators who are skilled and properly instructed how to manage Content Administrator's powerful features without damaging documents or their repositories.

Caution: Once accessed, Content Administrator does not restrict users from using any function or feature, some of which may damage Content Administrator, the warehouse, or the documents. Before allowing a user to access to Content Administrator, verify that he/she is properly instructed what features may be used according to the task being performed and his/her skills.

The appendix describes the workflow to define a new publication:

- Define the new publication (section 5.1)
- Link the new publication to its warehouse (section 5.1)
- Create an index or collection for the new publication, so that it can be searched (section 5.2)
- Bind the publication to the index (section 5.3)

The final section in this appendix describes the considerations involved in managing Content Administrator in a distributed environment.

5.1 Publication Configuration

► To configure publications:

1. Click the **Repository** tab.

A table of publications with defined repositories appears.

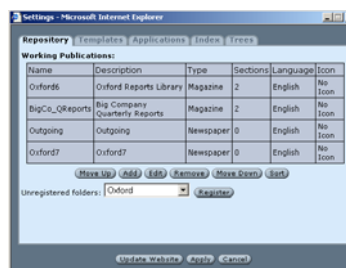


Figure 47: Content Administrator Settings Window with Repository Tab Selected

2. Create a new publication:
 - A. Click **Add**.
A **Publication Info** dialog box appears.



Figure 48: Publication Details Dialog Box

- B. Enter a name for the publication in the **Publication Name** field and a display name in the **Description** field.
 - C. Click the down arrow (▼) to the right of the **Language** field and select the desired default language.
 - D. Uncheck the **Periodical publication** checkbox. Periodical publications are documents that each issue is associated to a specific publishing dates, such as newspapers, so the ViewPoint Warehouse directory structure is organized according to publishing dates.
 - E. In the **Publication Icon** section, check the **Disabled** checkbox.
 - F. Click **OK** to save the new warehouse settings in Content Administrator.
The Publication Details dialog box closes.
3. You can sort, move or remove warehouse definition inside the Repository list:
 - A. Select the defined warehouse and click **Remove** to remove the warehouse definition from the list.
 - B. To move the warehouse definition up or down in the list, click **Move Up** or **Move Down** respectively.
 - C. To sort the warehouse definitions in the list alphabetically, click **Sort**.
4. Link the publication to a warehouse directory:
 - A. Under the **Publication Directories** table, click **Add**.
A **Publication Info** dialog box appears.

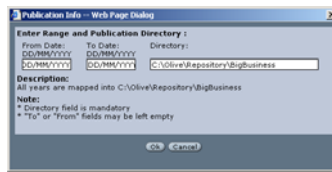


Figure 49: Publication Warehouse Path Dialog Box

- B. If the publication's warehouse is divided chronologically, enter the range of dates that the selected warehouse contains in the **From Date** and **To Date** fields.

If the publication's documents are not chronological or linked to dates, leave these fields empty.

- C. Enter the path to the server and directory where the warehouse is stored in the **Directory** field and click **OK**.
- D. The new publication warehouse folder appears in the **Publication Directories** table.
- E. Click **Map On Server**.

A mapping confirmation message appears if Content Administrator succeeded finding ViewPoint Warehouse files.



Figure 50: Publication Warehouse Mapping Confirmation Message

- F. Click **OK** on the confirmation message and then **OK** on the Publication Details dialog box.
5. Click **Apply** and then **Update Website** in the **Settings** dialog box.
- The Settings dialog box closes and the main Content Administrator window refreshes.
6. Click the down arrow (▼) to the right of the **Current folders tree** field and select the display name of the tree that you have just created.
7. Click **(Inbox)** folder.

All the folders and documents in the Warehouse appear in the top-right pane of the main Content Administrator window.

programmed specifically for certain document types and your specific requirements. Contact Olive Professional Services more information.

ViewPoint includes several default collection styles, as described below:

Table 5: Collection Styles

Style	Description
ArchDefault	Default archive collection style for version 3.0
ArchExtPack	Same as ArchDefault with additional Text Snippet data
ArchiveDefault	Default archive collection style for version 2.6
DailyDefault	Default daily collection style for version 2.X
EntPubDefault	Default ViewPoint collection style
EntPubDefaultHeb	Default Hebrew collection style
EntPubNew	New ViewPoint collection style
OCRDefault	Default collection style for OCR text
ViewPoint	Collection style for ViewPoint

5. Enter a description of the Collection and click **OK**.




Figure 54: Collection Description Dialog Box

6. Enter a path to save the collection directory and click **OK**.



Figure 55: Collection Directory Path Dialog Box

7. The new collection appears in the indexes table.
Click **Apply** and then **Update Website** to save the new index.

5.3 Binding Publications to Collections

Binding publications to collections is the final step to

► **To configure a collection (index):**

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator** on page 7.

2. Click the Settings button ().

The **Content Administrator Setting** window opens.

3. Click the **Repository** tab.

A table of the existing collections (indexes) appears.

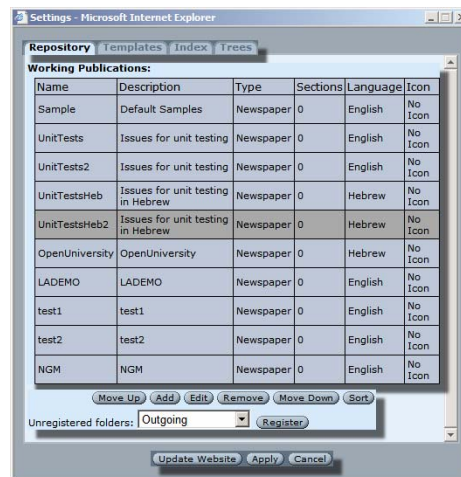


Figure 56: Content Administrator Settings Window with Index Warehouse Tab Selected

4. Select a Warehouse that was created as described in section 5.1, Publication Configuration, and then click **Edit**.

The **Publication Details** dialog box appears.

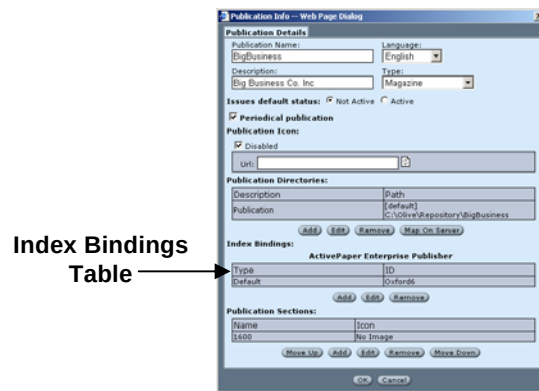


Figure 57: Publication Details Dialog Box

- A. Locate the **Index Bindings** table and click **Add** below the table. An **SE Data Binding Rule** dialog box appears.

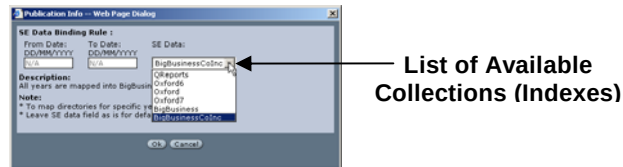


Figure 58: SE Data Binding Rule Dialog Box

- B. Click the down arrow (▼) to the right of the **SE Data** field, and select a collection (index) from the list.

The collections (indexes) that appear were defined as described in section **5.2, Collection Configuration (Indexing)**.

- C. Click **OK**.

The dialog box closes and the selected collection appears in the **Index Bindings** table.

5. Click **OK** to save changes to the publication settings and close the dialog box.
6. Click **Apply** to apply the changes and **Update Website** to close the window and show the changes in the main Content Administrator window.

5.4 Building a Folders Tree

► To build a new folder tree:

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator** on page 7.
2. Click the Settings button ().

The **Content Administrator Setting** window appears.

3. Click the **Trees** tab.

A table of the existing trees appears.

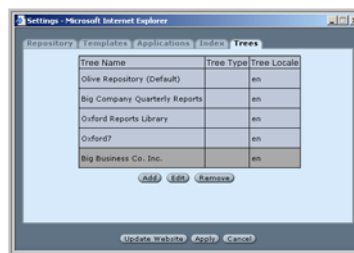


Figure 59: Content Administrator Settings Window with Trees Tab Selected

4. Define a new folders tree:

- A. Click **Add**.

A **Tree Details** dialog box appears.

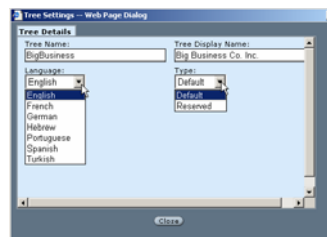


Figure 60: New Tree Dialog Box

- B. Enter the new tree's name in the **Tree Name** field and the display name in the **Tree Display Name** field.
- C. Click the down arrow (▼) to the right of the **Language** field and select the default language of the documents that will be associated with the tree.
- D. Click the down arrow (▼) to the right of the **Type** field and select **Default**.
- E. Click **Close** at the bottom of the dialog box.

The dialog box closes and the new tree's display name appears at the bottom of the table.

5. Add an Inbox folder to the new tree:
 - A. Select the new tree and click **Edit**.

The **Tree Details** dialog box appears, showing the information that was entered in step 5.
 - B. Click **Add** at the bottom of the dialog box.

A **Folder Details** dialog box appears.

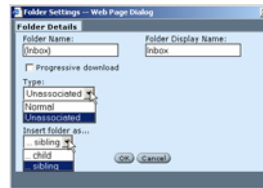


Figure 61: Folder Details Dialog Box

- C. Enter **Inbox** in the **Folder Name** field and **(Inbox)** in the **Folder Display Name** field.
 - D. Click the down arrow (▼) to the right of the **Type** field and select **Unassociated**.

An Unassociated folder shows all the documents in bound Warehouse (repository) directories that have not yet been associated with defined folders in a tree. Every tree must have one folder, from which documents may be selected and dragged to the appropriate folder. See section **2.4 Assigning Documents to Folders on page 23** for instructions how to associate documents with folders.
 - E. Click the down arrow (▼) to the right of the **Insert folder as...** field and select **...sibling**.
 - F. Click **OK**.

The new Inbox folder appears in the tree.
6. Repeat step 5 above to create more folder, as required.
7. Click **Close** to close the **Tree Details** dialog box.
8. Click **Apply** and Update Website.

5.5 Metadata Templates

The metadata fields and their content can be applied to ViewPoint documents and entities according to metadata templates, which can be designed and saved in advance. Content Administrator automatically looks for these templates when starting.

► To design, change and save a metadata template:

9. Locate the metadata templates directory in `\\[server_name]\Olive\Applications\Director\MetaTemplate`, where [server_name] is the computer where the ViewPoint Server is installed.
10. A default template file, named **sample.xml**, is located in the directory.
11. Open the file using a text editing application, such as Microsoft Notepad.

```
<?xml version="1.0" encoding="windows-1252" ?>
<Template NAME="Temporary Template">
  <Application_Data xmlns:dc="http://purl.org/dc/elements/1.1/" SEE_ALSO="0" dc:creator="0"
    dc:publisher="1" dc:contributor="0" dc:identifier="0" dc:language="2" dc:coverage="0" dc:type="0" dc:relation="1"
    dc:format="2" dc:source="1" FOLDERS="0" EP_PATH="2" dc:description="0" dc:subject="Object" dc:test="3">
    <Application_Info AL_TYPE="WORKING_STATUS">In Progress</Application_Info>
    <Application_Info AL_TYPE="RENDERING_OPT">Regular</Application_Info>
    <Application_Info AL_TYPE="SEE_ALSO" />
    <Application_Info AL_TYPE="dc:title">Alegro</Application_Info>
    <Application_Info AL_TYPE="dc:date">14/08/2003</Application_Info>
    <Application_Info AL_TYPE="dc:rights">Best endeavour</Application_Info>
  </Application_Data>
  <dc:publisher>
    <dc_item NAME="Alegro" />
  </dc:publisher>
  <Application_Info>
    <Application_Info AL_TYPE="dc:language">
      <dc_item NAME="English" />
      <dc_item NAME="German" />
    </Application_Info>
    <Application_Info AL_TYPE="dc:relation">
      <dc_item NAME="PDF" />
    </Application_Info>
    <Application_Info AL_TYPE="dc:source">
      <dc_item NAME="Web" />
    </Application_Info>
    <Application_Info AL_TYPE="EP_PATH">
      <dc_item NAME="Repository:|Catalogs" />
    </Application_Info>
    <Application_Info AL_TYPE="DOCTYPE">Catalogue</Application_Info>
    <Application_Info AL_TYPE="dc:test">
      <dc_item NAME="test1" />
      <dc_item NAME="test2" />
      <dc_item NAME="test3" />
    </Application_Info>
  </Application_Data>
</Template>
```

Figure 62: Sample.xml Metadata Template File

12. Each defined metadata field appears in the file's content with its default values. Change and/or the field names and values as required and save the file under a new name, with the suffix **.xml**. Do not overwrite the existing **sample.xml** file. For more information, instructions or services to write metadata template files, contact Olive Professional Services.

5.6 Distributed Configuration

Olive ViewPoint can manage large document repositories that are distributed over many disks and servers. Since access to Content Administrator is managed through an Internet connection, Content Administrator and all its repositories may be managed remotely. Likewise, Content Administrator can manage repositories that are stored on dispersed disks and different servers.

When managing Content Administrator in a distributed environment, verify that the server that runs Content Administrator and the servers where the Warehouses are

stored are all defined as *trusted* sites. See section 2.1.3, Making ViewPoint Content Administrator Accessible, on page 8.

6. Appendix D: External Utilities

ViewPoint Content Administrator works with a series of external applications that perform certain functions that are not part of Content Administrator's core functionality.

Content Administrator works with the following external utilities:

- **Apria** performs advanced indexing functions, such as optimizing, cleaning and deleting existing indexes, as well as batch processing.
- **DocCopy** is a JavaScript command line utility that copies an individual issue from one place to another within the same Warehouse.
- **Envelope** is an application that packs all the required files for a selected set of documents, XML files, schemas, and image files, into a single ZIP file that ViewPoint can accessed directly.
- **EPImport/EPRepositoryImport** scans physical directories (VPImport) and logical publications (VPWarehouse) for new or updates documents.
- **RepVal** (Repository Validator) is an application that validates the XML files in a selected Warehouse with their associated schemas.

6.1 Apria

Apria is an advanced indexing application for ViewPoint collections. It enables users to perform indexing functions that are not available in ViewPoint Content Administrator.

The advanced indexing features in Apria include:

- **Optimize** the performance of the index for a collection.
- **Clean** indexes by removing references to content that may no longer be in the updated source document.
- **Delete** existing indexes to documents, so that new indexes can be generated.
- **Batch** process indexing **jobs**.

► To perform advanced indexing operation in Apria:

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator** on page 7.
2. Click the down arrow (▼) to the right of the **Current folder tree** field and select the folder tree and documents that you want to index.
3. Right-click on the document in the upper-right pane and select **Open Indexing Agent** from the pop-up menu.




Figure 63: Document Right-Click Pop-Up Menu

Apria opens in the Explorer browser window.

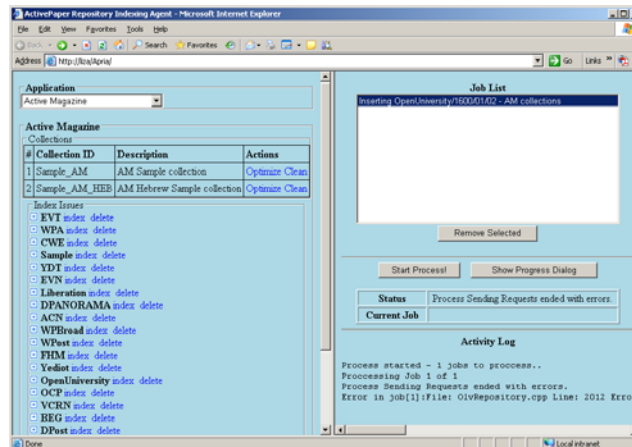


Figure 64: Apria Window in Internet Explorer

4. In the upper-left pane, click the down arrow (▼) to the right of the **Application** field and select the ViewPoint application whose documents require advanced indexing operations.

The lower-left pane shows all collections and issues that are indexed for the selected application.

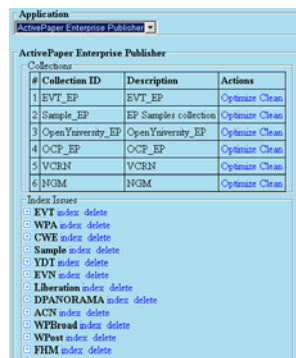


Figure 65: Collections and Issues for a Selected Application

5. In the **Collections** area, click to **Optimize** and/or **Clean** the index at the collection level.
6. In the **Index Issues** area, click to **Index** (create a new index) or **Delete** an existing index for a single issue or folder of issues.

For each operation that you select in the left pane, an indexing job appears in the upper-right pane and is added to the **Job List**.



Figure 66: Apria Indexing Jobs List

7. Repeat steps 3 through 4 above to perform advanced indexing for the collections and issues of each application.
8. Review all the indexing jobs listed in the Job list.
Click **Remove Selected** to remove any jobs from the list.
9. Click **Start Process** to start the indexing process on the jobs in the list.
10. An **Indexing Process** window opens, displaying a log of the current and recently processed indexes.

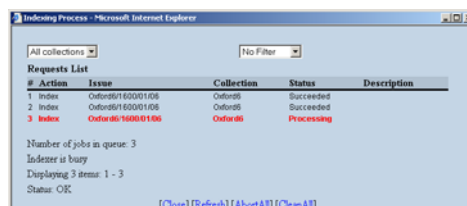


Figure 67: Indexing Process Window

This dialog box remains open until it is closed.

11. Close the Indexing Process dialog box or return to the main Apria window.

A processing job status and log of the most recent indexing jobs appears in the bottom right pane.



Figure 68: Apria Activity Log

6.2 DocCopy

DocCopy is a JavaScript command line utility that copies an individual issue from one place to another within the same Warehouse.

► To operate DocCopy:

1. Click **Start >> Run** at the bottom-left corner on the Windows desktop.
The Run dialog box appears.



Figure 69: Run Dialog Box

2. Enter the following command in the **Open** field.

```
CScript.exe DocCopy.js/From< BASEHRef_From> /To:<BASEHRef_To> [/O] [/M] [/R]
```

- **From, To** – path to source and destination files (BASEHRef)
- **O** – Overwrite target file, if one exists (optional)
- **M** – Move source issue and deleting from source location (optional)
- **R** – Registers the new issue (target) in ViewPoint's inventory (optional)
- **U** – Un-registers the source issue from ViewPoint's inventory (optional)

3. Click **OK**.

Below is an example of a DocCopy script:

```
CScript.exe DocCopy.js/From:\Olive\Warehouse\BigBusiness\1600\01\01  
/To: \Olive\Warehouse\BigBusiness\1600\01\02 [/O] [/M] [/R] [/U]
```

6.3 Envelope

Envelope is an application that packs all the required files for a selected set of documents, XML files, schemas, and image files, into a single ZIP file that ViewPoint can access directly. All the data is arranged in recursive directories, as it would be when stored in a regular unpacked Warehouse.

Envelope also performs other related tasks, such as unzipping files, renaming files, and optimizing the content of ZIP files for fast access by ViewPoint.

► To operate the Envelope application:

1. Open the Envelope application:
 - A. Open the Envelope directory at:
`\\[server]\olive\Applications\Utils\Envelope`
 - B. Double-click the **Envelope.exe** application icon.
 - C. The Envelope application window opens.

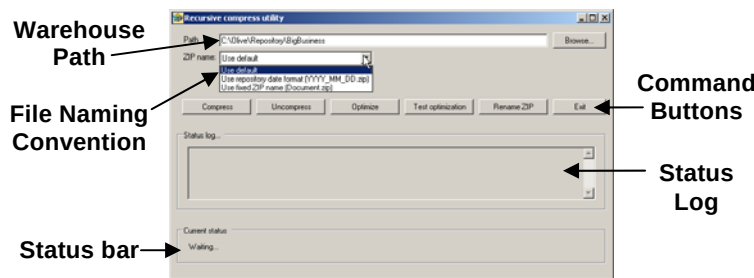


Figure 70: Envelope Application Window

2. Select the warehouse that you want to envelope (zip).
 - A. Click **Browse**.
 - B. Navigate to the desired Warehouse and click **OK**.
3. Select the desired file naming convention for the ZIP file:
 - A. **Use default** names the file **Document.zip**.
 - B. **Use warehouse date format** names the ZIP file according to the warehouse name structure, such as **2006_08_14.zip** for periodical documents or **1600_01_01.zip** for non-periodical documents.
 - C. **Use fixed ZIP name** names the file **Document.zip**
4. Click **Compress**.

Envelope creates two files from the content of each directory within the selected warehouse:

TOC.xml - Envelope create a TOC file that ViewPoint can access easily and quickly before entering the ZIP file.

Document.zip or **YYYY_MM_DD.zip** - Envelope gathers all the relevant files for each document in the selected warehouse into a single file. The **YYYY_MM_DD** naming convention repeats the name of the warehouse directory structure where the document is stored. Each document has a unique name and location.

5. To open a compressed warehouse and save the contents in uncompressed files and recursive directories, click **Uncompress**.
6. Envelope can arrange the content in compressed repositories so that ViewPoint can access the contents within the ZIP file most quickly and efficiently.
 - A. To perform this arrangement or optimization, click **Optimize**.
 - B. Envelope can check if the zipped warehouse files are optimized.

To check if a warehouse is optimized, click **Test optimization**.
7. Envelope can rename all or selected ZIP files in a warehouse to Document.zip or YYYY_MM_DD.zip naming conventions.

To change the file names, follow step 3 to select the desired naming convention and then click **Rename ZIP**.
8. Click **Exit** to close Envelope.

6.4 VPIImport, VPWarehouseImport

Olive ViewPoint enables rescanning existing warehouses for updated or new documents.

VPIImport rescans and imports specific directories in a ViewPoint Warehouse, selected according to physical location.

VPWarehouseImport rescans and imports the documents that are associated to specific publications. The files are selected according to their logical association to a publication.

► To scan and import documents with VPIImport:

1. Open and log on to ViewPoint Content Administrator, as described in **Logging On to Content Administrator** on page 7.
2. Click the External Applications icon (.
3. The **Executing External Applications** dialog box appears.

Click the down arrow (▼) to the right of the **Choose Application** field and select **EPIImport**.

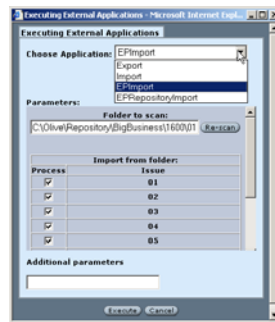


Figure 71: EPIImport Dialog Box

4. In the **Folder to scan** field, enter the path to a document warehouse and click **Re-scan**.
5. The **Import from folder** table shows all the documents in the warehouse. Click the check box in the **Process** column, next to each document to import.
6. Click **Execute**.
Content Administrator rescans the selected documents.

► **To scan and import publications with EPRepositoryImport:**

1. Open and log on to ViewPoint Content Administrator, as described in Logging On to Content Administrator on page 7.
2. Click the **Executing External Applications** icon ().
3. The External Applications dialog box appears.
Click the down arrow (▼) to the right of the **Choose Application** field and select **EPRepositoryImport**.

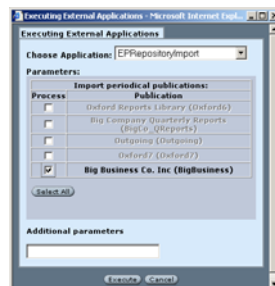


Figure 72: EPRepositoryImport Dialog Box

4. The table lists all the publications that defined in Content Administrator. Click the check box in the **Process** column, next to each publication whose documents are to be rescanned and imported.
5. Click **Execute**.
Content Administrator rescans the selected documents.

6.5 RepVal

Olive **Repository Validator** (RepVal) is an application that validates the XML files with their associated schemas.

► To validate a repository with RepVal:

1. Open the Warehouse Validator application:
 - A. Open the RepVal directory at:
\\[server]\Olive\Applications\Utils\RepVal
 - B. Double-click the **RepositoryValidator.exe** application icon.
 - C. The Warehouse Validator application window opens.

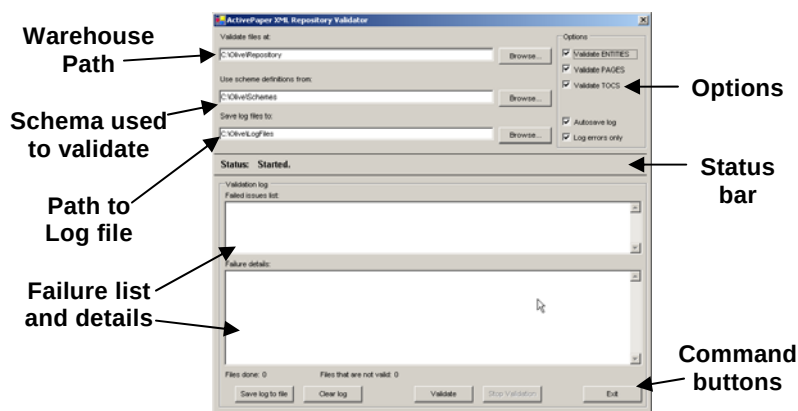


Figure 73: Warehouse Validator Application Window

2. In the **Validate Files at** field, enter the path to the ViewPoint Warehouse whose files are to be validated.
3. In the **Use schema definitions from** field, enter the path to the directory where the schemas are saved.
4. In the **Save log files to** field, enter the path to the log file.
5. Select the application **Options**:
 - A. **Validate ENTITIES** validates document entities, such as articles, headings, drop caps, bylines, ads, and the like.
 - B. **Validate PAGES** validates page structure, headers, footers, footnotes, and other page description data.
 - C. **Validate TOCS** validates Table OF Contents (TOC) elements that it finds, including links to headers.
 - D. **Autosave log** automatically saves a log file of all failures and errors.
 - E. **Log errors only** reports and logs only errors and failures.

6. Click **Validate**.
 - A. You can also stop the validation process while in progress by clicking **Stop Validation**.
 - B. If any XML files failed to validate, they are listed in the **Failed issues list**, and a description of each failed validation appears in **Failure details**.
7. To save the log file to a specific location, click **Save log file**.
 - A. A save to dialog box appears.
 - B. Select the location and name of the log file and click **Save**.
8. To clear the log file of all previous information, click **Clear log**.
9. Click **Exit** to close Repository Validator.

7. Appendix E: Error Messages

The following is a list of ViewPoint Content Administrator error messages:

DIR_ONLY_ENTITIES: **Only entities can be edited.**

DIR_CHANNEL_NOT_AVAILABLE_FOR_XTDB: **The XTDB issue can't be viewed in this mode.**

DIR_EDIT_FIELD_WORNG_INPUT: **The value is not according to field format! Re-enter please.**

DIR!TOC_READ: **Error: Cannot read TOC.xml!**

DIR!XSL_NOT_EXISTS: **Error: Required XSL file does not exist. Please check the XSL assignments in the Application Settings and try again.**

DIR!TOC_XSL_LOAD: **Error: Cannot load TOC xsl file.**

DIR!TOC_LOAD: **Error: Cannot load TOC:**

DIR!XML_LOAD: **Error: Cannot load XML from the Repository.**

DIR!NO_DRAG_AND_DROP: **You can not drag-and-drop an item of this type.**

DIR!NO_DRAG_AND_DROP2: **You can not link an item to itself.**

DIR!NO_DRAG_AND_DROP3: **Embedded picture couldn't be added to 'See Also' list.**

DIR!ENTITY_HAS_INVALID_METADATA: **Entity contains invalid meta data!**

DIR!ENTITY_NOT_SAVED: **Error: Could not save entity!**

DIR!NO_PDF_EXISTS: **Error: No PDF file defined!**

DIR_ENTITY_IS_LOCKED: **Editing is not allowed in a locked entity. Unlock the entity and try again.**

DIR_ENTITY_RENAMED: **Entity successfully renamed**

DIR!SEARCH_INVALID_DATE: **Error: Wrong dates values entered.**

DIR_SEARCH_LOADING_ERROR: **Error occurred while loading search results:**

DIR_SEARCH_ERROR: **Error occurred while searching:**

DIR_SEARCH_DISABLED: Search is disabled.

DIR_VALUES_NOT_MODIFIED: Keyword database has not been modified.

DIR_TITLE_ERROR: Illegal Action

DIR_DIRECTORY_MAPPING: This function will work on last saved settings, would you like to continue?

DIR_DIRECTORY_MAPPING_FAIL: Unable to map directory action

DIR_SETTINGS_ERROR: Settings Error

DIR_FIELD_CONTAINS: You cannot discard field, which contains data. Please delete field's content first.

Making the Olive Content Administrator a Trusted Site

For this application to work properly, you must enter this website as a "Trusted Site" on your browser. To add your site to the browser's trusted sites list do the following steps:

Uncheck the box marked "Require server verification (http:) for all sites in this zone"

DIR_SELECT_ISSUE_DATE: Select Issue Date

DIR_NO_ISSUE_SELECTED: No Issue Selected.

DIR_NO_SEARCH_DONE: No Search Done yet.

DIR_SEARCH_STP_MSSG: The following words are very common and were not included in your search:

DIR_SEARCH_EMPTY_BY_STP: All words included in your search are very common. No search done.

DIR_LINK_EMBED_PICTURE: Embedded picture cannot be added to 'See Also' list.

DIR_KEYWORDS_EXCLUDED: This entity can't have keywords.

DIR_DUPLICATE_SECTIONS: Duplicate sections found in the TOC:

DIR_EDE_FOR_PUBLICATION_EXISTS: There already exists early edition container for this publication.

DIR_EDE_POINTS_TO_NONEXISTENT: Early edition points to non-existent publication.

DIR_EDE_DESCRIPTIONS_DIFFER: Warning: Descriptions of publication and its early edition container differ!

DIR_PUBLICATION_ALREADY_EXISTS: This publication exists already.

DIR_NAME_CONTAINS_BAD_CHARS: Name contains invalid characters!

DIR_NO_PUB_NAME: You must enter a publication name

DIR_CANNOT_UPDATE_SETTINGS: Fatal Error: Cannot update Settings.

DIR_CANNOT_POINT_TO_ITSELF: Cannot contain early issues for itself!