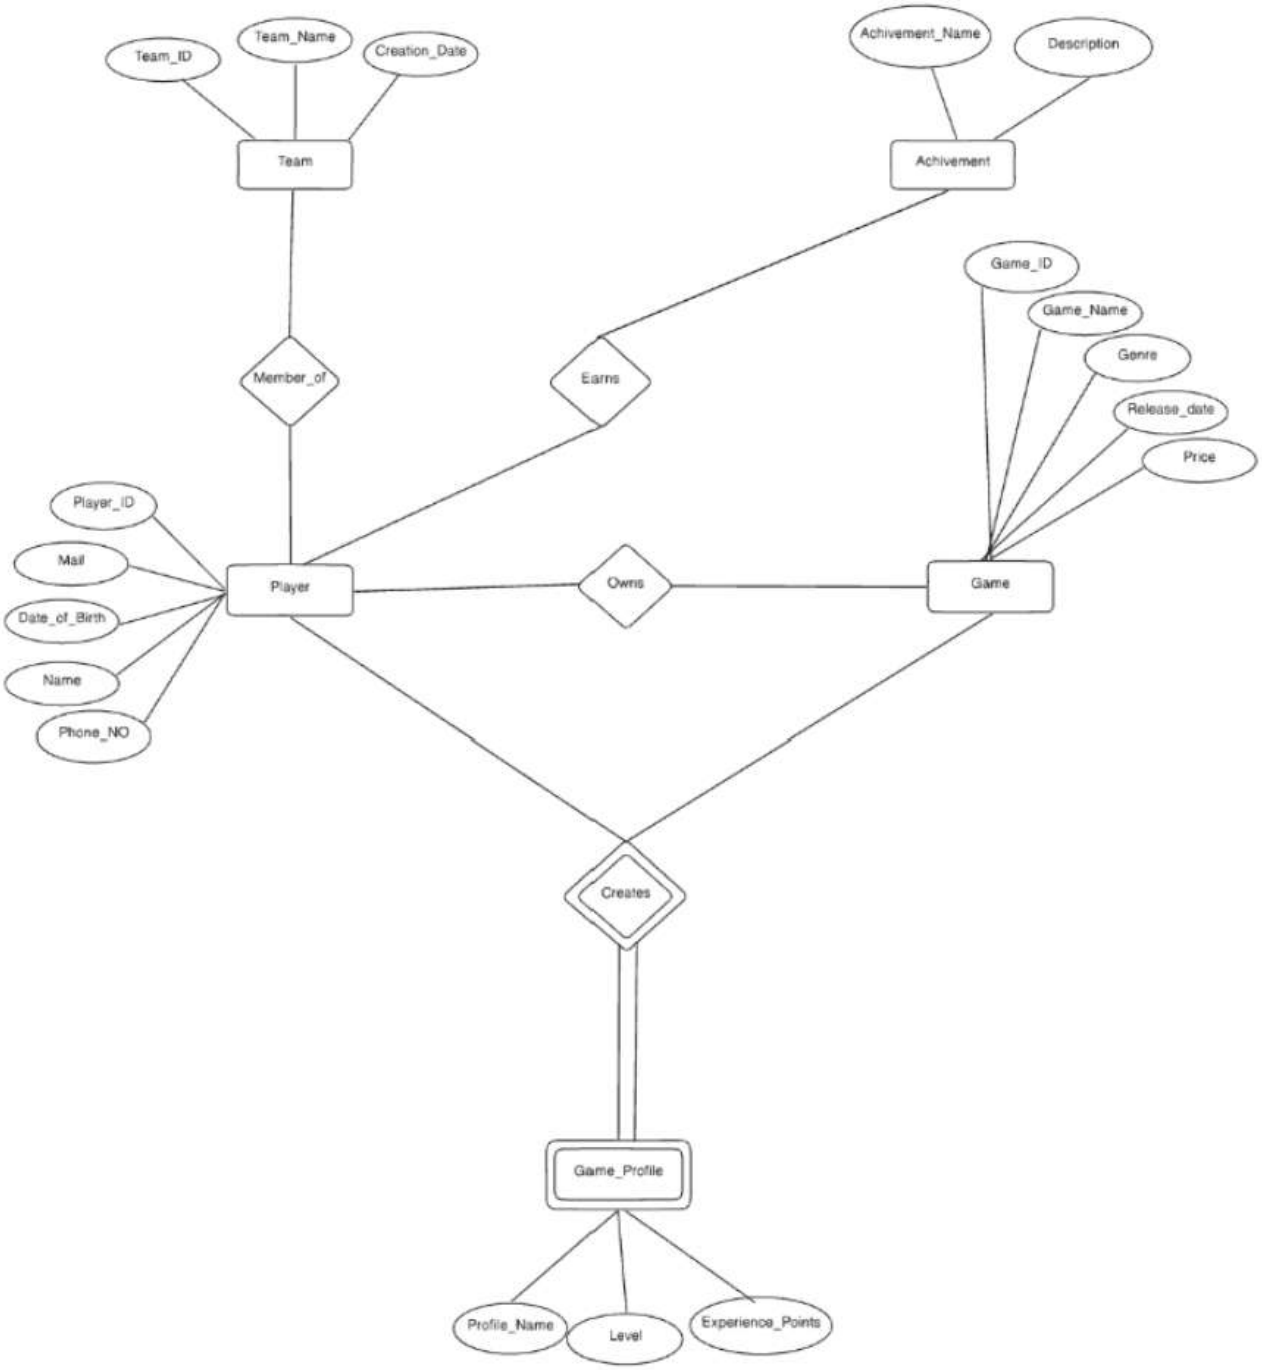

Team_ID
Team_Name
Creation_Date
Team
Achivement_Name
Description
Achivement
Member_of
Earns
Game_ID
Game_Name
Genre
Release_date
Price
Player_ID
Mail
Date_of_Birth
Name
Phone_NO
Player
Owns
Game
Creates
Game_Profile
Profile_Name
Level
Experience_Points

Output:

```
+-------+-------+-------------+
| name  | marks | BonusMarks  |
+-------+-------+-------------+
| SONU  |    10 |          11 |
| MONU  |    20 |          21 |
| BAANU |    30 |          32 |
+-------+-------+-------------+
```

```
+-------+-------+-----------+
| name  | marks | Remainder |
+-------+-------+-----------+
| SONU  |    10 |         0 |
| MONU  |    20 |         0 |
| BAANU |    30 |         0 |
+-------+-------+-----------+
```

```
+-------+-----------+------------+
| name  | new_marks | Rounded_Up |
+-------+-----------+------------+
| SONU  |    1.0000 |          1 |
| MONU  |    2.0000 |          2 |
| BAANU |    3.0000 |          3 |
+-------+-----------+------------+
```

```
+-------+-------+------------+
| name  | marks | Difference |
+-------+-------+------------+
| SONU  |    10 |         70 |
| MONU  |    20 |         60 |
| BAANU |    30 |         50 |
+-------+-------+------------+
```

```
+-------+-----------+--------------+
| name  | new_marks | Rounded_Down |
+-------+-----------+--------------+
| SONU  |    1.0000 |            1 |
| MONU  |    2.0000 |            2 |
| BAANU |    3.0000 |            3 |
+-------+-----------+--------------+
```

```sql

-- insert
INSERT INTO student VALUES (1, 'SONU', 'bca', 10);
INSERT INTO student VALUES (2, 'MONU', 'bsc', 20);
INSERT INTO student VALUES (3, 'BAANU', 'btech', 30);

SELECT name,
marks,
ROUND(marks * 1.05) AS BonusMarks
FROM student;

SELECT name,
marks / 10.0 AS new_marks,
CEIL(marks / 10.0) AS Rounded_Up
FROM student;

SELECT name,
marks / 10.0 AS new_marks,
FLOOR(marks / 10.0) AS Rounded_Down
FROM student;

SELECT name,
marks,
MOD(marks, 10) AS Remainder
FROM student;

SELECT name,
marks,
ABS(marks - 80) AS Difference
FROM student;

```

```
+-------+-----+------+
| name  | dob | Age  |
+-------+-----+------+
| SONU  |   0 | NULL |
| MONU  |   0 | NULL |
| BAANU |   0 | NULL |
+-------+-----+------+
+------------+
| Today      |
+------------+
| 2026-09-04 |
+------------+
```

Output:

```
+-------+-----+------------+
| name  | dob | Birth_Year |
+-------+-----+------------+
| SONU  |   0 |          0 |
| MONU  |   0 |          0 |
| BAANU |   0 |          0 |
+-------+-----+------------+
```

```
+-------+-----+-------------+
| name  | dob | Birth_Month |
+-------+-----+-------------+
| SONU  |   0 |           0 |
| MONU  |   0 |           0 |
| BAANU |   0 |           0 |
+-------+-----+-------------+
```

```
+-------+-----+-----------+
| name  | dob | Birth_Day |
+-------+-----+-----------+
| SONU  |   0 |         0 |
| MONU  |   0 |         0 |
| BAANU |   0 |         0 |
+-------+-----+-----------+
```

```sql
--

-- insert
INSERT INTO student VALUES (1, 'SONU', 'bca', 10 , 22/9/2006);
INSERT INTO student VALUES (2, 'MONU', 'bsc', 20 , 16/11/2006);
INSERT INTO student VALUES (3, 'BAANU', 'btech' , 30 , 18/5/1983);

SELECT  name,
dob,
YEAR(dob) AS Birth_Year
FROM student;

SELECT  name,
dob,
MONTH(dob) AS Birth_Month
FROM student;

SELECT  name,
dob,
DAY(dob) AS Birth_Day
FROM student;

SELECT  name,
dob,
TIMESTAMPDIFF(YEAR, dob, CURDATE()) AS Age
FROM student;

SELECT CURDATE() AS Today;
```

```sql
SELECT CONCAT(name, '-', course) AS Student_Details
FROM student;

SELECT name,
SUBSTRING(name, 1, 4) AS First_Five_Characters
FROM student;
```

```
+-----------------+
+-------+-----------------------+
| name  | First_Five_Characters |
+-------+-----------------------+
| SONU  | SONU                  |
| MONU  | MONU                  |
| BAANU | BAAN                  |
+-------+-----------------------+
```

queries.sql

```sql
-- create
CREATE TABLE student (
  stuid INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- insert
INSERT INTO student VALUES (1, 'SONU', 'bca');
INSERT INTO student VALUES (2, 'MONU', 'bsc');
INSERT INTO student VALUES (3, 'BAANU', 'btech');

-- upper
SELECT name,
UPPER(name) AS uppername
FROM student;

SELECT name,
LOWER(name) AS Lowername
FROM student;

SELECT name,
LENGTH(name) AS namelenght
FROM student;

SELECT CONCAT(name, '-', course) AS Student_Details
FROM student;

```

I/O | AI Agent

STDIN

Input for the program (

Output:

```
| SONU  | SONU      |
| MONU  | MONU      |
| BAANU | BAANU     |
+-------+-----------+
+-------+-----------+
| name  | Lowername |
+-------+-----------+
| SONU  | sonu      |
| MONU  | monu      |
| BAANU | baanu     |
+-------+-----------+
+-------+------------+
| name  | namelenght |
+-------+------------+
| SONU  |          4 |
| MONU  |          4 |
| BAANU |          5 |
+-------+------------+
+-----------------+
| Student_Details |
+-----------------+
| SONU-bca        |
| MONU-bsc        |
| BAANU-btech     |
+-----------------+
```

```sql
-- create
CREATE TABLE student (
  stuid INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- insert
INSERT INTO student VALUES (1, 'SONU', 'bca');
INSERT INTO student VALUES (2, 'MONU', 'bsc');
INSERT INTO student VALUES (3, 'BAANU', 'btech');

-- upper
SELECT name,
UPPER(name) AS uppername
FROM student;

SELECT name,
LOWER(name) AS Lowername
FROM student;

SELECT name,
LENGTH(name) AS namelenght
FROM student;

```

STDIN

Input for the program (

Output:

```
+-------+-----------+
| name  | uppername |
+-------+-----------+
| SONU  | SONU      |
| MONU  | MONU      |
| BAANU | BAANU     |
+-------+-----------+
+-------+-----------+
| name  | Lowername |
+-------+-----------+
| SONU  | sonu      |
| MONU  | monu      |
| BAANU | baanu     |
+-------+-----------+
+-------+------------+
| name  | namelenght |
+-------+------------+
| SONU  |          4 |
| MONU  |          4 |
| BAANU |          5 |
+-------+------------+
```

9:34 ··· 96

dbms.pdf

queries.sql

```sql
-- create
CREATE TABLE student (
  stuid INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- insert
INSERT INTO student VALUES (1, 'SONU', 'bca');
INSERT INTO student VALUES (2, 'MONU', 'bsc');
INSERT INTO student VALUES (3, 'BAANU', 'btech');

-- upper
SELECT name,
UPPER(name) AS uppername
FROM student;

SELECT name,
LOWER(name) AS Lowername
FROM student;
```

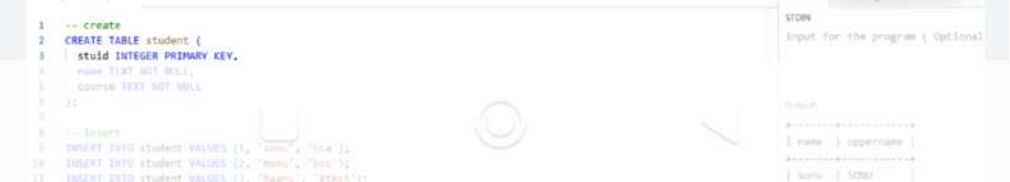
I/O | AI Agent

STDIN

Input for the program (

Output:

```
+-------+-----------+
| name  | uppername |
+-------+-----------+
| SONU  | SONU      |
| MONU  | MONU      |
| BAANU | BAANU     |
+-------+-----------+
+-------+-----------+
| name  | Lowername |
+-------+-----------+
| SONU  | sonu      |
| MONU  | monu      |
| BAANU | baanu     |
+-------+-----------+
```



queries.sql

```sql
-- create
CREATE TABLE student (
  stuid INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- insert
INSERT INTO student VALUES (1, 'SONU', 'bca');
INSERT INTO student VALUES (2, 'MONU', 'bsc');
INSERT INTO student VALUES (3, 'BAANU', 'btech');

-- upper
SELECT name,
UPPER(name) AS uppername
FROM student;

SELECT name,
LOWER(name) AS Lowername
FROM student;

```

I/O | AI Agent

STDIN

Input for the program (

Output:

```
+-------+-----------+
| name  | uppername |
+-------+-----------+
| SONU  | SONU      |
| MONU  | MONU      |
| BAANU | BAANU     |
+-------+-----------+
+-------+-----------+
| name  | Lowername |
+-------+-----------+
| SONU  | sonu      |
| MONU  | monu      |
| BAANU | baanu     |
+-------+-----------+
```

```sql
-- create
CREATE TABLE student (
  stuid INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- insert
INSERT INTO student VALUES (1, 'sonu', 'bca');
INSERT INTO student VALUES (2, 'monu', 'bsc');
INSERT INTO student VALUES (3, 'baanu', 'btech');

-- upper
SELECT name,
UPPER(name) AS uppername
FROM student;

```

STDIN

Input for the program (Optional

Output:

```
+-------+-----------+
| name  | uppername |
+-------+-----------+
| sonu  | SONU      |
| monu  | MONU      |
| baanu | BAANU     |
+-------+-----------+
```

9:35 ··· 96

dbms.pdf



```
-- create
CREATE TABLE student (
  stuId INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- Insert
INSERT INTO student VALUES (1, 'sona', 'bca');
INSERT INTO student VALUES (2, 'mona', 'bsc');
INSERT INTO student VALUES (3, 'baanu', 'btech');

-- Fetch
SELECT * FROM student
```

```
+-------+-------+--------+
| stuId | name  | course |
+-------+-------+--------+
|     1 | sona  | bca    |
|     2 | mona  | bsc    |
|     3 | baanu | btech  |
+-------+-------+--------+
```

queries.sql

```sql
-- create
CREATE TABLE student (
  stuid INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- insert
INSERT INTO student VALUES (1, 'sonu', 'bca');
INSERT INTO student VALUES (2, 'monu', 'bsc');
INSERT INTO student VALUES (3, 'baanu', 'btech');

-- fetch
SELECT * FROM student
```

I/O | AI Agent

STDIN

Input for the program (Optional)

Output

```
+-------+-------+--------+
| stuid | name  | course |
+-------+-------+--------+
|     1 | sonu  | bca    |
|     2 | monu  | bsc    |
|     3 | baanu | btech  |
+-------+-------+--------+
```

queries.sql

```sql
-- create
CREATE TABLE student (
  stuid INTEGER PRIMARY KEY,
  name TEXT NOT NULL,
  course TEXT NOT NULL
);

-- insert
INSERT INTO student VALUES (1, 'sonu', 'bca');
INSERT INTO student VALUES (2, 'monu', 'bsc');
INSERT INTO student VALUES (3, 'baanu', 'btech');

-- fetch
SELECT * FROM student WHERE course = 'bca';

```

I/O | AI Agent

STDIN

Input for the program (Optional)

Output

```
+-------+------+--------+
| stuid | name | course |
+-------+------+--------+
|     1 | sonu | bca    |
+-------+------+--------+
```