README

Andrea Pierré

December 17, 2018

Contents

| 1 | Design decisions | 1 |
|---|-------------------|---|
| | 1.1 Data | 1 |
| | .2 Back-end | 2 |
| | 1.3 Front-end | 2 |
| 2 | Setup the app | 3 |
| 3 | Γime spent | 3 |
| 4 | FDA 21 CFR 820.30 | 3 |

1 Design decisions

1.1 Data

For consistency reasons since *Node.js* was an imposed choice for the backend, and to not impose to my reviewer to install another language, I would have chosen to load the data in *Javascript*. But since I was allowed to use Docker this was not a problem anymore. So since time was limited, I choose Python to get the data in the database as it was the language I was more confident with.

The MySQL official Docker image was more than 100MB, I thought it was overkill for a simple application like this one, so I eliminated MySQL. I surprisingly found a lean alpine version of PostgreSQL which was less than 30MB, so I hesitated between PostgreSQL and SQLite. At the end I chose to go with PostgreSQL because it was simpler to use with Docker. Without Docker I would have chosen to go with SQLite. I also chose to go with the SQLAlchemy ORM in case I had some problem down the road so that it

would be easy to switch to another database in case (and also because I wanted to learn it).

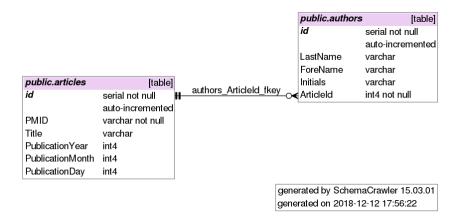


Figure 1: Entity relationship diagram of the database

1.2 Back-end

The assignment asked for a single page application, the back-end being there only to make the queries to the database, so I believe a simple *Node.js* API with the needed routes should do the work. I also used the *Sequelize* ORM to query the database.

1.3 Front-end

Since I have a really small experience with front-end frameworks, and since time was limited, I choose the one I read it had the more gentle learning curve, e.g. *Vue.js*. Without the time limiting constraint, I would probably have chosen *React* which has the biggest community today. I also used the *Vuetify* plugin to gain some time with already tuned components with nice CSS.

For the visualization, I chose to use the *Britecharts* library, which is built on top of D3.js, and which should require less time to learn how to use. Without the time limiting constraint, I would probably have chosen to go directly with D3.js.

2 Setup the app

Just run docker-compose up and open your browser at the following URL: $\label{eq:url} {\tt http://localhost:8080/}$

3 Time spent

| Table 1: Time spent on assignment | nt |
|-----------------------------------|----|
| Design decisions | 2h |
| Pulling data from PubMed API | 2h |
| Database design and data parsing | 6h |
| Back-end development | 3h |
| Learning front-end framework | 4h |
| Front-end development | 8h |
| Docker containerization | 4h |

4 FDA 21 CFR 820.30